
ADS Documentation

Release 2.8.3

Oracle Data Science

Mar 22, 2023

GETTING STARTED:

1	Release Notes	3
1.1	2.8.3	3
1.2	2.8.2	3
1.3	2.8.1	4
1.4	2.8.0	4
1.5	2.7.3	4
1.6	2.7.2	5
1.7	2.7.1	5
1.8	2.7.0	5
1.9	2.6.9	5
1.10	2.6.8	6
1.11	2.6.7	6
1.12	2.6.6	6
1.13	2.6.5	7
1.14	2.6.4	7
1.15	2.6.3	7
1.16	2.6.2	7
1.17	2.6.1	8
1.18	2.5.10	8
1.19	2.5.9	9
1.20	2.5.8	9
1.21	2.5.7	10
1.22	2.5.6	10
1.23	2.5.5	10
1.24	2.5.4	10
1.25	2.5.3	11
1.26	2.5.2	11
1.27	2.5.0	11
1.28	2.4.2	12
1.29	2.4.1	12
1.30	2.4.0	12
1.31	2.3.4	13
1.32	2.3.3	13
1.33	2.3.1	13
1.34	2.2.1	14
1.35	January 13, 2021	16
1.36	August 11, 2020	18
1.37	June 9, 2020	18
1.38	April 30, 2020	19
1.39	March 18, 2020	20

2	Quick Start	23
3	Installation and Setup	25
3.1	Install ADS CLI	25
3.2	Install <code>oracle-ads</code> SDK	25
3.2.1	Data Science Conda Environments	25
3.2.2	Install in Local Environments	26
3.2.2.1	Installing the <code>oracle-ads</code> base package	26
3.2.2.2	Installing extras libraries	26
4	Authentication	29
4.1	1. Authenticating Using Resource Principals	29
4.2	2. Authenticating Using API Keys	30
4.3	3. Authenticating Using Instance Principals	30
4.4	4. Overriding Defaults	30
5	CLI Configuration	33
6	Local Development Environment Setup	35
6.1	Build Development Container Image	35
6.2	Setting up Visual Studio Code	36
6.3	Working with Conda packs	36
6.3.1	create	37
6.3.2	publish	37
6.3.3	install	37
6.4	Build Your Own Container (BYOC)	37
6.4.1	Test Container image	37
6.4.2	Setup VS Code to use container as development environment	38
6.4.3	Publish image to registry	38
6.4.4	Run container image on OCI Data Science	38
6.5	Local Job Execution	38
6.5.1	Prerequisites	39
6.5.2	Restrictions	39
6.5.3	Running your Job	39
6.5.3.1	Using a conda environment	39
6.5.3.2	Using a custom image	40
6.5.3.3	Viewing container output	40
6.6	Local Pipeline Execution	40
6.6.1	Prerequisites	40
6.6.2	Restrictions	40
6.6.3	Configuring Local Pipeline Orchestrator	41
6.6.4	Running your Pipeline	41
6.6.4.1	Source folder and relative paths	41
6.6.4.2	Viewing container output and orchestration messages	42
7	Load Data	45
7.1	Connecting to Data Sources	45
7.1.1	Object Storage	45
7.1.2	Local Storage	46
7.1.3	Oracle Database	46
7.1.3.1	Oracle ADB to Pandas	46
7.1.3.2	Oracle Database to Pandas - No Wallet	48
7.1.3.3	Performance	49
7.1.3.4	Large Result Set	49
7.1.3.5	Very Large Result Set	50

7.1.3.6	Pandas to Oracle Database	50
7.1.4	MySQL	50
7.1.5	BDS Hive	52
7.1.5.1	Connection Parameters	52
7.1.5.2	Partition	53
7.1.5.3	Large Dataframe	54
7.1.6	HTTP(S) Sources	54
7.1.7	Convert Pandas DataFrame to ADSDataset	54
7.1.8	Using PyArrow	55
7.2	DataSetFactory	55
7.2.1	Connect with DatasetFactory	55
7.2.1.1	Object Storage	56
7.2.1.2	Local Storage	56
7.2.1.2.1	Oracle Database	57
7.2.1.3	Autonomous Database	58
7.2.1.3.1	Load from ADB	58
7.2.1.3.2	Query ADB	59
7.2.1.4	Update ADB Tables	60
7.2.1.5	Amazon S3	60
7.2.1.6	HTTP(S) Sources	61
7.2.1.7	DatasetBrowser	61
8	Label Data	63
8.1	Overview	63
8.2	Quick Start	64
8.3	Export Metadata	65
8.4	List	65
8.5	Load	65
8.5.1	LabeledDatasetReader	66
8.5.2	Pandas Accessor	67
8.6	Visualize	68
8.6.1	Image	68
8.6.2	Text	69
8.7	Examples	69
8.7.1	Binary Text Classification	69
8.7.1.1	Dataset	70
8.7.1.2	Load	70
8.7.1.3	Preprocess	70
8.7.1.4	Train	71
8.7.1.5	Predict	71
8.7.2	Image Classification	71
8.7.2.1	Data Source	71
8.7.2.2	Load	72
8.7.2.3	Visualize	72
8.7.2.4	Preprocess	72
8.7.2.5	Train	73
8.7.2.6	Predict	73
8.7.3	Multinomial Text Classification	73
8.7.3.1	Dataset	73
8.7.3.2	Load	74
8.7.3.3	Preprocess	74
8.7.3.4	Train	74
8.7.3.5	Predict	75
8.7.4	Named Entity Recognition	75

8.7.4.1	Dataset	75
8.7.4.2	Load	75
8.7.4.3	Preprocess	76
8.7.4.4	Train	77
8.7.4.5	Predict	79
9	Transform Data	81
9.1	Loading the Dataset	81
9.2	Automated Transformations	81
9.3	Row Operations	82
9.3.1	Delete Rows	83
9.3.2	Reset Index	83
9.3.3	Append Rows	83
9.3.4	Row Filtering	83
9.3.5	Removing Duplicated Rows	84
9.4	Column Operations	84
9.4.1	Delete a Column	84
9.4.2	Rename a Column	84
9.4.3	Counts of Unique Values	84
9.4.4	Normalize a Column	85
9.4.5	Combine Columns	85
9.4.6	Apply a Function to a Column	85
9.4.7	Change Data Type	86
9.5	Dataset Manipulation	87
9.5.1	Categorical Encoding	87
9.5.2	One-Hot Encoding	87
9.5.3	Extract Null Values	88
9.5.4	Imputation	88
9.5.5	Combine Datasets	89
9.5.5.1	Join Datasets	89
9.5.5.2	Concatenate Datasets	90
9.6	Train/Test Datasets	90
9.7	Text Data	91
9.7.1	TextStrings	91
9.7.1.1	Overview	91
9.7.1.2	Quick Start	91
9.7.1.2.1	NLP Parse	91
9.7.1.2.2	Plugin	92
9.7.1.2.3	RegEx Match	93
9.7.1.3	NLP Parse	93
9.7.1.3.1	NLTK	93
9.7.1.3.2	spaCy	95
9.7.1.4	Plugin	97
9.7.1.4.1	Custom Plugin	97
9.7.1.4.2	OCI Language Services	98
9.7.1.5	RegEx Match	104
9.7.1.6	Still a String	105
9.7.2	Text Extraction	105
9.7.2.1	Introduction	106
9.7.2.1.1	Configure the Data Source	107
9.7.2.2	Load	107
9.7.2.2.1	Read a Dataset	107
9.7.2.2.2	Read Options	108
9.7.2.3	Augment Records	113

9.7.2.3.1	Examples	114
9.7.2.4	Custom File Processor and Backend	115
9.7.2.4.1	Custom Backend	115
9.7.2.4.2	Custom File Processor	115
9.7.2.4.3	Example	116
10	Visualize Data	117
10.1	Automatic	117
10.2	Customized	126
10.2.1	Seaborn	126
10.2.2	Matplotlib	126
10.2.3	Geographic Information System (GIS)	129
11	Train Models	131
11.1	ADSTuner	131
11.1.1	Notebook Example: Hyperparameter Optimization with ADSTuner	136
11.2	Training with OCI	144
11.3	Distributed Training	146
11.3.1	Getting Started	147
11.3.1.1	Key Steps	147
11.3.1.2	Prepare container image for distributed workload	148
11.3.1.3	Check Config File generated by the Main and the Worker Nodes	148
11.3.2	Configurations	148
11.3.2.1	Networks	148
11.3.2.2	OCI Policies	149
11.3.2.3	Policy Syntax	150
11.3.3	Developer Guide	151
11.3.3.1	Build Image	151
11.3.3.2	Publish Docker Image	152
11.3.3.3	Run the container Image on the OCI Data Science or local	152
11.3.3.4	Development Flow	153
11.3.3.5	Diagnosing Infrastructure Setup	154
11.3.4	Dask	154
11.3.4.1	Creating Workloads	155
11.3.4.2	Writing Dask Code	160
11.3.4.3	Distributed XGBoost & LightGBM	161
11.3.4.3.1	LightGBM	161
11.3.4.3.2	XGBoost	162
11.3.4.4	Securing with TLS	163
11.3.4.5	Dask Cluster Tuning	166
11.3.4.5.1	Configuring dask startup options	166
11.3.4.5.2	Configuration through Environment Variables	167
11.3.4.6	Dask dashboard	167
11.3.4.6.1	Bastion Host	168
11.3.5	Horovod	168
11.3.5.1	Creating Horovod Workloads	168
11.3.5.2	Writing Distributed code with Horovod Framework	177
11.3.5.2.1	TensorFlow	177
11.3.5.2.2	PyTorch	178
11.3.5.3	Monitoring Training	183
11.3.6	PyTorch Distributed	184
11.3.6.1	Creating PyTorch Distributed Workloads	184
11.3.7	Tensorflow	194
11.3.7.1	Creating Tensorflow Workloads	195

11.3.8	Run Source Code from Git or Object Storage	207
11.3.8.1	Git Repository	208
11.3.8.2	Object Storage	208
11.3.9	YAML Schema	209
11.3.10	Troubleshooting	212
11.4	TensorBoard	212
11.4.1	Setting up local environment	212
11.4.2	Viewing logs from your experiments	213
11.4.3	Writing TensorBoard logs to Object Storage	213
11.4.3.1	PyTorch	213
11.4.3.2	TensorFlow	214
11.4.3.2.1	OCI Data Science Notebook	214
11.4.3.2.2	OCI Data Science Jobs	215
11.5	Model Evaluation	216
11.5.1	Quick Start	216
11.5.1.1	Comparing Binary Classification Models	216
11.5.1.2	Comparing Multi Classification Models	217
11.5.1.3	Comparing Regression Models	218
11.5.2	Binary Classification	218
11.5.2.1	Fairness Metrics	223
11.5.3	Multinomial Classification	224
11.5.4	Regression	230
11.6	Oracle AutoMLx	234
11.6.1	Quick Start	234
11.6.1.1	Load dataset	234
11.6.1.2	Set the AutoMLx engine	235
11.6.1.3	Train a model using AutoMLx	235
11.6.1.4	Explain a classifier	236
12	Register and Deploy Models	237
12.1	Workflow	237
12.2	Register	238
12.2.1	Quick Start	238
12.2.1.1	Sklearn	238
12.2.1.2	XGBoost	239
12.2.1.3	LightGBM	240
12.2.1.4	PyTorch	241
12.2.1.5	Spark Pipeline	242
12.2.1.6	TensorFlow	243
12.2.1.7	HuggingFace Pipelines	244
12.2.1.8	Other Frameworks	245
12.2.1.9	With Model Version Set	245
12.2.2	Model Registration	246
12.2.2.1	Model Artifact	246
12.2.2.2	Prepare the Model Artifact	247
12.2.2.3	score.py	248
12.2.2.3.1	load_model	249
12.2.2.3.2	predict	249
12.2.2.3.3	pre_inference	249
12.2.2.3.4	post_inference	249
12.2.2.3.5	deserialize	249
12.2.2.3.6	fetch_data_type_from_schema	250
12.2.2.4	Model Introspection	250
12.2.2.5	Save Model	251

12.2.2.6	Save Large Model	251
12.2.2.7	Export Model Artifact to Object Storage	252
12.2.3	Model Schema	252
12.2.3.1	Schema Model	253
12.2.3.2	Generating Schema	254
12.2.3.3	Update the Schema	255
12.2.4	Model Metadata	256
12.2.4.1	Taxonomy Metadata	256
12.2.4.2	Custom Metadata	261
12.2.5	Customizing the Model	263
12.2.5.1	Customize score.py	263
12.2.6	Model Version Set	271
12.2.6.1	Overview	271
12.2.6.2	Quick Start	272
12.2.6.3	Associate a Model	273
12.2.6.3.1	ModelVersionSet Object	273
12.2.6.3.2	Model Serialization	273
12.2.6.3.3	Context Manager	274
12.2.6.4	Create	274
12.2.6.5	Delete	275
12.2.6.6	Download	275
12.2.6.7	List	275
12.2.6.7.1	ModelVersionSet	275
12.2.6.7.2	Model	276
12.2.6.8	Update	276
12.2.6.8.1	ModelVersionSet Properties	276
12.2.6.8.2	Version Label	277
12.3	Deploying model	277
12.3.1	Deploy Model with Conda Runtime	277
12.3.1.1	Deploy	279
12.3.1.2	Predict	279
12.3.1.3	Observability	279
12.3.1.4	Update Model Deployment	279
12.3.2	Deploy Model with Container Runtime	280
12.3.2.1	Deploy Using GenericModel Class	280
12.3.2.2	Deploy Using ModelDeployment Class	281
12.4	Loading model	283
12.4.1	Load Registered Model	283
12.4.2	Load Deployed Model	285
12.4.3	Load Model From Object Storage	286
12.4.4	Large Model Artifacts	286
12.5	Frameworks	288
12.5.1	SklearnModel	288
12.5.1.1	Overview	288
12.5.1.2	Prepare Model Artifact	288
12.5.1.3	Summary Status	290
12.5.1.4	Register Model	290
12.5.1.5	Deploy and Generate Endpoint	291
12.5.1.6	Run Prediction against Endpoint	291
12.5.1.7	Run Prediction with oci raw-request command	291
12.5.1.7.1	json payload example	291
12.5.1.7.2	numpy.ndarray payload example	292
12.5.1.7.3	pandas.core.frame.DataFrame payload example	292
12.5.1.7.4	dict payload example	293

12.5.1.7.5	Expected output of raw-request command	293
12.5.1.8	Examples	294
12.5.2	PyTorchModel	295
12.5.2.1	Overview	295
12.5.2.2	Prepare Model Artifact	295
12.5.2.2.1	Save as TorchScript	295
12.5.2.2.2	Save state_dict	296
12.5.2.3	Verify Changes to Score.py	299
12.5.2.4	Summary Status	299
12.5.2.5	Register Model	299
12.5.2.6	Deploy and Generate Endpoint	300
12.5.2.7	Run Prediction against Endpoint	301
12.5.2.7.1	Predict with Image	301
12.5.2.8	Run Prediction with oci raw-request command	303
12.5.2.8.1	<i>torch.Tensor</i> payload example	303
12.5.2.8.2	Expected output of raw-request command	303
12.5.2.9	Example	304
12.5.3	TensorFlowModel	305
12.5.3.1	Overview	306
12.5.3.2	Prepare Model Artifact	306
12.5.3.3	Summary Status	308
12.5.3.4	Register Model	308
12.5.3.5	Deploy and Generate Endpoint	309
12.5.3.6	Run Prediction against Endpoint	309
12.5.3.6.1	Predict with Image	309
12.5.3.7	Run Prediction with oci raw-request command	310
12.5.3.7.1	<i>numpy.ndarray</i> payload example	310
12.5.3.7.2	Expected output of raw-request command	310
12.5.3.8	Example	311
12.5.4	SparkPipelineModel	312
12.5.4.1	Overview	312
12.5.4.2	Prepare Model Artifact	313
12.5.4.3	Summary Status	315
12.5.4.4	Register Model	315
12.5.4.5	Deploy and Generate Endpoint	316
12.5.4.6	Run Prediction against Endpoint	316
12.5.4.7	Run Prediction with oci raw-request command	316
12.5.4.7.1	<i>json</i> payload example	316
12.5.4.7.2	Expected output of raw-request command	317
12.5.4.8	Example	317
12.5.5	LightGBMModel	319
12.5.5.1	Overview	319
12.5.5.2	Prepare Model Artifact	319
12.5.5.3	Summary Status	321
12.5.5.4	Register Model	322
12.5.5.5	Deploy and Generate Endpoint	322
12.5.5.6	Run Prediction against Endpoint	322
12.5.5.7	Run Prediction with oci raw-request command	323
12.5.5.7.1	<i>json</i> payload example	323
12.5.5.7.2	<i>numpy.ndarray</i> payload example	323
12.5.5.7.3	<i>pandas.core.frame.DataFrame</i> payload example	324
12.5.5.7.4	<i>dict</i> payload example	324
12.5.5.7.5	Expected output of raw-request command	324
12.5.5.8	Example	325

12.5.6	XGBoostModel	326
12.5.6.1	Overview	326
12.5.6.2	Prepare Model Artifact	327
12.5.6.3	Summary Status	328
12.5.6.4	Register Model	329
12.5.6.5	Deploy and Generate Endpoint	329
12.5.6.6	Run Prediction against Endpoint	330
12.5.6.7	Run Prediction with oci raw-request command	330
12.5.6.7.1	json payload example	330
12.5.6.7.2	numpy.ndarray payload example	330
12.5.6.7.3	pandas.core.frame.DataFrame payload example	331
12.5.6.7.4	dict payload example	331
12.5.6.7.5	Expected output of raw-request command	332
12.5.6.8	Example	332
12.5.7	HuggingFacePipelineModel	333
12.5.7.1	Overview	333
12.5.7.2	Prepare a Custom Conda Pack	334
12.5.7.3	Prepare Model Artifact	334
12.5.7.4	Summary Status	335
12.5.7.5	Register Model	336
12.5.7.6	Deploy and Generate Endpoint	336
12.5.7.7	Run Prediction against Endpoint	336
12.5.7.7.1	Predict with Image	336
12.5.7.7.2	Predict with Multiple Arguments	337
12.5.7.8	Run Prediction with oci sdk	337
12.5.7.8.1	bytes payload example	337
12.5.7.9	Example	338
12.5.8	AutoMLModel	339
12.5.8.1	Example	339
12.5.9	Other Frameworks	344
12.5.9.1	Overview	344
12.5.9.2	Prepare Model Artifact	344
12.5.9.3	Summary Status	345
12.5.9.4	Example	345
12.5.9.5	Example – CatBoost	347
12.5.9.6	Example – Save Your Own Model	348
13	Apache Spark	355
13.1	Quick Start	355
13.1.1	Submit a Toy Python Script to DataFlow	355
13.1.1.1	From a Python Environment	355
13.1.1.2	From the Command Line	356
13.1.2	Real Data Flow Example with Conda Environment	357
13.1.2.1	From a Python Environment	357
13.1.2.2	From the Command Line	359
13.2	Setup and Installation	361
13.2.1	Notebook Session Development	361
13.2.1.1	Pyspark Environment	361
13.2.1.2	Configuring core-site.xml	361
13.2.2	Local Development	363
13.2.2.1	PySpark Environment	363
13.2.2.2	Developing in Visual Studio Code	363
13.2.3	Logging From DataFlow	364
13.3	Running your Spark Application on OCI Data Flow	364

13.3.1	Notebook Extension	364
13.3.2	ADS CLI	366
13.3.3	ADS Python SDK	367
13.3.3.1	YAML	373
13.4	spark-defaults.conf	376
13.4.1	odsc Command-line	377
13.4.2	Manual	377
13.4.2.1	Resource Principal	378
13.4.2.2	API Keys	378
13.5	Data Catalog Metastore	378
13.5.1	Prerequisite	379
13.5.2	Quick Start	379
13.5.2.1	Data Flow	379
13.5.2.2	Interactive Spark	381
13.5.3	Data Flow	382
13.5.3.1	PySpark Script	382
13.5.3.2	Create Application	384
13.5.3.3	Run	385
13.5.4	Interactive Spark	385
13.6	OCI Data Flow Studio	386
13.6.1	Prerequisite	386
13.6.1.1	Policies	387
13.6.2	Quick Start	387
13.6.3	Data Flow Spark Magic	387
13.6.3.1	Create Session	388
13.6.3.2	Update Session	390
13.6.3.3	Configure Session	390
13.6.3.4	Stop Session	390
13.6.3.5	Activate Session	390
13.6.3.6	Use Existing Session	390
13.6.4	Basic Spark Usage Examples	391
13.6.4.1	Spark SQL	391
13.7	[Legacy]	392
13.7.1	Prerequisite	392
13.7.2	Create a Instance	392
13.7.3	Generate a Script Using a Template	392
13.7.4	Create a Application	393
13.7.4.1	Load an Existing Application	394
13.7.4.2	Listing Applications	394
13.7.4.3	Create a Run	394
13.7.4.4	Fetching Logs	395
13.7.4.5	Edit and Synchronize PySpark Script	396
13.7.4.6	Arguments and Parameters	396
13.7.4.7	Add Third-Party Libraries	397
13.7.4.8	Fetching PySpark Output	397
13.7.5	Example Notebook: Develop Pyspark jobs locally - from local to remote workflows	399
13.7.6	Example Notebook: Using the ADB with PySpark	407
14	Big Data Service	411
14.1	Quick Start	411
14.1.1	Set Up A Conda Environment	411
14.1.2	Connect from a Notebook	411
14.1.2.1	Using the Vault	411
14.1.2.2	Without Using the Vault	412

14.2	Conda Environment	412
14.2.1	Create	412
14.2.2	Publish	412
14.3	Connect	413
14.3.1	Notebook Session	413
14.3.1.1	Using the Vault	413
14.3.1.2	Without Using the Vault	413
14.3.2	Jobs	414
14.4	File Management	414
14.4.1	FSSpec	414
14.4.1.1	Connect	414
14.4.1.2	Delete	415
14.4.1.3	Download	415
14.4.1.4	List	415
14.4.1.5	Upload	415
14.4.2	Ibis	416
14.4.2.1	Connect	416
14.4.2.2	Delete	416
14.4.2.3	Download	416
14.4.2.4	List	416
14.4.2.5	Upload	417
14.4.3	Pandas	417
14.4.3.1	Connect	417
14.4.3.2	File Handle	418
14.4.3.3	URL	418
14.4.4	PyArrow	418
14.4.4.1	Connect	419
14.4.4.2	Filesystem	419
14.5	SQL Data Management	420
14.5.1	Ibis	420
14.5.1.1	Connect	420
14.5.1.2	Query	420
14.5.1.3	Close a Connection	421
14.5.2	Impala	421
14.5.2.1	Connect	421
14.5.2.2	Create a Table	421
14.5.2.3	Query	421
14.5.2.4	Drop a Table	422
14.5.2.5	Close a Connection	422
14.5.3	PyHive	422
14.5.3.1	Connect	422
14.5.3.2	Create a Table	422
14.5.3.3	Query	423
14.5.3.4	Drop a Table	423
14.5.3.5	Close a Connection	423
15	Data Science Jobs	425
15.1	Quick Start	425
15.1.1	Define a Job	426
15.1.2	YAML	428
15.1.3	Run a Job and Monitor outputs	428
15.1.4	Load Existing Job or Job Run	429
15.1.5	List Existing Jobs or Job Runs	429
15.1.6	Delete a Job or Job Run	429

15.1.7	Variable Substitution	430
15.2	IAM Policies	431
15.3	Infrastructure and Runtime	432
15.3.1	Example	433
15.3.2	Infrastructure	434
15.3.2.1	Using Configurations from Notebook	435
15.3.2.2	Compute Shapes	436
15.3.2.3	Networking	436
15.3.2.4	Logging	437
15.3.3	Runtime	437
15.3.3.1	Environment Variables	437
15.3.3.2	Command Line Arguments	438
15.3.3.3	Conda Environment	441
15.3.3.4	Override Configurations	442
15.4	Run a Python Workload	442
15.4.1	Example	442
15.4.2	Source Code	445
15.4.3	Working Directory	445
15.4.3.1	File Source Code	445
15.4.3.2	Folder Source Code	445
15.4.3.3	Archive Source Code	446
15.4.4	Python Paths	447
15.4.5	Outputs	447
15.5	Run a Notebook	447
15.5.1	TensorFlow Example	447
15.5.2	Working Directory	449
15.5.3	Download the Outputs	449
15.5.4	Exclude Cells	449
15.5.5	Notebook with Dependencies	450
15.6	Run a Script	451
15.6.1	Working Directory	453
15.7	Run a Container	453
15.8	Run Code from Git Repo	455
15.8.1	PyTorch Example	456
15.8.2	Git Repository	457
15.8.3	Entrypoint	458
15.8.4	Working Directory	459
15.8.5	Python Paths	459
15.8.6	Outputs	459
15.8.7	Metadata	459
15.9	Working with the CLI	460
15.9.1	Prerequisite	460
15.9.2	Running a Pre Defined Job	460
15.9.3	Delete Job or Job Run	460
15.9.4	Cancel Job Run	460
15.9.5	Cancel Distributed Training Job	460
15.10	Monitoring With CLI	460
15.10.1	watch	460
16	Data Science Pipelines	463
16.1	Overview	463
16.1.1	Pipeline Step	463
16.1.2	Pipeline	463
16.1.3	Pipeline Run	463

16.2	Quick Start	464
16.2.1	ADS Python SDK	464
16.2.2	ADS CLI	468
16.2.2.1	Create / Run	468
16.2.2.2	Monitor	468
16.2.2.3	Cancel	468
16.2.2.4	Delete	468
16.2.3	ADS Magic Commands	469
16.2.3.1	Installation	469
16.2.3.2	Create / Run	469
16.2.3.3	Visualize	469
16.2.3.4	Watch status	469
16.2.3.5	Monitor logs	470
16.2.3.6	Cancel	470
16.2.3.7	Delete	470
16.3	Pipeline	471
16.3.1	Define	471
16.3.1.1	DAG	471
16.3.1.2	Logs	471
16.3.2	Create	473
16.3.3	Run	473
16.3.4	Load	474
16.3.5	Visualize	474
16.3.6	Delete	474
16.4	Pipeline Step	475
16.4.1	Data Science Job Step	475
16.4.2	Custom Script Step	476
16.5	Pipeline Run	480
16.5.1	Watch status	480
16.5.2	Monitor Logs	481
16.5.3	Load	482
16.5.4	Cancel	482
16.5.5	Delete	483
16.6	Examples	483
16.6.1	Create a pipeline	483
16.6.2	Run a job as a step	485
16.6.3	Run a python script as a step	487
16.6.4	Run a notebook as a step	488
16.6.5	Run two steps with the same infrastructure	490
16.6.6	Run two steps in parallel	493
16.6.7	Run two steps sequentially	496
16.6.8	Run multiple steps with dependencies specified in DAG	498
16.6.9	Set environment variables in a step	502
16.6.10	Watch status update on a pipeline run	504
16.6.11	Monitor logs of a pipeline run	506
16.6.12	Override configurations when creating a pipeline run	508
17	Store Credentials	511
17.1	Quick Start	511
17.1.1	Auth Tokens	511
17.1.1.1	Save Credentials	511
17.1.1.2	Load Credentials	512
17.1.2	Autonomous Database	512
17.1.2.1	Save Credentials	512

17.1.2.2	Load Credentials	513
17.1.3	Big Data Service	513
17.1.3.1	Save Credentials	513
17.1.3.2	Load Credentials	514
17.1.4	MySQL	514
17.1.4.1	Save Credentials	514
17.1.4.2	Load Credentials	515
17.1.5	Oracle Database	515
17.1.5.1	Save Credentials	515
17.1.5.2	Load Credentials	516
17.2	Auth Token	516
17.2.1	Save Credentials	516
17.2.1.1	AuthTokenSecretKeeper	516
17.2.1.1.1	Save	516
17.2.1.2	Examples	517
17.2.1.2.1	Save Auth Token	517
17.2.1.2.2	Save as a yaml File	517
17.2.2	Load Credentials	517
17.2.2.1	Load	517
17.2.2.1.1	Using a with Statement	518
17.2.2.1.2	Without using a with Statement	518
17.2.2.2	Examples	518
17.2.2.2.1	Using a with Statement	518
17.2.2.2.2	Export to Environment Variables Using a with Statement	519
17.3	Autonomous Database	520
17.3.1	Save Credentials	520
17.3.1.1	ADBSecretKeeper	520
17.3.1.1.1	Save	520
17.3.1.2	Examples	521
17.3.1.2.1	Without the Wallet File	521
17.3.1.2.2	With the Wallet File	522
17.3.2	Load Credentials	522
17.3.2.1	Load	522
17.3.2.1.1	Using a with Statement	523
17.3.2.1.2	Without using a with Statement	523
17.3.2.2	Examples	523
17.3.2.2.1	Using a with Statement	523
17.3.2.2.2	Export to Environment Variables Using a with Statement	524
17.3.2.2.3	Wallet File Location	525
17.4	Big Data Service	525
17.4.1	Save Credentials	526
17.4.1.1	BDSecretKeeper	526
17.4.1.1.1	Save	526
17.4.1.2	Examples	526
17.4.1.2.1	With the Keytab and kerb5 Config Files	526
17.4.1.2.2	Without the Keytab and kerb5 Config Files	527
17.4.2	Load Credentials	528
17.4.2.1	Load	528
17.4.2.1.1	Using a with Statement	528
17.4.2.1.2	Without Using a with Statement	528
17.4.2.2	Examples	529
17.4.2.2.1	Using a With Statement	529
17.4.2.2.2	Without Using a With Statement	529
17.5	MySQL	530

17.5.1	Save Credentials	530
17.5.1.1	MySQLDBSecretKeeper	530
17.5.1.1.1	Save	531
17.5.1.2	Examples	531
17.5.1.2.1	Save Credentials	531
17.5.1.2.2	Save as a YAML File	532
17.5.2	Load Credentials	532
17.5.2.1	Load	532
17.5.2.1.1	Using a <code>with</code> Statement	532
17.5.2.1.2	Without Using a <code>with</code> Statement	532
17.5.2.2	Examples	532
17.5.2.2.1	Using a <code>with</code> Statement	532
17.5.2.2.2	Export the Environment Variables Using a <code>with</code> Statement	533
17.6	Oracle Database	534
17.6.1	Save Credentials	534
17.6.1.1	OracleDBSecretKeeper	534
17.6.1.2	Save	535
17.6.1.3	Examples	535
17.6.1.3.1	Save Credentials	535
17.6.1.3.2	Save as a YAML File	536
17.6.2	Load Credentials	536
17.6.2.1	Load	536
17.6.2.1.1	Using a <code>with</code> Statement	536
17.6.2.1.2	Without using a <code>with</code> Statement	536
17.6.2.2	Examples	537
17.6.2.2.1	Using a <code>with</code> Statement	537
17.6.2.2.2	Export the Environment Variable Using a <code>with</code> Statement	537
18	Class Documentation	539
18.1	ads package	539
18.1.1	Subpackages	539
18.1.1.1	ads.bds package	539
18.1.1.1.1	Submodules	539
18.1.1.1.2	ads.bds.auth module	539
18.1.1.1.3	ads.bds.big_data_service module	540
18.1.1.1.4	Module contents	542
18.1.1.2	ads.catalog package	542
18.1.1.2.1	Submodules	542
18.1.1.2.2	ads.catalog.model module	542
18.1.1.2.3	ads.catalog.notebook module	549
18.1.1.2.4	ads.catalog.project module	552
18.1.1.2.5	ads.catalog.summary module	555
18.1.1.2.6	Module contents	555
18.1.1.3	ads.common package	555
18.1.1.3.1	Subpackages	555
18.1.1.3.2	Submodules	560
18.1.1.3.3	ads.common.analyzer module	560
18.1.1.3.4	ads.common.auth module	560
18.1.1.3.5	ads.common.base_properties module	571
18.1.1.3.6	ads.common.card_identifier module	573
18.1.1.3.7	ads.common.config module	573
18.1.1.3.8	ads.common.data module	579
18.1.1.3.9	ads.common.data_serializer module	581
18.1.1.3.10	ads.common.error module	581

18.1.1.3.11	ads.common.extended_enum module	581
18.1.1.3.12	ads.common.ipython module	582
18.1.1.3.13	ads.common.model module	582
18.1.1.3.14	ads.common.model_artifact module	585
18.1.1.3.15	ads.common.model_export_util module	592
18.1.1.3.16	ads.common.model_introspect module	594
18.1.1.3.17	ads.common.model_metadata module	597
18.1.1.3.18	ads.common.model_metadata_mixin module	597
18.1.1.3.19	ads.common.object_storage_details module	598
18.1.1.3.20	ads.common.oci_client module	599
18.1.1.3.21	ads.common.oci_datascience module	600
18.1.1.3.22	ads.common.oci_logging module	601
18.1.1.3.23	ads.common.oci_mixin module	607
18.1.1.3.24	ads.common.oci_resource module	614
18.1.1.3.25	ads.common.serializer module	616
18.1.1.3.26	ads.common.utils module	620
18.1.1.3.27	ads.common.word_lists module	629
18.1.1.3.28	Module contents	629
18.1.1.4	ads.data_labeling package	629
18.1.1.4.1	Subpackages	629
18.1.1.4.2	Submodules	664
18.1.1.4.3	ads.data_labeling.boundingbox module	664
18.1.1.4.4	ads.data_labeling.constants module	667
18.1.1.4.5	ads.data_labeling.data_labeling_service module	667
18.1.1.4.6	ads.data_labeling.metadata module	669
18.1.1.4.7	ads.data_labeling.ner module	671
18.1.1.4.8	ads.data_labeling.record module	672
18.1.1.4.9	Module contents	673
18.1.1.5	ads.database package	673
18.1.1.5.1	Submodules	673
18.1.1.5.2	ads.database.connection module	673
18.1.1.5.3	Module contents	674
18.1.1.6	ads.dataflow package	674
18.1.1.6.1	Submodules	674
18.1.1.6.2	ads.dataflow.dataflow module	674
18.1.1.6.3	ads.dataflow.dataflowssummary module	682
18.1.1.6.4	Module contents	682
18.1.1.7	ads.dataset package	682
18.1.1.7.1	Submodules	682
18.1.1.7.2	ads.dataset.classification_dataset module	682
18.1.1.7.3	ads.dataset.correlation module	686
18.1.1.7.4	ads.dataset.correlation_plot module	686
18.1.1.7.5	ads.dataset.dask_series module	688
18.1.1.7.6	ads.dataset.dataframe_transformer module	688
18.1.1.7.7	ads.dataset.dataset module	689
18.1.1.7.8	ads.dataset.dataset_browser module	700
18.1.1.7.9	ads.dataset.dataset_with_target module	703
18.1.1.7.10	ads.dataset.exception module	708
18.1.1.7.11	ads.dataset.factory module	708
18.1.1.7.12	ads.dataset.feature_engineering_transformer module	713
18.1.1.7.13	ads.dataset.feature_selection module	713
18.1.1.7.14	ads.dataset.forecasting_dataset module	714
18.1.1.7.15	ads.dataset.helper module	714
18.1.1.7.16	ads.dataset.label_encoder module	717

18.1.1.7.17	ads.dataset.pipeline module	717
18.1.1.7.18	ads.dataset.plot module	717
18.1.1.7.19	ads.dataset.progress module	718
18.1.1.7.20	ads.dataset.recommendation module	718
18.1.1.7.21	ads.dataset.recommendation_transformer module	718
18.1.1.7.22	ads.dataset.regression_dataset module	719
18.1.1.7.23	ads.dataset.sampled_dataset module	719
18.1.1.7.24	ads.dataset.target module	720
18.1.1.7.25	ads.dataset.timeseries module	721
18.1.1.7.26	Module contents	721
18.1.1.8	ads.dbmixin package	721
18.1.1.8.1	Submodules	721
18.1.1.8.2	ads.dbmixin.db_pandas_accessor module	721
18.1.1.8.3	Module contents	723
18.1.1.9	ads.environment package	723
18.1.1.9.1	Submodules	723
18.1.1.9.2	ads.environment.ml_runtime module	723
18.1.1.9.3	Module contents	723
18.1.1.10	ads.evaluations package	723
18.1.1.10.1	Submodules	723
18.1.1.10.2	ads.evaluations.evaluation_plot module	723
18.1.1.10.3	ads.evaluations.evaluator module	725
18.1.1.10.4	ads.evaluations.statistical_metrics module	737
18.1.1.10.5	Module contents	738
18.1.1.11	ads.experiments package	741
18.1.1.11.1	Module contents	741
18.1.1.12	ads.feature_engineering package	741
18.1.1.12.1	Subpackages	741
18.1.1.12.2	Submodules	839
18.1.1.12.3	ads.feature_engineering.exceptions module	839
18.1.1.12.4	ads.feature_engineering.feature_type_manager module	839
18.1.1.12.5	ads.feature_engineering.schema module	843
18.1.1.12.6	ads.feature_engineering.utils module	853
18.1.1.12.7	Module contents	854
18.1.1.13	ads.hpo package	854
18.1.1.13.1	Subpackages	854
18.1.1.13.2	Submodules	854
18.1.1.13.3	ads.hpo.ads_search_space module	854
18.1.1.13.4	ads.hpo.distributions module	856
18.1.1.13.5	ads.hpo.objective module	859
18.1.1.13.6	ads.hpo.search_cv module	859
18.1.1.13.7	ads.hpo.stopping_criterion module	871
18.1.1.13.8	ads.hpo.tuner_artifact module	871
18.1.1.13.9	ads.hpo.utils module	872
18.1.1.13.10	ads.hpo.validation module	872
18.1.1.13.11	Module contents	873
18.1.1.14	ads.jobs package	873
18.1.1.14.1	Subpackages	873
18.1.1.14.2	Submodules	926
18.1.1.14.3	Module contents	945
18.1.1.15	ads.model package	1052
18.1.1.15.1	Subpackages	1052
18.1.1.15.2	Submodules	1296
18.1.1.15.3	ads.model.artifact module	1296

18.1.1.15.4	ads.model.artifact_downloader module	1299
18.1.1.15.5	ads.model.artifact_uploader module	1300
18.1.1.15.6	ads.model.base_properties module	1301
18.1.1.15.7	ads.model.model_introspect module	1331
18.1.1.15.8	ads.model.model_metadata module	1334
18.1.1.15.9	ads.model.model_metadata_mixin module	1352
18.1.1.15.10	ads.model.model_properties module	1353
18.1.1.15.11	ads.model.model_version_set module	1354
18.1.1.15.12	Module contents	1362
18.1.1.16	ads.model_artifact_boilerplate package	1464
18.1.1.16.1	Subpackages	1464
18.1.1.16.2	Submodules	1465
18.1.1.16.3	ads.model_artifact_boilerplate.score module	1465
18.1.1.16.4	Module contents	1465
18.1.1.17	ads.mysqlldb package	1465
18.1.1.17.1	Submodules	1465
18.1.1.17.2	ads.mysqlldb.mysql_db module	1465
18.1.1.17.3	Module contents	1465
18.1.1.18	ads.opctl package	1465
18.1.1.18.1	Subpackages	1465
18.1.1.18.2	Submodules	1478
18.1.1.18.3	ads.opctl.cli module	1478
18.1.1.18.4	ads.opctl.cmds module	1478
18.1.1.18.5	ads.opctl.constants module	1478
18.1.1.18.6	ads.opctl.utils module	1479
18.1.1.18.7	Module contents	1480
18.1.1.19	ads.oracledb package	1480
18.1.1.19.1	Submodules	1480
18.1.1.19.2	ads.oracledb.oracle_db module	1480
18.1.1.19.3	Module contents	1480
18.1.1.20	ads.pipeline package	1480
18.1.1.20.1	Subpackages	1480
18.1.1.20.2	Submodules	1487
18.1.1.20.3	ads.pipeline.ads_pipeline module	1487
18.1.1.20.4	ads.pipeline.ads_pipeline_run module	1508
18.1.1.20.5	ads.pipeline.ads_pipeline_step module	1513
18.1.1.20.6	ads.pipeline.cli module	1520
18.1.1.20.7	ads.pipeline.extension module	1520
18.1.1.20.8	Module contents	1520
18.1.1.21	ads.secrets package	1520
18.1.1.21.1	Submodules	1520
18.1.1.21.2	ads.secrets.adb module	1520
18.1.1.21.3	ads.secrets.auth_token module	1524
18.1.1.21.4	ads.secrets.big_data_service module	1525
18.1.1.21.5	ads.secrets.mysqlldb module	1530
18.1.1.21.6	ads.secrets.oracledb module	1532
18.1.1.21.7	ads.secrets.secrets module	1534
18.1.1.21.8	Module contents	1538
18.1.1.22	ads.telemetry package	1538
18.1.1.22.1	Submodules	1538
18.1.1.22.2	ads.telemetry.telemetry module	1538
18.1.1.22.3	Module contents	1538
18.1.1.23	ads.text_dataset package	1538
18.1.1.23.1	Submodules	1538

18.1.1.23.2	ads.text_dataset.backends module	1538
18.1.1.23.3	ads.text_dataset.dataset module	1541
18.1.1.23.4	ads.text_dataset.extractor module	1545
18.1.1.23.5	ads.text_dataset.options module	1548
18.1.1.23.6	ads.text_dataset.udfs module	1548
18.1.1.23.7	ads.text_dataset.utils module	1548
18.1.1.23.8	Module contents	1549
18.1.1.24	ads.type_discovery package	1549
18.1.1.24.1	Submodules	1549
18.1.1.24.2	ads.type_discovery.abstract_detector module	1549
18.1.1.24.3	ads.type_discovery.constant_detector module	1549
18.1.1.24.4	ads.type_discovery.continuous_detector module	1549
18.1.1.24.5	ads.type_discovery.credit_card_detector module	1549
18.1.1.24.6	ads.type_discovery.datetime_detector module	1550
18.1.1.24.7	ads.type_discovery.discrete_detector module	1550
18.1.1.24.8	ads.type_discovery.document_detector module	1550
18.1.1.24.9	ads.type_discovery.ip_detector module	1550
18.1.1.24.10	ads.type_discovery.latlon_detector module	1551
18.1.1.24.11	ads.type_discovery.phone_number_detector module	1551
18.1.1.24.12	ads.type_discovery.type_discovery_driver module	1551
18.1.1.24.13	ads.type_discovery.typed_feature module	1552
18.1.1.24.14	ads.type_discovery.unknown_detector module	1553
18.1.1.24.15	ads.type_discovery.zipcode_detector module	1553
18.1.1.24.16	Module contents	1553
18.1.1.25	ads.vault package	1553
18.1.1.25.1	Submodules	1553
18.1.1.25.2	ads.vault.vault module	1553
18.1.1.25.3	Module contents	1555
18.1.2	Submodules	1555
18.1.3	ads.cli module	1555
18.1.4	ads.config module	1555
18.1.5	Module contents	1556
19	Additional Documentation	1559
20	Examples	1561
20.1	Load data from Object Storage	1561
20.2	Load data from Autonomous DB	1561
20.3	More Examples	1562
21	Contributing	1563
22	Security	1565
23	License	1567
	Python Module Index	1569
	Index	1575

RELEASE NOTES

1.1 2.8.3

Release date: March 22, 2023

- Added support for custom containers (Bring Your Own Container or BYOC) and environment variables for *GenericModel*.
- Added default values for configuring parameters in *ModelDeployment*, such as default flex shape, ocpu, memory in gbs, bandwidth, and instance count.
- Added support for *NotebookRuntime* to use directory as job artifact.
- Added support for *PythonRuntime* and *GitPythonRuntime* to use shell script as entrypoint.

1.2 2.8.2

Release date: March 2, 2023

- Remove support for Python 3.7.
- Improved the `DataScienceMode.create()` to support timeout argument and auto extract region from the signer and signer config.
- Support Jupyter Notebook as `entrypoint` when defining Data Science jobs with `PythonRuntime` and `GitPythonRuntime`.
- Support environment variable substitution in Data Science job names and output URI.
- Support JSON serialization of list/dictionary when assigning them as Data Science jobs environment variables.
- Support saving the notebook to output URI even if the job run failed when running a Data Science job using `NotebookRuntime`.
- Added `job.build()` method to Data Science job to load default values from environment.
- Added `DataScienceJob.fast_launch_shapes()` method to list fast launch shapes available for Data Science job.
- Added *HuggingFacePipelineModel* class to support prepare, save, deploy and predict for HuggingFace pipelines.
- Updated Data Science job run YAML representation to include configurations inherited from the job.
- Fixed custom conda environment not showing in Data Science Job YAML specification.
- Fixed an issue where model saving was failing in notebook session without ipywidgets installed.

- Fixed “Unknown archive format” error in `ads.jobs.PythonRuntime`, when the source code folder name ends with “zip”. List of supported archive files are: “zip”, “tar.gz”, “tar” and “tgz”.

1.3 2.8.1

Release date: February 16, 2023

- Fixed a bug for `ads opctl run` when `--auth` flag is passed and image is built by ADS.
- Fixed a bug in `GenericModel.save()` when the work requests are not successfully populated.
- Fixed a bug in `DataScienceModel.create()` to when the provenance metadata is not provided.

1.4 2.8.0

Release date: January 25, 2023

- Added support for the *machine learning pipelines* feature.
- Fixed a bug in `fetch_training_code_details()`. When git commit is empty string, set it as `None` to avoid service error.
- Fixed a bug in `fetch_training_code_details()`. Use the folder of `training_script_path` as the artifact directory, instead of `..`.

1.5 2.7.3

Release date: January 18, 2023

- Added support for the *model version set* feature.
- Added `--job-info` option to `ads opctl run` CLI to save job run information to a YAML file.
- Added the `AuthContext` class. It supports API key configuration, resource principal, and instance principal authentication. In addition, predefined signers, callable signers, or API keys configurations from specified locations.
- Added `restart_deployment()` method to the *framework-specific* classes. Update model deployment associated with the model.
- Added `activate()` and `deactivate()` method to the *model deployment* classes.
- Fixed a bug in `to_sql()`. The string length for the column created in Oracle Database table was counting characters, not bytes.
- Fixed a bug where any exception that occurred in a notebook cell printed “ADS Exception” even if the ADS code was not responsible for the error.

1.6 2.7.2

Release date: December 20, 2022

- Fixed a bug in ADS jobs. The `job_run.watch()` method sometimes threw an exception due to an unexpected logging parameter.

1.7 2.7.1

Release date: December 14, 2022

- Fixed a bug with `ads.set_auth('resource_principal')` - <https://github.com/oracle/accelerated-data-science/issues/38>

1.8 2.7.0

Release date: December 7, 2022

- Fixed a bug in `GenericModel.prepare`. The `.model-ignore` file was not included in the `Manifest.in`.

1.9 2.6.9

Release date: December 7, 2022

- Added compatibility with Python 3.10.
- Added `update_deployment()` method to the *framework-specific* classes. Update model deployment associated with the model.
- Added `from_id()` method to the *framework-specific* classes. Load existing model by OCID directly from the OCI Models and OCI Model Deployment.
- Added `upload_artifact()` to the *framework-specific* classes. Upload model artifacts to Object Storage.
- Added `update()` method to the *framework-specific* classes. Update the model metadata for the registered model.
- Added `config`, `signer`, `signer_callable` attributes to the `ads.set_auth()` to support additional signers.
- Added support for Instance Principals authentication for the `ads opctl conda publish` and `ads opctl conda install` commands.
- Added an option for `PyTorchModel` framework allowing to serialize model in a `TorchScript` format.
- Added an option to import *framework-specific* classes directly from the `ads.model` package. Example: `from ads.model import LightGBMModel, GenericModel`.
- Fixed a bug in `ADSDataset.get_recommendations` when imbalanced correction depends on classes alpha order.
- Fixed a bug in ADS jobs. The shape configuration details were incorrectly extracted from a notebook session.
- Fixed a bug to replace the use of a deprecated API with latest API in the Model Evaluation module.

Following modules are marked as deprecated:

- `ads.catalog.model.py`.

- `ads.catalog.notebook.py`
- `ads.catalog.project.py`
- `ads.catalog.summary.py`

1.10 2.6.8

Release date: October 29, 2022

- Fixed a bug in `ads.dataset.helper` to support Python 3.8 and Python 3.9.

1.11 2.6.7

Release date: October 27, 2022

- Fixed a bug in `PyTorchModel`. The `score.py` failed when `torch.Tensor` was used as input data.
- Fixed a bug in `ads opctl conda publish` command.
- Added support for flexible shapes for Data Flow Jobs.
- Loading a model from Model Catalog (`GenericModel.from_model_catalog()`) and Model Deployment (`GenericModel.from_model_deployment()`) no longer requires a model file name.
- Switched from using `cx_Oracle` interface to the `oracledb` driver to connect to Oracle Databases.
- Added support for image attribute for the `PyTorchModel.predict()` and `TensorFlowModel.predict()` methods. Images can now be directly passed to the model Deployment predict.

The following APIs are deprecated:

- `OracleAutoMLProvider`

1.12 2.6.6

Release date: October 7, 2022

- Added `SparkPipelineModel` model serialization class for fast and easy model deployment.
- Added support for flexible shapes for Jobs and Model Deployments.
- Added support for `freeform_tags` and `defined_tags` for Model Deployments.
- Added the `populate_schema()` method to the `GenericModel` class. Populate input and output schemas for model artifacts.
- The `ADSString` was added to the Feature types system. Use the enhanced string class functionalities such as regular expression (RegEx) matching and natural language parsing within Pandas dataframes and series.
- Saving model does not require iPython dependencies

Following APIs are deprecated:

- `DatasetFactory.open`
- `ADSModel.prepare`
- `ads.common.model_export_util.prepare_generic_model`

1.13 2.6.5

Release date: September 16, 2022

- OCI SDK updated from version 2.59.0 to version 2.82.0.

1.14 2.6.4

Release date: September 14, 2022

- Added support for large models with artifact size between 2 and 6 GB. The large models can be saved to the Model Catalog, downloaded from the Model Catalog, and deployed as a Model Deployment resource.
- Added `delete()` method to the `GenericModel` class. Deletes models and associated model deployments.
- The Model Input Schema is improved to return features sorted by the `order` attribute.
- Added user-friendly default names for created Jobs, Model Deployments, and Models.

1.15 2.6.3

Release date: August 4, 2022

- Deprecated the `ads.dataflow.DataFlow` class. It has been superseded by the `ads.jobs.DataFlow` class.
- Added `prepare_save_deploy()` method to the `GenericModel` class. Prepare model artifacts and deploy the model with one command.
- Added support for binary payloads in model deployment.
- Updated `AutoMLModel`, `GenericModel`, `LightgbmModel`, `PyTorchModel`, `SklearnModel`, `TensorflowModel`, and `XgboostModel` classes to support binary payloads in model deployment.
- The maximum runtime for a Job can be limited with the `with_maximum_runtime_in_minutes()` method in the `CondaRuntime`, `DataFlowNotebookRuntime`, `DataFlowRuntime`, `GitPythonRuntime`, `NotebookRuntime`, and `ScriptRuntime` classes.
- The `ads.jobs.DataFlow` class supports Published conda environments.

1.16 2.6.2

Release date: June 21, 2022

- Added `from_model_deployment()` method to the `GenericModel` class. Now you can load a model directly from an existing model deployment.
- Moved dependencies from being default into optional installation groups:
 - `all-optional`
 - `bds`
 - `boosted`
 - `data`
 - `geo`

- notebook
- onnx
- opctl
- optuna
- tensorflow
- text
- torch
- viz

Use `python3 -m pip install "oracle-ads[XXX]"` where XXX are the group names.

1.17 2.6.1

Release date: June 1, 2022

- Added support for running a container as jobs using `ads.jobs.ContainerRuntime`.
- The `ModelArtifact` class is deprecated. Use the model serialization classes (`GenericModel`, `PyTorchModel`, `SklearnModel`, etc.).

1.18 2.5.10

Release date: May 6, 2022

- Added `BDSecretKeeper` to store and save configuration parameters to connect to Big Data service to the vault.
- Added the `krbcontext` and `refresh_ticket` functions to configure Kerberos authentication for the Big Data service.
- Added authentication options to logging APIs to allow you to pass in the OCI API key configuration or signer.
- Added the configuration file path option in the `set_auth` method. This allows you to change the path of the OCI configuration.
- Fixed a bug in AutoML for Text datasets.
- Fixed bug in `import ads.jobs` to notify users installing ADS optional dependencies.
- Fixed a bug in the generated `score.py` file, where Pandas dataframe's dtypes changed when deserializing. Now you can recover it from the input schema.
- Updated requirements to `oci>=2.59.0`.

1.19 2.5.9

Release date: April 4, 2022

- Added framework-specific model serialization to add more inputs to the generated `score.py` file.
- Added the following framework-specific classes for fast and easy model deployment:
 - `AutoMLModel`
 - `SKlearnModel`
 - `XGBoostModel`
 - `LightGBMModel`
 - `PyTorchModel`
 - `TensorFlowModel`
- Added the `GenericModel` class for frameworks not included in the preceding list:
- You can now prepare, verify, save and deploy your models using the methods in these new classes:
 - `.prepare()`: Creates `score.py`, `runtime.yaml`, and `schema` files for model deployment purpose, and adds the model artifacts to the model catalog.
 - `.verify()`: Helps test your model locally, before deploying it from the model catalog to an endpoint.
 - `.save()`: Saves the model and model artifacts to the model catalog.
 - `.deploy()`: Deploys a model from the model catalog to a REST endpoint.
 - `.predict()`: Calls the endpoint and creates inferences from the deployed model.
- Added support to create jobs with managed egress.
- Fixed bug in jobs, where log entries were being dropped when there were a large number of logs in a short period of time. Now you can list all logs with `jobwatch()`.

1.20 2.5.8

Release date: March 3, 2022

- Fixed bug in automatic extraction of taxonomy metadata for `Sklearn` models.
- Fixed bug in jobs `NotebookRuntime` when using non-ASCII encoding.
- Added compatibility with Python 3.8 and 3.9.
- Added an enhanced string class, called `ADSString`. It adds functionality such as regular expression (RegEx) matching, and natural language processing (NLP) parsing. The class can be expanded by registering custom plugins to perform custom string processing actions.

1.21 2.5.7

Release date: February 4, 2022

- Fixed bug in DataFlow Job creation.
- Fixed bug in ADSDataset `get_recommendations` raising `HTML is not defined` exception.
- Fixed bug in jobs `ScriptRuntime` causing the parent artifact folder to be zipped and uploaded instead of the specified folder.
- Fixed bug in `ModelDeployment` raising `TypeError` exception when updating an existing model deployment.

1.22 2.5.6

Release date: January 21, 2022

- Added support for the `storage_options` parameter in `ADSDataset.to_hdf()`.
- Fixed error message to specify `overwrite_script` or `overwrite_archive` option in `data_flow.create_app()`.
- Fixed output of multiclass evaluation plots when `ADSEvaluator()` class uses a non-default `legend_labels` option.
- Added support to connect to an Oracle Database that does not require a wallet file.
- Added support to read and write from MySQL using ADS DataFrame APIs.

1.23 2.5.5

Release date: December 9, 2021

- Fixed bug in model artifact `prepare()`, `reload()`, and `prepare_generic_model()` raising `ONNXRuntimeError` caused by the mismatched version of `skl2onnx`.

1.24 2.5.4

Release date: December 3, 2021

The following features were added:

- Added support to read exported dataset from the consolidated export file for the Data Labeling service.

Following fixes were added:

- The `DaskSeries` class was marked as deprecated.
- The `DaskSeriesAccessor` class was marked as deprecated.
- The `MLRuntime` class was marked as deprecated.
- The `ADSDataset.ddf` attribute was marked as deprecated.

1.25 2.5.3

Release date: November 29, 2021

The following features were added:

- Moved `fastavro`, `pandavro` and `openpyxl` to an optional dependency.
- Added the ability to specify the output annotation format to be `spacy` for the Entity Extraction dataset or `yolo` for the Object Detection dataset in the Data Labeling service.
- Added support to load labeled datasets from OCI Data Labeling, and return the Pandas dataframe or generator formats in the Data Labeling service.
- Added support to load labeled datasets by chunks in the Data Labeling service.

1.26 2.5.2

Release Notes: November 17, 2021

The following features were added:

- Added support to manage credentials with the OCI Vault service for ADB and Access Tokens.
- Improved model introspection functionality. The `INFERENCE_ENV_TYPE` and `INFERENCE_ENV_SLUG` parameters are no longer required.
- Updated ADS dependency requirements. Relaxed the versions for the `scikit-learn`, `scipy` and `onnx` dependencies.
- Moved `dask`, `ipywidget` and `wordcloud` to an optional dependency.
- The Boston Housing dataset was replaced with an alternative one.
- Migrated `ADSDataset` to use Pandas instead of Dask.
- Deprecated `MLRuntime`.
- Deprecated `resource_analyze` method.
- Added support for magic commands in notebooks when they run in a Job.
- Added support to download notebook and output after running it in a Job.

1.27 2.5.0

Release notes: October 20, 2021

The following features related to the Data Labeling service were added:

- Integrating with the Oracle Cloud Infrastructure Data Labeling service.
- Listing labeled datasets in the Data Labeling service.
- Exporting labeled datasets into Object Storage.
- Loading labeled datasets in the Pandas dataframe or generator formats.
- Visualizing the labeled entity extraction and object detection data.
- Converting the labeled entity extraction and object detection data to the Spacy and YOLO formats respectively.

1.28 2.4.2

The following improvements were effected:

- Improve ads import time.
- Fix the version of the *jsonschema* package.
- Update *numpy* deps to $\geq 1.19.2$ for compatibility with *TensorFlow 2.6*.
- Added progress bar when creating a Data Flow application.
- Fixed the file upload path in Data Flow.
- Added supporting tags when saving model artifacts to the model catalog.
- Updated Model Deployment authentication.
- Specify spark version in `prepare_app()` now works.
- Run a Job from a ZIP or folder.

This release has the following bug fixes:

- Fixed the default `runtime.yaml` template generated outside of a notebook session.
- Oracle DB mixin the batch size parameter is now passed downstream.
- `ADSModel.prepare()` and `prepare_generic_model()` `force_overwrite` deletes user-created folders.
- `prepare_generic_model` fails to create a successful artifact when taxonomy is extracted.

1.29 2.4.1

Release notes: September 27, 2021

The following dependencies were removed:

- `pyarrow`
- `python-snappy`

1.30 2.4.0

Release notes: September 22, 2021

The Data Science jobs feature is introduced and includes the following:

- Data Science jobs allow data scientists to run customized tasks outside of a notebook session.
- Running Data Science jobs and Data Flow applications through unified APIs by configuring job infrastructure and runtime parameters.
- Configuring various runtime configurations for running code from Python/Bash script, packages including multiple modules, Jupyter notebook, or a Git repository.
- Monitoring job runs and streaming log messages using the Logging service.

1.31 2.3.4

Release notes: September 20, 2021

This release has the following bug fixes:

- `prepare_generic_model` fails when used outside the Data Science notebook session
- `TextDatasetFactory` fails when used outside the Data Science notebook session

1.32 2.3.3

Release notes: September 17, 2021

- Removed dependency on `plotly`.
- `print_user_message` replaced with `logger`.

1.33 2.3.1

Release notes: August 3, 2021

This release of the model catalog includes these enhancements:

- Automatic extraction of model taxonomy metadata that lets data scientists document the use case, framework, and hyperparameters of their models.
- Improvement to the model provenance metadata, including a reference to the model training resource (notebook sessions) by passing in the `training_id` to the `.save()` method.
- Support for custom metadata which lets data scientists document the context around their models, automatic extraction references to the conda environment used to train the model, the training and validation datasets, and so on.
- Automatic extraction of the model input feature vector and prediction schemas.
- Model introspection tests that are run on the model artifact before the model is saved to the model catalog. Model introspection validates the artifact against a series of common issues and errors found with artifacts. These introspection tests are part of the model artifact code template that is included.

Feature type is an additional added module which includes the following functionality:

- Support for Exploratory Data Analysis including feature count, feature plot, feature statistics, correlation, and correlation plot.
- Support for the feature type manager that provides the tools to manage the handlers used to drive the feature type system.
- Support for the feature type validators that are a way of performing data validation and also allow a feature type to be dynamically extended so that the data validation process can be reproducible and shared across projects.
- Support for feature type warnings that allow you to automate the process of checking for data quality issues.

1.34 2.2.1

Release notes: May 7, 2021

Improvements include:

- Requires Pandas >- 1.2 and Python == 3.7.
- Upgraded the scikit-learn dependency to 0.23.2.
- Added the ADSTextDataset and the ADS Text Extraction Framework.
- Updated the ADSTuner method `.tune()` to allow asynchronous tuning, including the ability to halt, resume, and terminate tuning operations from the main process.
- Added the ability to load and save ADSTuner tuned trials to Object Storage. The tuning progress can now be saved and loaded in a different ADSTuner object.
- Added the ability to update the ADSTuner tuning search space. Hyperparameters can be changed and distribution ranges modified during tuning.
- Updated plotting functions to plot in real-time while ADSTuner asynchronous tuning operations proceed.
- Added methods to report on the remaining budget for running ADSTuner asynchronous tuner (trials and time-based budgets).
- Added a method to report the difference between the optimal and current best score for ADSTuner tuning processes with score-based stopping criteria.
- Added caching for model loading method to avoid model deserialization each time the predict method is called.
- Made the list of supported formats in `DatasetFactory.open()` more explicit.
- Moved the ADSEvaluator caption to above the table.
- Added a warning message in the `get_recommendations()` method when no recommendations can be made.
- Added a parameter in `print_summary()` to display the ranking table only.
- `list_apps` in the DataFlow class supports the optional parameter `compartment_id`.
- An exception occurs when using SVC or KNN on large datasets in OracleAutoMLProvider.
- Speed improvements in correlation calculations.
- Improved the name of the y-axis label in `feature_selection_trials()`.
- Automatically chooses the y-label based on the `score_metric` set in `train` if you don't set it.
- Increased the default timeout for uploading models to the model catalog.
- Improved the module documentation.
- Speed improvements in `get_recommendations()` on wide datasets.
- Speed improvements in `DatasetFactory.open()`.
- Deprecated the `frac` keyword from `DatasetFactory.open()`.
- Disabled writing `requirements.txt` when `function_artifacts = False`.
- Pretty printing of specific labels in `ADSEvaluator.metrics`.
- Removed the global setting as the only mechanism for choosing the authentication in `OCIClientFactory`.
- Added the ability to have defaults and to provide authentication information while instantiating a Provider Class.
- Added a larger time buffer for the `plot_param_importance` method.

- Migrated the `DatasetFactory` reading engine from Dask to Pandas.
- Enabling Pandas to read lists and glob of files.
- `DatasetFactory` now supports reading from Object Storage using `ocifs`.
- The `DatasetFactory` URI pattern now supports namespaces and follows the HDFS Connector format.
- The `url()` method can generate PARs for Object Storage objects.
- `DatasetFactory` now has caching for Object Storage operations.

The following issues were fixed:

- Issue with multipart upload and download in `DatasetFactory`.
- Issues with log level in `OracleAutoMLProvider`.
- Issue with `fill_value` when running `get_recommendations()`.
- Issue with an invalid training path when saving model provenance.
- Issue with errors during model deletion.
- Issues with deep copying `ADSData`.
- Evaluation plot `KeyError`.
- `Dataset show_in_notebook` issue.
- Inconsistency in preparing `ADSModels` and generic models.
- Issue with `force_overwrite` in `prepare_generic_model` not being properly triggered.
- Issue with `OracleAutoMLProvider` failing to `visualize_tuning_trials`.
- Issues with `model_prepare` trying to do feature transforms on keras and pytorch models.
- Erroneous creation of `__pycache__`.
- The `AttributeError` message when an `ApplicationSummary` or `RunSummary` object is being displayed in a notebook.
- Issues with newer versions of Dask breaking `DatasetFactory`.

AutoML is upgraded to AutoML v1.0 and the changes include:

- Switched to using Pandas Dataframes internally. AutoML now uses Pandas dataframes internally instead of Numpy dataframes, avoiding needless conversions.
- Pytorch is now an optional dependency. If Pytorch is installed, AutoML automatically considers multilayer perceptrons in its search. If Pytorch is not found, deep learning models are ignored.
- Updated the Pipeline interface to include `train()`, which runs all the pipeline stages though doesn't do the final fitting of the model (`fit()` API should be used if the final fit is needed).
- Updated the Pipeline interface to include `refit()` to allow you to refit the pipeline to an updated dataset without re-running the full pipeline again. We recommend this for advanced users only. For best results, we recommended that you rerun the full pipeline when the dataset changes.
- AutoML now reports memory usage for each trial as a part of its trial attributes. This information relies on the maximum resident size metric reported by Linux, and can sometimes be unreliable.
- `holidays` is now an optional dependency. If `holidays` is installed, AutoML automatically uses it to add `holidays` as a feature for engineering datetime columns.
- Added support for Anomaly Detection and Forecasting tasks (experimental).
- Downcast dataset to reduce pipeline training memory consumption.

- Set numpy BLAS parallelism to 1 to avoid CPU over subscription.
- Created interactive example notebooks for all supported tasks (classification, regression, anomaly detection, and forecasting), see <http://automl.oraclecorp.com/>.
- Other general bug fixes.

MLX is upgraded to MLX v1.1.1 the changes include:

- Upgrading to Python 3.7
- Upgrading to support Numpy $\geq 1.19.4$
- Upgrading to support Pandas $\geq 1.1.5$
- Upgrading to support Scikit-learn $\geq 0.23.2$
- Upgrading to support Statsmodel $\geq 0.12.1$
- Upgrading to support Dask $\geq 2.30.0$
- Upgrading to support Distributed $\geq 2.30.1$
- Upgrading to support Xgboost $\geq 1.2.1$
- Upgrading to support Category_encoders $\geq 2.2.2$
- Upgrading to support Tqdm $\geq 4.36.1$
- Fixed imputation issue when columns are all NaN.
- Fixed WhatIF internal index-reference issue.
- Fixed rare floating point problem in FD/ALE explainers.

1.35 January 13, 2021

- A full distribution of this release of ADS is found in the General Machine Learning for CPU and GPU environments. The Classic environments include the previous release of ADS.
- A distribution of ADS without AutoML and MLX is found in the remaining environments.
- `DatasetFactory` can now download files first before opening them in memory using the `.download()` method.
- Added support to archive files in creating Data Flow applications and runs.
- Support was added for loading Avro format data into ADS.
- Changed model serialization to use ONNX by default when possible on supported models.
- Added `ADSTuner`, which is a framework and model agnostic hyperparameter optimizer, use the `adstuner.ipynb` notebook for examples of how to use this feature.
- Corrected the `up_sample()` method in `get_recommendations()` so that it does not fail when all features are categorical. Up-sampling is possible for datasets containing continuous and categorical features.
- Resolved issues with serializing `ndarray` objects into JSON.
- A table of all of the ADS notebook examples can be found in our service documentation: [Oracle Cloud Infrastructure Data Science](#)
- Changed `set_documentation_mode` to false by default.
- Added unit-tests related to the dataset helper.
- Fixed the `_check_object_exists` to handle situations where the object storage bucket has more than 1000 objects.

- Added option `overwrite_script` in the `create_app()` method to allow a user to override a pre-existing file.
- Added support for newer fsspec versions.
- Added support for the C library Snappy.
- Fixed issue with uploading model provenance data due to inconsistency with OCI interface.
- Resolved issue with multiple versions of Cryptography being installed when installing fbprophet.

AutoML is upgraded to AutoML v0.5.2 and the changes include:

- AutoML is now distributed in the General Machine Learning and Data Exploration conda environments.
- Support for ONNX. AutoML models can now be serialized using ONNX by calling the `to_onnx()` API on the AutoML estimator.
- Pre-processing has been overhauled to use `sklearn` pipelines to allow serialization using ONNX. Numerical, categorical, and text columns are supported for ONNX serialization. Datetime and time series columns are not supported.
- Torch-based deep learning models, `TorchMLPClassifier` and `TorchMLPRegressor`, have been added.
- GPU support for XGBoost and torch-based models have been added. This is disabled by default and can be enabled by passing in `'gpu_id': 'auto'` in `engine_opts` in the constructor. ONNX serialization for GPUs has not been tested.
- Adaptive sampling's learning curve has been smoothened. This allows adaptive sampling to converge faster on some datasets.
- Improvements to ranking performance in feature selection were added. Feature selection is now much faster on large datasets.
- The default execution engine for AutoML has been switched to Dask. You can still use the Python multiprocessing by passing `engine='local'`, `engine_opts={'n_jobs' : -1}` to `init()`
- GaussianNB has been enabled in the interface by default.
- The `AdaBoostClassifier` has been disabled in the pipeline-interface by default. The ONNX converter for AdaBoost should not be used.
- The issue `ValueError: Found unknown categories during transform` has been fixed.
- You can manually specify a hyperparameter search space to AutoML. A new parameter was added to the pipeline. This allows you to freeze some hyperparameters or to expose further ones for tuning.
- New API: Refit an AutoML pipeline to another dataset. This is primarily used to handle updated training data, where you train the pipeline once, and refit in on newer data.
- AutoML no longer closes a user-specified Dask cluster.
- AutoML properly cleans up any existing futures on the Dask cluster at the end of fit.

MLX is upgraded to MLX v1.0.16 the changes include:

- MLX is now distributed in the General Machine Learning conda environments.
- Updated the explanation descriptions to use a base64 representation of the static plots. This obviates the need for creating a `mlx_static` directory.
- Replaced the boolean indexing in slicing Pandas dataFrame with integer indexing. After updating to Pandas `>= 1.1.0` the boolean indexing caused some issues. Integer indexing addresses these issues.
- Fixed MLX-related import warnings.
- Corrected an issue with ALE when the target values are strings.

- Removed the dependency on Paramiko.
- Addresses an issue with ALE when the target values are not of type `list`.

1.36 August 11, 2020

- Support was added to use resource principles as an authentication mechanism for ADS.
- Support was added to MLX for an additional model explanation diagnostic, Accumulated Local Effects (ALEs).
- Support was added to MLX for “What-if” scenarios in model explainability.
- Improvements were made to the correlation heatmap calculations in `show_in_notebook()`.
- Improvements were made to the model artifact.

The following bugs were fixed:

- Data Flow applications inherit the compartment assignment of the client. Runs inherit from applications by default. Compartment OCIDs can also be specified independently at the client, application, and run levels.
- The Data Flow log link for logs pulled from an application loaded into the notebook session is fixed.
- Progress bars now complete fully (in `ADSModel.prepare()` and `prepare_generic_model()`).
- `BaselineModel` is now significantly faster and can be opted out of.

MLX upgraded to MLX v1.0.10 the changes include:

- Added support to specify the `mlx_static` root path (used for ALE summary).
- Added support for making `mlx_static` directory hidden (for example, `<path>/mlx_static/`).
- Fixed issue with the boolean features in ALE.

1.37 June 9, 2020

Numerous bug fixes including:

- Support for Data Flow applications and runs outside of a notebook session compartment. Support for specific object storage logs and script buckets at the application and run levels.
- ADS detects small shapes and gives warnings for AutoML execution.
- Removal of triggers in the Oracle Cloud Infrastructure Functions `func.yaml` file.
- `DatasetFactory.open()` incorrectly yielding a classification dataset for a continuous target was fixed.
- `LabelEncoder` producing the wrong results for category and object columns was fixed.
- An untrusted notebook issue when running model explanation visualizations were fixed.
- A warning about adaptive sampling requiring at least 1000 data points was added.
- A dtype cast float to integer into `DatasetFactory.open("csv")` was added.
- An option to specify the bucket of Data Flow logs when you create the application was added.

AutoML upgraded to 0.4.2 the changes include:

- Reduced parallelization on low compute hardware.
- Support for passing in a custom logger object in `automl.init(logger=)`.

- Support for `datetime` columns. AutoML should automatically infer `datetime` columns based on the Pandas dataframe, and perform feature engineering on them. This can also be forced by using the `col_types` argument in `pipeline.fit()`. The supported types are: `['categorical', 'numerical', 'datetime']`

MLX upgraded to MLX 1.0.7 the changes include:

- Updated the feature distributions in the PDP/ICE plots (performance improvement).
- All distributions are now shown as PMFs. Categorical features show the category frequency and continuous features are computed using a NumPy histogram (with 'auto'). They are also separate sub-plots, which are interactive.
- Classification PDP: The y-axis for continuous features is now auto-scaled (not fixed to 0-1).
- 1-feature PDP/ICE: The x-axis for continuous features now shows the entire feature distribution, whereas the plot may show a subset depending on the `partial_range` parameter (for example, `partial_range=[0.2, 0.8]` computes the PDP between the 20th and 80th percentile. The plot now shows the full distribution on the x-axis, but the line charts are only drawn between the specified percentile ranges).
- 2-feature PDP: The plot x and y axes are now auto-set to match the `partial_range` specified by the user. This ensures that the heatmap fills the entire plot by default. However, the entire feature distribution can be viewed by zooming out or clicking Autoscale in plotly.
- Support for plotting scatter plots using WebGL (`show_in_notebook(..., use_webgl=True)`) was added.
- The side issues that were causing the MLX Visualization Omitted warnings in JupyterLab were fixed.

1.38 April 30, 2020

- ADS integration with the [Oracle Cloud Infrastructure Data Flow](#) service provides a more efficient and convenient to launch a Spark application and run Spark jobs
- `show_in_notebook()` has had "head" removed from accordion and is replaced with dataset "warnings".
- `get_recommendations()` is deprecated and replaced with `suggest_recommendations()`, which returns a Pandas dataframe with all the recommendations and suggested code to implement each action.
- A progress indication of [Autonomous Data Warehouse](#) reads has been added.

AutoML updated to version 0.4.1 from 0.3.1:

- More consistent handling of stratification and random state.
- Bug-fix for LightGBM and XGBoost crashing on AMD shapes was implemented.
- Unified Proxy Models across all stages of the AutoML Pipeline, ensuring leaderboard rankings are consistent was implemented.
- Remove visual option from the interface.
- The default tuning metric for both binary and multi-class classification has been changed to `neg_log_loss`.
- Bug-fix in AutoML XGBoost, where the predicted probabilities were sometimes NaN, was implemented.
- Fixed several corner case issues in Hyperparameter Optimization.

MLX updated to version 1.0.3 from 1.0.0:

- Added support for specifying the 'average' parameter in sklearn metrics by `<metric>_<average>`, for example `F1_avg`.
- Fixed an issue with the detailed scatter plot visualizations and cutoff feature/axis names.
- Fixed an issue with the balanced sampling in the Global Feature Permutation Importance explainer.

- Updated the supported scoring metrics in MLX. The `PermutationImportance` explainer now supports a large number of classification and regression metrics. Also, many of the metrics' names were changed.
- Updated LIME and `PermutationImportance` explainer descriptions.
- Fixed an issue where `sklearn.pipeline` wasn't imported.
- Fixed deprecated `asscalar` warnings.

1.39 March 18, 2020

Access to ADW performance has been improved significantly

Major improvements were made to the performance of the ADW dataset loader. Your data is now loaded much faster, depending on your environment.

Change to `DatasetFactory.open()` with ADW

`DatasetFactory.open()` with `format='sql'` no longer requires the `index_col` to be specified. This was confusing, since “index” means something very different in databases. Additionally, the `table` parameter may now be either a table or a `sql` expression.

```
ds = DatasetFactory.open(
    connection_string,
    format = 'sql',
    table = """
        SELECT *
        FROM sh.times
        WHERE rownum <= 30
    """
)
```

No longer automatically starts an H2O cluster

ADS no longer instantiates an H2O cluster on behalf of the user. Instead, you need to `import h2o` on your own and then start your own cluster.

Profiling Dask APIs

With support for Bokeh extension, you can now profile Dask operations and visualize profiler output. For more details, see [Dask ResourceProfiler](#).

You can use the `ads.common.analyzer.resource_analyze` decorator to visualize the CPU and memory utilization of operations.

During execution, it records the following information for each timestep:

- Time in seconds since the epoch
- Memory usage in MB
- % CPU usage

Example:

```
from ads.common.analyzer import resource_analyze
from ads.dataset.dataset_browser import DatasetBrowser
@resource_analyze
def fetch_data():
    sklearn = DatasetBrowser.sklearn()
    wine_ds = sklearn.open('wine').set_target("target")
    return wine_ds
fetch_data()
```

The output shows two lines, one for the total CPU percentage used by all the workers, and one for total memory used.

Dask Upgrade

Dask is updated to version 2.10.1 with support for Oracle Cloud Infrastructure Object Storage. The 2.10.1 version provides better performance than the older version.

QUICK START

- *Install*
- *Read and Write to Object Storage, Databases and other OCI Resources*
- *OCI serverless Spark - Data Flow*
- *Evaluate Trained Models*
- *Register and Deploy Models*
- *Store and Retrieve your data source credentials*
- *Connect to existing OCI Big Data Service*

INSTALLATION AND SETUP

3.1 Install ADS CLI

Prerequisites

- Linux/Mac (Intel CPU)
- For Mac on M series - Experimental.
- For Windows: Use [Windows Subsystem for Linux \(WSL\)](#)
- python >=3.7, <3.10

ads cli provides a command line interface to Jobs API related features. Set up your development environment, build docker images compliant with Notebook session and Data Science Jobs, build and publish conda pack locally, start distributed training, etc.

Installation

Install ADS and enable CLI:

```
python3 -m pip install "oracle-ads[opctl]"
```

Tip

ads opctl subcommand lets us setup your local development environment for Data Science Jobs. More information can be found by running ads opctl -h

3.2 Install oracle-ads SDK

3.2.1 Data Science Conda Environments

ADS is installed in the data science conda environments. Upgrade your existing oracle-ads package by running -

```
$ python3 -m pip install oracle-ads --upgrade
```

3.2.2 Install in Local Environments

You have various options when installing ADS.

3.2.2.1 Installing the oracle-ads base package

```
$ python3 -m pip install oracle-ads
```

3.2.2.2 Installing extras libraries

The all-optional module will install all optional dependencies.

```
$ python3 -m pip install oracle-ads[all-optional]
```

To work with gradient boosting models, install the boosted module. This module includes XGBoost and LightGBM model classes.

```
$ python3 -m pip install oracle-ads[boosted]
```

For big data use cases using Oracle Big Data Service (BDS), install the bds module. It includes the following libraries: *ibis-framework[impala]*, *hdfs[kerberos]* and *sqlalchemy*.

```
$ python3 -m pip install oracle-ads[bds]
```

To work with a broad set of data formats (for example, Excel, Avro, etc.) install the data module. It includes the following libraries: *fastavro*, *openpyxl*, *pandavro*, *asteval*, *datefinder*, *htmlistparse*, and *sqlalchemy*.

```
$ python3 -m pip install oracle-ads[data]
```

To work with geospatial data install the geo module. It includes the *geopandas* and libraries from the *viz* module.

```
$ python3 -m pip install oracle-ads[geo]
```

Install the notebook module to use ADS within the Oracle Cloud Infrastructure Data Science service [Notebook Session](#). This module installs *ipywidgets* and *ipython* libraries.

```
$ python3 -m pip install oracle-ads[notebook]
```

To work with ONNX-compatible run times and libraries designed to maximize performance and model portability, install the onnx module. It includes the following libraries, *onnx*, *onnxruntime*, *onnxmltools*, *skl2onnx*, *xgboost*, *lightgbm* and libraries from the *viz* module.

```
$ python3 -m pip install oracle-ads[onnx]
```

For infrastructure tasks, install the opctl module. It includes the following libraries, *oci-cli*, *docker*, *conda-pack*, *nbconvert*, *nbformat*, and *inflection*.

```
$ python3 -m pip install oracle-ads[opctl]
```

For hyperparameter optimization tasks install the optuna module. It includes the *optuna* and libraries from the *viz* module.


```
$ python3 -m pip install oracle-ads[optuna]
```

For Spark tasks install the `spark` module.

```
$ python3 -m pip install oracle-ads[spark]
```

Install the `tensorflow` module to include *tensorflow* and libraries from the `viz` module.

```
$ python3 -m pip install oracle-ads[tensorflow]
```

For text related tasks, install the `text` module. This will include the *wordcloud*, *spacy* libraries.

```
$ python3 -m pip install oracle-ads[text]
```

Install the `torch` module to include *pytorch* and libraries from the `viz` module.

```
$ python3 -m pip install oracle-ads[torch]
```

Install the `viz` module to include libraries for visualization tasks. Some of the key packages are *bokeh*, *folium*, *seaborn* and related packages.

```
$ python3 -m pip install oracle-ads[viz]
```

Note

Multiple extra dependencies can be installed together. For example:

```
$ python3 -m pip install oracle-ads[notebook,viz,text]
```


AUTHENTICATION

When you are working within a notebook session, you are operating as the `datascience` Linux user. This user does not have an OCI Identity and Access Management (IAM) identity, so it has no access to the Oracle Cloud Infrastructure API. Oracle Cloud Infrastructure resources include Data Science projects, models, jobs, model deployment, and the resources of other OCI services, such as Object Storage, Functions, Vault, Data Flow, and so on. To access these resources, you must use one of the two provided authentication approaches:

4.1 1. Authenticating Using Resource Principals

Prerequisite

- You are operating within a OCI service that has resource principal based authentication configured
- You have setup the required policies allowing the `resourcetype` within which you are operating to use/manage the target OCI resources.

This is the generally preferred way to authenticate with an OCI service. A resource principal is a feature of IAM that enables resources to be authorized principal actors that can perform actions on service resources. Each resource has its own identity, and it authenticates using the certificates that are added to it. These certificates are automatically created, assigned to resources, and rotated avoiding the need for you to upload credentials to your notebook session.

Data Science enables you to authenticate using your notebook session's resource principal to access other OCI resources. When compared to using the OCI configuration and key files approach, using resource principals provides a more secure and easy way to authenticate to the OCI APIs.

You can choose to use the resource principal to authenticate while using the Accelerated Data Science (ADS) SDK by running `ads.set_auth(auth='resource_principal')` in a notebook cell. For example:

```
import ads
ads.set_auth(auth='resource_principal')
compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
pc = ProjectCatalog(compartment_id=compartment_id)
pc.list_projects()
```

4.2 2. Authenticating Using API Keys

Prerequisite

- You have setup api keys as per the instruction [here](#)

Use API Key setup when you are working from a local workstation or on platform which does not support resource principals.

This is the default method of authentication. You can also authenticate as your own personal IAM user by creating or uploading OCI configuration and API key files inside your notebook session environment. The OCI configuration file contains the necessary credentials to authenticate your user against the model catalog and other OCI services like Object Storage. The example notebook, *api_keys.ipynb* demonstrates how to create these files.

You can follow the steps in [api_keys.ipynb](#) for step by step instruction on setting up API Keys.

Note: If you already have an OCI configuration file (`config`) and associated keys, you can upload them directly to the `/home/datascience/.oci` directory using the JupyterLab **Upload Files** or the drag-and-drop option.

4.3 3. Authenticating Using Instance Principals

Prerequisite

- You are operating within an OCI compute instance
- You have created a Dynamic Group with Matching Rules to include your compute instances, and you have authored policies allowing this Dynamic Group to perform actions within your tenancy

For more information on Instance Principals, see [Calling Services from an Instance](#).

You can choose to use the instance principal to authenticate while using the Accelerated Data Science (ADS) SDK by running `ads.set_auth(auth='instance_principal')`. For example:

```
import ads
ads.set_auth(auth='instance_principal')
mc = ModelCatalog(compartment_id="<compartment_id>")
mc.list_models()
```

4.4 4. Overriding Defaults

The default authentication that is used by ADS is set with the `set_auth()` method. However, each relevant ADS method has an optional parameter to specify the authentication method to use. The most common use case for this is when you have different permissions in different API keys or there are differences between the permissions granted in the resource principals and your API keys.

By default, ADS uses API keys to sign requests to OCI resources. The `set_auth()` method is used to explicitly set a default signing method. This method accepts one of three strings `"api_key"`, `"resource_principal"`, or `instance_principal`.

The `~/.oci/config` configuration allow for multiple configurations to be stored in the same file. The `set_auth()` method takes is `oci_config_location` parameter that specifies the location of the configuration, and the default is `~/.oci/config`. Each configuration is called a profile, and the default profile is `DEFAULT`. The `set_auth()` method takes in a parameter `profile`. It specifies which profile in the `~/.oci/config` configuration file to use. In

this context, the profile parameter is only used when API keys are being used. If no value for profile is specified, then the DEFAULT profile section is used.

```
import ads
import oci

ads.set_auth("api_key") # default signer is set to API Keys
ads.set_auth("api_key", profile = "TEST") # default signer is set to API Keys and to use
↳TEST profile
ads.set_auth("api_key", oci_config_location = "~/test_oci/config") # default signer is
↳set to API Keys and to use non-default oci_config_location
ads.set_auth("resource_principal") # default signer is set to resource principal
↳authentication
ads.set_auth("instance_principal") # default signer is set to instance principal
↳authentication

signer = oci.auth.signers.ResourcePrincipalsFederationSigner()
ads.set_auth(config={}, signer=signer) # default signer is set to
↳ResourcePrincipalsFederationSigner

signer_callable = oci.auth.signers.ResourcePrincipalsFederationSigner
ads.set_auth(signer_callable=signer_callable) # default signer is set
↳ResourcePrincipalsFederationSigner callable
```

The auth module has helper functions that return a signer which is used for authentication. The `api_keys()` method returns a signer that uses the API keys in the `.oci` configuration directory. There are optional parameters to specify the location of the API keys and the profile section. The `resource_principal()` method returns a signer that uses resource principals. The method `default_signer()` returns either a signer for API Keys or resource principals depending on the defaults that have been set. The `set_auth()` method determines which signer type is the default. If nothing is set then API keys are the default.

Additional signers may be provided by running `set_auth()` with `signer` or `signer_callable` with optional `signer_kwargs` parameters. You can find the list of additional signers [here](#).

```
from ads.common import auth as authutil
from ads.common import oci_client as oc

# Example 1: Create Object Storage client with the default signer.
auth = authutil.default_signer()
oc.OCIClientFactory(**auth).object_storage

# Example 2: Create Object Storage client with timeout set to 6000 using resource
↳principal authentication.
auth = authutil.resource_principal({"timeout": 6000})
oc.OCIClientFactory(**auth).object_storage

# Example 3: Create Object Storage client with timeout set to 6000 using API Key
↳authentication.
auth = authutil.api_keys(oci_config="/home/datascience/.oci/config", profile="TEST",
↳kwargs={"timeout": 6000})
oc.OCIClientFactory(**auth).object_storage
```

In this example, the default authentication uses API keys specified with the `set_auth` method. However, since `os_auth` is specified to use resource principals, the notebook session uses the resource principal to access OCI Object Store.

```
set_auth("api_key") # default signer is set to api_key
os_auth = authutil.resource_principal() # use resource principal to as the preferred way_
↳to access object store
```

More signers can be created using the `create_signer()` method. With the `auth_type` parameter set to `instance_principal`, the method will return a signer that uses instance principals. For other signers there are `signer` or `signer_callable` parameters. Here are examples:

```
import ads
import oci

# Example 1. Create signer that uses instance principals
auth = ads.auth.create_signer("instance_principal")

# Example 2. Provide a ResourcePrincipalsFederationSigner object
signer = oci.auth.signers.ResourcePrincipalsFederationSigner()
auth = ads.auth.create_signer(config={}, signer=signer)

# Example 3. Create signer that uses instance principals with log requests enabled
signer_callable = oci.auth.signers.InstancePrincipalsSecurityTokenSigner
signer_kwargs = dict(log_requests=True) # will log the request url and response data_
↳when retrieving
auth = ads.auth.create_signer(signer_callable=signer_callable, signer_kwargs=signer_
↳kwargs)
```

CLI CONFIGURATION

Prerequisite

- You have completed *ADS CLI installation*

Setup default values for different options while running OCI Data Science Jobs or OCI DataFlow. By setting defaults, you can avoid inputting compartment ocid, project ocid, etc.

To setup configuration run -

```
ads opctl configure
```

This will prompt you to setup default ADS CLI configurations for each OCI profile defined in your OCI config. By default, all the files are generated in the ~/.ads_ops folder.

~/.ads_ops/config.ini will contain OCI profile defaults and conda pack related information. For example:

```
[OCI]
oci_config = ~/.oci/config
oci_profile = ANOTHERPROF

[CONDA]
conda_pack_folder = </local/path/for/saving/condapack>
conda_pack_os_prefix = oci://my-bucket@mynamespace/conda_environments/
```

~/.ads_ops/ml_job_config.ini will contain defaults for running Data Science Job. Defaults are set for each profile listed in your oci config file. Here is a sample -

```
[DEFAULT]
compartment_id = oci.xxxx.<compartment_ocid>
project_id = oci.xxxx.<project_ocid>
subnet_id = oci.xxxx.<subnet-ocid>
log_group_id = oci.xxxx.<log_group_ocid>
log_id = oci.xxxx.<log_ocid>
shape_name = VM.Standard2.2
block_storage_size_in_GB = 100

[ANOTHERPROF]
compartment_id = oci.xxxx.<compartment_ocid>
project_id = oci.xxxx.<project_ocid>
subnet_id = oci.xxxx.<subnet-ocid>
shape_name = VM.Standard2.1
log_group_id = ocid1.loggroup.oc1.xxx.xxxxx
```

(continues on next page)

(continued from previous page)

```
log_id = oci.xxxx.<log_ocid>
block_storage_size_in_GBs = 50
```

~/.ads_ops/dataflow_config.ini will contain defaults for running Data Science Job. Defaults are set for each profile listed in your oci config file. Here is a sample -

```
[MYTENANCYPROF]
compartment_id = oci.xxxx.<compartment_ocid>
driver_shape = VM.Standard2.1
executor_shape = VM.Standard2.1
logs_bucket_uri = oci://mybucket@mytenancy/dataflow/logs
script_bucket = oci://mybucket@mytenancy/dataflow/mycode/
num_executors = 3
spark_version = 3.0.2
archive_bucket = oci://mybucket@mytenancy/dataflow/archive
```

~/.ads_ops/ml_pipeline.ini will contain defaults for running Data Science Pipeline. Defaults are set for each profile listed in your oci config file. Here is a sample -

```
[DEFAULT]
compartment_id = oci.xxxx.<compartment_ocid>
project_id = oci.xxxx.<project_ocid>

[ANOTHERPROF]
compartment_id = oci.xxxx.<compartment_ocid>
project_id = oci.xxxx.<project_ocid>
```

~/.ads_ops/local_backend.ini will contain defaults for running jobs and pipeline steps locally. While local operations do not involve connections to OCI services, default configurations are still set for each profile listed in your oci config file for consistency. Here is a sample -

```
[DEFAULT]
max_parallel_containers = 4
pipeline_status_poll_interval_seconds = 5

[ANOTHERPROF]
max_parallel_containers = 4
pipeline_status_poll_interval_seconds = 5
```


LOCAL DEVELOPMENT ENVIRONMENT SETUP

Prerequisite

- You have completed *ADS CLI installation*
- You have completed *Configuration*

Setup up your workstation for development and testing your code locally before you submit it as a OCI Data Science Job. This section will guide you on how to setup environment for -

- Building an OCI Data Science compatible conda environments on your workstation or CICD pipeline and publishing to object storage
- Developing and testing code with a conda environment that is compatible with OCI Data Science Notebooks and OCI Data Science Jobs
- Developing and testing code for running Bring Your Own Container (BYOC) jobs.

Note

- In this version you cannot directly access the Service provided conda environments from ADS CLI, but you can publish a service provided conda pack from an OCI Data Science Notebook session to your object storage bucket and then use the CLI to access the published version.

6.1 Build Development Container Image

To setup an environment that matches OCI Data Science, a container image must be built. With a Data Science compatible container image you can do the following -

- Build and Publish custom conda packs that can be used within Data Science environment. Enable building conda packs in your CICD pipeline.
- Install an existing conda pack that was published from an OCI Data Science Notebook.
- Develop code locally against the same conda pack that will be used within an OCID Data Science image.

Prerequisites

1. Install docker on your workstation
2. Internet connection to pull dependencies
3. **If the access is restricted through proxy -**
 - Setup proxy environment variables `https_proxy`, `https_proxy` and `no_proxy`
 - For Linux Workstation - update proxy variables in `docker.service` file and restart docker
 - For mac - update proxy setting in the docker desktop

4. ADS cli is installed. Check CLI Installation section [here](#)

Build a container image with name `ml-job`

```
ads opctl build-image job-local
```

6.2 Setting up Visual Studio Code

[Visual Studio Code](#) can automatically run the code that you are developing inside a preconfigured container. An OCI Data Science compatible container on your workstation can be used as a development environment. Visual Studio Code can automatically launch the container using the information from `devcontainer.json`, which is created in the code directory. Automatically generate this file and further customize it with plugins. For more details [see](#)

Prerequisites

1. ADS CLI is [configured](#)
2. Install Visual Studio Code
3. [Build Development Container Image](#)
4. Install Visual Studio Code extension for [Remote Development](#)

```
ads opctl init-vscode -s <source-folder>
```

`source-folder` is a directory on your workstation where the code will reside.

`env-var` - Use this option to setup the environment variables required when the container used for development is started.

If you have to setup a proxy, you can use the following command -

```
ads opctl init-vscode -s <source-folder> --env-var http_proxy=$http_proxy https_proxy=  
↪$https_proxy no_proxy=$no_proxy
```

The generated `.devcontainer.json` includes the python extension for Visual Studio Code by default.

Open the `source_folder` using Visual Studio Code. More details on running the workspace within the container can be found [here](#)

6.3 Working with Conda packs

Conda packs provide runtime dependencies and a `python` runtime for your code. The conda packs can be built inside an OCI Data Science Notebook session or you can build it locally on your workstation. `ads opctl` cli provides a way to setup a development environment to build and use the conda packs. You can push the conda packs that you build locally to Object Storage and use them in Jobs, Notebooks, Pipelines, or in Model Deployments.

Prerequisites

1. Build a local OCI Data Science Job [compatible docker image](#)
2. Connect to Object Storage through the Internet
3. Setup conda pack bucket, namespace, and authentication information using `ads opctl configure`. Refer to configuration [instructions](#).

Note

- In this version you cannot directly access the Service provided conda environments from ADS CLI, but you can publish a service provided conda pack from an OCI Data Science Notebook session to your object storage bucket and then use the CLI to access the published version.

6.3.1 create

```
ads opctl conda create -n <name> -f <path-to-environment-yaml>
```

Build conda packs from your workstation using `ads opctl conda create` subcommand.

Tip

To publish a conda pack that is natively installed on a oracle linux host (compute or laptop), use `NO_CONTAINER` environment variable to remove dependency on the ml-job container image:

```
NO_CONTAINER=1 ads opctl conda publish -s <slug> --auth <api_key/instance_principal/  
↪resource_principal>
```

6.3.2 publish

```
ads opctl conda publish -s <slug>
```

Publish conda pack to the object storage bucket from your laptop or workstation. You can use this conda pack inside OCI Data Science Service or Data Flow service.

6.3.3 install

Install conda pack using its URI. The conda pack can be used inside the docker image that you built. Use Visual Studio Code that is configured with the conda pack to help you test your code locally before submitting to OCI.

```
ads opctl conda install -u "oci://mybucket@namespace/conda_environment/path/to/my/conda"
```

6.4 Build Your Own Container (BYOC)

6.4.1 Test Container image

OCI Data Science Jobs allows you to use custom container images. `ads cli` can help you test a container image locally, publish it, and run it in OCI with a uniform interface.

Running an image locally can be conveniently achieved with “docker run” directly. “ads opctl” commands are provided here only to be symmetric to remote runs on OCI ML Job. The command looks like

```
ads opctl run -i <image-name> -e <docker entrypoint> -c "docker cmd" --env-var ENV_  
↪NAME=value -b <backend>
```

`-b` option can take either `local` - runs the container locally or `job` - runs the container on OCI.

6.4.2 Setup VS Code to use container as development environment

During the course of development, it is more productive to work within the container environment to iterate over the code. You can setup your VS Code environment to use the container as your development environment as shown here -

```
ads opctl init-vscode -i ubuntu --env-var TEST=test -v /Users/<username>/oci:/root/.oci
```

A *devcontainer.json* is created with following contents -

```
{
  "image": "ubuntu",
  "mounts": [
    "source=/Users/<username>/oci,target=/root/.oci,type=bind"
  ],
  "extensions": [
    "ms-python.python"
  ],
  "containerEnv": {
    "TEST": "test"
  }
}
```

6.4.3 Publish image to registry

To run a container image with OCI Data Science Job, the image needs to be in a registry accessible by OCI Data Science Job. “ads opctl publish-image” is a thin wrapper on “docker push”. The command looks like

```
ads opctl publish-image <image-name>
```

The image will be pushed to the docker registry specified in *ml_job_config.ini*. Check [configuration](#) for defaults. To overwrite the registry, use *-r <registry>*.

6.4.4 Run container image on OCI Data Science

To run a container on OCI Data Science, provide *ml_job* for *-b* option. Here is an example -

```
ads opctl run -i <region>.ocir.io/<tenancy>/ubuntu -e bash -c '-c "echo $TEST"' -b job -
↪ -env-var TEST=test
```

6.5 Local Job Execution

Your job can be executed in a local container to facilitate development and troubleshooting.

6.5.1 Prerequisites

1. *Install ADS CLI*
2. **Build a container image.**
 - *Build Development Container Image and install a conda environment*
 - *Build Your Own Container (BYOC)*

6.5.2 Restrictions

When running locally, your job is subject to the following restrictions:

- The job must use API Key auth. Resource Principal auth is not supported in a local container. See <https://docs.oracle.com/iaas/Content/API/Concepts/apisigningkey.htm>
- You can only use conda environment published to your own Object Storage bucket. See *Working with Conda packs*
- Your job files must be present on your local machine.
- Any network calls must be reachable by your local machine. (i.e. Your job cannot connect to an endpoint that is only reachable within the job's subnet.)
- Your local machine meets the hardware requirements of your job.

6.5.3 Running your Job

6.5.3.1 Using a conda environment

This example below demonstrates how to run a local job using an installed conda environment:

```
ads opctl run --backend local --conda-slug myconda_p38_cpu_v1 --source-folder /path/to/
↪my/job/files/ --entrypoint bin/my_script.py --cmd-args "--some-arg" --env-var "MY_
↪VAR=12345"
```

Parameter explanation:

- `--backend local`: Run the job locally in a docker container.
- `--conda-slug myconda_p38_cpu_v1`: Use the `myconda_p38_cpu_v1` conda environment. Note that you must install this conda environment locally first. The local conda environment directory will be automatically mounted into the container and activated before the entrypoint is executed.
- `--source-folder /path/to/my/job/files/`: The local directory containing your job files. This directory is mounted into the container as a volume.
- `--entrypoint bin/my_script.py`: Set the container entrypoint to `bin/my_script.py`. Note that this path is relative to the path specified with the `--source-folder` parameter.
- `--cmd-args "--some-arg"`: Pass `--some-arg` to the container entrypoint.
- `--env-var "MY_VAR=12345"`: Define environment variable `MY_VAR` with value 12345.

6.5.3.2 Using a custom image

This example below demonstrates how to run a local job using a custom container image:

```
ads opctl run --backend local --image my_image --entrypoint /path/to/my/binary --command_
↪my_cmd --env-var "MY_VAR=12345"
```

Parameter explanation:

- `--backend local`: Run the job locally in a docker container.
- `--image my_image`: Use the custom container image named `my_image`.
- `--entrypoint /path/to/my/binary`: Set the container entrypoint to `/path/to/my/binary`. Note that this path is within the container image.
- `--command my_cmd`: Set the container command to `my_cmd`.
- `--env-var "MY_VAR=12345"`: Define environment variable `MY_VAR` with value 12345.

6.5.3.3 Viewing container output

When the container is running, you can use the `docker logs` command to view its output. See <https://docs.docker.com/engine/reference/commandline/logs/>

Alternatively, you can use the `--debug` parameter to print the container stdout/stderr messages to your shell. Note that Python buffers output by default, so you may see output written to the shell in bursts. If you want to see output displayed in real-time, specify `--env-var PYTHONUNBUFFERED=1`.

```
ads opctl run --backend local --conda-slug myconda_p38_cpu_v1 --source-folder /path/to/
↪my/job/files/ --entrypoint my_script.py --env-var "PYTHONUNBUFFERED=1" --debug
```

6.6 Local Pipeline Execution

Your pipeline can be executed locally to facilitate development and troubleshooting. Each pipeline step is executed in its own local container.

6.6.1 Prerequisites

1. *Install ADS CLI*
2. *Build Development Container Image and install a conda environment*

6.6.2 Restrictions

Your pipeline steps are subject to the *same restrictions as local jobs*.

They are also subject to these additional restrictions:

- Pipeline steps must be of kind `customScript`.
- Custom container images are not yet supported. You must use the development container image with a conda environment.

6.6.3 Configuring Local Pipeline Orchestrator

Use `ads opctl configure`. Refer to the `local_backend.ini` description in the configuration [instructions](#).

Most importantly, `max_parallel_containers` controls how many pipeline steps may be executed in parallel on your machine. Your pipeline DAG may allow multiple steps to be executed in parallel, but your local machine may not have enough cpu cores / memory to effectively run them all simultaneously.

6.6.4 Running your Pipeline

Local pipeline execution requires you to define your pipeline in a yaml file. Refer to the YAML examples [here](#).

Then, invoke the following command to run your pipeline.

```
ads opctl run --backend local --file my_pipeline.yaml --source-folder /path/to/my/
↳ pipeline/step/files
```

Parameter explanation:

- `--backend local`: Run the pipeline locally using docker containers.
- `--file my_pipeline.yaml`: The yaml file defining your pipeline.
- `--source-folder /path/to/my/pipeline/step/files`: The local directory containing the files used by your pipeline steps. This directory is mounted into the container as a volume. Defaults to the current working directory if no value is provided.

6.6.4.1 Source folder and relative paths

If your pipeline step runtimes are of type `script` or `notebook`, the paths in your yaml files must be relative to the `--source-folder`.

Pipeline steps using a runtime of type `python` are able to define their own working directory that will be mounted into the step's container instead.

For example, suppose your yaml file looked like this:

```
kind: pipeline
spec:
  displayName: example
  dag:
    - (step_1, step_2) >> step_3
  stepDetails:
    - kind: customScript
      spec:
        description: A step running a notebook
        name: step_1
        runtime:
          kind: runtime
          spec:
            conda:
              slug: myconda_p38_cpu_v1
              type: service
            notebookEncoding: utf-8
            notebookPathURI: step_1_files/my-notebook.ipynb
```

(continues on next page)

(continued from previous page)

```

        type: notebook
- kind: customScript
  spec:
    description: A step running a shell script
    name: step_2
    runtime:
      kind: runtime
      spec:
        conda:
          slug: myconda_p38_cpu_v1
          type: service
        scriptPathURI: step_2_files/my-script.sh
        type: script
- kind: customScript
  spec:
    description: A step running a python script
    name: step_3
    runtime:
      kind: runtime
      spec:
        conda:
          slug: myconda_p38_cpu_v1
          type: service
        workingDir: /step_3/custom/working/dir
        scriptPathURI: my-python.py
        type: python
type: pipeline

```

And suppose the pipeline is executed locally with the following command:

```
ads opctl run --backend local --file my_pipeline.yaml --source-folder /my/files
```

step_1 uses a notebook runtime. The container for step_1 will mount the /my/files directory into the container. The /my/files/step_1_files/my-notebook.ipynb notebook file will be converted into a python script and executed in the container.

step_2 uses a script runtime. The container for step_2 will mount the /my/files directory into the container. The /my/files/step_2_files/my-script.sh shell script will be executed in the container.

step_3 uses a python runtime. Instead of mounting the /my/files directory specified by --source-folder, the /step_3/custom/working/dir directory will be mounted into the container. The /step_3/custom/working/dir/my-python.py script will be executed in the container.

6.6.4.2 Viewing container output and orchestration messages

When a container is running, you can use the `docker logs` command to view its output. See <https://docs.docker.com/engine/reference/commandline/logs/>

Alternatively, you can use the `--debug` parameter to print each container's stdout/stderr messages to your shell. Note that Python buffers output by default, so you may see output written to the shell in bursts. If you want to see output displayed in real-time for a particular step, specify a non-zero value for the `PYTHONUNBUFFERED` environment variable in your step's runtime specification. For example:


```
- kind: customScript
  spec:
    description: A step running a shell script
    name: step_1
    runtime:
      kind: runtime
      spec:
        conda:
          slug: myconda_p38_cpu_v1
          type: service
        scriptPathURI: my-script.sh
        env:
          PYTHONUNBUFFERED: 1
      type: script
```

Pipeline steps can run in parallel. You may want your pipeline steps to prefix their log output to easily distinguish which lines of output are coming from which step.

When the `--debug` parameter is specified, the CLI will also output pipeline orchestration messages. These include messages about which steps are being started and a summary of each step's result when the pipeline finishes execution.

LOAD DATA

7.1 Connecting to Data Sources

You can load data into ADS in several different ways from Oracle Cloud Infrastructure Object Storage, cx_Oracle, or S3. Following are some examples.

Begin by loading the required libraries and modules:

```
import ads
import numpy as np
import pandas as pd
from ads.common.auth import default_signer
```

7.1.1 Object Storage

To load a dataframe from Object Storage using the API keys, you can use the following example, replacing the angle bracketed content with the location and name of your file:

```
ads.set_auth(auth="api_key", oci_config_location=~/.oci/config", profile="DEFAULT")
bucket_name = <bucket-name>
file_name = <file-name>
namespace = <namespace>
df = pd.read_csv(f"oci://{bucket_name}@{namespace}/{file_name}", storage_options=default_
↪signer())
```

For a list of pandas functions to read different file format, please refer to [the Pandas documentation](#).

To load a dataframe from Object Storage using the resource principal method, you can use the following example, replacing the angle bracketed content with the location and name of your file:

```
ads.set_auth(auth='resource_principal')
bucket_name = <bucket-name>
file_name = <file-name>
namespace = <namespace>
df = pd.read_csv(f"oci://{bucket_name}@{namespace}/{file_name}", storage_options=default_
↪signer())
```

To write a pandas dataframe to object storage, provide the file name in the following format - oci://<mybucket>@<mynamespace>/<path/to/file/name>

```

ads.set_auth(auth='resource_principal')
bucket_name = <bucket-name>
file_name = <file-name>
namespace = <namespace>
df = pd.to_csv(f"oci://{bucket_name}@{namespace}/{file_name}", index=False, storage_
↳ options=default_signer())

# To setup the content type while writing to object storage, set `oci_additional_
↳ kwargs` attribute with `storage_options` to the desired content type

storage_options = default_signer()
storage_options['oci_additional_kwargs'] = {"content_type": "application/octet-stream"}
df = pd.to_csv(f"oci://{bucket_name}@{namespace}/{file_name}", index=False, storage_
↳ options=storage_options)


```

7.1.2 Local Storage

To load a dataframe from a local source, use functions from pandas directly:

```
df = pd.read_csv("/path/to/data.data")
```

7.1.3 Oracle Database

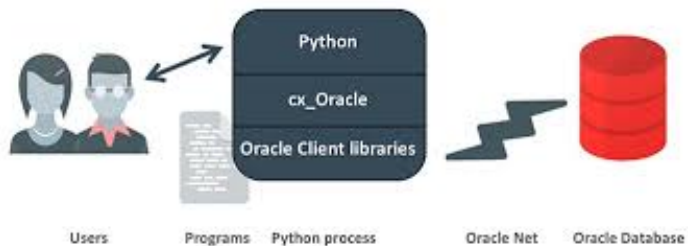

When using the [Oracle ADB](#) with Python the most common representation of tabular data is a [Pandas dataframe](#). When you're in a dataframe, you can perform many operations from visualization to persisting in a variety of formats.

7.1.3.1 Oracle ADB to Pandas

The Pandas `read_sql(...)` function is a general, database independent approach that uses the [SQLAlchemy - Object Relational Mapper](#) to arbitrate between specific database types and Pandas.

Read SQL query or database table into a dataframe.

This function is a convenience wrapper around `read_sql_table` and `read_sql_query` (for backward compatibility). It delegates to the specific function depending on the provided input. A SQL query is routed to `read_sql_query`, while a database table name is routed to `read_sql_table`.

Use the Pandas ADS accessor drop-in replacement, `pd.DataFrame.ads.read_sql(...)`, instead of using `pd.read_sql`.

See [how to](#) save and retrieve credentials from OCI Vault

Example using Wallet File

```
# If you are using Wallet file, provide the zip file path for `wallet_location`
connection_parameters = {
    "user_name": "<username>",
    "password": "<password>",
    "service_name": "<service_name_{high|med|low}>",
    "wallet_location": "/full/path/to/my_wallet.zip",
}
import pandas as pd
import ads

# simple read of a SQL query into a dataframe with no bind variables
df = pd.DataFrame.ads.read_sql(
    "SELECT * FROM SH.SALES",
    connection_parameters=connection_parameters,
)

# read of a SQL query into a dataframe with a bind variable. Use bind variables
# rather than string substitution to avoid the SQL injection attack vector.
df = pd.DataFrame.ads.read_sql(
    """
    SELECT
    *
    FROM
    SH.SALES
    WHERE
        ROWNUM <= :max_rows
    """,
    bind_variables={
        "max_rows" : 100
    },
    connection_parameters=connection_parameters,
)
```

Example using TLS

```
connection_parameters = {
    "user_name": "<username>",
    "password": "<password>",
    "dsn": "<connection string copied from console>",
}
import pandas as pd
import ads

# simple read of a SQL query into a dataframe with no bind variables
df = pd.DataFrame.ads.read_sql(
    "SELECT * FROM SH.SALES",
    connection_parameters=connection_parameters,
)

# read of a SQL query into a dataframe with a bind variable. Use bind variables
# rather than string substitution to avoid the SQL injection attack vector.
```

(continues on next page)

(continued from previous page)

```

df = pd.DataFrame.ads.read_sql(
    """
    SELECT
    *
    FROM
    SH.SALES
    WHERE
        ROWNUM <= :max_rows
    """,
    bind_variables={
        "max_rows" : 100
    },
    connection_parameters=connection_parameters,
)

```

7.1.3.2 Oracle Database to Pandas - No Wallet

New in version 2.5.6..

If your database connection doesn't require a wallet file, you can connect to the database by specifying host/port/sid/service name.

See [how to](#) save and retrieve credentials from OCI Vault

Example

```

connection_parameters = {
    "user_name": "<username>",
    "password": "<password>",
    "service_name": "<service_name>",
    "host": "<database hostname>",
    "port": "<database port number>"
}
import pandas as pd
import ads

# simple read of a SQL query into a dataframe with no bind variables
df = pd.DataFrame.ads.read_sql(
    "SELECT * FROM SH.SALES",
    connection_parameters=connection_parameters,
)

# read of a SQL query into a dataframe with a bind variable. Use bind variables
# rather than string substitution to avoid the SQL injection attack vector.
df = pd.DataFrame.ads.read_sql(
    """
    SELECT
    *
    FROM
    SH.SALES
    WHERE

```

(continues on next page)

(continued from previous page)

```

        ROWNUM <= :max_rows
    """
    bind_variables={
        max_rows : 100
    }
    ,
    connection_parameters=connection_parameters,
)

```

7.1.3.3 Performance

The performance is limited by three things:

- Generational latency: How long the database takes to return rows, use of indexes and writing efficient SQL mitigates this performance bottleneck.
- Network saturation: Once the network is saturated, data can't be delivered between the database and notebook environment any faster. OCI networking is very fast and this isn't usually a concern. One exception is when the network path goes over VPN or other more complex routing topologies.
- CPU latency in the notebook: Python has to collect the byte stream delivered by the database into Python data types before being promoted to Numpy objects for Pandas. Additionally, there is a cryptographic CPU overhead because the data in transit is secured with public key infrastructure (PKI).

7.1.3.4 Large Result Set

If a database query returns more rows than the memory of the client permits, you have a couple of options. The simplest is to use a larger client shape, along with increased compute performance because larger shapes come with more RAM. If that's not an option, then you can use the `pd.DataFrame.ads.read_sql` mixin in chunk mode, where the result is no longer a Pandas dataframe it is an iterator over a sequence of dataframes. You could use this read a large data set and write it to Object storage or a local file system with the following example:

```

for i, df in enumerate(pd.DataFrame.ads.read_sql(
    "SELECT * FROM SH.SALES",
    chunksize=100000 # rows per chunk,
    connection_parameters=connection_parameters,
)):
    # each df will contain up to 100000 rows (chunksize)
    # to write the data to object storage use oci://bucket@namespace/part_{i}.
    ↪ csv"
    df.to_csv(f"part_{i}.csv")

```

7.1.3.5 Very Large Result Set

If the data exceeds what's practical in a notebook, then the next step is to use the [Data Flow service](#) to partition the data across multiple nodes and handle data of any size up to the size of the cluster.

7.1.3.6 Pandas to Oracle Database

Typically, you would do this using `df.to_sql`. However, this uses Oracle Resource Manager to collect data and is less efficient than code that has been optimized for a specific database.

Instead, use the Pandas ADS accessor mixin.

With a `df` dataframe, writing this to the database is as simple as:

```
df.ads.to_sql(  
    "MY_TABLE",  
    connection_parameters=connection_parameters, # Should contain wallet location if you  
    ↪ are connecting to ADB  
    if_exists="replace"  
)
```

The resulting data types (if the table was created by ADS as opposed to inserting into an existing table), are governed by the following:

Pandas	Oracle
bool	NUMBER(1)
int16	INTEGER
int32	INTEGER
int64	INTEGER
float16	FLOAT
float32	FLOAT
float64	FLOAT
datetime64	TIMESTAMP
string	VARCHAR2 (Maximum length of the actual data.)

When a table is created, the length of any `VARCHAR2` column is computed from the longest string in the column. The ORM defaults to `CLOB` data, which is not correct or efficient. `CLOB`s are stored efficiently by the database, but the `c` API to query them works differently. The non-LOB columns are returned to the client through a cursor, but LOBs are handled differently resulting in an additional network fetch per row, per LOB column. ADS deals with this by creating the correct data type, and setting the correct `VARCHAR2` length.

7.1.4 MySQL

New in version 2.5.6..

To load a dataframe from a MySQL database, you must set `engine=mysql` in `pd.DataFrame.ads.read_sql`.

See [how to](#) save and retrieve credentials from OCI Vault

Example

```
connection_parameters = {  
    "user_name": "<username>",  
    "password": "<password>",
```

(continues on next page)

(continued from previous page)

```

    "host": "<database hostname>",
    "port": "<database port number>",
    "database": "<database name>"
}
import pandas as pd
import ads

# simple read of a SQL query into a dataframe with no bind variables
df = pd.DataFrame(ads.read_sql(
    "SELECT * FROM EMPLOYEE",
    connection_parameters=connection_parameters,
    engine="mysql"
))

# read of a SQL query into a dataframe with a bind variable. Use bind variables
# rather than string substitution to avoid the SQL injection attack vector.
df = pd.DataFrame(ads.read_sql(
    """
    SELECT
    *
    FROM
    EMPLOYEE
    WHERE
        emp_no <= ?
    """,
    bind_variables=(1000,)
    ,
    connection_parameters=connection_parameters,
    engine="mysql"
))

```

To save the dataframe df to MySQL, use df.ads.to_sql API with engine=mysql

```

df.ads.to_sql(
    "MY_TABLE",
    connection_parameters=connection_parameters,
    if_exists="replace",
    engine="mysql"
)

```

The resulting data types (if the table was created by ADS as opposed to inserting into an existing table), are governed by the following:

Pandas	MySQL
bool	NUMBER(1)
int16	INTEGER
int32	INTEGER
int64	INTEGER
float16	FLOAT
float32	FLOAT
float64	FLOAT
datetime64	DATETIME (Format: %Y-%m-%d %H:%M:%S)
string	VARCHAR (Maximum length of the actual data.)

7.1.5 BDS Hive

New in version 2.6.1..

To load a dataframe from BDS Hive, set `engine="hive"` in `pd.DataFrame.ads.read_sql`.

See [how to](#) save and retrieve credentials from OCI Vault

7.1.5.1 Connection Parameters

Work with BDS with Kerberos authentication

If you are working with BDS that requires Kerberos authentication, you can follow [here](#) to get connection parameters required to connect with BDS, and then follow [here](#) to save the connection parameters as well as the files needed to configure the kerberos authentication into vault. The `connection_parameters` can be set as:

```
connection_parameters = {
    "host": "<hive hostname>",
    "port": "<hive port number>",
}
```

Work with unsecure BDS

If you are working with unsecure BDS, you can set `connection_parameters` as:

```
connection_parameters = {
    "host": "<hive hostname>",
    "port": "<hive port number>",
    "auth_mechanism": "PLAIN" # for connection with unsecure BDS
}
```

Example

```
connection_parameters = {
    "host": "<database hostname>",
    "port": "<database port number>",
}
import pandas as pd
import ads

# simple read of a SQL query into a dataframe with no bind variables
df = pd.DataFrame.ads.read_sql(
```

(continues on next page)

(continued from previous page)

```

"SELECT * FROM EMPLOYEE",
connection_parameters=connection_parameters,
engine="hive"
)

# read of a SQL query into a dataframe with a bind variable. Use bind variables
# rather than string substitution to avoid the SQL injection attack vector.
df = pd.DataFrame.ads.read_sql(
    """
    SELECT
    *
    FROM
    EMPLOYEE
    WHERE
        `emp_no` <= ?
    """,
    bind_variables=(1000,)
    ,
    connection_parameters=connection_parameters,
    engine="hive"
)

```

To save the dataframe df to BDS Hive, use df.ads.to_sql API with engine="hive".

```

df.ads.to_sql(
    "MY_TABLE",
    connection_parameters=connection_parameters,
    if_exists="replace",
    engine="hive"
)

```

7.1.5.2 Partition

You can create table with partition, and then use df.ads.to_sql API with engine="hive", if_exists="append" to insert data into the table.

```

create_table_sql = f'''
    CREATE TABLE {table_name} (col1_name datatype, ...)
    partitioned by (col_name datatype, ...)
'''

df.ads.to_sql(
    "MY_TABLE",
    connection_parameters=connection_parameters,
    if_exists="append",
    engine="hive"
)

```

7.1.5.3 Large Dataframe

If the dataframe waiting to be uploaded has many rows, and the `.to_sql()` method is slow, you have other options. The simplest is to use a larger client shape, along with increased compute performance because larger shapes come with more RAM. If that's not an option, then you can follow these steps:

```
# Step1: Save your df as csv
df.to_csv(f"my_data.csv")

# Step2: Upload the csv to hdfs
hdfs_host = "<hdfs hostname>"
hdfs_port = "<hdfs port number>"
hdfs_config = {"host": hdfs_host, "port": hdfs_port, "protocol": "webhdfs"}
fs = fsspec.filesystem(**hdfs_config)
fs.upload(
    lpath="./my_data.csv",
    rpath="/user/hive/iris.csv"
)

# Step3: Create table
sql = f"""
CREATE TABLE IF NOT EXISTS {table_name} (col1_name datatype, ...)
ROW FORMAT DELIMITED
FIELDS TERMINATED BY ','
STORED AS TEXTFILE
"""
cursor.execute(sql)

# Step4: Load data into Hive table from hdfs
hdfs_path = "./my_data.csv"
sql = f"LOAD DATA INPATH '{hdfs_path}' INTO TABLE {table_name}"
cursor.execute(sql)
```

7.1.6 HTTP(S) Sources

To load a dataframe from a remote web server source, use pandas directly and specify the URL of the data:

```
df = pd.read_csv('https://example.com/path/to/data.csv')
```

7.1.7 Convert Pandas DataFrame to ADSDataset

To convert a Pandas dataframe to ADSDataset, pass the `pandas.DataFrame` object directly into the `ADS DatasetFactory.open` method:

```
import pandas as pd
from ads.dataset.factory import DatasetFactory

df = pd.read_csv('/path/some_data.csv') # load data with Pandas

# use open...
```

(continues on next page)

(continued from previous page)

```

ds = DatasetFactory.open(df) # construct **ADS** Dataset from DataFrame

# alternative form...

ds = DatasetFactory.from_dataframe(df)

# an example using Pandas to parse data on the clipboard as a CSV and construct an ADS_
↳Dataset object
# this allows easily transferring data from an application like Microsoft Excel, Apple_
↳Numbers, etc.

ds = DatasetFactory.from_dataframe(pd.read_clipboard())

# use Pandas to query a SQL database:

from sqlalchemy import create_engine
engine = create_engine('dialect://user:pass@host:port/schema', echo=False)
df = pd.read_sql_query('SELECT * FROM mytable', engine, index_col = 'ID')
ds = DatasetFactory.from_dataframe(df)

```

7.1.8 Using PyArrow

ADS supports reading files into PyArrow dataset directly via ocifs. ocifs is installed as ADS dependencies.

```

import ocifs
import pyarrow.dataset as ds
bucket_name = <bucket_name>
namespace = <namespace>
path = <path>
fs = ocifs.OCIFileSystem(**default_signer())
ds = ds.dataset(f"{bucket_name}@{namespace}/{path}/", filesystem=fs)

```

7.2 DataSetFactory

7.2.1 Connect with DatasetFactory

Deprecation Note

- `DataSetFactory.open` is deprecated in favor of Pandas to read from file systems.
- Pandas(>1.2.1) can connect to object storage using uri format - `oci://bucket@namespace/path/to/data`.
- To read from Oracle database or MySQL, see DataBase sections under [Connecting to Datasources](#)
- `DataSetFactory.from_dataframe` is supported to create `ADSDataset` class from pandas dataframe

See [Connecting to Datasources](#) for examples.

You can load data into ADS in several different ways from Oracle Cloud Infrastructure Object Storage, cx_Oracle, or S3. Following are some examples.

Begin by loading the required libraries and modules:

```
import ads
import numpy as np
import pandas as pd

from ads.dataset.dataset_browser import DatasetBrowser
from ads.dataset.factory import DatasetFactory
```

7.2.1.1 Object Storage

To open a dataset from Object Storage using the resource principal method, you can use the following example, replacing the angle bracketed content with the location and name of your file:

```
import ads
import os

from ads.dataset.factory import DatasetFactory

ads.set_auth(auth='resource_principal')
bucket_name = <bucket-name>
file_name = <file-name>
namespace = <namespace>
storage_options = {'config': {}, 'tenancy': os.environ['TENANCY_OCID'], 'region': os.
    ↪environ['NB_REGION']}
ds = DatasetFactory.open(f"oci://{bucket_name}@{namespace}/{file_name}", storage_
    ↪options=storage_options)
```

To open a dataset from Object Storage using the Oracle Cloud Infrastructure configuration file method, include the location of the file using this format `oci://<bucket_name>@<namespace>/<file_name>` and modify the optional parameter `storage_options`. Insert:

- The path to your [Oracle Cloud Infrastructure configuration file](#),
- The profile name you want to use.

For example:


```
ds = DatasetFactory.open("oci://<bucket_name>@<namespace>/<file_name>", storage_options_
    ↪= {
    "config": "~/.oci/config",
    "profile": "DEFAULT"
})
```

7.2.1.2 Local Storage

To open a dataset from a local source, use `DatasetFactory.open` and specify the path of the data file:

```
ds = DatasetFactory.open("/path/to/data.data", format='csv', delimiter=" ")
```

7.2.1.2.1 Oracle Database

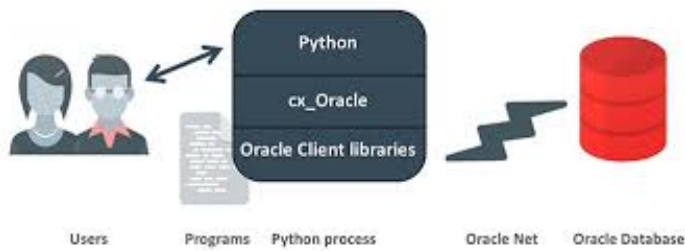

To connect to Oracle Databases from Python, you use the `cx_Oracle` package that conforms to the Python database API specification.

You must have the client credentials and connection information to connect to the database. The client credentials include the wallet, which is required for all types of connections. Use these steps to work with ADB and wallet files:

1. From the Console, go to the Oracle Cloud Infrastructure ADW or ATP instance page that you want to load the dataset from, and then click **DB Connection**.
2. Click **Download Wallet**.
3. You have to enter a password. This password is used for some ADB connections, but not the ones that are used in the notebook.
4. Create a folder for your wallet in the notebook environment (`<path_to_wallet_folder>`).
5. Upload your wallet files into `<path_to_wallet_folder>` folder using the Jupyterlab Upload Files button.
6. Open the `sqlnet.ora` file from the wallet files, and then configure the `METHOD_DATA` to be: `METHOD_DATA = (DIRECTORY="<path_to_wallet_folder>")`
7. Set the env variable, `TNS_ADMIN`. `TNS_ADMIN`, to point to the wallet you want to use.

In this example a Python dictionary, `creds` is used to store the credentials. However, it is poor security practice to store this information in a notebook. The notebook `ads-examples/ADB_working_with.ipynb` gives an example of how to store them in Block Storage.

```
creds = {}
creds['tns_admin'] = <path_to_wallet_folder>
creds['sid'] = <your SID>
creds['user'] = <database username>
creds['password'] = <database password>
```

Once your Oracle client is setup, you can use `cx_Oracle` directly with Pandas as in this example:

```
import pandas as pd
import cx_Oracle
import os

os.environ['TNS_ADMIN'] = creds['tns_admin']
with cx_Oracle.connect(creds['user'], creds['password'], creds['sid']) as ora_conn:
    df = pd.read_sql(''
        SELECT ename, dname, job, empno, hiredate, loc
        FROM emp, dept
        WHERE emp.deptno = dept.deptno
```

(continues on next page)

(continued from previous page)

```
ORDER BY ename
'', con=ora_conn)
```

You can also use `cx_Oracle` within ADS by creating a connection string:

```
os.environ['TNS_ADMIN'] = creds['tns_admin']
from ads.dataset.factory import DatasetFactory
uri = 'oracle+cx_Oracle://' + creds['user'] + ':' + creds['password'] + '@' + creds['sid']
ds = DatasetFactory.open(uri, format="sql", table=table, index_col=index_col)
```

7.2.1.3 Autonomous Database



Oracle has two configurations of Autonomous Databases. They are the Autonomous Data Warehouse (ADW) and the Autonomous Transaction Processing (ATP) database. Both are fully autonomous databases that scale elastically, deliver fast query performance, and require minimal database administration.

Note: To access [ADW](#), review the Autonomous Database configuration section. It shows you how to get the client credentials (wallet) and set up the proper environment variable.

7.2.1.3.1 Load from ADB

After you have stored the ADB username, password, and database name (SID) as variables, you can build the URI as your connection source.

```
uri = 'oracle+cx_Oracle://' + creds['user'] + ':' + creds['password'] + '@' + creds['sid']
```

You can use ADS to query a table from your database, and then load that table as an `ADSDataset` object through `DatasetFactory`. When you open `DatasetFactory`, specify the name of the table you want to pull using the `table` variable for a given table. For SQL expressions, use the `table` parameter also. For example, (`table="SELECT * FROM sh.times WHERE rownum <= 30"`).

```
os.environ['TNS_ADMIN'] = creds['tns_admin']
ds = DatasetFactory.open(uri, format="sql", table=table, target='label')
```


7.2.1.3.2 Query ADB

- Query using Pandas

This example shows you how to query data using Pandas and `sqlalchemy` to read data from ADB:

```
from sqlalchemy import create_engine
import os

os.environ['TNS_ADMIN'] = creds['tns_admin']
engine = create_engine(uri)
df = pd.read_sql('SELECT * from <TABLENAME>', con=engine)
```

You can convert the `pd.DataFrame` into `ADSDataset` using the `DatasetFactory.from_dataframe()` function.

```
ds = DatasetFactory.from_dataframe(df)
```

These two examples run a simple query on ADW data. With `read_sql_query` you can use SQL expressions not just for tables, but also to limit the number of rows and to apply conditions with filters, such as (`where`).

```
ds = pd.read_sql_query('SELECT * from <TABLENAME>', uri)
```

```
ds = pd.read_sql_query('SELECT * FROM emp WHERE ROWNUM <= 5', uri)
```

- Query using cx_Oracle

You can also query data from ADW using `cx_Oracle`. Use the `cx_Oracle 7.0.0` version with ADS. Ensure that you change the dummy `<TABLENAME>` placeholder to the actual table name you want to query data from, and the dummy `<COLNAME>` placeholder to the column name that you want to select:

```
import
import pandas as pd
import numpy as np
import os

os.environ['TNS_ADMIN'] = creds['tns_admin']
connection = cx_Oracle.connect(creds['user'], creds['password'], creds['sid'])
cursor = connection.cursor()
results = cursor.execute("SELECT * from <TABLENAME>")

data = results.fetchall()
df = pd.DataFrame(np.array(data))

ds = DatasetFactory.from_dataframe(df)
```

```
results = cursor.execute('SELECT <COLNAME> from <TABLENAME>').fetchall()
```

Close the cursor and connection using the `.close()` method:

```
cursor.close()
connection.close()
```

7.2.1.4 Update ADB Tables

To add predictions to a table, you can either update an existing table, or create a new table with the added predictions. There are many ways to do this. One way is to use the model to update a CSV file, and then use Oracle SQL*Loader or SQL*Plus.

This example adds predictions programmatically using `cx_Oracle`. It uses `executemany` to insert rows as tuples created using the model's `predict` method:

```
ds = DatasetFactory.open("iris.csv")

create_table = '''CREATE TABLE IRIS_PREDICTED (,
                  sepal_length number,
                  sepal_width number,
                  petal_length number,
                  petal_width number,
                  SPECIES VARCHAR2(20),
                  yhat VARCHAR2(20),
                  )'''

connection = cx_Oracle.connect(creds['user'], creds['password'], creds['sid'])
cursor = connection.cursor()
cursor.execute(create_table)

ds_res.to_sql('predicted_iris', con=engine, index=False, if_exists="append")\

rows = [tuple(x) for x in ds_res.values]

cursor.executemany("""
    insert into IRIS_PREDICTED
        (sepal_length, sepal_width, petal_length, petal_width, SPECIES, yhat)
    values (:1, :2, :3, :4, :5, :6)""",
    rows
)

connection.commit()
cursor.close()
connection.close()
```

For some models, you could also use `predict_proba` to get an array of predictions and their confidence probability.

7.2.1.5 Amazon S3

You can open Amazon S3 public or private files in ADS. For private files, you must pass the right credentials through the ADS `storage_options` dictionary. If you have large S3 files, then you benefit from an increased `blocksize`.

```
ds = DatasetFactory.open("s3://bucket_name/iris.csv", storage_options = {
    'key': 'aws key',
    'secret': 'aws secret',
    'blocksize': 1000000,
    'client_kwargs': {
        "endpoint_url": "https://s3-us-west-1.amazonaws.com"
    }
})
```

7.2.1.6 HTTP(S) Sources

To open a dataset from a remote web server source, use `DatasetFactory.open()` and specify the URL of the data:

```
ds = DatasetFactory.open('https://example.com/path/to/data.csv', target='label')
```

7.2.1.7 DatasetBrowser

`DatasetBrowser` allows easy access to datasets from reference libraries and index websites, such as scikit-learn. To see the supported libraries, use the `list()` function:

```
DatasetBrowser.list()
```

```
['web', 'sklearn', 'seaborn', 'R']
```

To see which dataset is available from scikit-learn, use:

```
sklearn = DatasetBrowser.sklearn()  
sklearn.list()
```

```
['boston', 'breast_cancer', 'diabetes', 'iris', 'wine', 'digits']
```

Datasets are provided as a convenience. Datasets are considered Third Party Content and are not considered Materials under Your agreement with Oracle applicable to the Services. Review the [dataset license](#).

To explore one of the datasets, use `open()` specifying the name of the dataset:

```
ds = sklearn.open('wine')
```


LABEL DATA

The Oracle Cloud Infrastructure (OCI) Data Labeling service allows you to create and browse datasets, view data records (text, images) and apply labels for the purposes of building AI/machine learning (ML) models. The service also provides interactive user interfaces that enable the labeling process. After you label records, you can export the dataset as line-delimited JSON Lines (JSONL) for use in model development.

Datasets are the core resource available within the Data Labeling service. They contain records and their associated labels. A record represents a single image or text document. Records are stored by reference to their original source such as path on Object Storage. You can also upload records from local storage. Labels are annotations that describe a data record. There are three different dataset formats, each having its respective annotation classes:

- Images: Single label, multiple label, and object detection. Supported image types are `.png`, `.jpeg`, and `.jpg`.
- Text: Single label, multiple label, and entity extraction. Plain text, `.txt`, files are supported.
- Document: Single label and multiple label. Supported document types are `.pdf` and `.tiff`.

8.1 Overview

The Oracle Cloud Infrastructure (OCI) Data Labeling service allows you to create and browse datasets, view data records (text, images) and apply labels for the purposes of building AI/machine learning (ML) models. The service also provides interactive user interfaces that enable the labeling process. After you label records, you can export the dataset as line-delimited JSON Lines (JSONL) for use in model development.

Datasets are the core resource available within the Data Labeling service. They contain records and their associated labels. A record represents a single image or text document. Records are stored by reference to their original source such as path on Object Storage. You can also upload records from local storage. Labels are annotations that describe a data record. There are three different dataset formats, each having its respective annotation classes:

- Images: Single label, multiple label, and object detection. Supported image types are `.png`, `.jpeg`, and `.jpg`.
- Text: Single label, multiple label, and entity extraction. Plain text, `.txt`, files are supported.
- Document: Single label and multiple label. Supported document types are `.pdf` and `.tiff`.

8.2 Quick Start

The following examples provide an overview of how to use ADS to work with the Data Labeling service.

List all the datasets in the compartment:

```
from ads.data_labeling import DataLabeling
dls = DataLabeling()
dls.list_dataset()
```

With a labeled data set, the details of the labeling is called the export. To generate the export and get the path to the metadata JSONL file, you can use `export()` with these parameters:

- `dataset_id`: The OCID of the Data Labeling dataset to take a snapshot of.
- `path`: The Object Storage path to store the generated snapshot.

```
metadata_path = dls.export(
    dataset_id="<dataset_id>",
    path="oci://<bucket_name>@<namespace>/<prefix>"
)
```

To load the labeled data into a Pandas dataframe, you can use `LabeledDatasetReader` object that has these parameters:

- `materialize`: Load the contents of the dataset. This can be quite large. The default is *False*.
- `path`: The metadata file path that can be local or object storage path.

```
from ads.data_labeling import LabeledDatasetReader
ds_reader = LabeledDatasetReader.from_export(
    path="<metadata_path>",
    materialize=True
)
df = ds_reader.read()
```

You can also read labeled datasets from the OCI Data Labeling Service into a Pandas dataframe using `LabeledDatasetReader` object by specifying `dataset_id`:

```
from ads.data_labeling import LabeledDatasetReader
ds_reader = LabeledDatasetReader.from_DLS(
    dataset_id="<dataset_ocid>",
    materialize=True
)
df = ds_reader.read()
```

Alternatively, you can use the `.read_labeled_data()` method by either specifying `path` or `dataset_id`.

This example loads a labeled dataset and returns a Pandas dataframe containing the content and the annotations:

```
df = pd.DataFrame.ads.read_labeled_data(
    path="<metadata_path>",
    materialize=True
)
```

The following example loads a labeled dataset from the OCI Data Labeling, and returns a Pandas dataframe containing the content and the annotations:

```
df = pd.DataFrame.ads.read_labeled_data(
    dataset_id="<dataset_ocid>",
    materialize=True
)
```

8.3 Export Metadata

To obtain a handle to a `DataLabeling` object, you call the `DataLabeling()` constructor. The default compartment is the same compartment as the notebook session, but the `compartment_id` parameter can be used to select a different compartment.

To work with the labeled data, you need a snapshot of the dataset. The `export()` method copies the labeled data from the Data Labeling service into a bucket in Object Storage. The `.export()` method has the following parameters:

- `dataset_id`: The OCID of the Data Labeling dataset to take a snapshot of.
- `path`: The Object Storage path to store the generated snapshot.

The export process creates a JSONL file that contains metadata about the labeled dataset in the specified bucket. There is also a record JSONL file that stores the image, text, or document file path of each record and its label.

The `export()` method returns the path to the metadata file that was created in the export operation.

```
from ads.data_labeling import DataLabeling
dls = DataLabeling()
metadata_path = dls.export(
    dataset_id="<dataset_id>",
    path="oci://<bucket_name>@<namespace>/<prefix>"
)
```

8.4 List

The `.list_dataset()` method generates a list of the available labeled datasets in the compartment. The compartment is set when you call `DataLabeling()`. The `.list_dataset()` method returns a Pandas dataframe where each row is a dataset.

```
from ads.data_labeling import DataLabeling
dls = DataLabeling(compartment_id="<compartment_id>")
dls.list_dataset()
```

8.5 Load

The returned value from the `.export()` method is used to load a dataset. You can load a dataset into a Pandas dataframe using `LabeledDatasetReader` or a Pandas accessor. The `LabeledDatasetReader` creates an object that allows you to perform operations, such as getting information about the dataset without having to load the entire dataset. It also allows you to read the data directly into a Pandas dataframe or to use an iterator to process the records one at a time. The Pandas accessor approach provides a convenient method to load the data in a single command.

8.5.1 LabeledDatasetReader

Call the `.from_export()` method on `LabeledDatasetReader` to construct an object that allows you to read the data. You need the metadata path that was generated by the `.export()` method. Optionally, you can set `materialize` to `True` to load the contents of the dataset. It's set to `False` by default.

```
from ads.data_labeling import LabeledDatasetReader
ds_reader = LabeledDatasetReader.from_export(
    path=metadata_path,
    materialize=True
)
```

You can explore the metadata information of the dataset by calling `info()` on the `LabeledDatasetReader` object. You can also convert the metadata object to a dictionary using `to_dict`:

```
metadata = ds_reader.info()
metadata.labels
metadata.to_dict()
```

On the `LabeledDatasetReader` object, you call `read()` to load the labeled dataset. By default, it's read into a Pandas dataframe. You can specify the output annotation format to be `spacy` for the Entity Extraction dataset or `yolo` for the Object Detection dataset.

An Entity Extraction dataset is a dataset type that supports natural language processing named entity recognition (NLP NER). [Here is an example of spacy format.](#) A Object Detection dataset is a dataset type that contains data from detecting instances of objects of a certain class within an image. [Here is an example of yolo format.](#)

```
df = ds_reader.read()
df = ds_reader.read(format="spacy")
df = ds_reader.read(format="yolo")
```

When a dataset is too large, you can read it in small portions. The result is presented as a generator.

```
for df in ds_reader.read(chunksize=10):
    df.head()
```

Alternatively, you can call `read(iterator=True)` to return a generator of the loaded dataset, and loop all the records in the `ds_generator` by running:

```
ds_generator = ds_reader.read(iterator=True)
for item in ds_generator:
    print(item)
```

The `iterator` parameter can be combined with the `chunksize` parameter. When you use the two parameters, the result is also presented as a generator. Every item in the generator is a list of dataset records.

```
for items in ds_reader.read(iterator=True, chunksize=10):
    print(items)
```


8.5.2 Pandas Accessor

The Pandas accessor approach allows you to read a labeled dataset into a Pandas dataframe using a single command.

Use the `.read_labeled_data()` method to read the metadata file, record file, and all the corpus documents. To do this, you must know the metadata path that was created from the `.export()` method. Optionally you can set `materialize` to `True` to load content of the dataset. It's set to `False` by default. The `read_labeled_data()` method returns a dataframe that is easy to work with.

This example loads a labeled dataset and returns a Pandas dataframe containing the content and the annotations:

```
import pandas as pd
df = pd.DataFrame.ads.read_labeled_data(
    path="<metadata_path>",
    materialize=True
)
```

If you'd like to load a labeled dataset from the OCI Data Labeling, you can specify the `dataset_id`, which is dataset OCID that you'd like to read.

The following example loads a labeled dataset from the OCI Data Labeling and returns a Pandas dataframe containing the content and the annotations:

```
import pandas as pd
df = pd.DataFrame.ads.read_labeled_data(
    dataset_id="<dataset_ocid>",
    materialize=True
)
```

You can specify the output annotation format to be `spacy` for the Entity Extraction dataset or `yolo` for the Object Detection dataset.

```
import pandas as pd
df = pd.DataFrame.ads.read_labeled_data(
    dataset_id="<dataset_ocid>",
    materialize=True,
    format="spacy"
)
```

An example of a dataframe loaded with the labeled dataset is:

	Path	Content	Annotations
0	oci://hosted-ds-datasets@bigdatadatasciencelar...	From: luriem@alleg.edu(Michael Lurie) The Libe...	0
1	oci://hosted-ds-datasets@bigdatadatasciencelar...	From: nsmca@aurora.alaska.edu\nSubject: 30826\...	1
2	oci://hosted-ds-datasets@bigdatadatasciencelar...	From: aws@iti.org (Allen W. Sherzer)\nSubject:...	1
3	oci://hosted-ds-datasets@bigdatadatasciencelar...	Subject: Re: quick way to tell if your local b...	0
4	oci://hosted-ds-datasets@bigdatadatasciencelar...	Subject: Best Sportwriters...\nFrom: csc2imd@c...	0

8.6 Visualize

After the labeled dataset is loaded in a Pandas dataframe, you can visualize it using ADS. The visualization functionality only works if there are no transformations made to the *Annotations* column.

8.6.1 Image

An image dataset, with an Object Detection annotation class, can have selected image records visualized by calling the `.render_bounding_box()` method. You can provide customized colors for each label. If the `path` parameter is specified, the annotated image file is saved to that path. Otherwise, the image is displayed in the notebook session. The maximum number of records to display is set to 50 by default. This setting can be changed with the `limit` parameter:

```
df.head(1).ads.render_bounding_box()    # without user defined colors

df.iloc[1:3,:].ads.render_bounding_box(
    options={"default_color": "white",
            "colors": {"flower": "orange", "temple": "green"}},
    path="test.png"
)
```

An example of a single labeled image record is similar to:



Optionally, you can convert the bounding box to YOLO format by calling `to_yolo()` on bounding box. The labels are mapped to the index value of each label in the `metadata.labels` list.

```
df["Annotations"] = df.Annotations.apply(
    lambda items: [item.to_yolo(metadata.labels) for item in items] if items else None
)
```

8.6.2 Text

For a text dataset, with an entity extraction annotation class, you can also visualize selected text records by calling `.render_ner()`, and optionally providing customized colors for each label. By default, a maximum of 50 records are displayed. However, you can adjust this using the `limit` parameter:

```
df.head(1).ads.render_ner() # without user defined colors

df.iloc[1:3,:].ads.render_ner(options={"default_color": "#DDEECC",
                                       "colors": {"company": "#DDEECC",
                                                  "person": "#FFAAAA",
                                                  "city": "#CCC"}})
```

This is an example output for a single labeled text record:

COFFEE, SUGAR AND COCOA EXCHANGE NAMES CHAIRMAN The New York CITY Coffee, Sugar and Cocoa Exchange (CSCE COMPANY) elected former first vice chairman Gerald PERSON Clancy to a two-year term as chairman of the board of managers, replacing previous chairman Howard Katz PERSON . Katz PERSON , chairman since 1985, will remain a board member. Clancy PERSON currently serves on the Exchange board of managers as chairman of its appeals, executive, pension and political action committees. The CSCE COMPANY also elected Charles Nastro PERSON , executive vice president of Shearson Lehman Bros COMPANY , as first vice chairman. Anthony Maccia PERSON , vice president of Woodhouse COMPANY , Drake PERSON and Carey PERSON , was named second vice chairman, and Clifford Evans PERSON , president of Demico Futures PERSON , was elected treasurer.

Optionally, you can convert the entities by calling `to_spacy()`:

```
df["Annotations"] = df.Annotations.apply(
    lambda items: [item.to_spacy() for item in items] if items else None
)
```

8.7 Examples

8.7.1 Binary Text Classification

This example will demonstrate how to do binary text classification. It will demonstrate a typical data science workflow using a single label dataset from the Data Labeling Service (DLS).

Start by loading in the required libraries:

```
import ads
import oci
import os
import pandas as pd

from sklearn.feature_extraction.text import TfidfVectorizer
from sklearn.tree import DecisionTreeClassifier
```

8.7.1.1 Dataset

A subset of the 20 Newsgroups dataset is used in this example. The complete dataset is a collection of approximately 20,000 newsgroup documents partitioned across 20 different newsgroups. The dataset is popular for experiments where the machine learning application predicts which newsgroup a record belongs to.

Since this example is a binary classification, only the `rec.sport.baseball` and `sci.space` newsgroups are used. The dataset was previously labeled in the Data Labeling service. The metadata was exported and saved in a publicly accessible Object Storage bucket.

The data was previously labeled in the Data Labeling service. The metadata was exported and was saved in a publicly accessible Object Storage bucket. The metadata JSONL file is used to import the data and labels.

8.7.1.2 Load

You use the `.read_labeled_data()` method to read in the metadata file, record file, and the entire corpus of documents. Only the metadata file has to be specified because it contains references to the record and corpus documents. The `.read_labeled_data()` method returns a dataframe that is easy to work with.

The next example loads a labeled dataset, and returns the text from each email and the labeled annotation:

```
df = pd.DataFrame.ads.read_labeled_data(
    "oci://hosted-ds-datasets@bigdatadatasciencelarge/DLS/text_single_label_20news/
    ↪ metadata.jsonl",
    materialize=True
)
```

8.7.1.3 Preprocess

The data needs to be standardized. The next example performs the following operations:

- Converts the text to lower case.
- Uses a regular expression (RegEx) command to remove any character that is not alphanumeric, underscore, or whitespace.
- Replace the sequence of characters `\n` with a space.

The binary classifier model you train is a decision tree where the features are based on n-grams of the words. You use n-grams that are one, two, and three words long (unigrams, bigrams, and trigrams). The vectorizer removes English stop words because they provide little value to the model being built. A weight is assigned to these features using the `term frequency-inverse document frequency` (TF*IDF) approach .

```
df['text_clean'] = df['Content'].str.lower().str.replace(r'[^w\s]+', ' ').str.replace('\n
    ↪ ', ' ')
vectorizer = TfidfVectorizer(stop_words='english', analyzer='word', ngram_range=(1,3))
```

8.7.1.4 Train

In this example, you skip splitting the dataset into the training and test sets since the goal is to build a toy model. You assign 0 for the `rec.sport.baseball` label and 1 for the `sci.space` label:

```
classifier = DecisionTreeClassifier()
feature = vectorizer.fit_transform(df['text_clean'])
model = classifier.fit(feature, df['Annotations'])
```

8.7.1.5 Predict

Use the following to predict the category for a given text data using the trained binary classifier:

```
classifier.predict(vectorizer.transform(["reggie jackson played right field"]))
```

8.7.2 Image Classification

This example demonstrates how to read image files and labels, normalize the size of the image, train a SVC model, and make predictions. The SVC model is used to try and determine what class a model belongs to.

To start, import the required libraries:

```
import ads
import matplotlib.pyplot as plt
import oci
import os
import pandas as pd

from ads.data_labeling import LabeledDatasetReader
from PIL import Image
from sklearn import svm, metrics
from sklearn.model_selection import train_test_split
```

8.7.2.1 Data Source

The data for this example was taken from a set of x-rays that were previously labeled in the Data Labeling service whether they have pneumonia or not. The metadata was exported and saved in a publicly accessible Object Storage bucket. The following commands define the parameters needed to access the metadata JSONL file:

```
metadata_path = f"oci://hosted-ds-datasets@bigdatadatasciencelarge/DLS/image_single_
↪label_xray/metadata.jsonl"
```

8.7.2.2 Load

This example loads and materializes the data in the dataframe. That is the dataframe to contain a copy of the image file. You do this with the `.ads.read_labeled_data()` method:

```
df = pd.DataFrame.ads.read_labeled_data(path=metadata_path,
                                       materialize=True)
```

8.7.2.3 Visualize

The next example extracts images from the dataframe, and plots them along with their labels:

```
_, axes = plt.subplots(nrows=1, ncols=4, figsize=(10, 3))
for ax, image, label in zip(axes, df.Content, df.Annotations):
    ax.set_axis_off()
    ax.imshow(image, cmap=plt.cm.gray_r, interpolation='nearest')
    ax.set_title(f'Training: {label}')
```

8.7.2.4 Preprocess

The image files are mixture of RGB and grayscale. Convert all the images to single channel grayscale so that the input to the SVC model is consistent:

```
df.Content = df.Content.apply(lambda x: x.convert("L"))
```

The images are different sizes and you can normalize the size with:

```
basewidth, hsize = min(df.Content.apply(lambda x: x.size))
df.Content = df.Content.apply(lambda x: x.resize((basewidth, hsize), Image.NEAREST))
```

Convert the image to a numpy array as that is what the SVC is expecting. Each pixel in the image is now a dimension in hyperspace.

```
from numpy import asarray
import numpy as np

data = np.stack([np.array(image).reshape(-1) for image in df.Content], axis=0)
labels = df.Annotations
```

The model needs to be trained on one set of data, and then its performance would be assessed on a set of data that it has not seen before. Therefore, this splits the data into a training and testing sets:

```
X_train, X_test, y_train, y_test = train_test_split(
    data, labels, test_size=0.1, shuffle=True)
```

8.7.2.5 Train

The following obtains an SVC classifier object, and trains it on the training set:

```
clf = svm.SVC(gamma=0.001)
clf.fit(X_train, y_train)
```

8.7.2.6 Predict

With the trained SVC model, you can now make predictions using the testing dataset:

```
predicted = clf.predict(X_test)
predicted
```

8.7.3 Multinomial Text Classification

Building a multinomial text classifier is similar to creating a binary text classifier except that you make a classifier for each class. You use a one-vs-the-rest (OvR) multinomial strategy. That is, you create one classifier for each class where one class is the class you are trying to predict, and the other class is all the other classes. You treat the other classes as if they were one class. The classifier predicts whether the observation is in the class or not. If there are m classes, then there will be m classifiers. Classification is based on which classifier has the more confidence that an observation is in the class.

Start by loading in the required libraries:

```
import ads
import nltk
import oci
import os
import pandas as pd

from nltk.corpus import stopwords
from sklearn.feature_extraction.text import TfidfVectorizer
from sklearn.model_selection import cross_val_score
from sklearn.multiclass import OneVsRestClassifier
from sklearn.preprocessing import MultiLabelBinarizer
from sklearn.svm import LinearSVC
```

8.7.3.1 Dataset

A subset of the [Reuters Corpus](#) dataset is used in this example. You use scikit-learn and nltk packages to build a multinomial classifier. The Reuters data is a benchmark dataset for document classification. More precisely, it is a data set where the target variable is multinomial. It has 90 categories, 7,769 training documents, and 3,019 testing documents.

The data was previously labeled in the Data Labeling service. The metadata was exported and was saved in a publicly accessible Object Storage bucket. The metadata JSONL file is used to import the data and labels.

8.7.3.2 Load

This example loads a dataset with a target variable that is multinomial. It returns the text and the class annotation in a dataframe:

```
df = pd.DataFrame.ads.read_labeled_data(  
    "oci://hosted-ds-datasets@bigdatadatasciencelarge/DLS/text_multi_label_nltk_reuters/  
    ↪metadata.jsonl",  
    materialize=True  
)
```

8.7.3.3 Preprocess

You can use the `MultiLabelBinarizer()` method to convert the labels into the scikit-learn classification format during the dataset preprocessing. This [transformer converts](#) a list of sets or tuples into the supported multilabel format, a binary matrix of `samples*classes`.

The next step is to vectorize the input text to feed it into a supervised machine learning system. In this example, TF*IDF vectorization is used.

For performance reasons, the `TfidfVectorizer` is limited to 10,000 words.

```
nltk.download('stopwords')  
  
stop_words = stopwords.words("english") ## See scikit-learn documentation for what these ↪  
↪words are  
vectorizer = TfidfVectorizer(stop_words=stop_words, max_features = 10000)  
mlb = MultiLabelBinarizer()  
  
X_train = vectorizer.fit_transform(df["Content"]) ## Vectorize the inputs with tf-idf  
y_train = mlb.fit_transform(df["Annotations"]) ## Vectorize the labels
```

8.7.3.4 Train

You train a Linear Support Vector, `LinearSVC`, classifier using the text data to generate features and annotations to represent the response variable.

The data from the [study class](#) is treated as positive, and the data from all the other classes is treated as negative.

This example uses the scalable Linear Support Vector Machine, `LinearSVC`, for classification. It's quick to train and empirically adequate on NLP problems:

```
clf = OneVsRestClassifier(LinearSVC(class_weight = "balanced"), n_jobs = -1)  
clf.fit(X_train, y_train)
```


8.7.3.5 Predict

The next example applies cross-validation to estimate the prediction error. The K fold cross-validation works by partitioning a dataset into K splits. For the k^{th} part, it fits the model to the other $K-1$ splits of the data and calculates the prediction error. It uses the k^{th} part to do this prediction. For more details about this process, see [here](#) and specifically this [image](#).

By performing cross-validation, there are five separate models trained on different train and test splits to get an estimate of the error that is expected when the model is generalized to an independent dataset. This example uses the `cross_val_score` method to estimate the mean and standard deviation of errors:

```
cross_val_score(clf, X_train, y_train, cv=5)
```

8.7.4 Named Entity Recognition

This example shows you how to use a labeled dataset to create a named entity recognition model. The dataset is labeled using the Oracle Cloud Infrastructure (OCI) Data Labeling Service (DLS).

To start, load the required libraries

```
import ads
import os
import pandas as pd
import spacy

from spacy.tokens import DocBin
from tqdm import tqdm
```

8.7.4.1 Dataset

The [Reuters Corpus](#) is a benchmark dataset that is used in the evaluation of document classification models. It is based on Reuters' financial newswire service articles from 1987. It contains the title and text of the article in addition to a list of people, places and organizations that are referenced in the article. It is this information that is used to label the dataset. A subset of the news articles were labeled using the DLS.

8.7.4.2 Load

This labeled dataset has been exported from the DLS and the metadata has been stored in a publically accessible Object Storage bucket. The `.read_labeled_data()` method is used to load the data. The `materialize` parameter causes the original data to be also be returned with the dataframe.

```
path = 'oci://hosted-ds-datasets@bigdatadatasciencelarge/DLS/text_entity_extraction_nltk_
↳ reuters/metadata.jsonl'
df = pd.DataFrame(ads.read_labeled_data(
    path,
    materialize=True
))
```

8.7.4.3 Preprocess

Covert the annotations data to the [SpaCy format](#) This will give you the start and end position of each entity and then the type of entity, such as person, place, organization.

```
df.Annotations = df.Annotations.apply(lambda items: [x.to_spacy() for x in items])
```

The resulting dataframe will look like the following:

	Path	Content	Annotations
0	oci://hosted-ds-datasets@bigdatadatasciencelar...	(CORRECTED) - MOBIL <MOB> TO UPGRADE REFIN...	[(56, 66, company), (149, 157, city), (161, 16...
1	oci://hosted-ds-datasets@bigdatadatasciencelar...	COFFEE, SUGAR AND COCOA EXCHANGE NAMES CHAIRMA...	[(54, 62, city), (99, 103, company), (140, 146...
2	oci://hosted-ds-datasets@bigdatadatasciencelar...	N.Z. TRADING BANK DEPOSIT GROWTH RISES SLIGHTL...	[(50, 61, country), (189, 201, company)]
3	oci://hosted-ds-datasets@bigdatadatasciencelar...	CANADA OIL EXPORTS RISE 20 PCT IN 1986\nCana...	[(0, 6, country), (41, 49, country), (210, 216...
4	oci://hosted-ds-datasets@bigdatadatasciencelar...	U.K. GROWING IMPATIENT WITH JAPAN - THATCHER\n...	[(62, 79, person), (128, 133, country), (509, ...

In this example, you will not be evaluating the performance of the model. Therefore, the data will not be split into train and test sets. Instead, you use all the data as training data. The following code snippet will create a list of tuples that contain the original article text and the annotation data.

```
train_data = []
for i, row in df.iterrows():
    train_data.append((row['Content'], {'entities': row['Annotations']}))
```

The training data will look similar to the following:

```
[("CORRECTED) - MOBIL &lt;MOB> TO UPGRADE REFINERY UNIT
Mobil Corp said it will spend over 30
mln dlrs to upgrade a gasoline-producing unit at its Beaumont,
...
(Correcting unit's output to barrels/day from barrels/year)",
 {'entities': [(56, 66, 'company'), (149, 157, 'city'), (161, 166, 'city')]}),
('COFFEE, SUGAR AND COCOA EXCHANGE NAMES CHAIRMAN
The New York Coffee, Sugar and Cocoa
...
of Demico Futures, was elected treasurer.',
 {'entities': [(54, 62, 'city'),
 (99, 103, 'company'),
 (140, 146, 'person'),
 (243, 254, 'person'),
 ...
 (718, 732, 'person')]}),
...
]
```

The DocBin format will be used as it provides faster serialization and efficient storage. The following code snippet does the conversion and writes the resulting DocBin object to a file.

```

nlp = spacy.blank("en") # load a new spacy model
db = DocBin() # create a DocBin object
i=0
for text, annot in tqdm(train_data): # data in previous format
    doc = nlp.make_doc(text) # create doc object from text
    ents = []
    for start, end, label in annot["entities"]: # add character indexes
        span = doc.char_span(start, end, label=label, alignment_mode="contract")

        if span is not None:
            ents.append(span)
    doc.ents = ents # label the text with the ents
    db.add(doc)

db.to_disk(os.path.join(os.path.expanduser("~"), "train.spacy") # save the docbin object

```

8.7.4.4 Train

The model will be trained using spaCy. Since this is done through the command line a configuration file is needed. In spaCy, this is a two-step process. You will create a `base_config.cfg` file that will contain the non-default settings for the model. Then the `init fill-config` argument on the spaCy module will be used to auto-fill a partial `config.cfg` file with the default values for the parameters that are not given in the `base_config.cfg` file. The `config.cfg` file contains all the settings and hyperparameters that will be needed to train the model. See the [spaCy training documentation](#) for more details.

The following code snippet will write the `base_config.cfg` configuration file and contains all the non-default parameter values.

```

config = """
[paths]
train = null
dev = null

[system]
gpu_allocator = null

[nlp]
lang = "en"
pipeline = ["tok2vec", "ner"]
batch_size = 1000

[components]

[components.tok2vec]
factory = "tok2vec"

[components.tok2vec.model]
@architectures = "spacy.Tok2Vec.v2"

[components.tok2vec.model.embed]
@architectures = "spacy.MultiHashEmbed.v2"
width = ${components.tok2vec.model.encode.width}

```

(continues on next page)

(continued from previous page)

```
attrs = ["ORTH", "SHAPE"]
rows = [5000, 2500]
include_static_vectors = false

[components.tok2vec.model.encode]
@architectures = "spacy.MaxoutWindowEncoder.v2"
width = 96
depth = 4
window_size = 1
maxout_pieces = 3

[components.ner]
factory = "ner"

[components.ner.model]
@architectures = "spacy.TransitionBasedParser.v2"
state_type = "ner"
extra_state_tokens = false
hidden_width = 64
maxout_pieces = 2
use_upper = true
n0 = null

[components.ner.model.tok2vec]
@architectures = "spacy.Tok2VecListener.v1"
width = ${components.tok2vec.model.encode.width}

[corpora]

[corpora.train]
@readers = "spacy.Corpus.v1"
path = ${paths.train}
max_length = 0

[corpora.dev]
@readers = "spacy.Corpus.v1"
path = ${paths.dev}
max_length = 0

[training]
dev_corpus = "corpora.dev"
train_corpus = "corpora.train"

[training.optimizer]
@optimizers = "Adam.v1"

[training.batcher]
@batchers = "spacy.batch_by_words.v1"
discard_oversize = false
tolerance = 0.2

[training.batcher.size]
```

(continues on next page)

(continued from previous page)

```
@schedules = "compounding.v1"
start = 100
stop = 1000
compound = 1.001

[initialize]
vectors = ${paths.vectors}
"""

with open(os.path.join(os.path.expanduser("~"), "base_config.cfg"), 'w') as f:
    f.write(config)
```

The following code snippet calls a new Python interpreter that runs the spaCy module. It loads the `base_config.cfg` file and writes out the configuration file `config.cfg` that has all of the training parameters that will be used. It contains the default values plus the ones that were specified in the `base_config.cfg` file.

```
!$CONDA_PREFIX/bin/python -m spacy init fill-config ~/base_config.cfg ~/config.cfg
```

To train the model, you will call a new Python interpreter to run the spaCy module using the `train` command-line argument and other arguments that point to the training files that you have created.

```
!$CONDA_PREFIX/bin/python -m spacy train ~/config.cfg --output ~/output --paths.train ~/
↪train.spacy --paths.dev ~/train.spacy
```

8.7.4.5 Predict

The spaCy training procedure creates a number of models. The best model is stored in `model-best` under the output directory that was specified. The following code snippet loads that model and creates a sample document. The model is run and the output has the new document plus and entities that were detected are highlighted.

```
nlp = spacy.load(os.path.join(os.path.expanduser("~"), "output", "model-best")) #load the
↪best model
doc = nlp("The Japanese minister for post and telecommunications was reported as saying
↪that he opposed Cable and Wireless having a managerial role in the new company.") #
↪input sample text

spacy.displacy.render(doc, style="ent", jupyter=True) # display in Jupyter
```

The Japanese minister for post and telecommunications was reported as saying that he opposed **Cable and Wireless company** having a managerial role in the new company.

TRANSFORM DATA

When datasets are loaded with DatasetFactory, they can be transformed and manipulated easily with the built-in functions. Underlying, an ADSDataset object is a Pandas dataframe. Any operation that can be performed to a [Pandas dataframe](#) can also be applied to an ADS Dataset.

9.1 Loading the Dataset

You can load a pandas dataframe into an ADSDataset by calling.

```
from ads.dataset.factory import DatasetFactory  
  
ds = DatasetFactory.from_dataframe(df)
```

9.2 Automated Transformations

ADS has built in automatic transform tools for datasets. When the `get_recommendations()` tool is applied to an ADSDataset object, it shows the user detected issues with the data and recommends changes to apply to the dataset. You can accept the changes as easy as clicking a button in the drop down menu. After all the changes are applied, the transformed dataset can be retrieved by calling `get_transformed_dataset()`.

```
wine_ds.get_recommendations()
```

Alternatively, you can use `auto_transform()` to apply all the recommended transformations at once. `auto_transform()` returns a transformed dataset with several optimizations applied automatically. The optimizations include:

- Dropping constant and primary key columns, which has no predictive quality.
- Imputation to fill in missing values in noisy data.
- Dropping strongly co-correlated columns that tend to produce less generalizable models.
- Balancing a dataset using up or down sampling.


One optional argument to `auto_transform()` is `fix_imbalance`, which is set to `True` by default. When `True`, `auto_transform()` corrects any imbalance between the classes. ADS downsamples the dominant class first unless there are too few data points. In that case, ADS upsamples the minority class.

```
ds = wine_ds.auto_transform()
```

You can visualize the transformation that has been performed on a dataset by calling `visualize_transforms()`.

Note: `visualize_transforms()` is only applied to the automated transformations and does not capture any custom transformations that you may have applied to the dataset.

```
ds.visualize_transforms()
```

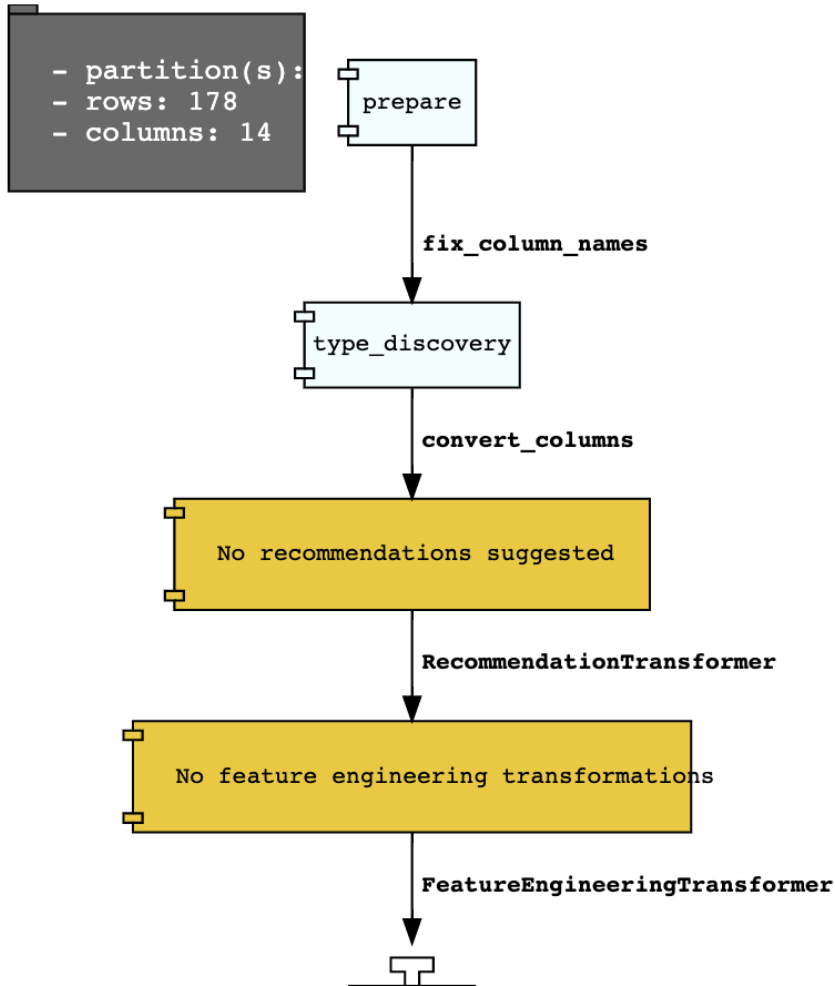

9.3 Row Operations

The operations that can be applied to a Pandas dataframe can be applied to an `ADSDataset` object.

Examples of some of the most common row operations you can apply on an `ADSDataset` object follow.

9.3.1 Delete Rows

Rows within a dataset can be filtered out by row numbers. The index of the new dataset can be reset accordingly.

```
#Filter out rows by row number and reset index of new data
ds_subset = ds.loc[10:100]
ds_subset = ds_subset.reset_index()
```

Do not try to insert index into dataset columns.

9.3.2 Reset Index

Reset the index to the default index. When you reset index, the old index is added as a column `index` and a new sequential index is used. You can use the `drop` parameter to avoid the old index being added as a column:

```
ds_subset = ds.loc[10:100]
ds_subset = ds_subset.reset_index(drop=True)
ds_subset.head()
```

The index restarts at zero for each partition. This is due to the inability to statically know the full length of the index.

9.3.3 Append Rows

New rows can be added to an existing dataset:

```
#Create new row to be added
row_to_add = ds.loc[0]
row_to_add['target'] = 'class_0'

#Add in new row to existing dataset
new_addition_ds = ds.merge(row_to_add, how = 'outer')
```

Alternatively, you can use the `append()` method of a Pandas dataframe to achieve a similar result:

```
ds2 = wine_ds.df.append(ds)
```

The `ds2` is created as a Pandas DataFrame object.

9.3.4 Row Filtering

Columns can be filtered out by the values:

```
ds_filtered = ds[(ds['alcohol'] > 13.0) & (ds['malic_acid'] < 2.5)]
ds_filtered.head()
```

9.3.5 Removing Duplicated Rows

Duplicate rows can be removed using the `drop_duplicates` function:

```
ds_without_dup = ds.drop_duplicates()
```

9.4 Column Operations

The column operations that can be applied to a Pandas dataframe can be applied to an ADS dataset as in the following examples.

9.4.1 Delete a Column

To delete specific columns from the dataset, the `drop_columns` function can be used along with names of the columns to be deleted from the dataset. The `ravel` Pandas command returns the flattened underlying data as an ndarray. The `name_of_df.columns[:].ravel()` command returns the name of all the columns in a dataframe as an array.

```
ds_subset_columns = ds.drop_columns(['alcohol', 'malic_acid'])
ds_subset_columns.columns[:].ravel()
```

```
array(['ash', 'alkalinity_of_ash', 'magnesium', 'total_phenols',
       'flavanoids', 'nonflavanoid_phenols', 'proanthocyanins',
       'color_intensity', 'hue', 'od280/od315_of_diluted_wines',
       'proline', 'target'], dtype=object)
```

9.4.2 Rename a Column

Columns can be renamed with the `rename_columns()` method:

```
ds_columns_rename = ds.rename_columns({'alcohol': 'alcohol_amount',
                                       'malic_acid': 'malic_acid_amount'})
ds_columns_rename.columns[:].ravel()
```

```
array(['alcohol_amount', 'malic_acid_amount', 'ash', 'alkalinity_of_ash',
       'magnesium', 'total_phenols', 'flavanoids', 'nonflavanoid_phenols',
       'proanthocyanins', 'color_intensity', 'hue',
       'od280/od315_of_diluted_wines', 'proline', 'target'], dtype=object)
```

9.4.3 Counts of Unique Values

The count per unique value can be obtained with the `value_counts()` method:

```
ds['target'].value_counts()
```

```
class_1    71
class_0    59
class_2    48
Name: target, dtype: int64
```

9.4.4 Normalize a Column

You can apply a variety of normalization techniques to numerical columns (both continuous and discrete). You can leverage the built in `max()` and `min()` methods to perform a minmax normalization:

```
max_alcohol = wine_ds['alcohol'].max()
min_alcohol = wine_ds['alcohol'].min()
alcohol_range = max_alcohol - min_alcohol
wine_ds.df['norm_alcohol'] = (wine_ds['alcohol'] / alcohol_range)
```

9.4.5 Combine Columns

This example creates a new column by performing operations to combine two or more columns together:

```
new_feature_col = ((0.4)*wine_ds['total_phenols'] + (0.6)*wine_ds['flavanoids'])
ds_new_feature = wine_ds.assign_column('new_feature', new_feature_col)
ds_new_feature.head()
```

Alternatively, you can create a new column directly in the Pandas dataframe attribute:

```
new_feature_col = ((0.4)*wine_ds['total_phenols'] + (0.6)*wine_ds['flavanoids'])
wine_ds.df['new_feature'] = new_feature_col
wine_ds.head()
```

To add new column, use a new name for it. You can add anew column and change it by combining with existing column:

```
noise = np.random.normal(0,.1,wine_ds.shape[0])
ds_noise = wine_ds.assign_column('noise', noise)

ds_ash = ds_noise.assign_column('noise', ds_noise['noise'] + ds_noise['ash'])
ds_ash = ds_ash.rename(columns={'noise':'ash_with_noise'})
ds_ash.head()
```

The resulting column is renamed with dict-like mapper.

9.4.6 Apply a Function to a Column

You can apply functions to update column values in existing column. This example updates the column in place using lambda expression:

```
wine_ds.assign_column('proline', lambda x: x is None or x > 1000)
wine_ds.head()
```

9.4.7 Change Data Type

You can change the data type columns with the `astype()` method. ADS uses the Pandas method, `astype()`, on dataframe objects. For specifics, see [astype for a Pandas Dataframe, using `numpy.dtype`, or Pandas `dtypes`](#).

When you change the type of a column, ADS updates its semantic type to categorical, continuous, datetime, or ordinal. For example, if you update a column type to integer, its semantic type updates to ordinal. For data type details, see [ref:loading-data-specify-dtype](#).

This example converts a dataframe column from float, to the low-level integer type and ADS updates its semantic type to ordinal:

```
wine_ds = wine_ds.astype(types={'proline': 'int64'})
print(wine_ds.feature_types['proline']['low_level_type'])
print(wine_ds.feature_types['proline']['type'])

# Note: When you cast a float column to integer, you lose precision.
wine_ds['proline'].head()
```

To convert a column of type float to categorical, you convert it to integer first. This example converts a column data type from float to integer, then to categorical, and then the number of categories in the column is reduced:

```
# create a new dataset with a renamed column for binned data and update the values
ds = wine_ds.rename_columns({'color_intensity': 'color_intensity_bin'})
ds = ds.assign_column('color_intensity_bin', lambda x: x/3)

# convert the column from float to categorical:
ds = ds.astype(types={'color_intensity_bin': 'int64'})
ds = ds.astype(types={'color_intensity_bin': 'categorical'})
```

You can use `feature_types` to see if the semantic data type of the converted column is categorical:

```
wine_ds.feature_types['color_intensity_bin']['type']
```

```
'categorical'
```

The low-level type of the converted column is category:

```
ds['color_intensity_bin'].head()
```

```
0    1
1    1
2    1
3    2
4    1
Name: color_intensity_bin, dtype: category
Categories (5, int64): [0, 1, 2, 3, 4]
```

9.5 Dataset Manipulation

ADS has built in functions that support categorical encoding, null values and imputation.

9.5.1 Categorical Encoding

ADS has a built in categorical encoder that can be accessed by calling `from ads.dataset.label_encoder import DataFrameLabelEncoder`. This example encodes the three classes of wine that make up the dataset:

```
from ads.dataset.label_encoder import DataFrameLabelEncoder
ds_encoded = DataFrameLabelEncoder().fit_transform(ds.to_pandas())
ds_encoded['target'].value_counts()
```

```
1    71
0    59
2    48
```

9.5.2 One-Hot Encoding

One-hot encoding transforms one categorical column with n categories into n or $n-1$ columns with indicator variables. You can prepare one of the columns to be categorical with categories low, medium, and high:

```
def convert_to_level(value):
    if value < 12:
        return 'low'
    elif value > 13:
        return 'high'
    else:
        return 'medium'

ds = wine_ds
ds = ds.assign_column('alcohol', convert_to_level)
```

You can use the Pandas method `get_dummies()` to perform one-hot encoding on a column. Use the `prefix` parameter to assign a prefix to the new columns that contain the indicator variables. This example creates n columns with one-hot encoding:

```
data = ds.to_pandas()['alcohol'] # data of which to get dummy indicators
onehot = pd.get_dummies(data, prefix='alcohol')
```

To create $n-1$ columns, use `drop_first=True` when converting the categorical column. You can add a one-hot column to the initial dataset with the `merge()` method:

```
data = ds.to_pandas()['alcohol'] # data of which to get dummy indicators
onehot = pd.get_dummies(data, prefix='alcohol', drop_first=False)
ds_onehot = ds.merge(onehot)
```

Encoding for all categorical columns can be accomplished with the `fit_transform()` method:

```
from ads.dataset.label_encoder import DataFrameLabelEncoder
```

(continues on next page)

(continued from previous page)

```
ds_encoded = DataFrameLabelEncoder().fit_transform(ds_onehot.to_pandas())
ds_encoded['alcohol'].value_counts()
```

```
0    92
2    67
1    19
```

To drop the initial categorical column that you transformed into one-hot, use one of these examples:

```
ds_onehot = ds_onehot.drop_columns('alcohol') # before ``fit_transform()`` method
# or
ds_encoded = ds_encoded.drop(columns='alcohol') # after ``fit_transform()`` method
```

9.5.3 Extract Null Values

To detect all nulls in a dataset, use the `isnull` function to return a boolean dataset matching the dimension of our input:

```
ds_null = ds.isnull()
np.any(ds_null)
```

```
alcohol           False
malic_acid        False
ash               False
alcalinity_of_ash False
magnesium         False
total_phenols     False
flavanoids        False
nonflavanoid_phenols False
proanthocyanins   False
color_intensity   False
hue               False
od280/od315_of_diluted_wines False
proline           False
target            False
```

9.5.4 Imputation

The `fillna` function is used to replace null values with specific values. Generate a null value by replacing the entry below a certain value with null, and then imputing it with a value:

```
ds_with_null = ds.assign_column("malic_acid", lambda x: None if x < 2 else x)
ds_with_null['malic_acid'].head()
```

```
0    NaN
1    NaN
2    2.36
3    NaN
```

(continues on next page)

(continued from previous page)

```
4    2.59
Name: malic_acid, dtype: float64
```

```
ds_impute = ds_with_null.fillna(method='bfill')
ds_impute['malic_acid'].head()
```

```
0    2.36
1    2.36
2    2.36
3    2.59
4    2.59
Name: malic_acid, dtype: float64
```

9.5.5 Combine Datasets

ADS datasets can be merged and combined together to form a new dataset.

9.5.5.1 Join Datasets

You can merge two datasets together with a database-styled join on columns or indexes by specifying the type of join `left`, `right`, `outer`, or `inner`. These type are defined by:

- `left`: Use only keys from the left dataset, similar to SQL left outer join.
- `right`: Use only keys from the right dataset, similar to SQL right outer join.
- `inner`: Intersection of keys from both datasets, similar to SQL inner join.
- `outer`: Union of keys from both datasets, similar to SQL outer join.

This is an example of performing an outer join on two datasets. The datasets are subsets of the wine dataset, and each dataset contains only one class of wine.

```
ds_class1 = ds[ds['target']=='class_1']
ds_class2 = ds[ds['target']=='class_2']
ds_merged_outer = ds_class1.merge(ds_class2, how='outer')
ds_merged_outer['target'].value_counts()
```

```
class_1    71
class_2    48
class_0     0
Name: target, dtype: int64
```

9.5.5.2 Concatenate Datasets

Two datasets can be concatenated along a particular axis (vertical or horizontal) with the option of performing set logic (union or intersection) of the indexes on the other axes. You can stack two datasets vertically with:

```
ds_concat = pd.concat([ds_class1, ds_class2], axis = 0)
ds_concat['target'].value_counts()
```

```
class_1    71
class_2    48
class_0     0
Name: target, dtype: int64
```

9.6 Train/Test Datasets

After all data transformations are complete, you can split the data into a train and test or train, test, and validation set. To split data into a train and test set with a train size of 80% and test size of 20%:

```
from ads.dataset.dataset_browser import DatasetBrowser
sklearn = DatasetBrowser.sklearn()
wine_ds = sklearn.open('wine')
ds = wine_ds.auto_transform()
train, test = ds.train_test_split(test_size=0.2)
```

For a train, test, and validation set, the defaults are set to 80% of the data for training, 10% for testing, and 10% for validation. This example sets split to 70%, 15%, and 15%:

```
data_split = wine_ds.train_validation_test_split(
    test_size=0.15,
    validation_size=0.15
)
train, validation, test = data_split
print(data_split)  # print out shape of train, validation, test sets in split
```

The resulting three data subsets each have separate data (X) and labels (y).

```
print(train.X)  # print out all features in train dataset
print(train.y)  # print out labels in train dataset
```

You can split the dataset right after the `DatasetFactory.open()` statement:

```
ds = DatasetFactory.open("path/data.csv").set_target('target')
train, test = ds.train_test_split(test_size=0.25)
```


9.7 Text Data

9.7.1 TextStrings

9.7.1.1 Overview

Text analytics uses a set of powerful tools to understand the content of unstructured data, such as text. It's becoming an increasingly more important tool in feature engineering as product reviews, media content, research papers, and more are being mined for their content. In many data science areas, such as marketing analytics, the use of unstructured text is becoming as popular as structured data. This is largely due to the relatively low cost of collection of the data. However, the downside is the complexity of working with the data. To work with unstructured that you need to clean, summarize, and create features from it before you create a model. The `ADSString` class provides tools that allow you to quickly do this work. More importantly, you can expand the tool to meet your specific needs.

Data scientists need to be able to quickly and easily manipulate strings. ADS SDK provides an enhanced string class, called `ADSString`. It adds functionality like regular expression (RegEx) matching and natural language processing (NLP) parsing. The class can be expanded by registering custom plugins so that you can process a string in a way that it fits your specific needs. For example, you can register the [OCI Language service](#) plugin to bind functionalities from the [OCI Language service](#) to `ADSString`.

9.7.1.2 Quick Start

9.7.1.2.1 NLP Parse

The following example parses a text corpus using the `NLTK` and `spaCy` engines.

```
from ads.feature_engineering.adsstring.string import ADSString

s = ADSString("""
Lawrence Joseph Ellison (born August 17, 1944) is an American business magnate,
investor, and philanthropist who is a co-founder, the executive chairman and
chief technology officer (CTO) of Oracle Corporation. As of October 2019, he was
listed by Forbes magazine as the fourth-wealthiest person in the United States
and as the sixth-wealthiest in the world, with a fortune of $69.1 billion,
increased from $54.5 billion in 2018.[4] He is also the owner of the 41st
largest island in the United States, Lanai in the Hawaiian Islands with a
population of just over 3000.
""").strip())

# NLTK
ADSString.nlp_backend("nltk")
noun = s.noun
adj = s.adjective
pos = s.pos # Parts of Speech

# spaCy
ADSString.nlp_backend("spacy")
noun = s.noun
adj = s.adjective
pos = s.pos # Parts of Speech
```

9.7.1.2.2 Plugin

Custom Plugin

This example demonstrates how to create a custom plugin that will take a string, detect the credit card numbers, and return a list of the last four digits of the credit card number.

```
from ads.feature_engineering.adsstring.string import ADSSString

class CreditCardLast4:
    @property
    def credit_card_last_4(self):
        return [x[len(x)-4:len(x)] for x in ADSSString(self.string).credit_card]

ADSSString.plugin_register(CreditCardLast4)

creditcard_numbers = "I purchased the gift on this card 4532640527811543 and the dinner_
↳on 340984902710890"
s = ADSSString(creditcard_numbers)
s.credit_card_last_4
```

OCI Language Services Plugin

This example uses the [OCI Language service](#) to perform an aspect-based sentiment analysis, language detection, key phrase extraction, and a named entity recognition.

```
from ads.feature_engineering.adsstring.oci_language import OCILanguage
from ads.feature_engineering.adsstring.string import ADSSString

ADSSString.plugin_register(OCILanguage)

s = ADSSString("""
    Lawrence Joseph Ellison (born August 17, 1944) is an American business magnate,
    investor, and philanthropist who is a co-founder, the executive chairman and
    chief technology officer (CTO) of Oracle Corporation. As of October 2019, he was
    listed by Forbes magazine as the fourth-wealthiest person in the United States
    and as the sixth-wealthiest in the world, with a fortune of $69.1 billion,
    increased from $54.5 billion in 2018.[4] He is also the owner of the 41st
    largest island in the United States, Lanai in the Hawaiian Islands with a
    population of just over 3000.
    """).strip()

# Aspect-Based Sentiment Analysis
df_sentiment = s.absa

# Key Phrase Extraction
key_phrase = s.key_phrase

# Language Detection
language = s.language_dominant
```

(continues on next page)

(continued from previous page)

```
# Named Entity Recognition
named_entity = s.ner

# Text Classification
classification = s.text_classification
```

9.7.1.2.3 RegEx Match

In this example, the dates and prices are extracted from the text using regular expression matching.

```
from ads.feature_engineering.adsstring.string import ADSString

s = ADSString("""
    Lawrence Joseph Ellison (born August 17, 1944) is an American business magnate,
    investor, and philanthropist who is a co-founder, the executive chairman and
    chief technology officer (CTO) of Oracle Corporation. As of October 2019, he was
    listed by Forbes magazine as the fourth-wealthiest person in the United States
    and as the sixth-wealthiest in the world, with a fortune of $69.1 billion,
    increased from $54.5 billion in 2018.[4] He is also the owner of the 41st
    largest island in the United States, Lanai in the Hawaiian Islands with a
    population of just over 3000.
    """).strip()

dates = s.date
prices = s.price
```

9.7.1.3 NLP Parse

ADSString also supports NLP parsing and is backed by [Natural Language Toolkit \(NLTK\)](#) or [spaCy](#). Unless otherwise specified, NLTK is used by default. You can extract properties, such as nouns, adjectives, word counts, parts of speech tags, and so on from text with NLP.

The ADSString class can have one backend enabled at a time. What properties are available depends on the backend, as do the results of calling the property. The following examples provide an overview of the available parsers, and how to use them. Generally, the parser supports the adjective, adverb, bigram, noun, pos, sentence, trigram, verb, word, and word_count base properties. Parsers can support additional parsers.

9.7.1.3.1 NLTK

The Natural Language Toolkit ([NLTK](#)) is a powerful platform for processing human language data. It supports all the base properties and in addition `stem` and `token`. The `stem` property returns a list of all the stemmed tokens. It reduces a token to its word stem that affixes to suffixes and prefixes, or to the roots of words that is the lemma. The `token` property is similar to the `word` property, except it returns non-alphanumeric tokens and doesn't force tokens to be lowercase.

The following example use a sample of text about Larry Ellison to demonstrate the use of the NLTK properties.

```
test_text = """
    Lawrence Joseph Ellison (born August 17, 1944) is an American business
    ↪magnate,
```

(continues on next page)

(continued from previous page)

```

investor, and philanthropist who is a co-founder, the executive chairman and
chief technology officer (CTO) of Oracle Corporation. As of October 2019, he
↳was
listed by Forbes magazine as the fourth-wealthiest person in the United
↳States
and as the sixth-wealthiest in the world, with a fortune of $69.1 billion,
increased from $54.5 billion in 2018.[4] He is also the owner of the 41st
largest island in the United States, Lanai in the Hawaiian Islands with a
population of just over 3000.
"".strip()
ADSSString.nlp_backend("nltk")
s = ADSSString(test_text)

```

```
s.noun[1:5]
```

```
['Joseph', 'Ellison', 'August', 'business']
```

```
s.adjective
```

```
['American', 'chief', 'fourth-wealthiest', 'largest', 'Hawaiian']
```

```
s.word[1:5]
```

```
['joseph', 'ellison', 'born', 'august']
```

By taking the difference between token and word, the token set contains non-alphanumeric tokens, and also the upper-case version of words.

```
list(set(s.token) - set(s.word))[1:5]
```

```
['Oracle', '1944', '41st', 'fourth-wealthiest']
```

The `stem` property takes the list of words and stems them. It produces morphological variations of a word's root form. The following example stems some words, and shows some of the stemmed words that were changed.

```
list(set(s.stem) - set(s.word))[1:5]
```

```
['fortun', 'technolog', 'increas', 'popul']
```

Part of Speech Tags

Part of speech (POS) is a category in which a word is assigned based on its syntactic function. POS depends on the language. For English, the most common POS are adjective, adverb, conjunction, determiner, interjection, noun, preposition, pronoun, and verb. However, each POS system has its own set of POS tags that vary based on their respective training set. The NLTK parsers produce the following POS tags:

Table 1: Parts of Speech Tags

CC: coordinating conjunction	CD: cardinal digit
DT: determiner	EX: existential there; like “there is”; “there exists”
FW: foreign word	IN: preposition/subordinating conjunction
JJ: adjective; “big”	JJR: adjective, comparative; “bigger”
JJS: adjective, superlative; “biggest”	LS: list marker 1)
MD: modal could, will	NN: noun, singular; “desk”
NNS: noun plural; “desks”	NNP: proper noun, singular; “Harrison”
NNPS: proper noun, plural; “Americans”	PDT: predeterminer; “all the kids”
POS: possessive ending; “parent’s”	PRP: personal pronoun; I, he, she
PRP\$: possessive pronoun; my, his, hers	RB: adverb; very, silently
RBR: adverb; comparative better	RBS: adverb; superlative best
RP: particle; give up	TO: to go; “to” the store.
UH: interjection; errrrrrrm	VB: verb, base form; take
VBD: verb, past tense; took	VBG: verb, gerund/present participle; taking
VBN: verb, past participle; taken	VBP: verb, singular present; non-3d take
VBZ: verb, 3rd person singular present; takes	WDT: wh-determiner; which
WP: wh-pronoun; who, what	WP\$: possessive wh-pronoun; whose
WRB: wh-adverb; where, when	

```
s.pos[1:5]
```

	Word	Label
1	Joseph	NNP
2	Ellison	NNP
3	((
4	born	VCN

9.7.1.3.2 spaCy

spaCy is an advanced NLP toolkit. It helps you understand what the words mean in context, and who is doing what to whom. It helps you determine what companies and products are mentioned in a document. The spaCy backend is used to parse the adjective, adverb, bigram, noun, pos, sentence, trigram, verb, word, and word_count base properties. It also supports the following additional properties:

- **entity:** All entities in the text.
- **entity_artwork:** The titles of books, songs, and so on.
- **entity_location:** Locations, facilities, and geopolitical entities, such as countries, cities, and states.
- **entity_organization:** Companies, agencies, and institutions.
- **entity_person:** Fictional and real people.
- **entity_product:** Product names and so on.
- **lemmas:** A rule-based estimation of the roots of a word.

- `tokens`: The base tokens of the tokenization process. This is similar to `word`, but it includes non-alphanumeric values and the word case is preserved.

If the `spacy` module is installed, you can change the NLP backend using the `ADSSString.nlp_backend('spacy')` command.

```
ADSSString.nlp_backend("spacy")
s = ADSSString(test_text)
```

```
s.noun[1:5]
```

```
['magnate', 'investor', 'philanthropist', 'co']
```

```
s.adjective
```

```
['American', 'executive', 'chief', 'fourth', 'wealthiest', 'largest']
```

```
s.word[1:5]
```

```
['Joseph', 'Ellison', 'born', 'August']
```

You can identify all the locations that are mentioned in the text.

```
s.entity_location
```

```
['the United States', 'the Hawaiian Islands']
```

Also, the organizations that were mentioned.

```
s.entity_organization
```

```
['CTO', 'Oracle Corporation', 'Forbes', 'Lanai']
```

Part of Speech Tags

The POS tagger in `spacy` uses a smaller number of categories. For example, `spacy` has the `ADJ` POS for all adjectives, while `NLTK` has `JJ` to mean an adjective. `JJR` refers to a comparative adjective, and `JJS` refers to a superlative adjective. For fine grain analysis of different parts of speech, `NLTK` is the preferred backend. However, `spacy`'s reduced category set tends to produce fewer errors, at the cost of not being as specific.

The `spacy` parsers produce the following POS tags:

- `ADJ`: adjective; big, old, green, incomprehensible, first
- `ADP`: adposition; in, to, during
- `ADV`: adverb; very, tomorrow, down, where, there
- `AUX`: auxiliary; is, has (done), will (do), should (do)
- `CONJ`: conjunction; and, or, but
- `CCONJ`: coordinating conjunction; and, or, but
- `DET`: determiner; a, an, the

- INTJ: interjection; psst, ouch, bravo, hello
- NOUN: noun; girl, cat, tree, air, beauty
- NUM: numeral; 1, 2017, one, seventy-seven, IV, MMXIV
- PART: particle; 's, not,
- PRON: pronoun; I, you, he, she, myself, themselves, somebody
- PROPN: proper noun; Mary, John, London, NATO, HBO
- PUNCT: punctuation; ., (,), ?
- SCONJ: subordinating conjunction; if, while, that
- SYM: symbol; \$, %, \$, ©, +, , ×, ÷, =, :),
- VERB: verb; run, runs, running, eat, ate, eating
- X: other; sfpkdpsxmsa
- SPACE: space

```
s.pos[1:5]
```

	Word	Label
1	Joseph	PROP
2	Ellison	PROP
3	(PUNCT
4	born	VERB

9.7.1.4 Plugin

One of the most powerful features of `ADSSString` is that you can expand and customize it. The `.plugin_register()` method allows you to add properties to the `ADSSString` class. These plugins can be provided by third-party providers or developed by you. This section demonstrates how to connect the to the [OCI Language service](#), and how to create a custom plugin.

9.7.1.4.1 Custom Plugin

You can bind additional properties to `ADSSString` using custom plugins. This allows you to create custom text processing extensions. A plugin has access to the `self.string` property in `ADSSString` class. You can define functions that perform a transformation on the text in the object. All functions defined in a plugin are bound to `ADSSString` and accessible across all objects of that class.

Assume that your text is "I purchased the gift on this card 4532640527811543 and the dinner on 340984902710890" and you want to know what credit cards were used. The `.credit_card` property returns the entire credit card number. However, for privacy reasons you don't want the entire credit card number, but the last four digits.

To solve this problem, you can create the class `CreditCardLast4` and use the `self.string` property in `ADSSString` to access the text associated with the object. It then calls the `.credit_card` method to get the credit card numbers. Then it parses this to return the last four characters in each credit card.

The first step is to define the class that you want to bind to `ADSSString`. Use the `@property` decorator and define a property function. This function only takes `self`. The `self.string` is accessible with the text that is defined for a given object. The property returns a list.

```
class CreditCardLast4:
    @property
    def credit_card_last_4(self):
        return [x[len(x)-4:len(x)] for x in ADSSString(self.string).credit_card]
```

After the class is defined, it must be registered with `ADSSString` using the `.register_plugin()` method.

```
ADSSString.plugin_register(CreditCardLast4)
```

Take the text and make it an `ADSSString` object, and call the `.credit_card_last_4` property to obtain the last four digits of the credit cards that were used.

```
creditcard_numbers = "I purchased the gift on this card 4532640527811543 and the dinner_
↪on 340984902710890"
s = ADSSString(creditcard_numbers)
s.credit_card_last_4
```

```
['1543', '0890']
```

9.7.1.4.2 OCI Language Services

The [OCI Language service](#) provides pretrained models that provide sophisticated text analysis at scale.

The Language service contains these pretrained language processing capabilities:

- **Aspect-Based Sentiment Analysis:** Identifies aspects from the given text and classifies each into positive, negative, or neutral polarity.
- **Key Phrase Extraction:** Extracts an important set of phrases from a block of text.
- **Language Detection:** Detects languages based on the given text, and includes a confidence score.
- **Named Entity Recognition:** Identifies common entities, people, places, locations, email, and so on.
- **Text Classification:** Identifies the document category and subcategory that the text belongs to.

Those are accessible in ADS using the `OCILanguage` plugin.

```
ADSSString.plugin_register(OCILanguage)
```

Aspect-Based Sentiment Analysis

Aspect-based sentiment analysis can be used to gauge the mood or the tone of the text.

The aspect-based sentiment analysis (ABSA) supports fine-grained sentiment analysis by extracting the individual aspects in the input document. For example, a restaurant review “The driver was really friendly, but the taxi was falling apart.” contains positive sentiment toward the taxi driver aspect. Also, it has a strong negative sentiment toward the service mechanical aspect of the taxi. Classifying the overall sentiment as negative would neglect the fact that the taxi driver was nice.

ABSA classifies each of the aspects into one of the three polarity classes, positive, negative, mixed, and neutral. With the predicted sentiment for each aspect. It also provides a confidence score for each of the classes and their corresponding

offsets in the input. The range of the confidence score for each class is between 0 and 1, and the cumulative scores of all the three classes sum to 1.

In the next example, the sample sentence is analyzed. The two aspects, taxi cab and driver, have their sentiments determined. It defines the location of the aspect by giving its offset position in the text, and the length of the aspect in characters. It also gives the text that defines the aspect along with the sentiment scores and which sentiment is dominant.

```
t = ADSString("The driver was really friendly, but the taxi was falling apart.")
t.absa
```

	Length	Offset	Sentiment	Text	Negative	Neutral	Positive
0	6	4	Positive	driver	0.0	3.484637e-09	1.000000e+00
1	4	40	Negative	taxi	1.0	0.000000e+00	5.187591e-10

Key Phrase Extraction

Key phrase (KP) extraction is the process of extracting the words with the most relevance, and expressions from the input text. It helps summarize the content and recognizes the main topics. The KP extraction finds insights related to the main points of the text. It understands the unstructured input text, and returns keywords and KPs. The KPs consist of subjects and objects that are being talked about in the document. Any modifiers, like adjectives associated with these subjects and objects, are also included in the output. Confidence scores for each key phrase that signify how confident the algorithm is that the identified phrase is a KP. Confidence scores are a value from 0 to 1.

The following example determines the key phrases and the importance of these phrases in the text (which is the value of `test_text`):

```
Lawrence Joseph Ellison (born August 17, 1944) is an American business magnate, investor, and philanthropist who is a co-founder, the executive chairman and chief technology officer (CTO) of Oracle Corporation. As of October 2019, he was listed by Forbes magazine as the fourth-wealthiest person in the United States and as the sixth-wealthiest in the world, with a fortune of $69.1 billion, increased from $54.5 billion in 2018.[4] He is also the owner of the 41st largest island in the United States, Lanai in the Hawaiian Islands with a population of just over 3000.
```

```
s = ADSString(test_text)
s.key_phrase
```

	Score	Text
0	1.000000	united states
1	0.999811	lawrence joseph ellison
2	0.999811	august 17
3	0.999811	american business magnate
4	0.999811	executive chairman
5	0.999811	chief technology officer
6	0.999811	oracle corporation
7	0.999811	october 2019
8	0.999811	forbes magazine
9	0.999811	fourth-wealthiest person
10	0.999811	fortune of \$69.1 billion
11	0.999811	41st largest island
12	0.999811	hawaiian islands
13	0.999239	philanthropist
14	0.999239	co-founder
15	0.999239	cto
16	0.999239	sixth-wealthiest
17	0.999239	lanai
18	0.999239	population
19	0.997934	investor
20	0.973272	owner

Language Detection

The language detection tool identifies which natural language the input text is in. If the document contains more than one language, the results may not be what you expect. Language detection can help make customer support interactions more personable and quicker. Customer service chatbots can interact with customers based on the language of their input text and respond accordingly. If a customer needs help with a product, the chatbot server can field the corresponding language product manual, or transfer it to a call center for the specific language.

The following is a list of some of the supported languages:

Table 2: Supported Languages

Afrikaans	Albanian	Arabic	Armenian	Azerbaijani	Basque
Belarusian	Bengali	Bosnian	Bulgarian	Burmese	Cantonese
Catalan	Cebuano	Chinese	Croatian	Czech	Danish
Dutch	Eastern Punjabi	Egyptian Arabic	English	Esperanto	Estonian
Finnish	French	Georgian	German	Greek	Hebrew
Hindi	Hungarian	Icelandic	Indonesian	Irish	Italian
Japanese	Javanese	Kannada	Kazakh	Korean	Kurdish (Sorani)
Latin	Latvian	Lithuanian	Macedonian	Malay	Malayalam
Marathi	Minangkabau	Nepali	Norwegian (Bokmal)	Norwegian (Nynorsk)	Persian
Polish	Portuguese	Romanian	Russian	Serbian	Serbo-Croatian
Slovak	Slovene	Spanish	Swahili	Swedish	Tagalog
Tamil	Telugu	Thai	Turkish	Ukrainian	Urdu
Uzbek	Vietnamese	Welsh			

The next example determines the language of the text, the [ISO 639-1](#) language code, and a probability score.

```
s.language_dominant
```

	Code	Language	Score
0	en	English	0.999678

Named Entity Recognition

Named entity recognition (NER) detects named entities in text. The NER model uses NLP, which uses machine learning to find predefined named entities. This model also provides a confidence score for each entity and is a value from 0 to 1. The returned data is the text of the entity, its position in the document, and its length. It also identifies the type of entity, a probability score that it is an entity of the stated type.

The following are the supported entity types:

- **DATE:** Absolute or relative dates, periods, and date range.
- **EMAIL:** Email address.
- **EVENT:** Named hurricanes, sports events, and so on.
- **FAC:** Facilities; Buildings, airports, highways, bridges, and so on.

- GPE: Geopolitical entity; Countries, cities, and states.
- IPADDRESS: IP address according to IPv4 and IPv6 standards.
- LANGUAGE: Any named language.
- LOCATION: Non-GPE locations, mountain ranges, and bodies of water.
- MONEY: Monetary values, including the unit.
- NORP: Nationalities, religious, and political groups.
- ORG: Organization; Companies, agencies, institutions, and so on.
- PERCENT: Percentage.
- PERSON: People, including fictional characters.
- PHONE_NUMBER: Supported phone numbers.
 - (“GB”) - United Kingdom
 - (“AU”) - Australia
 - (“NZ”) - New Zealand
 - (“SG”) - Singapore
 - (“IN”) - India
 - (“US”) - United States
- PRODUCT: Vehicles, tools, foods, and so on (not services).
- QUANTITY: Measurements, as weight or distance.
- TIME: Anything less than 24 hours (time, duration, and so on).
- URL: URL

The following example lists the named entities:

```
s .ner
```

The output gives the named entity, its location, and offset position in the text. It also gives a probability and score that this text is actually a named entity along with the type.

	PII	Length	Offset	Score	Entity	Type
0	True	23	0	1.0	Lawrence Joseph Ellison	PERSON
1	False	15	30	1.0	August 17, 1944	DATE
2	False	18	215	1.0	Oracle Corporation	ORG
3	False	12	241	1.0	October 2019	DATE
4	False	6	284	1.0	Forbes	ORG
5	False	13	339	1.0	United States	GPE
6	False	13	425	1.0	\$69.1 billion	MONEY
7	False	13	467	1.0	\$54.5 billion	MONEY
8	False	8	484	1.0	2018.[4]	DATE
9	False	13	560	1.0	United States	GPE
10	False	5	575	1.0	Lanai	GPE
11	False	16	588	1.0	Hawaiian Islands	LOCATION
12	False	4	648	1.0	3000	CARDINAL

Text Classification

Text classification analyses the text and identifies categories for the content with a confidence score. Text classification uses NLP techniques to find insights from textual data. It returns a category from a set of predefined categories. This text classification uses NLP and relies on the main objective lies on zero-shot learning. It classifies text with no or minimal data to train. The content of a collection of documents is analyzed to determine common themes.

The next example classifies the text and gives a probability score that the text is in that category.

```
s.text_classification
```

	Label	Score
0	Finance/Investing	0.369175

9.7.1.5 RegEx Match

Text documents are often parsed looking for specific patterns to extract information like emails, dates, times, web links, and so on. This pattern matching is often done using RegEx, which is hard to write, modify, and understand. Custom written RegEx often misses the edge cases. `ADSSString` provides a number of common RegEx patterns so that your work is simplified. You can use the following patterns:

- `credit_card`: Credit card number.
- `dates`: Dates in a variety of standard formats.
- `email`: Email address.
- `ip`: IP addresses, versions IPV4 and IPV6.
- `link`: Text that appears to be a link to a website.
- `phone_number_US`: USA phone numbers including those with extensions.
- `price`: Text that appears to be a price.
- `ssn`: USA social security number.
- `street_address`: Street address.
- `time`: Text that appears to be a time and less than 24 hours.
- `zip_code`: USA zip code.

The preceding `ADSSString` properties return an array with each pattern that in matches. The following examples demonstrate how to extract email addresses, dates ,and links from the text. Note that the text is extracted as is. For example, the dates aren't converted to a standard format. The returned value is the text as it is represented in the input text. Use the `datetime.strptime()` method to convert the date to a date time stamp.

```
s = ADSSString("Get in touch with my associates john.smith@example.com and jane.
↪johnson@example.com to schedule")
s.email
```

```
['john.smith@example.com', 'jane.johnson@example.com']
```

```
s = ADSSString("She is born on Jan. 19th, 2014 and died 2021-09-10")
s.date
```

```
['Jan. 19th, 2014', '2021-09-10']
```

```
s = ADSSString("Follow the link www.oracle.com to Oracle's homepage.")
s.link
```

```
['www.oracle.com']
```

9.7.1.6 Still a String

While `ADSString` expands your feature engineering capabilities, it can still be treated as a `str` object. Any standard operation on `str` is preserved in `ADSString`. For instance, you can convert it to lowercase:

```
hello_world = "HELLO WORLD"
s = ADSString(hello_world)
s.lower()
```

```
'hello world'
```

You could split a text string.

```
s.split()
```

```
['HELLO', 'WORLD']
```

You can use all the `str` methods, such as the `.replace()` method, to replace text.

```
s.replace("L", "N")
```

```
'HENNO WORND'
```

You can perform a number of `str` manipulation operations, such as `.lower()` and `.upper()` to get an `ADSString` object back.

```
isinstance(s.lower().upper(), ADSString)
```

```
True
```

While a new `ADSString` object is created with `str` manipulation operations, the equality operation holds.

```
s.lower().upper() == s
```

```
True
```

The equality operation even holds between `ADSString` objects (`s`) and `str` objects (`hello_world`).

```
s == hello_world
```

```
True
```

9.7.2 Text Extraction

Convert files such as PDF, and Microsoft Word files into plain text. The data is stored in Pandas dataframes and therefore it can easily be manipulated and saved. The text extraction module allows you to read files of various file formats, and convert them into different formats that can be used for text manipulation. The most common `DataLoader` commands are demonstrated, and some advanced features, such as defining custom backend and file processor.

```
import ads
import fsspec
```

(continues on next page)

(continued from previous page)

```

import oci
import os
import pandas as pd
import shutil
import time
import tempfile

from ads.text_dataset.backends import Base
from ads.text_dataset.dataset import TextDatasetFactory as textfactory
from ads.text_dataset.extractor import FileProcessor, FileProcessorFactory
from ads.text_dataset.options import Options
from sklearn import metrics
from sklearn.linear_model import LogisticRegression
from sklearn.feature_extraction.text import TfidfVectorizer
from sklearn.model_selection import train_test_split

ads.set_debug_mode()
ads.set_auth("resource_principal")

```

9.7.2.1 Introduction

Text extraction is the process of extracting text from one document and converting it into another form, typically plain text. For example, you can extract the body of text from a PDF document that has figures, tables, images, and text. The process can also be used to extract metadata about the document. Generally, text extraction takes a corpus of documents and returns the extracted text in a structured format. In the ADS text extraction module, that format is a Pandas dataframe.

The Pandas dataframe has a record in each row. That record can be an entire document, a sentence, a line of text, or some other unit of text. In the examples, you explore using a row to indicate a line of text and an entire document.

The ADS text extraction module supports:

- Input formats: `text`, `pdf` and `docx` or `doc`.
- Output formats: Use `pandas` for Pandas dataframe, or `cudf` for a cuDF dataframe.
- Backends: [Apache Tika](#) (default) and [pdfplumber](#) (for PDF).
- Source location: local block volume, and in cloud storage such as the Oracle Cloud Infrastructure (OCI) Object Storage.
- Options to extract metadata.

You can manipulate files through the `DataLoader` object. Some of the most common commands are:

- `.convert_to_text()`: Convert document to text and then save them as plain text files.
- `.metadata_all()` and `.metadata_schema()`: Extract metadata from each file.
- `.read_line()`: Read files line-by-line. Each line corresponds to a record in the corpus.
- `.read_text()`: Read files where each file corresponds to a record in the corpus.

9.7.2.1.1 Configure the Data Source

The OCI Data Science service has a corpus of text documents that are used in the examples. This corpus is stored in a publicly accessible OCI Object Storage bucket. The following variables define the Object Storage namespace and the bucket name. You can update these variables to point at your Object Storage bucket, but you might also have to change some of the code in the examples so that the keys are correct.

```
namespace = 'bigdatadatasciencelarge'
bucket = 'hosted-ds-datasets'
```

9.7.2.2 Load

The `TextDatasetFactory`, which is aliased to `textfactory` in this notebook, provides access to the `DataLoader`, and `FileProcessor` objects. The `DataLoader` is a file format-specific object for reading in documents such as PDF and Word documents. Internally, a data loader binds together a file system interface (in this case `fsspec`) for opening files. The `FileProcessor` object is used to convert these files into plain text. It also has an `engine` object to control the output format. For a given `DataLoader` object, you can customize both the `FileProcessor` and `engine`.

Generally, the first step in reading a corpus of documents is to obtain a `DataLoader` object. For example, `TextDatasetFactory.format('pdf')` returns a `DataLoader` for PDFs. Likewise, you can get a Word document loaders by passing in `docx` or `doc`. You can choose an engine that controls how the data is returned. The default engine is a Python generator. If you want to use the data as a dataframe, then use the `.engine()` method. A call to `.engine('pandas')` returns the data as a Pandas dataframe. On a GPU machine, you can use cuDF dataframes with a call to `.engine('cudf')`.

The `.format()` method controls the backend with `Apache Tika` and `pdfplumber` being builtin. In addition, you can write your own backend and plug it into the system. This allows you complete control over the backend. The file processor is used to actually process a specific file format.

To obtain a `DataLoader` object, call the use the `.format()` method on `textfactory`. This returns a `DataLoader` object that can then be configured with the `.backend()`, `.engine()`, and `.options()` methods. The `.backend()` method is used to define which backend is to manage the process of parsing the corpus. If this is not specified then a sensible default backend is chosen based on the file format that is being processed. The `.engine()` method is used to control the output format of the data. If it is not specified, then an iterator is returned. The `.options()` method is used to add extra fields to each record. These would be things such as the filename, or metadata about the file. There are more details about this and the other configuration methods in the examples.

9.7.2.2.1 Read a Dataset

In this example you create a `DataLoader` object by calling `textfactory.format('pdf')`. This `DataLoader` object is configured to read PDF documents. You then change the backend to use `pdfplumber` with the method `.backend('pdfplumber')`. It's easier to work with the results if they are in a dataframe. So, the method `.engine('pandas')` returns a Pandas dataframe.

After you have the `DataLoader` object configured, you process the corpus. In this example, the corpus is a single PDF file. It is read from a publicly accessible OCI Object Storage bucket. The `.read_line()` method is used to read in the corpus where each line of the document is treated as a record. Thus, each row in the returned dataframe is a line of text from the corpus.

```
dl = textfactory.format('pdf').backend('pdfplumber').engine('pandas')
df = dl.read_line(
    f'oci://{bucket}/{namespace}/pdf_sample/paper-0.pdf',
    storage_options={"config": {}},
```

(continues on next page)

(continued from previous page)

```
)
df.head()
```

```

                                0
0      PREVENTING CHRONIC DISEASE\n
1  PUBLICHEALTHRESEARCH, ...
2      Volume 15, E97 ...
3      \n
4      ORIGINAL RESEARCH\n
```

9.7.2.2.2 Read Options

Typically, you want to treat each line of a document or each document as a record. The method `.read_line()` processes a corpus, and return each line in the documents as a text string. The method `.read_text()` treats each document in the corpus as a record.

Both the `.read_line()` and `.read_text()` methods parse the corpus, convert it to text, and reads it into memory. The `.convert_to_text()` method does the same processing as `.read_text()`, but it outputs the plain text to files. This allows you to post-process the data without having to *again* convert the raw documents into plain text documents, which can be an expensive process.

Each document can have a custom set of metadata that describes the document. The `.metadata_all()` and `.metadata_schema()` methods allow you to access this metadata. Metadata is represented as a key-value pair. The `.metadata_all()` returns a set of key-value pairs for each document. The `.metadata_schema()` returns what keys are used in defining the metadata. This can vary from document to document and this method creates a list of all observed keys. You use this to understand what metadata is available in the corpus.

``.read_line()``

The `.read_line()` method allows you to read a corpus line-by-line. In other words, each line in a file corresponds to one record. The only required argument to this method is `path`. It sets the path to the corpus, and it can contain a glob pattern. For example, `oci://{bucket}@{namespace}/pdf_sample/**/*.pdf`, `oci://{bucket}@{namespace}/20news-small/**/[1-9]*`, or `/home/datascience/<path-to-folder>/[A-Za-z]*.docx` are all valid paths that contain a glob pattern for selecting multiple files. The `path` parameter can also be a list of paths. This allows for reading files from different file paths.

The optional parameter `udf` stands for a user-defined function. This parameter can be a callable Python object, or a regular expression (RegEx). If it is a callable Python object, then the function must accept a string as an argument and returns a tuple. If the parameter is a RegEx, then the returned values are the captured RegEx patterns. If there is no match, then the record is ignored. This is a convenient method to selectively capture text from a corpus. In either case, the `udf` is applied on the record level, and is a powerful tool for data transformation and filtering.

The `.read_line()` method has the following arguments:

- `df_args`: Arguments to pass to the engine. It only applies to Pandas and cuDF dataframes.
- `n_lines_per_file`: Maximal number of lines to read from a single file.
- `path`: The path to the corpus.
- `storage_options`: Options that are necessary for connecting to OCI Object Storage.
- `total_lines`: Maximal number of lines to read from all files.

- `udf`: User-defined function for data transformation and filtering.

Examples

Python Callable `udf`

In the next example, a lambda function is used to create a Python callable object that is passed to the `udf` parameter. The lambda function takes a line and splits it based on white space to tokens. It then counts the number of tokens, and returns a tuple where the first element is the token count and the second element is the line itself.

The `df_args` parameter is used to change the column names into user-friendly values.

```
dl = textfactory.format('docx').engine('pandas')
df = dl.read_line(
    path=f'oci://{bucket}@{namespace}/docx_sample/*.docx',
    udf=lambda x: (len(x.strip().split()), x),
    storage_options={"config": {}},
    df_args={'columns': ['token count', 'text']},
)
df.head()
```

	token count	text
0	1	notes
1	0	
2	2	Geography Proper
3	94	Generally, geographers before the 70s were con...
4	100	A great example of this is Cuba - think of it ...

Regular Expression `udf`

In this example, the corpus is a collection of log files. A RegEx is used to parse the standard Apache log format. If a line does not match the pattern, it is discarded. If it does match the pattern, then a tuple is returned where each element is a value in the RegEx [capture group](#).

This example uses the default engine, which returns an iterator. The `next()` method is used to iterate through the values.

```
APACHE_LOG_PATTERN = r'^[(\S+)\s(\S+)\s(\d+)\s(\d+:\d+:\d+)\s(\d+)]\s(\S+)\s(\S+)\s(\S+\s(\S+)\s(\S+))\s(\S+)'
dl = textfactory.format('txt')
df = dl.read_line(
    f'oci://{bucket}@{namespace}/log_sample/*.log',
    udf=APACHE_LOG_PATTERN,
    storage_options={"config": {}},
)
next(df)
```

```
['Sun',  
 'Dec',  
 '04',  
 '04:47:44',  
 '2005',  
 '[notice]',  
 'workerEnv.init()',  
 'ok',  
 '/etc/httpd/conf/workers2.properties']
```

```.read_text()```

If you want to treat each document in a corpus as a record, use the `.read_text()` method. The `path` parameter is the only required parameter as it defines the location of the corpus.

The optional `udf` parameter stands for a user-defined function. This parameter can be a callable Python object or a `Regex`.

The `.read_text()` method has the following arguments:

- `df_args`: Arguments to pass to the engine. It only applies to Pandas and cuDF dataframes.
- `path`: The path to the corpus.
- `storage_options`: Options that are necessary for connecting to OCI Object Storage.
- `total_files`: The maximum number of files that should be processed.
- `udf`: User-defined function for data transformation and filtering.

## Examples

### `total_files`

In this example, there are six files in the corpus. However, the `total_files` parameter is set to 4 so only the first four files are processed. There is no guarantee which four will actually be processed. However, this parameter is commonly used to limit the size of the data when you are developing the code for the model. Later on, it is often removed so the entire corpus is processed.

This example also demonstrates the use of a list, plus globbing, to define the corpus. Notice that the `path` parameter is a list with two file paths. The output shows the dataframe has four rows and so only four files were processed.

```
dl = textfactory.format('docx').engine('pandas')
df = dl.read_text(
 path=[f'oci://{bucket}@{namespace}/docx_sample/*.docx', f'oci://{bucket}@{namespace}/
↪ docx_sample/*.doc'],
 total_files=4,
 storage_options={"config": {}},
)
df.shape
```

```
(4, 1)
```

## `.convert_to_text()`

Converting a set of raw documents can be an expensive process. The `.convert_to_text()` method allows you to convert a corpus of source documents and write them out as plain text files. Each document input document is written to a separate file that has the same name as the source file. However, the file extension is changed to `.txt`. Converting the raw documents allows you to post-process the raw text multiple times while only have to convert it once.

The `src_path` parameter defines the location of the corpus. The `dst_path` parameter gives the location where the plain text files are to be written. It can be an Object Storage bucket or the local block storage. If the directory does not exist, it is created. It overwrites any files in the directory.

The `.convert_to_text()` method has the following arguments:

- `dst_path`: Object Storage or local block storage path where plain text files are written.
- `encoding`: Encoding for files. The default is `utf-8`.
- `src_path`: The path to the corpus.
- `storage_options`: Options that are necessary for connecting to Object Storage.

The following example converts a corpus, and writes it to a temporary directory. It then lists all the plain text files that were created in the conversion process.

```
dst_path = tempfile.mkdtemp()
dl = textfactory.format('pdf')
dl.convert_to_text(
 src_path=f'oci://{bucket}@{namespace}/pdf_sample/*.pdf',
 dst_path=dst_path,
 storage_options={"config": {}},
)
print(os.listdir(dst_path))
shutil.rmtree(dst_path)
```

```
['paper-2.txt', 'paper-0.txt', 'Emerging Infectious Diseases copyright info.txt',
→ 'Preventing Chronic Disease Copyright License.txt', 'Budapest Open Access Initiative _u
→ Budapest Open Access Initiative.txt', 'paper-1.txt']
```

Each document can contain metadata. The purpose of the `.metadata_all()` method is to capture this information for each document in the corpus. There is no standard set of metadata across all documents so each document could return different set of values.

The `path` parameter is the only required parameter as it defines the location of the corpus.

The `.metadata_all()` method has the following arguments:

- `encoding`: Encoding for files. The default is `utf-8`.
- `path`: The path to the corpus.
- `storage_options`: Options that are necessary for connecting to Object Storage.

The next example processes a corpus of PDF documents using `pdfplumber`, and prints the metadata for the first document.

```
dl = textfactory.format('pdf').backend('pdfplumber').option(Options.FILE_NAME)
metadata = dl.metadata_all(
 path=f'oci://{bucket}@{namespace}/pdf_sample/Emerging Infectious Diseases copyright_
→ info.pdf',
```

(continues on next page)

(continued from previous page)

```

 storage_options={"config": {}}
)
next(metadata)

```

```

{'Creator': 'Mozilla/5.0 (Macintosh; Intel Mac OS X 10_15_7) AppleWebKit/537.36 (KHTML,
↳ like Gecko) Chrome/91.0.4472.114 Safari/537.36',
'Producer': 'Skia/PDF m91',
'CreationDate': 'D:20210802234012+00'00'',
'ModDate': 'D:20210802234012+00'00''}

```

The backend that is used can affect what metadata is returned. For example, the Tika backend returns more metadata than pdfplumber, and also the names of the metadata elements are also different. The following example processes the same PDF document as previously used, but you can see that there is a difference in the metadata.

```

dl = textfactory.format('pdf').backend('default')
metadata = dl.metadata_all(
 path=f'oci://{bucket}/{namespace}/pdf_sample/Emerging Infectious Diseases copyright_
↳ info.pdf',
 storage_options={"config": {}}
)
next(metadata)

```

```

{'Content-Type': 'application/pdf',
'Creation-Date': '2021-08-02T23:40:12Z',
'Last-Modified': '2021-08-02T23:40:12Z',
'Last-Save-Date': '2021-08-02T23:40:12Z',
'X-Parsed-By': ['org.apache.tika.parser.DefaultParser',
'org.apache.tika.parser.pdf.PDFParser'],
'access_permission:assemble_document': 'true',
'access_permission:can_modify': 'true',
'access_permission:can_print': 'true',
'access_permission:can_print_degraded': 'true',
'access_permission:extract_content': 'true',
'access_permission:extract_for_accessibility': 'true',
'access_permission:fill_in_form': 'true',
'access_permission:modify_annotations': 'true',
'created': '2021-08-02T23:40:12Z',
'date': '2021-08-02T23:40:12Z',
'dc:format': 'application/pdf; version=1.4',
'dcterms:created': '2021-08-02T23:40:12Z',
'dcterms:modified': '2021-08-02T23:40:12Z',
'meta:creation-date': '2021-08-02T23:40:12Z',
'meta:save-date': '2021-08-02T23:40:12Z',
'modified': '2021-08-02T23:40:12Z',
'pdf:PDFVersion': '1.4',
'pdf:charsPerPage': '2660',
'pdf:docinfo:created': '2021-08-02T23:40:12Z',
'pdf:docinfo:creator_tool': 'Mozilla/5.0 (Macintosh; Intel Mac OS X 10_15_7)
↳ AppleWebKit/537.36 (KHTML, like Gecko) Chrome/91.0.4472.114 Safari/537.36',
'pdf:docinfo:modified': '2021-08-02T23:40:12Z',
'pdf:docinfo:producer': 'Skia/PDF m91',
'pdf:encrypted': 'false',

```

(continues on next page)

(continued from previous page)

```
'pdf:hasMarkedContent': 'true',
'pdf:hasXFA': 'false',
'pdf:hasXMP': 'false',
'pdf:unmappedUnicodeCharsPerPage': '0',
'producer': 'Skia/PDF m91',
'xmp:CreatorTool': 'Mozilla/5.0 (Macintosh; Intel Mac OS X 10_15_7) AppleWebKit/537.36_
→(KHTML, like Gecko) Chrome/91.0.4472.114 Safari/537.36',
'xmpTPg:NPages': '1'}
```

### ``.metadata\_schema()``

As briefly discussed in the `.metadata_all()` method section, there is no standard set of metadata across all documents. The `.metadata_schema()` method is a convenience method that returns what metadata is available in the corpus. It returns a list of all observed metadata fields in the corpus. Since each document can have a different set of metadata, all the values returned may not exist in all documents. It should also be noted that the engine used can return different metadata for the same document.

The `path` parameter is the only required parameter as it defines the location of the corpus.

Often, you don't want to process an entire corpus of documents to get a sense of what metadata is available. Generally, the engine returns a fairly consistent set of metadata. The `n_files` option is handy because it limits the number of files that are processed.

The `.metadata_schema()` method has the following arguments:

- `encoding`: Encoding for files. The default is `utf-8`.
- `n_files`: Maximum number of files to process. The default is 1.
- `path`: The path to the corpus.
- `storage_options`: Options that are necessary for connecting to Object Storage.

The following example uses the `.metadata_schema()` method to collect the metadata fields on the first two files in the corpus. The `n_files=2` parameter is used to control the number of files that are processed.

```
dl = textfactory.format('pdf').backend('pdfplumber')
schema = dl.metadata_schema(
 f'oci://{bucket}@{namespace}/pdf_sample/*.pdf',
 storage_options={"config": {}},
 n_files=2
)
print(schema)
```

```
['ModDate', 'Producer', 'CreationDate', 'Creator']
```

### 9.7.2.3 Augment Records

The `text_dataset` module has the ability to augment the returned records with additional information using the `.option()` method. This method takes an enum from the `Options` class. The `.option()` method can be used multiple times on the same `DataLoader` to select a set of additional information that is returned. The `Options.FILE_NAME` enum returns the filename that is associated with the record. The `Options.FILE_METADATA` enum allows you to extract individual values from the document's metadata. Notice that the engine used can return different metadata for the same document.

### 9.7.2.3.1 Examples

#### ``Options.FILE\_NAME``

The following example uses `.option(Options.FILE_NAME)` to augment to add the filename of each record that is returned. The example uses the `txt` for the `FileProcessor`, and `Tika` for the backend. The engine is `Pandas` so a dataframe is returned. The `df_args` option is used to rename the columns of the dataframe. Notice that the returned dataframe has a column named `path`. This is the information that was added to the record from the `.option(Options.FILE_NAME)` method.

```
dl = textfactory.format('txt').backend('tika').engine('pandas').option(Options.FILE_NAME)
df = dl.read_text(
 path=f'oci://{bucket}@{namespace}/20news-small/**/[1-9]*',
 storage_options={"config": {}},
 df_args={'columns': ['path', 'text']}
)
df.head()
```

	path	text
0	hosted-ds-datasets@bigdatadatasciencelarge/20n...	\tThe Orioles' pitching staff again is having ...
1	hosted-ds-datasets@bigdatadatasciencelarge/20n...	Subject: Re: Eck vs Rickey (was Re: Rickey's w...
2	hosted-ds-datasets@bigdatadatasciencelarge/20n...	Hell, the Orioles' Opening Day game could easi...
3	hosted-ds-datasets@bigdatadatasciencelarge/20n...	There's a lot of whining about how much player...
4	hosted-ds-datasets@bigdatadatasciencelarge/20n...	In article <1993Apr5.173500.26383@ra.msstate.e...

#### ``Options.FILE\_METADATA``

You can add metadata about a document to a record using `.option(Options.FILE_METADATA, {'extract': ['<key1>', '<key2>']})`. When using `Options.FILE_METADATA`, there is a required second parameter. It takes a dictionary where the key is the action to be taken. In the next example, the `extract` key provides a list of metadata that can be extracted. When a list is used, the returned value is also a list of the metadata values. The example uses repeated calls to `.option()` where different metadata values are extracted. In this case, a list is not returned, but each value is in a separate Pandas column.

```
dl = textfactory.format('docx').engine('pandas') \
 .option(Options.FILE_METADATA, {'extract': ['Character Count']}) \
 .option(Options.FILE_METADATA, {'extract': ['Paragraph-Count']}) \
 .option(Options.FILE_METADATA, {'extract': ['Author']})
df = dl.read_text(
 path=f'oci://{bucket}@{namespace}/docx_sample/*.docx',
 storage_options={"config": {}},
 df_args={'columns': ['character count', 'paragraph count', 'author', 'content']},
)
df.head()
```



	character count	paragraph count	author	content
0	[444461]	[1042]	[miked_000]	notes\n\nGeography Proper\nGenerally, geograph...
1	[444461]	[1042]	[miked_000]	notes\n\nGeography Proper\nGenerally, geograph...
2	[119218]	[279]	[Miranda, Team 2012]	***The Gift K***\nNotes\n\nRelation to Colonia...

#### 9.7.2.4 Custom File Processor and Backend

The `text_dataset` module supports a number of file processors and backends. However, it isn't practical to provide these for all possible documents. So, the `text_dataset` allows you to create your own.

When creating a custom file processor, you must register it with ADS using the `FileProcessorFactory.register()` method. The first parameter is the name that you want to associate with the file processor. The second parameter is the class that is to be registered. There is no need to register the backend class.

##### 9.7.2.4.1 Custom Backend

To create a backend, you need to develop a class that inherits from the `ads.text_dataset.backends.Base` class. In your class, you need to overload any of the following methods that you want to use with: `.read_line()`, `.read_text()`, `.convert_to_text()`, and `.get_metadata()`. The `.get_metadata()` method must be overload if you want to use the `.metadata_all()` and `.metadata_schema()` methods in your backend.

The `.convert_to_text()` method takes a file handler, destination path, filename, and storage options as parameters. This method must write the plain text file to the destination path, and return the path of the file.

The `.get_metadata()` method takes a file handler as an input parameter, and returns a dictionary of the metadata. The `.metadata_all()` and `.metadata_schema()` methods don't need to be overload because they use the `.get_metadata()` method to return their results.

The `.read_line()` method must take a file handle, and have a `yield` statement that returns a plain text line from the document.

The `.read_text()` method has the same requirements as the `.read_line()` method, except it must `yield` the entire document as plain text.

The following are the method signatures:

```
convert_to_text(self, fhandler, dst_path, fname, storage_options)
get_metadata(self, fhandler)
read_line(self, fhandler)
read_text(self, fhandler)
```

##### 9.7.2.4.2 Custom File Processor

To create a custom file processor you must develop a class that inherits from `ads.text_dataset.extractor.FileProcessor`. Generally, there are no methods that need to be overloaded. However, the `backend_map` class variable has to be defined. This is a dictionary where the key is the name of the format that it supports and the value is the file processor class. There must be a key called `default` that is used when no file processor is defined for the `DataLoader`. An example of the `backend_map` is:

```
backend_map = {'default': MyCustomBackend, 'tika': Tika, 'custom': MyCustomBackend}
```

### 9.7.2.4.3 Example

In the next example, you create a custom backend class called `ReverseBackend`. It overloads the `.read_line()` and `.read_text()` methods. This toy backend returns the records in reverse order.

The `TextReverseFileProcessor` class is used to create a new file processor for use with the backend. This class has the `backend_map` class variable that maps the backend label to the backend object. In this case, the only format that is provided is the default class.

Having defined the backend (`TextReverseBackend`) and file processor (`TextReverseFileProcessor`) classes, the format must be registered. You register it with the `FileProcessorFactory.register('text_reverse', TextReverseFileProcessor)` command where the first parameter is the format and the second parameter is the file processor class.

```
class TextReverseBackend(Base):
 def read_line(self, fhandler):
 with fhandler as f:
 for line in f:
 yield line.decode()[::-1]

 def read_text(self, fhandler):
 with fhandler as f:
 yield f.read().decode()[::-1]

class TextReverseFileProcessor(FileProcessor):
 backend_map = {'default': TextReverseBackend}

FileProcessorFactory.register('text_reverse', TextReverseFileProcessor)
```

Having created the custom backend and file processor, you use the `.read_line()` method to read in one record and print it.

```
dl = textfactory.format('text_reverse')
reverse_text = dl.read_line(
 f'oci://{bucket}@{namespace}/20news-small/rec.sport.baseball/100521',
 total_lines=1,
 storage_options={"config": {}},
)
text = next(reverse_text)[0]
print(text)
```

```
)uiL C evetS(ude.uhj.fch.xinuhj@larimda :morF
```

The `.read_line()` method in the `TextReverseBackend` class reversed the characters in each line of text that is processed. You can confirm this by reversing it back.

```
text[::-1]
```

```
'From: admiral@jhunix.hcf.jhu.edu (Steve C Liu)n'
```

## VISUALIZE DATA

Data visualization is an important aspect of data exploration, analysis, and communication. Generally, visualization of the data is one of the first steps in any analysis. It allows the analysts to efficiently gain an understanding of the data and guides the exploratory data analysis (EDA) and the modeling process.

An efficient and flexible data visualization tool can provide a lot of insight into the data. ADS provides a smart visualization tool. It automatically detects the data type and renders plots that optimally represent the characteristics of the data. Within ADS, custom visualizations can be created using any plotting library.

### 10.1 Automatic

The ADS `show_in_notebook()` method creates a comprehensive preview of all the basic information about a dataset including:

- The predictive data type (for example, regression, binary classification, or multinomial classification).
- The number of columns and rows.
- Feature type information.
- Summary visualization of each feature.
- The correlation map.
- Any warnings about data conditions that you should be aware of.

To improve plotting performance, the ADS `show_in_notebook()` method uses an optimized subset of the data. This smart sample is selected so that it is statistically representative of the full dataset. The correlation map is only displayed when the data only has numerical (`continuous` or `ordinal`) columns.

```
ds.show_in_notebook()
```

To visualize the correlation, call the `show_corr()` method. If the correlation matrices have not been cached, this call triggers the `corr()` function which calculates the correlation matrices.

`corr()` uses the following methods to calculate the correlation based on the data types:

- Continuous-Continuous: ``Pearson`` method [https://en.wikipedia.org/wiki/Pearson\\_correlation\\_coefficient](https://en.wikipedia.org/wiki/Pearson_correlation_coefficient)>`\_\_`. The correlations range from -1 to 1.
- Categorical-Categorical: ``Cramer's V`` method [https://en.wikipedia.org/wiki/Cram%C3%A9r's\\_V](https://en.wikipedia.org/wiki/Cram%C3%A9r's_V)>`\_\_`. The correlations range from 0 to 1.
- Continuous-Categorical: ``Correlation Ratio`` method [https://en.wikipedia.org/wiki/Correlation\\_ratio](https://en.wikipedia.org/wiki/Correlation_ratio)>`\_\_`. The correlations range from 0 to 1.

▼ Summary

Name: DataFrame from oracle\_classification\_dataset1\_150K.csv

Type: BinaryClassificationDataset

150,000 Rows, 49 Columns

Column Types:

- continuous: 39 features
- categorical: 10 features

Note: Visualizations use a sampled subset of the dataset, this is to improve plotting performance. The sample size is calculated to be statistically significant within the confidence level: 95 and confidence interval: 1.0. The sampled data has 10,000 rows

- The confidence level refers to the long-term success rate of the method, that is, how often this type of interval will capture the parameter of interest.
- A specific confidence interval gives a range of plausible values for the parameter of interest

► Features (49)

► Correlations

► Warnings (3)

▼ Features (49)


Note these are computed on the entire dataset.

	count	mean	std	min	25%	50%	75%	max	missing	skew
class	150000	0.53	0.5	0	0	1	1	1	0	-0.11541953
col01	150000	0.01	3.68	-16.22	-2.47	0.01	2.47	16.48	0	-0.001944536
col02	150000	10.1	0.3	10	10	10	10	11	0	2.670402
col03	150000	0	2.21	-10.52	-1.48	0	1.5	9.94	0	0.0021300788
col04	150000	0.79	200.6	-889.09	-134.85	0.22	136.36	1124.37	0	0.0021092156
col05	150000	-0	0.12	-0.68	-0.05	-0	0.05	0.7	0	-0.022465346
col06	150000	-0.01	3.01	-15.08	-2.01	-0.01	2.01	14.9	0	-0.0033007577
col07	150000	-9.3	0.46	-10	-10	-9	-9	-9	0	-0.87149529
col08	150000	100.9	0.3	100	101	101	101	101	0	-2.6545245
col09	150000	-9.3	0.46	-10	-10	-9	-9	-9	0	-0.87139146
col010	150000	-0	0.4	-1.65	-0.27	-0	0.27	1.83	0	0.00080830709
col011	150000	1000.99	1.4	1000	1000	1000	1003.1	1003.1	0	0.77117106
col012	150000	10.2	0.4	10	10	10	10	11	0	1.4987655

Feature Visualizations...


class

- type: categorical (int64)
- missing\_percentage: 0.0%
- categorical statistics:
  - unique percentage: 0.020%
  - mode: 1
  - count: 10,000
  - unique: 2
  - top: 1
  - freq: 5,249

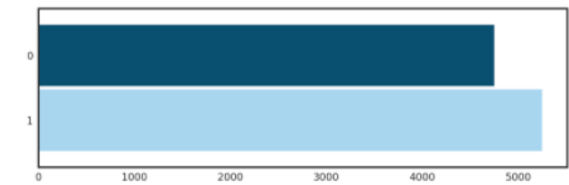


col01

- type: continuous (float64)
- missing\_percentage: 0.0%
- continuous statistics:
  - mode: -12.888
  - median: 0.049
  - kurtosis: 0.064
  - variance: 13.632
  - skewness: 0.051
  - outlier\_percentage: 0.220%
  - count: 10,000
  - mean: 0.050
  - std: 3.692
  - min: -12.888
  - 25%: -2.440
  - 50%: 0.049
  - 75%: 2.454
  - max: 13.991

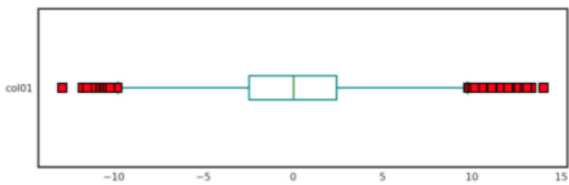

col02


- type: categorical (float64)
- missing\_percentage: 0.0%
- categorical statistics:
  - unique percentage: 0.020%
  - mode: 10
  - count: 10,000
  - unique: 2
  - top: 10
  - freq: 9,043

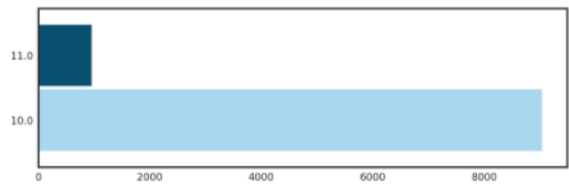

Correlations are displayed independently because the correlations are calculated using different methodologies and the ranges are not the same. Consolidating them into one matrix could be confusing and inconsistent.

**Note:** Continuous features consist of continuous and ordinal types. Categorical features consist of categorical and zipcode types.


```
ds.show_corr(nan_threshold=0.8, correlation_methods='all')
```

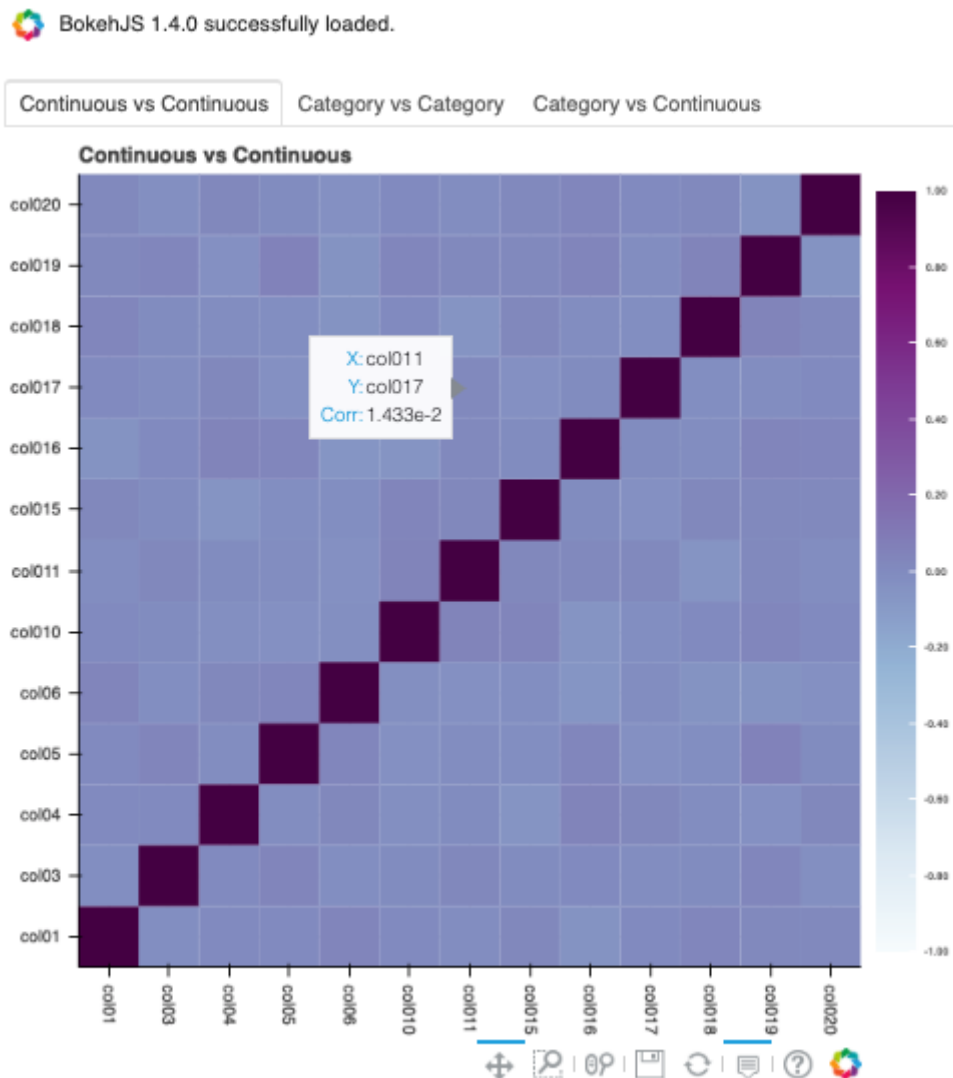


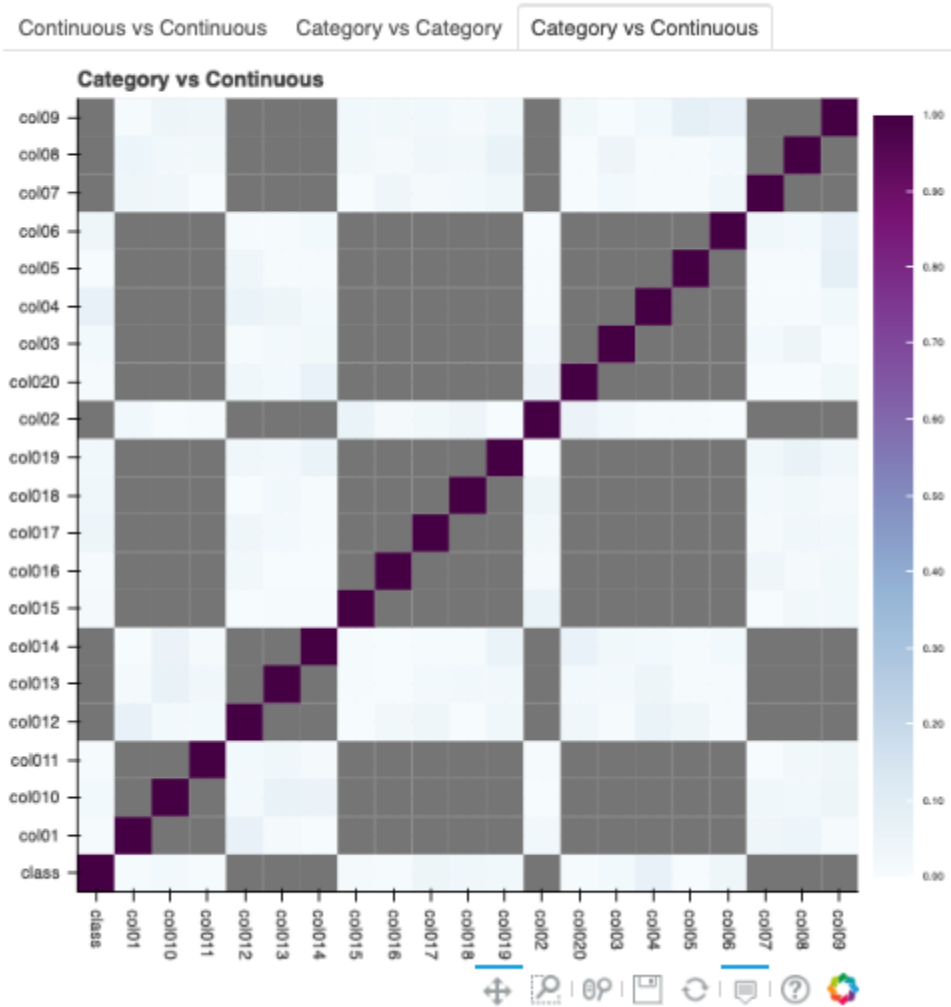
By default, `nan_threshold` is set to 0.8. This means that if more than 80% of the values in a column are missing, that column is dropped from the correlation calculation. `nan_threshold` should be between 0 and 1. Other options includes:

- `correlation_methods`: Methods to calculate the correlation. By default, only `pearson` correlation is calculated and shown. Can select one or more from `pearson`, `cramers_v`, and `correlation_ratio`. Or set to `all` to show all correlation charts.
- `correlation_target`: Defaults to `None`. It can be any columns of type `continuous`, `ordinal`, `categorical`

 BokehJS 1.4.0 successfully loaded.

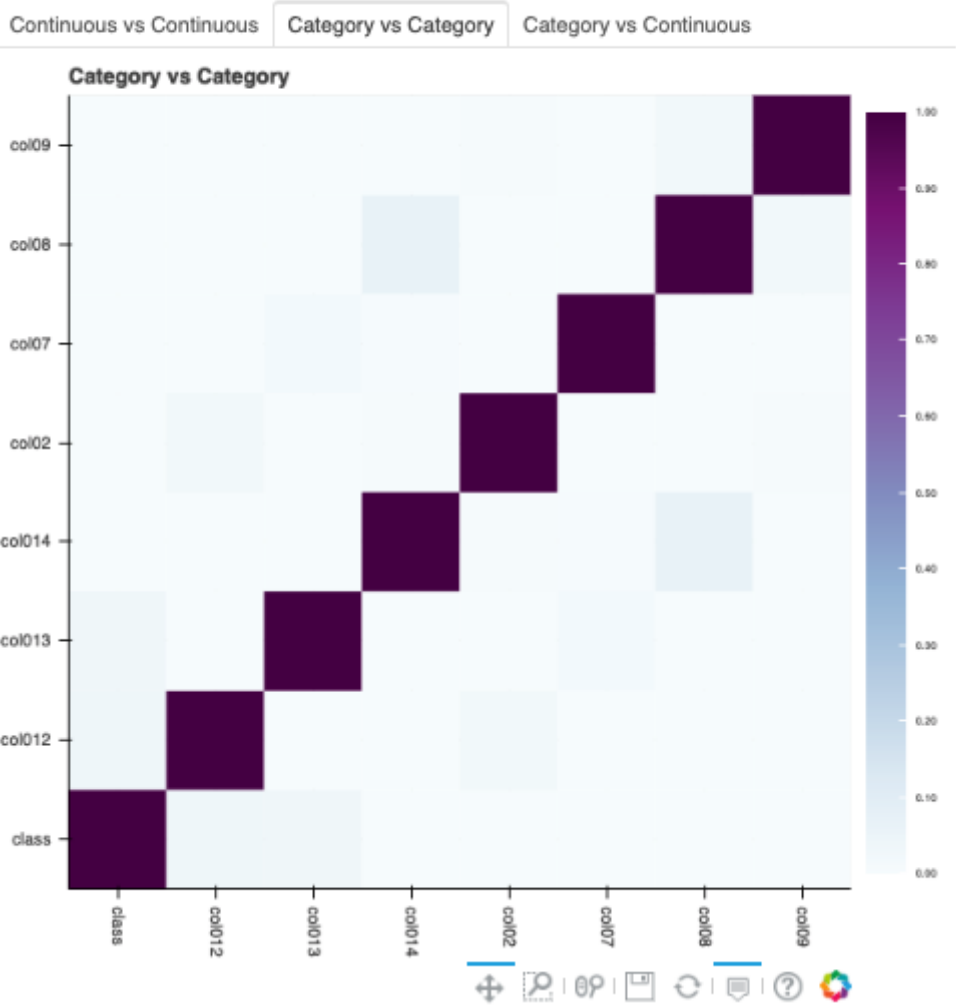

 BokehJS 1.4.0 successfully loaded.






or zipcode. When `correlation_target` is set, only pairs that contain `correlation_target` display.

- `correlation_threshold`: Apply a filter to the correlation matrices and only exhibit the pairs whose correlation values are greater than or equal to the `correlation_threshold`.
- `force_recompute`: Defaults to False. Correlation matrices are cached. Set `force_recompute` to True to recalculate the correlation. Note that both `corr()` and `show_corr()` method can trigger calculation of correlation matrices if run with `force_recompute` set to be True, or when there is no cached value exists. `show_in_notebook()` calculates the correlation only when there are only numerical columns in the dataset.
- `frac`: Defaults to 1. The portion of the original data to calculate the correlation on. `frac` must be between 0 and 1.
- `plot_type`: Defaults to heatmap. Valid values are `heatmap` and `bar`. If `bar` is chosen, `correlation_target` also has to be set and the bar chart will only show the correlation values of the pairs which have the target in them.

```
ds.show_corr(correlation_target='col01', plot_type='bar')
```

BokehJS 1.4.0 successfully loaded.

The correlation matrix has been cached. Please make sure `overwrite=True` if you want to recalculate the correlation.

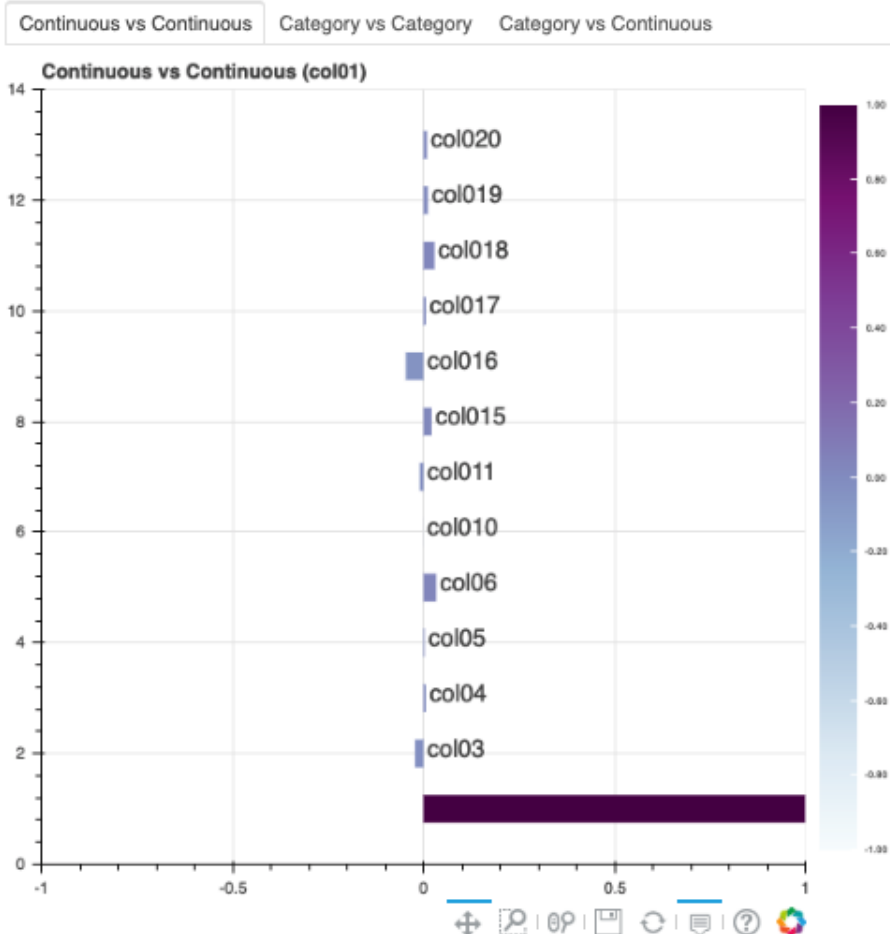

To explore features, use the `smart plot()` method. It accepts one or two feature names. The `show_in_notebook()`

method automatically determines the best type of plot based on the type of features that are to be plotted.

Three different examples are described. They use a binary classification dataset with 1,500 rows and 21 columns. 13 of the columns have a continuous data type, and 8 are categorical. There are three different examples.

- A single categorical feature: The `plot()` method detects that the feature is categorical because it only has the values of 0 and 1. It then automatically renders a plot of the count of each category.


```
ds.plot("col02").show_in_notebook(figsize=(4,4))
```

## NOTE

Visualizations use a sampled dataset of size 10,000 (confidence level: 95, confidence interval: 1.0)

Set `yscale` to one of `'linear'`, `'log'`, `'symlog'`, `'logit'` to apply scale to y axis

`_SINGLE_COLUMN_COUNT_PLOT, "col02" (categorical)`

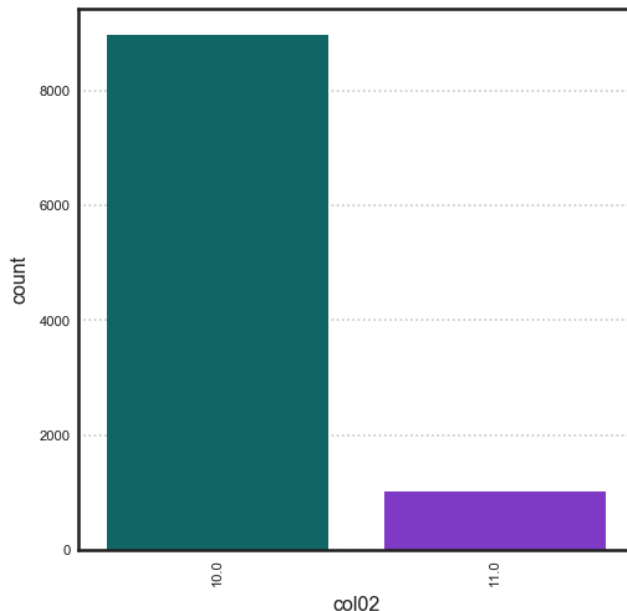

- Categorical and continuous feature pair: ADS chooses the best plotting method, which is a violin plot.

```
ds.plot("col02", y="col01").show_in_notebook(figsize=(4,4))
```


- A pair of continuous features: ADS chooses a Gaussian heatmap as the best visualization. It generates a scatter plot and assigns a color to each data point based on the local density (Gaussian kernel).

```
ds.plot("col01", y="col03").show_in_notebook()
```

**NOTE**

Visualizations use a sampled dataset of size 10,000 (confidence level: 95, confidence interval: 1.0)


`_VIOLIN_PLOT`, "col02" (categorical) vs "col01" (continuous)

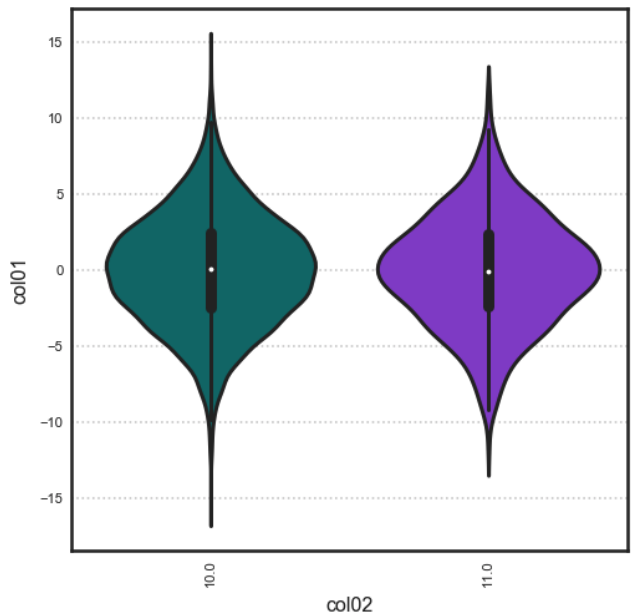

**NOTE**

Visualizations use a sampled dataset of size 10,000 (confidence level: 95, confidence interval: 1.0)

`_GAUSSIAN_HEATMAP`, "col01" (continuous) vs "col03" (continuous)

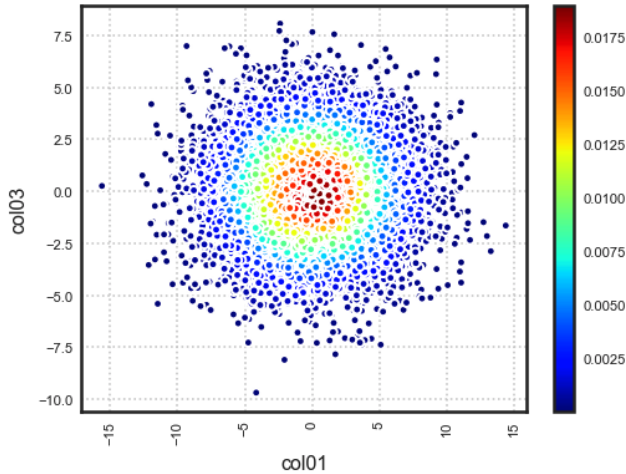

## 10.2 Customized

ADS provides intelligent default options for your plots. However, the visualization API is flexible enough to let you customize your charts or choose your own plotting library. You can use the `ADS call()` method to select your own plotting routine.

### 10.2.1 Seaborn

In this example, a dataframe is passed directly to the Seaborn pair plot function. It does a faceted, pairwise plot between all the features in the dataset. The function creates a grid of axes such that each variable in the data is shared in the y-axis across a row and in the x-axis across a column. The diagonal axes are treated differently by drawing a histogram of each feature.

```
import seaborn as sns
from sklearn.datasets import load_iris
import pandas as pd
data = load_iris()
df = pd.DataFrame(data.data, columns=data.feature_names)
sns.set(style="ticks", color_codes=True)
sns.pairplot(df.dropna())
```

### 10.2.2 Matplotlib

- Using Matplotlib:

```
import matplotlib.pyplot as plt
from numpy.random import randn

df = pd.DataFrame(randn(1000, 4), columns=list('ABCD'))

def ts_plot(df, figsize):
 ts = pd.Series(randn(1000), index=pd.date_range('1/1/2000', periods=1000))
 df.set_index(ts)
 df = df.cumsum()
 plt.figure()
 df.plot(figsize=figsize)
 plt.legend(loc='best')

ts_plot(df, figsize=(7,7))
```

- Using a Pie Chart:

```
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt

data = {'data': [1109, 696, 353, 192, 168, 86, 74, 65, 53]}
df = pd.DataFrame(data, index = ['20-50 km', '50-75 km', '10-20 km', '75-100 km',
 ↳ '3-5 km', '7-10 km', '5-7 km', '>100 km', '2-3 km'])


explode = (0, 0, 0, 0.1, 0.1, 0.2, 0.3, 0.4, 0.6)
```

(continues on next page)

Using entire dataset for graphing (150 rows)

Use `set_target()` to type the dataset for a particular learning task

<seaborn.axisgrid.PairGrid at 0x1153adc88>

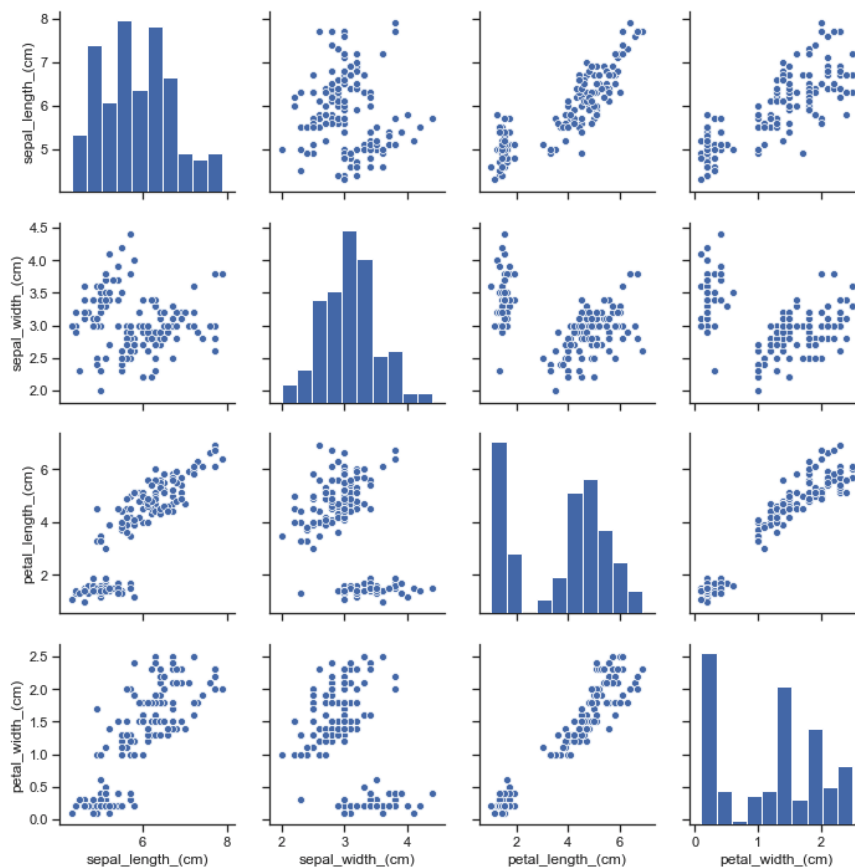


Using entire dataset for graphing (1000 rows)

**TIP:**

- + Use `show_in_notebook()` to visualize the dataset.
- + Use `get_recommendations()` to view and apply recommendations for dataset optimization.

<Figure size 432x288 with 0 Axes>

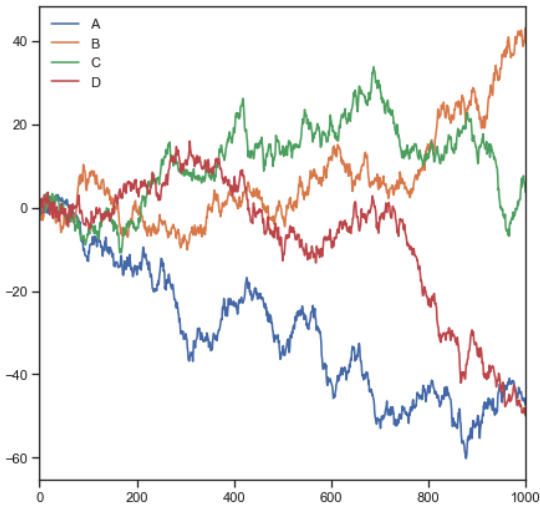

(continued from previous page)


```
colors = ['#191970', '#001CF0', '#0038E2', '#0055D4', '#0071C6', '#008DB8', '#00AAAA',
 '#00C69C', '#00E28E', '#00FF80',]

def bar_plot(df, figsize):
 df["data"].plot(kind='pie', fontsize=17, colors=colors, explode=explode)
 plt.axis('equal')
 plt.ylabel('')
 plt.legend(bbox_to_anchor=(1.05, 1), loc=2, borderaxespad=0.)
 plt.show()

bar_plot(df, figsize=(7,7))
```

Using entire dataset for graphing (9 rows)


Use `set_target()` to type the dataset for a particular learning task

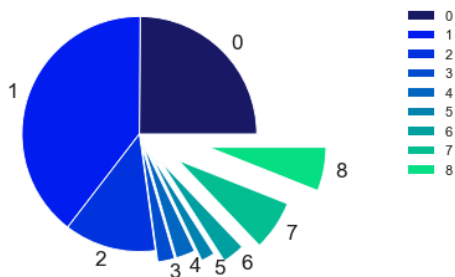

### 10.2.3 Geographic Information System (GIS)

This example uses the California earthquake data retrieved from United States Geological Survey (USGS) earthquake catalog. It visualizes the location of major earthquakes.

```
earthquake.plot_gis_scatter(lon="longitude", lat="latitude")
```

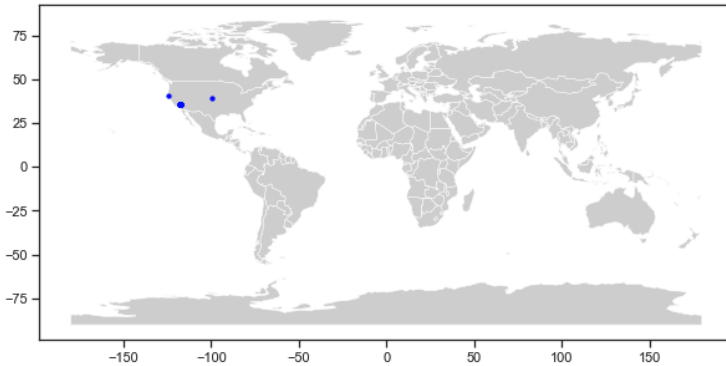





## TRAIN MODELS

In this section you will learn about model training on the Data Science cloud service using a variety of popular frameworks. This section covers the popular `sklearn` framework, along with gradient boosted tree estimators like `LightGBM` and `XGBoost`, and deep learning packages like `TensorFlow` and `PyTorch`.

The section covers how to serialize models and make use of the OCI Model Catalog to store model artifacts and meta data all using ADS to prepare the upload.

In the distributed training section you will see examples of how to work with `Dask`, `Horovod`, `TensorFlow` and `PyTorch` to do multinode training.

`TensorBoard` provides the visualization and the tooling that is needed to watch and record model training progress throughout the tuning stages.

### 11.1 ADSTuner

In addition to the other services for training models, ADS includes a hyperparameter tuning framework called `ADSTuner`.

`ADSTuner` supports using several hyperparameter search strategies that plug into common model architectures like `sklearn`.

`ADSTuner` further supports users defining their own search spaces and strategies. This makes `ADSTuner` functional and useful with any ML library that doesn't include hyperparameter tuning.

First, import the packages:

```
import category_encoders as ce
import lightgbm
import logging
import numpy as np
import os
import pandas as pd
import pytest
import sklearn
import xgboost

from ads.hpo.stopping_criterion import *
from ads.hpo.distributions import *
from ads.hpo.search_cv import ADSTuner, NotResumableError

from lightgbm import LGBMClassifier
from sklearn import preprocessing
```

(continues on next page)

(continued from previous page)

```

from sklearn.compose import ColumnTransformer
from sklearn.datasets import load_iris, load_boston
from sklearn.decomposition import PCA
from sklearn.ensemble import AdaBoostRegressor, AdaBoostClassifier
from sklearn.impute import SimpleImputer
from sklearn.linear_model import SGDClassifier, LogisticRegression
from sklearn.metrics import make_scorer, f1_score
from sklearn.model_selection import train_test_split
from sklearn.pipeline import Pipeline
from sklearn.preprocessing import StandardScaler
from sklearn.feature_selection import SelectKBest, f_classif
from xgboost import XGBClassifier

```

This is an example of running the ADSTuner on a support model SGD from sklearn:

```

model = SGDClassifier() ##Initialize the model
X, y = load_iris(return_X_y=True)
X_train, X_valid, y_train, y_valid = train_test_split(X, y)
tuner = ADSTuner(model, cv=3) ## cv is cross validation splits
tuner.search_space() ##This is the default search space
tuner.tune(X_train, y_train, exit_criterion=[NTrials(10)])

```

ADSTuner generates a tuning report that lists its trials, best performing hyperparameters, and performance statistics with:

```

[I 2020-10-23 21:56:17,630] Trial 9 finished with value: 0.8316737790422001 and parameters: {'alpha': 0.0002576226059719444, 'penalty': 'l2'}. Best is trial 9 with value: 0.8316737790422001.
[I 2020-10-23 21:56:17,674] Trial 5 finished with value: 0.9106211474632527 and parameters: {'alpha': 0.07161796713234189, 'penalty': 'l2'}. Best is trial 5 with value: 0.9106211474632527.
[I 2020-10-23 21:56:17,792] Trial 3 finished with value: 0.9642010431484116 and parameters: {'alpha': 0.006158601374396708, 'penalty': 'none'}. Best is trial 3 with value: 0.9642010431484116.
[I 2020-10-23 21:56:17,891] Trial 4 finished with value: 0.7956377430061642 and parameters: {'alpha': 0.0008008011222908228, 'penalty': 'l2'}. Best is trial 3 with value: 0.9642010431484116.
[I 2020-10-23 21:56:17,903] Trial 6 finished with value: 0.9551920341394027 and parameters: {'alpha': 0.002629113116871369, 'penalty': 'l1'}. Best is trial 3 with value: 0.9642010431484116.
[I 2020-10-23 21:56:17,937] Trial 7 finished with value: 0.9642010431484116 and parameters: {'alpha': 0.0007283968106220585, 'penalty': 'none'}. Best is trial 3 with value: 0.9642010431484116.
[I 2020-10-23 21:56:17,940] Trial 1 finished with value: 0.9551920341394026 and parameters: {'alpha': 0.0003638169088886491, 'penalty': 'l1'}. Best is trial 3 with value: 0.9642010431484116.
[I 2020-10-23 21:56:17,955] Trial 2 pruned. trial was pruned at iteration 99.
[I 2020-10-23 21:56:18,097] Trial 8 finished with value: 0.9732100521574205 and parameters: {'alpha': 0.006335356664818435, 'penalty': 'l1'}. Best is trial 8 with value: 0.9732100521574205.
[I 2020-10-23 21:56:18,101] Trial 0 finished with value: 0.9642010431484116 and parameters: {'alpha': 0.0013210136796797667, 'penalty': 'l1'}. Best is trial 8 with value: 0.9732100521574205.
CPU times: user 16.4 s, sys: 8.99 s, total: 25.3 s
Wall time: 16.4 s

```

You can use `tuner.best_score` to get the best score on the scoring metric used (accessible as `tuner.scoring_name`). The best selected parameters are obtained with `tuner.best_params` and the complete record of trials with `tuner.trials`.

If you have further compute resources and want to continue hyperparameter optimization on a model that has already been optimized, you can use:

```

tuner.resume(exit_criterion=[TimeBudget(5)], loglevel=logging.NOTSET)
print('So far the best {} score is {}'.format(tuner.scoring_name, tuner.best_score))
print("The best trial found was number: " + str(tuner.best_index))

```

ADSTuner has some robust visualization and plotting capabilities:

```

tuner.plot_best_scores()
tuner.plot_intermediate_scores()
tuner.search_space()
tuner.plot_contour_scores(params=['penalty', 'alpha'])


```


(continues on next page)

(continued from previous page)

```
tuner.plot_parallel_coordinate_scores(params=['penalty', 'alpha'])
tuner.plot_edf_scores()
```

These commands produce the following plots:

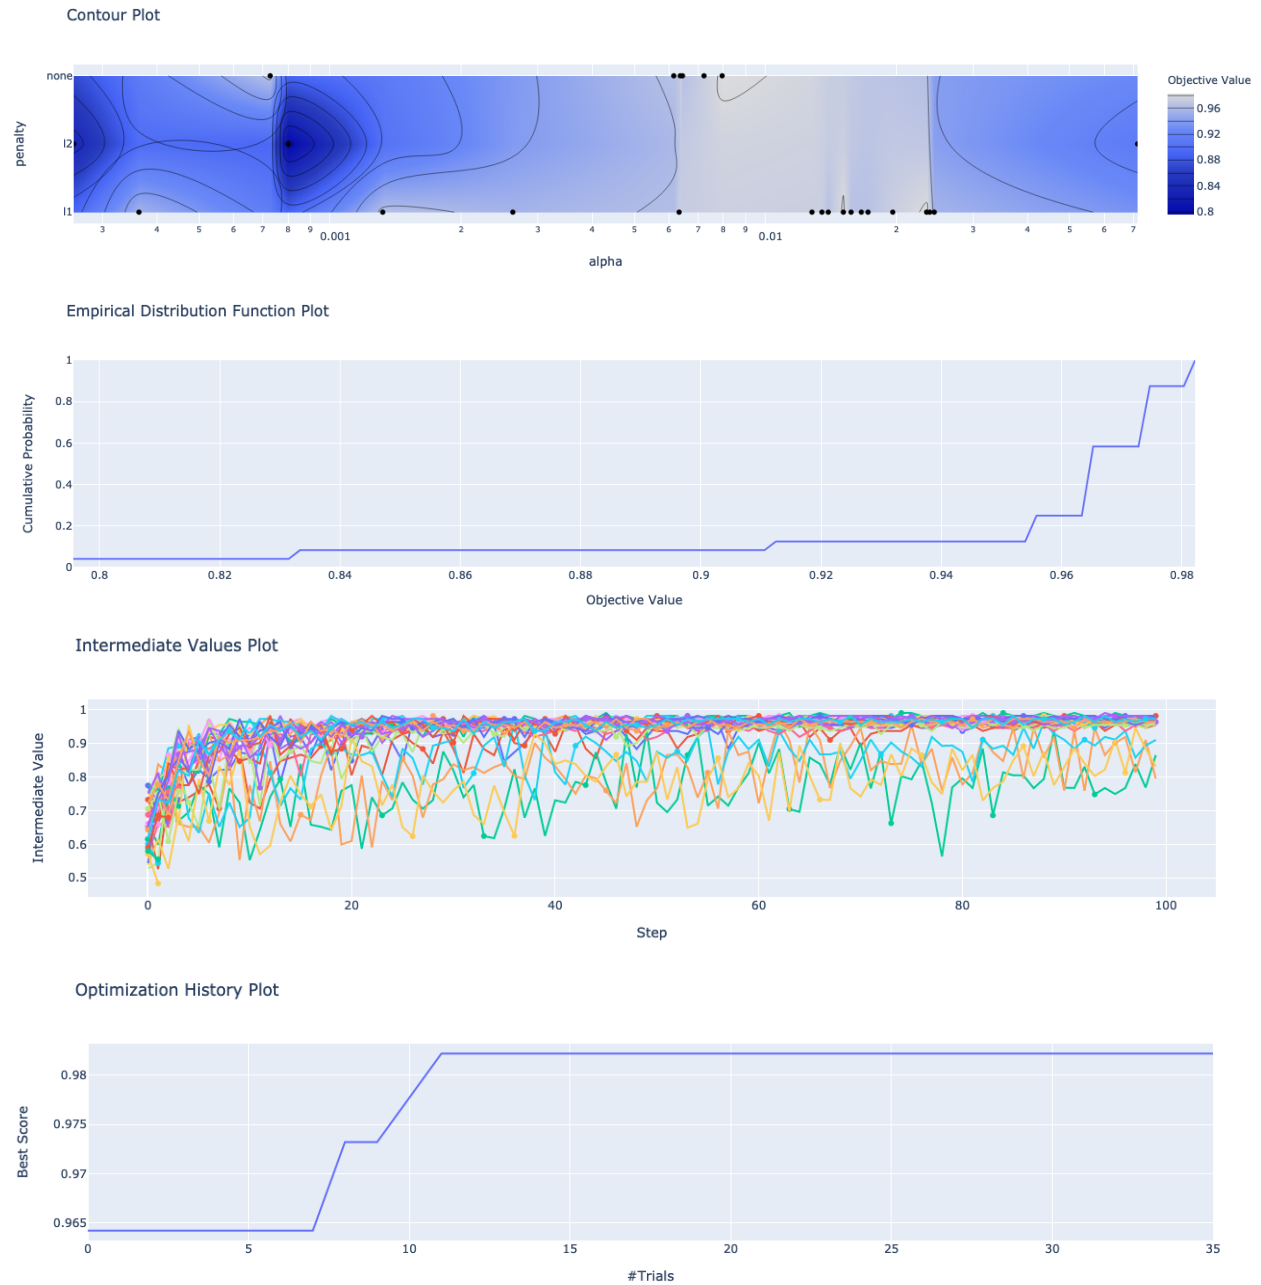

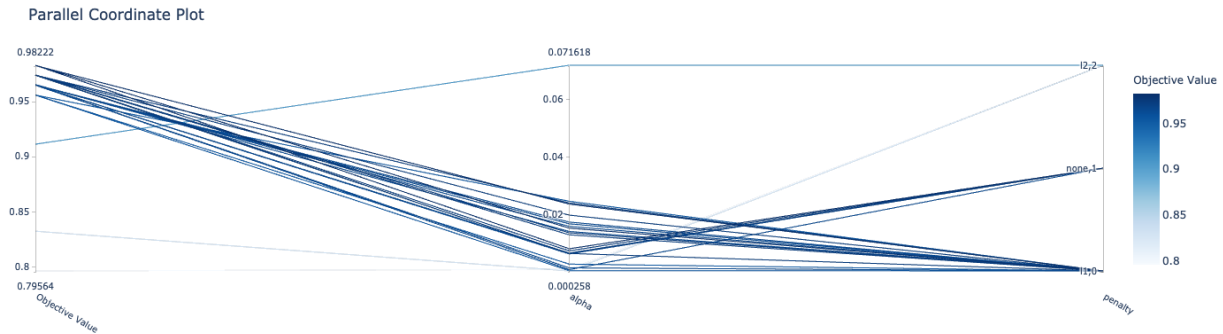

ADSTuner supports custom scoring functions and custom search spaces. This example uses a different model:

```
model2 = LogisticRegression()
tuner = ADSTuner(model2,
 strategy = {
 'C': LogUniformDistribution(low=1e-05, high=1),
 'solver': CategoricalDistribution(['saga']),
 'max_iter': IntUniformDistribution(500, 1000, 50)},
 scoring=make_scorer(f1_score, average='weighted'),
 cv=3)
tuner.tune(X_train, y_train, exit_criterion=[NTrials(5)])
```

ADSTuner doesn't support every model. The supported models are:

- 'Ridge',
- 'RidgeClassifier',
- 'Lasso',
- 'ElasticNet',
- 'LogisticRegression',
- 'SVC',
- 'SVR',
- 'LinearSVC',
- 'LinearSVR',
- 'DecisionTreeClassifier',
- 'DecisionTreeRegressor',
- 'RandomForestClassifier',
- 'RandomForestRegressor',
- 'GradientBoostingClassifier',
- 'GradientBoostingRegressor',
- 'XGBClassifier',
- 'XGBRegressor',
- 'ExtraTreesClassifier',
- 'ExtraTreesRegressor',
- 'LGBMClassifier',

- 'LGBMRegressor',
- 'SGDClassifier',
- 'SGDRegressor'

The AdaBoostRegressor model is not supported. This is an example of a custom strategy to use with this model:

```
model3 = AdaBoostRegressor()
X, y = load_boston(return_X_y=True)
X_train, X_valid, y_train, y_valid = train_test_split(X, y)
tuner = ADSTuner(model3, strategy={'n_estimators': IntUniformDistribution(50, 100)})
tuner.tune(X_train, y_train, exit_criterion=[TimeBudget(5)])
```

Finally, ADSTuner supports sklearn pipelines:

```
df, target = pd.read_csv(os.path.join('~', 'advanced-ds', 'tests', 'vor_datasets', 'vor_
↳ titanic.csv')), 'Survived'
X = df.drop(target, axis=1)
y = df[target]

numeric_features = X.select_dtypes(include=['int64', 'float64', 'int32', 'float32']).
↳ columns
categorical_features = X.select_dtypes(include=['object', 'category', 'bool']).columns

y = preprocessing.LabelEncoder().fit_transform(y)

X_train, X_valid, y_train, y_valid = train_test_split(X, y, test_size=0.3, random_
↳ state=42)

num_features = len(numeric_features) + len(categorical_features)

numeric_transformer = Pipeline(steps=[
 ('num_imputer', SimpleImputer(strategy='median')),
 ('num_scaler', StandardScaler())
])

categorical_transformer = Pipeline(steps=[
 ('cat_imputer', SimpleImputer(strategy='constant', fill_value='missing')),
 ('cat_encoder', ce.woe.WOEEncoder())
])

preprocessor = ColumnTransformer(
 transformers=[
 ('num', numeric_transformer, numeric_features),
 ('cat', categorical_transformer, categorical_features)
]
)

pipe = Pipeline(
 steps=[
 ('preprocessor', preprocessor),
 ('feature_selection', SelectKBest(f_classif, k=int(0.9 * num_features))),
 ('classifier', LogisticRegression())
]
)
```

(continues on next page)

(continued from previous page)

```
)

def customize_score(y_true, y_pred, sample_weight=None):
 score = y_true == y_pred
 return np.average(score, weights=sample_weight)

score = make_scorer(customize_score)
ads_search = ADSTuner(
 pipe,
 scoring=score,
 strategy='detailed',
 cv=2,
 random_state=42
)
ads_search.tune(X=X_train, y=y_train, exit_criterion=[NTrials(20)])
```

### 11.1.1 Notebook Example: Hyperparameter Optimization with ADSTuner

#### Overview:

A hyperparameter is a parameter that is used to control a learning process. This is in contrast to other parameters that are learned in the training process. The process of hyperparameter optimization is to search for hyperparameter values by building many models and assessing their quality. This notebook provides an overview of the ADSTuner hyperparameter optimization engine. ADSTuner can optimize any estimator object that follows the [scikit-learn API](#).

#### Objectives:

- Introduction
  - Synchronous Tuning with Exit Criterion Based on Number of Trials
  - Asynchronously Tuning with Exit Criterion Based on Time Budget
  - Inspecting the Tuning Trials
- Defining a Custom Search Space and Score
  - Changing the Search Space Strategy
- Optimizing a scikit-learn Pipeline()
- References

---

#### Important:

Placeholder text for required values are surrounded by angle brackets that must be removed when adding the indicated content. For example, when adding a database name to `database_name = "<database_name>"` would become `database_name = "production"`.

---

Datasets are provided as a convenience. Datasets are considered third party content and are not considered materials under your agreement with Oracle applicable to the services. The iris dataset is distributed under the [BSD license](#).

```

import category_encoders as ce
import lightgbm
import logging
import numpy as np
import os
import pandas as pd
import sklearn
import time

from ads.hpo.stopping_criterion import *
from ads.hpo.distributions import *
from ads.hpo.search_cv import ADSTuner, State

from sklearn import preprocessing
from sklearn.compose import ColumnTransformer
from sklearn.datasets import load_iris, load_boston
from sklearn.decomposition import PCA
from sklearn.impute import SimpleImputer
from sklearn.linear_model import SGDClassifier, LogisticRegression
from sklearn.metrics import make_scorer, f1_score
from sklearn.model_selection import train_test_split
from sklearn.pipeline import Pipeline
from sklearn.preprocessing import StandardScaler
from sklearn.feature_selection import SelectKBest, f_classif

```

## Introduction

Hyperparameter optimization requires a model, dataset, and an ADSTuner object to perform the search.

`ADSTuner()` Performs a hyperparameter search using [cross-validation](#). You can specify the number of folds you want to use with the `cv` parameter.

Because the `ADSTuner()` needs a search space in which to tune the hyperparameters, you must use the `strategy` parameter. This parameter can be set in two ways. You can specify detailed search criteria or you can use the built-in defaults. For the supported model classes, ADSTuner provides `perfunctory` and `detailed` search spaces that are optimized for the chosen class of model. The `perfunctory` option is optimized for a small search space so that the most important hyperparameters are tuned. Generally, this option is used early in your search as it reduces the computational cost and allows you to assess the quality of the model class that you are using. The `detailed` search space instructs ADSTuner to cover a broad search space by tuning more hyperparameters. Typically, you would use it when you have determined what class of model is best suited for the dataset and type of problem you are working on. If you have experience with the dataset and have a good idea of what the best hyperparameter values are, you can explicitly specify the search space. You pass a dictionary that defines the search space into the `strategy`.

The parameter `storage` takes a database URL. For example, `sqlite:///home/datascience/example.db`. When `storage` is set to the default value `None`, a new `sqlite` database file is created internally in the `tmp` folder with a unique name. The name format is `sqlite:///tmp/hpo_*.db`. `study_name` is the name of this study for this ADSTuner object. Each ADSTuner object has a unique `study_name`. However, one database file can be shared among different ADSTuner objects. `load_if_exists` controls whether to load an existing study from an existing database file. If `False`, it raises a `DuplicatedStudyError` when the `study_name` exists.

The `loglevel` parameter controls the amount of logging information displayed in the notebook.

This notebook uses the `scikit-learn` `SGDClassifier()` model and the `iris` dataset. This model object is a regularized linear model with [stochastic gradient descent](#) (SGD) used to optimize the model parameters.

The next cell creates the `SGDClassifier()` model, initialize an ADSTuner object, and loads the `iris` data.

```
tuner = ADSTuner(SGDClassifier(), cv=3, loglevel=logging.WARNING)
X, y = load_iris(return_X_y=True)
```

```
[32m[I 2021-04-21 20:04:03,435][0m A new study created with name: hpo_22cfd4d5-c512-4e84-
↪b7f8-d6d9c721ff05[0m
```

Each model class has a set of hyperparameters that you need to optimized. The `strategy` attribute returns what strategy is being used. This can be `perfunctory`, `detailed`, or a dictionary that defines the strategy. The method `search_space()` always returns a dictionary of hyperparameters that are to be searched. Any hyperparameter that is required by the model, but is not listed, uses the default value that is defined by the model class. To see what search space is being used for your model class when `strategy` is `perfunctory` or `detailed` use the `search_space()` method to see the details.

The `adstuner_search_space_update.ipynb` notebook has detailed examples about how to work with and update the search space.

The next cell displaces the search strategy and the search space.

```
print(f'Search Space for strategy "{tuner.strategy}" is: \n {tuner.search_space()}')
```

```
Search Space for strategy "perfunctory" is:
{'alpha': LogUniformDistribution(low=0.0001, high=0.1), 'penalty':
↪CategoricalDistribution(choices=['l1', 'l2', 'none'])}
```

The `tune()` method starts a tuning process. It has a synchronous and asynchronous mode for tuning. The mode is set with the `synchronous` parameter. When it is set to `False`, the tuning process runs asynchronously so it runs in the background and allows you to continue your work in the notebook. When `synchronous` is set to `True`, the notebook is blocked until `tune()` finishes running. The `adntuner_sync_and_async.ipynb` notebook illustrates this feature in a more detailed way.

The `ADSTuner` object needs to know when to stop tuning. The `exit_criterion` parameter accepts a list of criteria that cause the tuning to finish. If any of the criteria are met, then the tuning process stops. Valid exit criteria are:

- `NTrials(n)`: Run for `n` number of trials.
- `TimeBudget(t)`: Run for `t` seconds.
- `ScoreValue(s)`: Run until the score value exceeds `s`.

The default behavior is to run for 50 trials (`NTrials(50)`).

The stopping criteria are listed in the `ads.hpo.stopping_criterion` module.

### Synchronous Tuning with Exit Criterion Based on Number of Trials

This section demonstrates how to perform a synchronous tuning process with the exit criteria based on the number of trials. In the next cell, the `synchronous` parameter is set to `True` and the `exit_criterion` is set to `[NTrials(5)]`.

```
tuner.tune(X, y, exit_criterion=[NTrials(5)], synchronous=True)
```

You can access a summary of the trials by looking at the various attributes of the `tuner` object. The `scoring_name` attribute is a string that defines the name of the scoring metric. The `best_score` attribute gives the best score of all the completed trials. The `best_params` parameter defines the values of the hyperparameters that have to lead to the best score. Hyperparameters that are not in the search criteria are not reported.

```
print(f"So far the best {tuner.scoring_name} score is {tuner.best_score} and the best
↪hyperparameters are {tuner.best_params}")
```



So far the best mean accuracy score is 0.966666666666667 and the best hyperparameters are {'alpha': 0.002623793623610696, 'penalty': 'none'}

You can also look at the detailed table of all the trials attempted:

```
tuner.trials.tail()
```

### Asynchronously Tuning with Exit Criterion Based on Time Budget

ADSTuner() tuner can be run in an asynchronous mode by setting `synchronous=False` in the `tune()` method. This allows you to run other Python commands while the tuning process is executing in the background. This section demonstrates how to run an asynchronous search for the optimal hyperparameters. It uses a stopping criteria of five seconds. This is controlled by the parameter `exit_criterion=[TimeBudget(5)]`.

The next cell starts an asynchronous tuning process. A loop is created that prints the best search results that have been detected so far by using the `best_score` attribute. It also displays the remaining time in the time budget by using the `time_remaining` attribute. The attribute `status` is used to exit the loop.

```
This cell will return right away since it's running asynchronously.
tuner.tune(exit_criterion=[TimeBudget(5)])
while tuner.status == State.RUNNING:
 print(f"So far the best score is {tuner.best_score} and the time left is {tuner.time_
 remaining}")
 time.sleep(1)
```

```
So far the best score is 0.966666666666667 and the time left is 4.977275848388672
So far the best score is 0.966666666666667 and the time left is 3.9661824703216553
So far the best score is 0.966666666666667 and the time left is 2.9267797470092773
So far the best score is 0.966666666666667 and the time left is 1.912914752960205
So far the best score is 0.973333333333333 and the time left is 0.9021461009979248
So far the best score is 0.973333333333333 and the time left is 0
```

The attribute `best_index` give you the index in the `trials` data frame where the best model is located.

```
tuner.trials.loc[tuner.best_index, :]
```

```
number 10
value 0.98
datetime_start 2021-04-21 20:04:17.013347
datetime_complete 2021-04-21 20:04:18.623813
duration 0 days 00:00:01.610466
params_alpha 0.014094
params_penalty 11
user_attrs_mean_fit_time 0.16474
user_attrs_mean_score_time 0.024773
user_attrs_mean_test_score 0.98
user_attrs_metric mean accuracy
user_attrs_split0_test_score 1.0
user_attrs_split1_test_score 1.0
user_attrs_split2_test_score 0.94
user_attrs_std_fit_time 0.006884
user_attrs_std_score_time 0.00124
user_attrs_std_test_score 0.028284
```

(continues on next page)

(continued from previous page)

```
state COMPLETE
Name: 10, dtype: object
```

The attribute `n_trials` reports the number of successfully completed trials.

```
print(f"The total of trials was: {tuner.n_trials}.")
```

```
The total of trials was: 11.
```

### Inspecting the Tuning Trials

You can inspect the tuning trials performance using several built-in plots.

**Note:** If the tuning process is still running in the background, the plot runs in real time to update the new changes until the tuning process completes.

```
tuner.tune(exit_criterion=[NTrials(5)], loglevel=logging.WARNING) # uncomment this
↪ line to see the real-time plot.
tuner.plot_best_scores()
```

```
tuner.plot_intermediate_scores()
```

```
tuner.plot_contour_scores(params=['penalty', 'alpha'])
```

```
tuner.plot_parallel_coordinate_scores(params=['penalty', 'alpha'])
```

```
tuner.plot_edf_scores()
```

```
tuner.plot_param_importance()
```

Waiting **for** more trials before evaluating the param importance.

### Defining a Custom Search Space and Score

Instead of using a `perfunctory` or detailed strategy, define a custom search space strategy.

The next cell, creates a `LogisticRegression()` model instance then defines a custom search space strategy for the three `LogisticRegression()` hyperparameters, `C`, `solver`, and `max_iter` parameters.

You can define a custom scoring parameter, see `Optimizing a scikit-learn Pipeline()` though this example uses the standard weighted average  $F_1$ , `f1_score`.

```
tuner = ADSTuner(LogisticRegression(),
 strategy = {'C': LogUniformDistribution(low=1e-05, high=1),
 'solver': CategoricalDistribution(['saga']),
 'max_iter': IntUniformDistribution(500, 2000, 50)},
 scoring=make_scorer(f1_score, average='weighted'),
 cv=3)
tuner.tune(X, y, exit_criterion=[NTrials(5)], synchronous=True, loglevel=logging.WARNING)
```

### Changing the Search Space Strategy

You can change the search space in the following three ways:

- Add new hyperparameters

- Remove existing hyperparameters
- Modify the range of existing non-categorical hyperparameters

**Note:** You can't change the distribution of an existing hyperparameter or make any changes to a hyperparameter that is based on a categorical distribution. You need to initiate a new ADSTuner object for those cases. For more detailed information, review the `adstuner_search_space_update.ipynb` notebook.

The next cell switches to a detailed strategy. All previous values set for `C`, `solver`, and `max_iter` are kept, and ADSTuner infers distributions for the remaining hyperparameters. You can force an overwrite by setting `overwrite=True`.

```
tuner.search_space(strategy='detailed')
```

```
{'C': LogUniformDistribution(low=1e-05, high=10),
'solver': CategoricalDistribution(choices=['saga']),
'max_iter': IntUniformDistribution(low=500, high=2000, step=50),
'dual': CategoricalDistribution(choices=[False]),
'penalty': CategoricalDistribution(choices=['elasticnet']),
'l1_ratio': UniformDistribution(low=0, high=1)}
```

Alternatively, you can edit a subset of the search space by changing the range.

```
tuner.search_space(strategy={'C': LogUniformDistribution(low=1e-05, high=1)})
```

```
{'C': LogUniformDistribution(low=1e-05, high=1),
'solver': CategoricalDistribution(choices=['saga']),
'max_iter': IntUniformDistribution(low=500, high=2000, step=50),
'dual': CategoricalDistribution(choices=[False]),
'penalty': CategoricalDistribution(choices=['elasticnet']),
'l1_ratio': UniformDistribution(low=0, high=1)}
```

Here's an example of using `overwrite=True` to reset to the default values for detailed:

```
tuner.search_space(strategy='detailed', overwrite=True)
```

```
{'C': LogUniformDistribution(low=1e-05, high=10),
'dual': CategoricalDistribution(choices=[False]),
'penalty': CategoricalDistribution(choices=['elasticnet']),
'solver': CategoricalDistribution(choices=['saga']),
'l1_ratio': UniformDistribution(low=0, high=1)}
```

```
tuner.tune(X, y, exit_criterion=[NTrials(5)], synchronous=True, loglevel=logging.WARNING)
```

### Optimizing a scikit-learn Pipeline

The following example demonstrates how the ADSTuner hyperparameter optimization engine can optimize the `sklearn Pipeline()` objects.

You create a scikit-learn `Pipeline()` model object and use ADSTuner to optimize its performance on the iris dataset from sklearn.

The dataset is then split into `X` and `y`, which refers to the training features and the target feature respectively. Again, applying a `train_test_split()` call splits the data into training and validation datasets.

```

X, y = load_iris(return_X_y=True)
X = pd.DataFrame(data=X, columns=["sepal_length", "sepal_width", "petal_length", "petal_
↪width"])
y = pd.DataFrame(data=y)

numeric_features = X.select_dtypes(include=['int64', 'float64', 'int32', 'float32']).
↪columns
categorical_features = y.select_dtypes(include=['object', 'category', 'bool']).columns

y = preprocessing.LabelEncoder().fit_transform(y)

num_features = len(numeric_features) + len(categorical_features)

numeric_transformer = Pipeline(steps=[
 ('num_imputer', SimpleImputer(strategy='median')),
 ('num_scaler', StandardScaler())
])

categorical_transformer = Pipeline(steps=[
 ('cat_imputer', SimpleImputer(strategy='constant', fill_value='missing')),
 ('cat_encoder', ce.woe.WOEEncoder())
])

preprocessor = ColumnTransformer(
 transformers=[
 ('num', numeric_transformer, numeric_features),
 ('cat', categorical_transformer, categorical_features)
]
)

pipe = Pipeline(
 steps=[
 ('preprocessor', preprocessor),
 ('feature_selection', SelectKBest(f_classif, k=int(0.9 * num_features))),
 ('classifier', LogisticRegression())
]
)

```

You can define a custom score function. In this example, it is directly measuring how close the predicted y-values are to the true y-values by taking the weighted average of the number of direct matches between the y-values.

```

def custom_score(y_true, y_pred, sample_weight=None):
 score = (y_true == y_pred)
 return np.average(score, weights=sample_weight)

score = make_scorer(custom_score)

```

Again, you instantiate the `ADSTuner()` object and use it to tune the iris` dataset:

```

ads_search = ADSTuner(
 pipe,
 scoring=score,
 strategy='detailed',

```

(continues on next page)

(continued from previous page)

```

cv=2,
random_state=42)

ads_search.tune(X=X, y=y, exit_criterion=[NTrials(20)], synchronous=True,
↳ loglevel=logging.WARNING)

```

The `ads_search` tuner can provide useful information about the tuning process, like the best parameter that was optimized, the best score achieved, the number of trials, and so on.

```
ads_search.sklearn_steps
```

```
{'classifier__C': 9.47220908749299,
 'classifier__dual': False,
 'classifier__l1_ratio': 0.9967712201895031,
 'classifier__penalty': 'elasticnet',
 'classifier__solver': 'saga'}
```

```
ads_search.best_params
```

```
{'C': 9.47220908749299,
 'dual': False,
 'l1_ratio': 0.9967712201895031,
 'penalty': 'elasticnet',
 'solver': 'saga'}
```

```
ads_search.best_score
```

```
0.9733333333333334
```

```
ads_search.best_index
```

```
12
```

```
ads_search.trials.head()
```

```
ads_search.n_trials
```

```
20
```

## References

- [ADS Library Documentation](#)
- [Cross-Validation](#)
- [OCI Data Science Documentation](#)
- [Oracle Data & AI Blog](#)
- [Stochastic Gradient Descent](#)

## 11.2 Training with OCI

Oracle Cloud Infrastructure (OCI) [Data Science Jobs \(Jobs\)](#) enables you to define and run repeatable machine learning tasks on a fully managed infrastructure. You can have Compute resource on demand and run applications that perform tasks such as data preparation, model training, hyperparameter tuning, and batch inference.

Here is an example for training RNN on [Word-level Language Modeling](#), using the source code directly from GitHub.

Listing 1: Python

```
from ads.jobs import Job, DataScienceJob, GitPythonRuntime

job = (
 Job(name="Training RNN with PyTorch")
 .with_infrastructure(
 DataScienceJob()
 # Configure logging for getting the job run outputs.
 .with_log_group_id("<log_group_ocid>")
 # Log resource will be auto-generated if log ID is not specified.
 .with_log_id("<log_ocid>")
 # If you are in an OCI data science notebook session,
 # the following configurations are not required.
 # Configurations from the notebook session will be used as defaults.
 .with_compartment_id("<compartment_ocid>")
 .with_project_id("<project_ocid>")
 .with_subnet_id("<subnet_ocid>")
 .with_shape_name("VM.Standard.E3.Flex")
 # Shape config details are applicable only for the flexible shapes.
 .with_shape_config_details(memory_in_gbs=16, ocpus=1)
 # Minimum/Default block storage size is 50 (GB).
 .with_block_storage_size(50)
)
 .with_runtime(
 GitPythonRuntime(skip_metadata_update=True)
 # Use service conda pack
 .with_service_conda("pytorch110_p38_gpu_v1")
 # Specify training source code from GitHub
 .with_source(url="https://github.com/pytorch/examples.git", branch="main")
 # Entrypoint is a relative path from the root of the Git repository
 .with_entrypoint("word_language_model/main.py")
 # Pass the arguments as: "--epochs 5 --save model.pt --cuda"
 .with_argument(epochs=5, save="model.pt", cuda=None)
 # Set working directory, which will also be added to PYTHONPATH
 .with_working_dir("word_language_model")
 # Save the output to OCI object storage
 # output_dir is relative to working directory
 .with_output(output_dir=".", output_uri="oci://bucket@namespace/prefix")
)
)
```

Listing 2: YAML

```
kind: job
```

(continues on next page)

(continued from previous page)

```

spec:
 name: "My Job"
 infrastructure:
 kind: infrastructure
 type: dataScienceJob
 spec:
 blockSize: 50
 compartmentId: <compartment_ocid>
 jobInfrastructureType: STANDALONE
 logGroupId: <log_group_ocid>
 logId: <log_ocid>
 projectId: <project_ocid>
 shapeConfigDetails:
 memoryInGBs: 16
 ocpus: 1
 shapeName: VM.Standard.E3.Flex
 subnetId: <subnet_ocid>
 runtime:
 kind: runtime
 type: gitPython
 spec:
 args:
 - --epochs
 - '5'
 - --save
 - model.pt
 - --cuda
 branch: main
 conda:
 slug: pytorch110_p38_gpu_v1
 type: service
 entrypoint: word_language_model/main.py
 outputDir: .
 outputUri: oci://bucket@namespace/prefix
 skipMetadataUpdate: true
 url: https://github.com/pytorch/examples.git
 workingDir: word_language_model

```

```

Create the job on OCI Data Science
job.create()
Start a job run
run = job.run()
Stream the job run outputs
run.watch()

```

The job run will:

- Setup the PyTorch conda environment
- Fetch the source code from GitHub
- Run the training script with the specific arguments
- Save the outputs to OCI object storage

Following are the example outputs of the job run:

```
2023-02-27 20:26:36 - Job Run ACCEPTED
2023-02-27 20:27:05 - Job Run ACCEPTED, Infrastructure provisioning.
2023-02-27 20:28:27 - Job Run ACCEPTED, Infrastructure provisioned.
2023-02-27 20:28:53 - Job Run ACCEPTED, Job run bootstrap starting.
2023-02-27 20:33:05 - Job Run ACCEPTED, Job run bootstrap complete. Artifact execution_
↳starting.
2023-02-27 20:33:08 - Job Run IN_PROGRESS, Job run artifact execution in progress.
2023-02-27 20:33:31 - | epoch 1 | 200/ 2983 batches | lr 20.00 | ms/batch 8.41 | ↳
↳loss 7.63 | ppl 2064.78
2023-02-27 20:33:32 - | epoch 1 | 400/ 2983 batches | lr 20.00 | ms/batch 8.23 | ↳
↳loss 6.86 | ppl 949.18
2023-02-27 20:33:34 - | epoch 1 | 600/ 2983 batches | lr 20.00 | ms/batch 8.21 | ↳
↳loss 6.47 | ppl 643.12
2023-02-27 20:33:36 - | epoch 1 | 800/ 2983 batches | lr 20.00 | ms/batch 8.22 | ↳
↳loss 6.29 | ppl 537.11
2023-02-27 20:33:37 - | epoch 1 | 1000/ 2983 batches | lr 20.00 | ms/batch 8.22 | ↳
↳loss 6.14 | ppl 462.61
2023-02-27 20:33:39 - | epoch 1 | 1200/ 2983 batches | lr 20.00 | ms/batch 8.21 | ↳
↳loss 6.05 | ppl 425.85
...
2023-02-27 20:35:41 - ↳
↳=====
2023-02-27 20:35:41 - | End of training | test loss 4.96 | test ppl 142.94
2023-02-27 20:35:41 - ↳
↳=====
...
```

For more details, see:

- [Data Science Jobs](#)
- [Run Code from Git Repo](#)

## 11.3 Distributed Training

---

### Distributed Training with OCI Data Science

This documentation shows you how to preprocess, and train on a machine learning model, using Oracle Cloud Infrastructure. This section will not teach you about distributed training, instead it will help you run your existing distributed training code on OCI Data Science.

---

Distributed training is the process of taking a training workload which comprises training code and training data and making both of these available in a cluster.

The conceptual difference with distributed training is that multiple workers coordinated in a cluster running on multiple VM instances allows horizontal scaling of parallelizable tasks. While single node training is well suited to traditional ML models, very large datasets or compute intensive workloads like deep learning and deep neural networks, tends to be better suited to distributed computing environments.

Distributed Training benefits two classes of problem, one where the data is parallelizable, the other where the model network is parallelizable. The most common and easiest to develop is data parallelism. Both forms of parallelism can be combined to handle both large models and large datasets.



### Data Parallelism

In this form of distributed training the training data is partitioned into some multiple of the number of nodes in the compute cluster. Each node holds the model and is in communication with other node participating in a coordinated optimization effort.

Sometimes data sampling is possible, but often at the expense of model accuracy. With distributed training you can avoid having to sample the data to fit a single node.

### Model Parallelism

This form of distributed training is used when workers need to worker nodes need to synchronize and share parameters. The data fits into the memory of each worker, but the training takes too long. With model parallelism more epochs can run and more hyper-parameters can be explored.

### Distributed Training with OCI Data Science

To outline the process by which you create distributed training workloads is the same regardless of framework used. Sections of the configuration differ between frameworks but the experience is consistent. The user brings only the (framework specific) training python code, along with the yaml declarative definition.

ADS makes use of yaml to express configurations. The yaml specification has sections to describe the cluster infrastructure, the python runtime code, and the cluster framework.

The architecture is extensible to support well known frameworks and future versions of these. The set of service provided frameworks for distributed training include:

- [Dask](#) for LightGBM, XGBoost, Scikit-Learn, and Dask-ML
- [Horovod](#) for PyTorch & Tensorflow
- [PyTorch Distributed](#) for PyTorch native using DistributedDataParallel - no training code changes to run PyTorch model training on a cluster. You can use Horovod to do the same, which has some advanced features like auto-tuning to improve allreduce performance, and fp16 gradient compression.
- [Tensorflow Distributed](#) for Tensorflow distributed training strategies like MirroredStrategy, MultiWorkerMirroredStrategy and ParameterServerStrategy

## 11.3.1 Getting Started

### 11.3.1.1 Key Steps

1. Initialize the code workspace to prepare for distributed training
2. Build container image
3. Tag and Push the image to ocir
4. Define the cluster requirement using *YAML Spec*
5. Start distributed training using `ads opctl run -f <yaml file>`
6. Monitor the job using `ads jobs watch <main job run id>`

### 11.3.1.2 Prepare container image for distributed workload

#### Prerequisite:

1. Internet Connection
2. ADS cli is *installed*
3. Docker engine

```
ads opctl distributed-training init --framework <framework choice>
```

To run a distributed workload on OCI Data Science Jobs, you need prepare a container image with the source code that you want to run and the framework (Dask|Horovod|PyTorch) setup. OCI Data Science provides you with the Dockerfiles and bootstrapping scripts to build framework specific container images. This step creates a folder in the current working directory called `oci_distributed_training`. This folder contains all the artifacts required to setup and bootstrap the framework code. Refer to `README.md` file to see more details on how to build and push the container image to the ocir

### 11.3.1.3 Check Config File generated by the Main and the Worker Nodes

#### Prerequisite:

1. A cluster that is in In-Progress, Succeeded or Failed (Supported only in some cases)
2. Job OCID and the `work_dir` of the cluster or a yaml file which contains all the details displayed during cluster creation.

```
ads opctl distributed-training show-config -f <cluster yaml file>
```

The main node generates `MAIN_config.json` and worker nodes generate `WORKER_<job_run_ocid>_config.json`. You may want to check the configuration details for find the IP address of the Main node. This can be useful to bring up dashboard for dask or debugging.

## 11.3.2 Configurations

### 11.3.2.1 Networks

You need to use a private subnet for distributed training and configure the security list to allow traffic through specific ports for communication between nodes. The following default ports are used by the corresponding frameworks:

- *Dask*:
  - Scheduler Port: **8786**. More information [here](#)
  - Dashboard Port: **8787**. More information [here](#)
  - Worker Ports: **Default is Random**. It is good to open a specific range of port and then provide the value in the startup option. More information [here](#)
  - Nanny Process Ports: **Default is Random**. It is good to open a specific range of port and then provide the value in the startup option. More information [here](#)
- *PyTorch*: By default, PyTorch uses **29400**.
- *Horovod*: allow TCP traffic on all ports within the subnet.
- *Tensorflow*: Worker Port: Allow traffic from all source ports to one worker port (default: 12345). If changed, provide this in `train.yaml` config.

See also: [Security Lists](#)

### 11.3.2.2 OCI Policies

Several OCI policies are needed for distributed training.

#### Policy subject

In the following example, group `<your_data_science_users>` is the subject of the policy. When starting the job from an OCI notebook session using resource principal, the subject should be `dynamic-group`, for example, `dynamic-group <your_notebook_sessions>`

Distributed training uses [OCI Container Registry](#) to store the container image.

To push images to container registry, the `manage repos` policy is needed, for example:

```
Allow group <your_data_science_users> to manage repos in compartment <your_compartment_
↪name>
```

To pull images from container registry for local testing, the `use repos` policy is needed, for example:

```
Allow group <your_data_science_users> to read repos in compartment <your_compartment_
↪name>
```

You can also restrict the permission to specific repository, for example:

```
Allow group <your_data_science_users> to read repos in compartment <your_compartment_
↪name> where all { target.repo.name=<your_repo_name> }
```

See also: [Policies to Control Repository Access](#)

To start distributed training jobs, the user will need access to multiple resources, including:

- read repos
- manage data-science-jobs
- manage data-science-job-runs
- use virtual-network-family
- manage log-groups
- use log-content
- read metrics

For example:

```
Allow group <your_data_science_users> to manage data-science-jobs in compartment <your_
↪compartment_name>
Allow group <your_data_science_users> to manage data-science-job-runs in compartment
↪<your_compartment_name>
Allow group <your_data_science_users> to use virtual-network-family in compartment <your_
↪compartment_name>
Allow group <your_data_science_users> to manage log-groups in compartment <your_
↪compartment_name>
Allow group <your_data_science_users> to use logging-family in compartment <your_
```

(continues on next page)

(continued from previous page)

```
↪compartment_name>
Allow group <your_data_science_users> to use read metrics in compartment <your_
↪compartment_name>
```

We also need policies for job runs, for example:

```
Allow dynamic-group <distributed_training_job_runs> to read repos in compartment <your_
↪compartment_name>
Allow dynamic-group <distributed_training_job_runs> to use data-science-family in_
↪compartment <your_compartment_name>
Allow dynamic-group <distributed_training_job_runs> to use virtual-network-family in_
↪compartment <your_compartment_name>
Allow dynamic-group <distributed_training_job_runs> to use log-groups in compartment
↪<your_compartment_name>
Allow dynamic-group <distributed_training_job_runs> to use logging-family in compartment
↪<your_compartment_name>
```

See also [Data Science Policies](#).

Distributed training uses OCI Object Storage to store artifacts and outputs. The bucket should be created before starting any distributed training. The `manage objects` policy is needed for users and job runs to read/write files in the bucket. The `manage buckets` policy is required for job runs to synchronize generated artifacts. For example:

```
Allow group <your_data_science_users> to manage objects in compartment your_compartment_
↪name where all {target.bucket.name=<your_bucket_name>}
Allow dynamic-group <distributed_training_job_runs> to manage objects in compartment_
↪your_compartment_name where all {target.bucket.name=<your_bucket_name>}
Allow dynamic-group <distributed_training_job_runs> to manage buckets in compartment_
↪your_compartment_name where all {target.bucket.name=<your_bucket_name>}
```

See also [Object Storage Policies](#)

### 11.3.2.3 Policy Syntax

The overall syntax of a policy statement is as follows:

```
Allow <subject> to <verb> <resource-type> in <location> where <conditions>
```

See also: <https://docs.oracle.com/en-us/iaas/Content/Identity/Concepts/policysyntax.htm>

For <subject>:

- If you are using API key authentication, <subject> should be the group your user belongs to. For example, `group <your_data_science_users>`.
- If you are using resource principal or instance principal authentication, <subject> should be the dynamic group to which your OCI resource belongs. Here the resource is where you initialize the API requests, which is usually a job run, a notebook session or compute instance. For example, `dynamic-group <distributed_training_job_runs>`

**Dynamic group** allows you to group OCI resources like job runs and notebook sessions. Distributed training is running on Data Science Jobs, for the training process to access resources, the job runs need to be defined as a dynamic group and use as the <subject> for policies.

In the following examples, we define `distributed_training_job_runs` dynamic group as:

```
all { resource.type='datasciencejobrun', resource.compartment.id='<job_run_compartment_ocid>'
}
```

We also assume the user in group `<your_data_science_users>` is preparing the docker image and starting the training job.

The `<verb>` determines the ability of the `<subject>` to work on the `<resource-type>`. Four options are available: inspect, read, user and manage.

The `<resource-type>` specifies the resources we would like to access. Distributed training uses the following OCI resources/services:

- **Data Science Jobs.** Resource Type: data-science-jobs and data-science-job-runs
- **Object Storage.** Resource Type: buckets and objects
- **Container Registry.** Resource Type: repos

The `<location>` is usually the compartment or tenancy that your resources (specified by `<resource-type>`) resides. \* If you would like the `<subject>` to have access to all resources (specified by `<resource-type>`) in the tenancy, you can use `tenancy` as `<location>`. \* If you would like the `<subject>` to have access to resources in specific compartment, you can use `compartment your_compartment_name` as `<location>`.

The where `<conditions>` can be used to filter the resources specified in `<resource-type>`.

### 11.3.3 Developer Guide

#### 11.3.3.1 Build Image

---

##### Tip

Use `-h` option to see options and usage help

```
ads opctl distributed-training build-image -h
```

---

##### Args

- `-t`: Tag of the docker image
- `-reg`: Docker Repository
- `-df`: Dockerfile using which docker will be build
- `-push`: push the image to oci registry
- `-s`: source code dir

```
ads opctl distributed-training build-image \
-t $TAG \
-reg $NAME_OF_REGISTRY \
-df $PATH_TO_DOCKERFILE \
-s $MOUNT_FOLDER_PATH
```

##### Note :

This command can be used to build a docker image from ads CLI. It writes the config.ini file in the user's runtime environment which can be used further referred by other CLI commands.

If `-push tag` is used in command then docker image is pushed to mentioned repository

*Sample config.ini file*

```
[main]
tag = $TAG
registry = $NAME_OF_REGISTRY
dockerfile = $PATH_TO_DOCKERFILE
source_folder = $MOUNT_FOLDER_PATH
; mount oci keys for local testing
oci_key_mnt = ~/.oci:/home/oci_dist_training/.oci
```

### 11.3.3.2 Publish Docker Image

#### Args

- -image: Name of the Docker image (default value is picked from config.ini file)

#### Command

```
ads opctl distributed-training publish-image
```

#### Note

This command can be used to push images to the OCI repository. In case the name of the image is not mentioned it refers to the image name from the config.ini file.

### 11.3.3.3 Run the container Image on the OCI Data Science or local

---

#### Tip

Use `-h` option to see options and usage help

```
ads opctl run -h
```

---

#### Args

- -f: Path to train.yaml file (required argument)
- -b :
  - local → Run DT workflow on the local environment
  - job → Run DT workflow on the OCI ML Jobs
  - **Note** : default value is set to jobs
- -i: Auto increments the tag of the image
- -nopush: Doesn't Push the latest image to OCIR
- -nobuild: Doesn't build the image
- -t: Tag of the docker image
- -reg: Docker Repository
- -df: Dockerfile using which docker will be build
- -s: source code dir

**Note :** The value “@image” for image attribute in train.yaml is replaced at runtime using combination of -t and -r params.

### Command

#### Local Command

```
ads opctl run
 -f train.yaml
 -b local
 -i
```

#### Jobs Command

```
ads opctl run
 -f train.yaml
```

### Note

The command `ads opctl run -f train.yaml` is used to run distributed training jobs on OCI Data Science. By default, it builds the new image and pushes it to the OCIR.

If required OCI API keys can be mounted by specifying the location in the config.ini file

#### 11.3.3.4 Development Flow

##### Step 1:

Build the Docker and run it locally.

If required mount the code folder using the -s tag

##### Step 2:

If the user has changed files only in the mounted folder and needs to run it locally. *{Build is not required}*

```
ads opctl run
 -f train.yaml
 -b local
 -nobuild
```

In case there are some changes apart from the mounted folder and needs to run it locally. *{Build is required}*

-i tag is required only if the user needs to increment the tag of the image

```
ads opctl run
 -f train.yaml
 -b local
 -i
```

##### Step 3:

Finally, to run on a jobs platform

```
ads opctl run
 -f train.yaml
```

### 11.3.3.5 Diagnosing Infrastructure Setup

Before submitting your code to Data Science Jobs, check if the infra setup meets the framework requirement. Each framework has a specific set of requirements.

`ads opctl check` runs diagnosis by starting a single node `jobrun` using the container image specified in the `train.yaml` file.

```
ads opctl check -f train.yaml --output infra_report.html
```

The `train.yaml` is the same yaml file that is defined for running distributed training code. The diagnostic report is saved in the file provided in `--output` option.

Here is a sample report generated for Horovod cluster -

## Diagnostic Report for horovod

#	Requirement	Status
1	Check if job run has access to Job definition information	✓
2	Check if job run has access to VCN information	✓
3	Check if job run has access to the WORK DIR (object storage) configured in the cluster definition file	✓
4	Check Ports for Ingress	✓
5	Check if internet access is available	✓

🌟 You have satisfied all the requirements for cluster: horovod 🌟.

### 11.3.4 Dask

Dask is a flexible library for parallel computing in Python. The documentation will split between the two areas of writing distributed training using the Dask framework and creating both the container and yaml spec to run the distributed workload.

---

#### Dask

This is a good choice when you want to use `Scikit-Learn`, `XGBoost`, `LightGBM` or have data parallel tasks for very large datasets where the data can be partitioned.

---



### 11.3.4.1 Creating Workloads

#### Prerequisites

1. Internet Connection
2. ADS cli is installed
3. Install docker: <https://docs.docker.com/get-docker>

#### Write your training code:

While running distributed workload, the IP address of the scheduler is known only during the runtime. The IP address is exported as environment variable - SCHEDULER\_IP in all the nodes when the Job Run is in *IN\_PROGRESS* state. Create `dask.distributed.Client` object using environment variable to specify the IP address. Eg. -

```
client = Client(f"{os.environ['SCHEDULER_IP']}:{os.environ.get('SCHEDULER_PORT','8786')}")
```

see *Writing Dask Code* for more examples.

For this example, the code to run on the cluster will be:

Listing 3: gridsearch.py

```
from dask.distributed import Client
from sklearn.datasets import make_classification
from sklearn.svm import SVC
from sklearn.model_selection import GridSearchCV

import pandas as pd
import joblib
import os
import argparse

default_n_samples = int(os.getenv("DEFAULT_N_SAMPLES", "1000"))

parser = argparse.ArgumentParser()
parser.add_argument("--n_samples", default=default_n_samples, type=int, help="size of dataset")
parser.add_argument("--cv", default=3, type=int, help="number of cross validations")
args, unknownargs = parser.parse_known_args()

Using environment variable to fetch the SCHEDULER_IP is important.
client = Client(f"{os.environ['SCHEDULER_IP']}:{os.environ.get('SCHEDULER_PORT','8786')}")

X, y = make_classification(n_samples=args.n_samples, random_state=42)

with joblib.parallel_backend("dask"):
 GridSearchCV(
 SVC(gamma="auto", random_state=0, probability=True),
 param_grid={
 "C": [0.001, 0.01, 0.1, 0.5, 1.0, 2.0, 5.0, 10.0],
 "kernel": ["rbf", "poly", "sigmoid"],
 "shrinking": [True, False],
 },
```

(continues on next page)

(continued from previous page)

```

 return_train_score=False,
 cv=args.cv,
 n_jobs=-1,
).fit(X, y)

```

**Initialize a distributed-training folder:**

At this point you have created a training file (or files) - `gridsearch.py` in the above example. Now running the command below

**Note:** This step requires an internet connection. The `init` command initializes your code directory with dask related artifacts to build

```
ads opctl distributed-training init --framework dask
```

**Containerize your code and build container:**

Before you can build the image, you must set the following environment variables:

Specify image name and tag

```
export IMAGE_NAME=<region.ocir.io/my-tenancy/image-name>
export TAG=latest
```

Build the container image.

```
ads opctl distributed-training build-image \
 -t $TAG \
 -reg $IMAGE_NAME \
 -df oci_dist_training_artifacts/dask/v1/Dockerfile
```

The code is assumed to be in the current working directory. To override the source code directory, use the `-s` flag and specify the code dir. This folder should be within the current working directory.

```
ads opctl distributed-training build-image \
 -t $TAG \
 -reg $IMAGE_NAME \
 -df oci_dist_training_artifacts/dask/v1/Dockerfile
 -s <code_dir>
```

If you are behind proxy, `ads opctl` will automatically use your proxy settings (defined via `no_proxy`, `http_proxy` and `https_proxy`).

**Define your workload yaml:**

The `yaml` file is a declarative way to express the workload. Refer [YAML schema](#) for more details.

Listing 4: `train.yaml`

```
kind: distributed
apiVersion: v1.0
spec:
 infrastructure:
 kind: infrastructure
 type: dataScienceJob
 apiVersion: v1.0
```

(continues on next page)

(continued from previous page)

```

spec:
 projectId: oci.xxxx.<project_ocid>
 compartmentId: oci.xxxx.<compartment_ocid>
 displayName: my_distributed_training
 logGroupId: oci.xxxx.<log_group_ocid>
 logId: oci.xxxx.<log_ocid>
 subnetId: oci.xxxx.<subnet-ocid>
 shapeName: VM.Standard2.4
 blockStorageSize: 50
cluster:
 kind: dask
 apiVersion: v1.0
 spec:
 image: my-region.ocir.io/my-tenancy/dask-cluster-examples:dev
 workDir: "oci://my-bucket@my-namespace/daskexample/001"
 name: GridSearch Dask
 main:
 config:
 worker:
 config:
 replicas: 2
runtime:
 kind: python
 apiVersion: v1.0
 spec:
 entryPoint: "gridsearch.py"
 kwargs: "--cv 5"
 env:
 - name: DEFAULT_N_SAMPLES
 value: 5000

```

**Use ads opctl to create the cluster infrastructure and run the workload:**

Do a dry run to inspect how the yaml translates to Job and Job Runs. This does not create actual Job or Job Run.

```
ads opctl run -f train.yaml --dry-run
```

This will give an option similar to this -

```

-----Entering dryrun mode-----
Creating Job with payload:
kind: job
spec:
 infrastructure:
 kind: infrastructure
 spec:
 blockStorageSize: 50
 compartmentId: oci.xxxx.<compartment_ocid>
 displayName: GridSearch Dask
 jobInfrastructureType: ME_STANDALONE
 jobType: DEFAULT
 logGroupId: oci.xxxx.<log_group_ocid>
 logId: oci.xxxx.<log_ocid>

```

(continues on next page)

(continued from previous page)

```

 projectId: oci.xxxx.<project_ocid>
 shapeName: VM.Standard2.4
 subnetId: oci.xxxx.<subnet-ocid>
 type: dataScienceJob
name: GridSearch Dask
runtime:
 kind: runtime
 spec:
 entrypoint: null
 env:
 - name: OCI__WORK_DIR
 value: oci://my-bucket@my-namespace/daskexample/001
 - name: OCI__EPHEMERAL
 value: None
 - name: OCI__CLUSTER_TYPE
 value: DASK
 - name: OCI__WORKER_COUNT
 value: '2'
 - name: OCI__START_ARGS
 value: ''
 - name: OCI__ENTRY_SCRIPT
 value: gridsearch.py
 - name: OCI__ENTRY_SCRIPT_KWARGS
 value: --cv 5
 - name: DEFAULT_N_SAMPLES
 value: '5000'
 image: my-region.ocir.io/my-tenancy/dask-cluster-examples:dev
 type: container

+++++
Creating Main Job with following details:
Name: main
Environment Variables:
 OCI__MODE:MAIN
~~~~~
Creating 2 worker jobs with following details:
Name: worker
Environment Variables:
  OCI__MODE:WORKER
-----Ending dryrun mode-----

```

**Test Locally:**

Before submitting the workload to jobs, you can run it locally to test your code, dependencies, configurations etc. With `-b local` flag, it uses a local backend. Further when you need to run this workload on OCI data science jobs, simply use `-b job` flag instead.

```
ads opctl run -f train.yaml -b local
```

If your code requires to use any oci services (like object bucket), you need to mount oci keys from your local host machine onto the container. This is already done for you assuming the typical location of oci keys `~/oci`. You can modify it though, in-case you have keys at a different location. You need to do this in the `config.ini` file.

```
oci_key_mnt = ~/.oci:/home/oci_dist_training/.oci
```

Note that the local backend requires the source code for your workload is available locally in the source folder specified in the `config.ini` file. If you specified Git repository or OCI object storage location as source code location in your workflow YAML, please make sure you have a local copy available for local testing.

#### Submit the workload:

```
ads opctl run -f train.yaml -b job
```

**Note::** This will automatically push the docker image to the OCI [container registry repo](#) .

Once running, you will see on the terminal outputs similar to the below

Listing 5: info.yaml

```
jobId: oci.xxxx.<job_ocid>
mainJobRunId:
  mainJobRunIdName: oci.xxxx.<job_run_ocid>
workDir: oci://my-bucket@my-namesapce/cluster-testing/005
otherJobRunIds:
  - workerJobRunIdName_1: oci.xxxx.<job_run_ocid>
  - workerJobRunIdName_2: oci.xxxx.<job_run_ocid>
  - workerJobRunIdName_3: oci.xxxx.<job_run_ocid>
```

This information can be saved as YAML file and used as input to `ads opctl distributed-training show-config -f <info.yaml>`. You can use `--job-info` to save the job run info into YAML, for example:

```
ads opctl run -f train.yaml --job-info info.yaml
```

#### Monitoring the workload logs

To view the logs from a job run, you could run -

```
ads opctl watch oci.xxxx.<job_run_ocid>
```

You could stream the logs from any of the job run ocid using `ads opctl watch` command. You could run this command from multiple terminal to watch all of the job runs. Typically, watching `mainJobRunId` should yield most informative log.

To find the IP address of the scheduler dashboard, you could check the configuration file generated by the Main job by running -

```
ads opctl distributed-training show-config -f info.yaml
```

This will generate an output such as follows -

```
Main Info:
OCI__MAIN_IP: <ip address>
SCHEDULER_IP: <ip address>
tmpdir: oci://my-bucket@my-namesapce/daskcluster-testing/005/oci.xxxx.<job_ocid>
```

Dask dashboard is host at : `http://{SCHEDULER_IP}:8787` If the IP address is reachable from your workstation network, you can access the dashboard directly from your workstation. The alternate approach is to use either a Bastion host on the same subnet as the Job Runs and create an ssh tunnel from your workstation.

For more information about the dashboard, checkout <https://docs.dask.org/en/stable/diagnostics-distributed.html>

### Saving Artifacts to Object Storage Buckets

In case you want to save the artifacts generated by the training process (model checkpoints, TensorBoard logs, etc.) to an object bucket you can use the 'sync' feature. The environment variable `OCI__SYNC_DIR` exposes the directory location that will be automatically synchronized to the configured object storage bucket location. Use this directory in your training script to save the artifacts.

To configure the destination object storage bucket location, use the following settings in the workload yaml file(`train.yaml`).

```
- name: SYNC_ARTIFACTS
  value: 1
- name: WORKSPACE
  value: "<bucket_name>"
- name: WORKSPACE_PREFIX
  value: "<bucket_prefix>"
```

**Note:** Change `SYNC_ARTIFACTS` to `0` to disable this feature. Use `OCI__SYNC_DIR` env variable in your code to save the artifacts. For Example :

```
with open(os.path.join(os.environ.get("OCI__SYNC_DIR"), "results.txt"), "w") as rf:
    rf.write(f"Best Params are: {grid.best_params_}, Score is {grid.best_score_}")
```

### Terminating In-Progress Cluster

To terminate a running cluster, you could run -

```
ads opctl distributed-training cancel -f info.yaml
```

#### 11.3.4.2 Writing Dask Code

Dask Integrates at many levels into the Python ecosystem.

#### Run parallel computation using `dask.distributed` and `Joblib`

Joblib can use Dask as the backend. In the following example the long running function is distributed across the Dask cluster.

```
import time
import joblib

def long_running_function(i):
    time.sleep(.1)
    return i
```

This function can be called under Dask as a dask task which will be scheduled automatically by Dask across the cluster. Watching the cluster utilization will show the tasks run on the workers.

```
with joblib.parallel_backend('dask'):
    joblib.Parallel(verbose=100)(
        joblib.delayed(long_running_function)(i)
        for i in range(10))
```

#### Run parallel computation using `Scikit-Learn` & `Joblib`

To use the Dask backend to Joblib you have to create a Client, and wrap your code with the `joblib.parallel_backend('dask')` context manager.

```
import os
from dask.distributed import Client
import joblib

# the cluster once created will make available the IP address of the Dask scheduler
# through the SCHEDULER_IP environment variable
client = Client(f"{os.environ['SCHEDULER_IP']}:8786")

with joblib.parallel_backend('dask'):
    # Your scikit-learn code
```

A full example showing scaling out CPU-bound workloads; workloads with datasets that fit in RAM, but have many individual operations that can be done in parallel. To scale out to RAM-bound workloads (larger-than-memory datasets) use one of the dask-ml provided parallel estimators, or the dask-ml wrapped XGBoost & LightGBM estimators.

```
import numpy as np
from dask.distributed import Client

import joblib
from sklearn.datasets import load_digits
from sklearn.model_selection import RandomizedSearchCV
from sklearn.svm import SVC

client = Client(f"{os.environ['SCHEDULER_IP']}:8786")

digits = load_digits()

param_space = {
    'C': np.logspace(-6, 6, 13),
    'gamma': np.logspace(-8, 8, 17),
    'tol': np.logspace(-4, -1, 4),
    'class_weight': [None, 'balanced'],
}

model = SVC(kernel='rbf')
search = RandomizedSearchCV(model, param_space, cv=3, n_iter=50, verbose=10)

with joblib.parallel_backend('dask'):
    search.fit(digits.data, digits.target)
```

### 11.3.4.3 Distributed XGBoost & LightGBM

#### 11.3.4.3.1 LightGBM

For further examples and comprehensive documentation see [LightGBM](#) and [Github Examples](#)

```
import os
import joblib
import dask.array as da
from dask.distributed import Client
from sklearn.datasets import make_blobs
```

(continues on next page)

(continued from previous page)

```

import lightgbm as lgb

if __name__ == "__main__":
    print("loading data")
    size = int(os.environ.get("SIZE", 1000))
    X, y = make_blobs(n_samples=size, n_features=50, centers=2)
    client = Client(
        f"{os.environ['SCHEDULER_IP']}:{os.environ.get('SCHEDULER_PORT', '8786')}"
    )

    print("distributing training data on the Dask cluster")
    dX = da.from_array(X, chunks=(100, 50))
    dy = da.from_array(y, chunks=(100,))

    print("beginning training")
    dask_model = lgb.DaskLGBMClassifier(n_estimators=10)
    dask_model.fit(dX, dy)
    assert dask_model.fitted_

    print("done training")

    # Convert Dask model to sklearn model
    sklearn_model = dask_model.to_local()
    print(type(sklearn_model)) #<class 'lightgbm.sklearn.LGBMClassifier'>
    joblib.dump(sklearn_model, "sklearn-model.joblib")

```

### 11.3.4.3.2 XGBoost

For further examples and comprehensive documentation see [XGBoost](#)

XGBoost has a Scikit-Learn interface, this provides a familiar programming interface that mimics the scikit-learn estimators with higher level of abstraction. The interface is easier to use compared to the functional interface but with more constraints. It's worth mentioning that, although the interface mimics scikit-learn estimators, it doesn't work with normal scikit-learn utilities like GridSearchCV as scikit-learn doesn't understand distributed dask data collection.

```

import os
from distributed import LocalCluster, Client
import xgboost as xgb

def main(client: Client) -> None:
    X, y = load_data()
    clf = xgb.dask.DaskXGBClassifier(n_estimators=100, tree_method="hist")
    clf.client = client # assign the client
    clf.fit(X, y, eval_set=[(X, y)])
    proba = clf.predict_proba(X)

if __name__ == "__main__":
    with Client(f"{os.environ['SCHEDULER_IP']}:{8786}") as client:
        main(client)

```



### 11.3.4.4 Securing with TLS

You can setup Dask cluster to run using TLS. To do so, you need three things -

1. CA Certificate
2. A Certificate signed by CA
3. Private key of the certificate

For more details refer [Dask documentation](#)

#### Self signed Certificate using openssl

openssl lets you create test CA and certificates required to setup TLS connectivity for Dask cluster. Use the commands below to create certificate in your code folder. When the container image is built, all the artifacts in the code folder is copied to /code directory inside container image.

1. Generate CA Certificate

```
openssl req -x509 -nodes -newkey rsa:4096 -days 10 -keyout dask-tls-ca-key.pem -out dask-
↪tls-ca-cert.pem -subj "/C=US/ST=CA/CN=ODSC CLUSTER PROVISIONER"
```

2. Generate CSR

```
openssl req -nodes -newkey rsa:4096 -keyout dask-tls-key.pem -out dask-tls-req.pem -subj
↪"/C=US/ST=CA/CN=DASK CLUSTER"
```

3. Sign CSR

```
openssl x509 -req -in dask-tls-req.pem -CA dask-tls-ca-cert.pem -CAkey dask-tls-ca-key.
↪pem -CAcreateserial -out dask-tls-cert.pem
```

4. Follow the container build instructions [here](#) to build, tag and push the image to ocir.
5. Create a cluster definition YAML and configure the certificate information under cluster/config/startOptions. Here is an example -

```
kind: distributed
apiVersion: v1.0
spec:
  infrastructure:
    kind: infrastructure
    type: dataScienceJob
    apiVersion: v1.0
    spec:
      projectId: oci.xxxx.<project_ocid>
      compartmentId: oci.xxxx.<compartment_ocid>
      displayName: my_distributed_training
      logGroupId: oci.xxxx.<log_group_ocid>
      logId: oci.xxx.<log_ocid>
      subnetId: oci.xxxx.<subnet-ocid>
      shapeName: VM.Standard2.4
      blockSizeSize: 50
  cluster:
    kind: dask
    apiVersion: v1.0
    spec:
```

(continues on next page)

(continued from previous page)

```

image: iad.ocir.io/mytenancy/dask-cluster-examples:dev
workDir: oci://mybucket@mytenancy/daskexample/001
name: LGBM Dask
main:
  config:
    startOptions:
      - --tls-ca-file /code/dask-tls-ca-cert.pem
      - --tls-cert /code/dask-tls-cert.pem
      - --tls-key /code/dask-tls-key.pem
  worker:
    config:
      startOptions:
        - --tls-ca-file /code/dask-tls-ca-cert.pem
        - --tls-cert /code/dask-tls-cert.pem
        - --tls-key /code/dask-tls-key.pem
    replicas: 2
runtime:
  kind: python
  apiVersion: v1.0
  spec:
    entryPoint: lgbm_dask.py
    env:
      - name: SIZE
        value: 10000000

```

### Using OCI Certificate manager

See [OCI Certificates](#) for reference. In this approach, the Admin of the tenancy or the person with the requisite permission can create and manage certificate on OCI console. Specify the OCID of the CA Certificate, TLS Certificate and Private Key of the Certificate in `cluster/certificates` option.

### Policies Required:

```

# Create DG with resource.type='certificateauthority'

Allow dynamic-group certauthority-resource to use keys in compartment <my-compartment-
↪name>
Allow dynamic-group certauthority-resource to manage objects in compartment <my-
↪compartment-name>

```

1. Create certificate authority, certificate and private key inside OCI Certificates console.
2. Create a cluster definition YAML and configure the certificate information under `cluster/config/startOptions`. Here is an example -

```

kind: distributed
apiVersion: v1.0
spec:
  infrastructure:
    kind: infrastructure
    type: dataScienceJob
    apiVersion: v1.0
    spec:
      projectId: oci.xxxx.<project_ocid>

```

(continues on next page)

(continued from previous page)

```

    compartmentId: oci.xxxx.<compartment_ocid>
    displayName: my_distributed_training
    logGroupId: oci.xxxx.<log_group_ocid>
    logId: oci.xxx.<log_ocid>
    subnetId: oci.xxxx.<subnet-ocid>
    shapeName: VM.Standard2.4
    blockStorageSize: 50
cluster:
  kind: dask
  apiVersion: v1.0
  spec:
    image: iad.ocir.io/mytenancy/dask-cluster-examples:dev
    workDir: oci://mybucket@mytenancy/daskeample/001
    name: LGBM Dask
    certificate:
      caCert:
        id: ocid1.certificateauthority.oc1.xxx.xxxxxxxx
        downloadLocation: /code/dask-tls-ca-cert.pem
      cert:
        id: ocid1.certificate.oc1.xxx.xxxxxxxx
        certDownloadLocation: /code/dask-tls-cert.pem
        keyDownloadLocation: /code/dask-tls-key.pem
  main:
    config:
      startOptions:
        - --tls-ca-file /code/dask-tls-ca-cert.pem
        - --tls-cert /code/dask-tls-cert.pem
        - --tls-key /code/dask-tls-key.pem
    worker:
      config:
        startOptions:
          - --tls-ca-file /code/dask-tls-ca-cert.pem
          - --tls-cert /code/dask-tls-cert.pem
          - --tls-key /code/dask-tls-key.pem
      replicas: 2
runtime:
  kind: python
  apiVersion: v1.0
  spec:
    entryPoint: lgbm_dask.py
    env:
      - name: SIZE
        value: 1000000

```

### 11.3.4.5 Dask Cluster Tuning

#### 11.3.4.5.1 Configuring dask startup options

##### Dask scheduler

Dask scheduler is launched with `dask-scheduler` command. By default no arguments are supplied to `dask-scheduler`. You could influence the startup option by adding them to `startOptions` under `cluster/spec/main/config` section of the cluster YAML definition

Eg. Here is how you could change the scheduler port number:

```
# Note only portion of the yaml file is shown here for brevity.
cluster:
  kind: dask
  apiVersion: v1.0
  spec:
    image: region.ocir.io/my-tenancy/image:tag
    workDir: "oci://my-bucket@my-namespace/daskcluster-testing/005"
    ephemeral: True
    name: My Precious
    main:
      config:
        startOptions:
          - --port 8788
```

##### Dask worker

Dask worker is launched with `dask-worker` command. By default no arguments are supplied to `dask-worker`. You could influence the startup option by adding them to `startOptions` under `cluster/spec/worker/config` section of the cluster YAML definition

Eg. Here is how you could change the worker port, nanny port, number of workers per host and number of threads per process:

```
# Note only portion of the yaml file is shown here for brevity.
cluster:
  kind: dask
  apiVersion: v1.0
  spec:
    image: region.ocir.io/my-tenancy/image:tag
    workDir: "oci://my-bucket@my-namespace/daskcluster-testing/005"
    ephemeral: True
    name: My Precious
    main:
      config:
    worker:
      config:
        startOptions:
          - --worker-port 8700:8800
          - --nanny-port 3000:3100
          - --nworkers 8
          - --nthreads 2
```

Refer to the complete list

#### 11.3.4.5.2 Configuration through Environment Variables

You could set configuration parameters that Dask recognizes by add it to `cluster/spec/config/env` or `cluster/spec/main/config/env` or `cluster/spec/worker/config/env`. If a configuration value is some for both scheduler and worker section, then set it at `cluster/spec/config/env` section.

```
# Note only portion of the yaml file is shown here for brevity.
cluster:
  kind: dask
  apiVersion: v1.0
  spec:
    image: region.ocir.io/my-tenancy/image:tag
    workDir: "oci://my-bucket@my-tenancy/daskcluster-testing/005"
    ephemeral: True
    name: My Precious
    config:
      env:
        - name: DASK_ARRAY__CHUNK_SIZE
          value: 128 MiB
        - name: DASK_DISTRIBUTED__WORKERS__MEMORY__SPILL
          value: 0.85
        - name: DASK_DISTRIBUTED__WORKERS__MEMORY__TARGET
          value: 0.75
        - name: DASK_DISTRIBUTED__WORKERS__MEMORY__TERMINATE
          value: 0.98
```

Refer [here](#) for more information

#### 11.3.4.6 Dask dashboard

Dask dashboard allows you to monitor the progress of the tasks. It gives you a real time view of the resource usage, task status, number of workers, task distribution, etc. To learn more about Dask dashboard refer [this link](#).

##### Prerequisite

1. IP address of the Main/Scheduler Node. Use `ads opctl distributed-training show-config` or find the IP address from the logs of the main job run.
2. The default port is 8787. You can override this port in `cluster/main/config/startOptions` in the cluster definition file.
3. Allow ingress to the port 8787 in the security list associated with the Subnet of Main/Scheduler node.

The dashboard is accessible over `<SCHEDULER_IP>:8787`. The IP address may not always be accessible from your workstation especially if you are using a subnet which is not connected to your corporate network. To overcome this, you could setup a bastion host on the private regional subnet that was added to the jobrun and create an ssh tunnel from your workstation to bastion host to the Job Run instance with `<SCHEDULER_IP>`

#### 11.3.4.6.1 Bastion Host

Here are the steps to setup a Bastion host to allow you to connect to the scheduler dashboard -

1. Launch a compute instance (Linux or Windows) with primary vnic with a public subnet or the subnet that is connected to your corporate network.
2. Attach a secondary VNIC on the subnet used for starting the cluster. Follow the steps detailed [here](#) on how to setup and configure the host to setup the secondary VNIC.
3. Create a public IP if you need access to the dashboard over the internet.

#### Linux instance

If you setup a Linux instance, you can create ssh tunnel from your workstation and access the scheduler dashboard from your workstation at `localhost:8787`. To setup ssh tunnel -

```
ssh -i <oci-instance-key>.key <ubuntu or opc>@<instance-ip> L 8787:<scheduler jobrun-ip>:8787
```

If you are using proxy, use this command -

```
ssh -i <oci-instance-key>.key <ubuntu or opc>@<instance-ip> -o "ProxyCommand=nc -X connect -x $http_proxy:$http_port %h %p" -L 8787:<scheduler jobrun-ip>:8787
```

#### Windows instance

RDP to the Windows instance and access the dashboard using `<SCHEDULER_IP>:8787` from a browser running within the Windows instance.

### 11.3.5 Horovod

#### Distributed training framework for TensorFlow, Keras, PyTorch

Horovod is an open-source software framework for distributed deep learning training using TensorFlow, Keras, PyTorch. Horovod has the goal of improving the speed, scale, and resource allocation when training a machine learning model.

OCI Data Science currently support [Elastic Horovod](#) workloads with [gloo](#) backend.

#### 11.3.5.1 Creating Horovod Workloads

##### Prerequisites

1. Internet Connection
2. ADS cli is [installed](#)
3. Install docker: <https://docs.docker.com/get-docker>

##### Write your training code:

Your model training script (TensorFlow or PyTorch) needs to be adapted to use (Elastic) Horovod APIs for distributed training. Refer [Writing distributed code with horovod framework](#)

Also see : [Horovod Examples](#)

For this example, the code to run was inspired from an example [found here](#) . There are minimal changes to this script to save the training artifacts and TensorBoard logs to a folder referenced by OCI\_\_SYNC\_DIR environment variable. OCI\_\_SYNC\_DIR is a pre-provisioned folder which can be synchronized with an object bucket during the training process.

Listing 6: train.py

```
# Script adapted from https://github.com/horovod/horovod/blob/master/examples/elastic/
↪ tensorflow2/tensorflow2_keras_mnist_elastic.py

# =====

import argparse
import tensorflow as tf
import horovod.tensorflow.keras as hvd
from distutils.version import LooseVersion

import os

os.environ["TF_CPP_MIN_LOG_LEVEL"] = "2"

parser = argparse.ArgumentParser(description="Tensorflow 2.0 Keras MNIST Example")

parser.add_argument(
    "--use-mixed-precision",
    action="store_true",
    default=False,
    help="use mixed precision for training",
)

parser.add_argument(
    "--data-dir",
    help="location of the training dataset in the local filesystem (will be downloaded,
↪ if needed)",
    default='/code/data/mnist.npz'
)

args = parser.parse_args()

if args.use_mixed_precision:
    print(f"using mixed precision {args.use_mixed_precision}")
    if LooseVersion(tf.__version__) >= LooseVersion("2.4.0"):
        from tensorflow.keras import mixed_precision

        mixed_precision.set_global_policy("mixed_float16")
    else:
        policy = tf.keras.mixed_precision.experimental.Policy("mixed_float16")
        tf.keras.mixed_precision.experimental.set_policy(policy)

# Horovod: initialize Horovod.
hvd.init()
```

(continues on next page)

(continued from previous page)

```

# Horovod: pin GPU to be used to process local rank (one GPU per process)
gpus = tf.config.experimental.list_physical_devices("GPU")
for gpu in gpus:
    tf.config.experimental.set_memory_growth(gpu, True)
if gpus:
    tf.config.experimental.set_visible_devices(gpus[hvd.local_rank()], "GPU")

import numpy as np

minist_local = args.data_dir

def load_data():
    print("using pre-fetched dataset")
    with np.load(minist_local, allow_pickle=True) as f:
        x_train, y_train = f["x_train"], f["y_train"]
        x_test, y_test = f["x_test"], f["y_test"]
        return (x_train, y_train), (x_test, y_test)

(mnist_images, mnist_labels), _ = (
    load_data()
    if os.path.exists(minist_local)
    else tf.keras.datasets.mnist.load_data(path="mnist-%d.npz" % hvd.rank())
)

dataset = tf.data.Dataset.from_tensor_slices(
    (
        tf.cast(mnist_images[..., tf.newaxis] / 255.0, tf.float32),
        tf.cast(mnist_labels, tf.int64),
    )
)
dataset = dataset.repeat().shuffle(10000).batch(128)

model = tf.keras.Sequential(
    [
        tf.keras.layers.Conv2D(32, [3, 3], activation="relu"),
        tf.keras.layers.Conv2D(64, [3, 3], activation="relu"),
        tf.keras.layers.MaxPooling2D(pool_size=(2, 2)),
        tf.keras.layers.Dropout(0.25),
        tf.keras.layers.Flatten(),
        tf.keras.layers.Dense(128, activation="relu"),
        tf.keras.layers.Dropout(0.5),
        tf.keras.layers.Dense(10, activation="softmax"),
    ]
)

# Horovod: adjust learning rate based on number of GPUs.
scaled_lr = 0.001 * hvd.size()
opt = tf.optimizers.Adam(scaled_lr)

```

(continues on next page)



(continued from previous page)

```

# Horovod: add Horovod DistributedOptimizer.
opt = hvd.DistributedOptimizer(
    opt, backward_passes_per_step=1, average_aggregated_gradients=True
)

# Horovod: Specify `experimental_run_tf_function=False` to ensure TensorFlow
# uses hvd.DistributedOptimizer() to compute gradients.
model.compile(
    loss=tf.losses.SparseCategoricalCrossentropy(),
    optimizer=opt,
    metrics=["accuracy"],
    experimental_run_tf_function=False,
)

# Horovod: initialize optimizer state so we can synchronize across workers
# Keras has empty optimizer variables() for TF2:
# https://sourcegraph.com/github.com/tensorflow/tensorflow@v2.4.1/-/blob/tensorflow/
# python/keras/optimizer_v2/optimizer_v2.py#L351:10
model.fit(dataset, steps_per_epoch=1, epochs=1, callbacks=None)

state = hvd.elastic.KerasState(model, batch=0, epoch=0)

def on_state_reset():
    tf.keras.backend.set_value(state.model.optimizer.lr, 0.001 * hvd.size())
    # Re-initialize, to join with possible new ranks
    state.model.fit(dataset, steps_per_epoch=1, epochs=1, callbacks=None)

state.register_reset_callbacks([on_state_reset])

callbacks = [
    hvd.callbacks.MetricAverageCallback(),
    hvd.elastic.UpdateEpochStateCallback(state),
    hvd.elastic.UpdateBatchStateCallback(state),
    hvd.elastic.CommitStateCallback(state),
]

# Horovod: save checkpoints only on worker 0 to prevent other workers from corrupting
# them.
# save the artifacts in the OCI__SYNC_DIR dir.
artifacts_dir = os.environ.get("OCI__SYNC_DIR") + "/artifacts"
tb_logs_path = os.path.join(artifacts_dir, "logs")
check_point_path = os.path.join(artifacts_dir, "ckpts", "checkpoint-{epoch}.h5")
if hvd.rank() == 0:
    callbacks.append(tf.keras.callbacks.ModelCheckpoint(check_point_path))
    callbacks.append(tf.keras.callbacks.TensorBoard(tb_logs_path))

# Train the model.
# Horovod: adjust number of steps based on number of GPUs.
@hvd.elastic.run

```

(continues on next page)

(continued from previous page)

```
def train(state):
    state.model.fit(
        dataset,
        steps_per_epoch=500 // hvd.size(),
        epochs=2 - state.epoch,
        callbacks=callbacks,
        verbose=1,
    )

train(state)
```

**Initialize a distributed-training folder:**

At this point you have created a training file (or files) - `train.py` from the above example. Now, run the command below.

```
ads opctl distributed-training init --framework horovod-tensorflow --version v1
```

**Note:** If you choose to run a PyTorch example instead, use `horovod-pytorch` as the framework.

```
ads opctl distributed-training init --framework horovod-pytorch --version v1
```

This will download the `horovod-tensorflow`/`horovod-pytorch` framework and place it inside '`oci_dist_training_artifacts`' folder.

**Containerize your code and build container:**

To build the image:

Horovod frameworks for TensorFlow and PyTorch contains two separate docker files, for cpu and gpu. Choose the docker file based on whether you are going to use cpu or gpu based shapes.

Before you can build the image, you must set the following environment variables:

Specify image name and tag

```
export IMAGE_NAME=<region.ocir.io/my-tenancy/image-name>
export TAG=latest
```

Build the container image.

```
ads opctl distributed-training build-image \
    -t $TAG \
    -reg $IMAGE_NAME \
    -df oci_dist_training_artifacts/horovod/v1/<pytorch|tensorflow>.<cpu|gpu>.Dockerfile
```

The code is assumed to be in the current working directory. To override the source code directory, use the `-s` flag and specify the code dir. This folder should be within the current working directory.

```
ads opctl distributed-training build-image \
    -t $TAG \
    -reg $IMAGE_NAME \
    -df oci_dist_training_artifacts/horovod/v1/<pytorch|tensorflow>.<cpu|gpu>.Dockerfile
    -s <code_dir>
```

If you are behind proxy, ads opctl will automatically use your proxy settings (defined via no\_proxy, http\_proxy and https\_proxy).

### SSH Setup:

In Horovod distributed training, communication between scheduler and worker(s) uses a secure connection. For this purpose, SSH keys need to be provisioned in the scheduler and worker nodes. This is already taken care in the docker images. When the docker image is built, SSH key pair is placed inside the image with required configuration changes (adding public key to authorized\_keys file). This enables a secure connection between scheduler and the workers.

### Define your workload yaml:

The yaml file is a declarative way to express the workload.

Listing 7: train.yaml

```
kind: distributed
apiVersion: v1.0
spec:
  infrastructure: # This section maps to Job definition. Does not include environment_
    ↪ variables
    kind: infrastructure
    type: dataScienceJob
    apiVersion: v1.0
    spec:
      projectId: oci.xxxx.<project_ocid>
      compartmentId: oci.xxxx.<compartment_ocid>
      displayName: HVD-Distributed-TF
      logGroupId: oci.xxxx.<log_group_ocid>
      subnetId: oci.xxxx.<subnet_ocid>
      shapeName: VM.GPU2.1
      blockStorageSize: 50
  cluster:
    kind: HOROVOD
    apiVersion: v1.0
    spec:
      image: "<region>.ocir.io/<tenancy_id>/<repo_name>/<image_name>:<image_tag>"
      workDir: "oci://<bucket_name>@<bucket_namespace>/<bucket_prefix>"
      name: "horovod_tf"
      config:
        env:
          # MIN_NP, MAX_NP and SLOTS are inferred from the shape. Modify only when_
          ↪ needed.
          # - name: MIN_NP
          #   value: 2
          # - name: MAX_NP
          #   value: 4
          # - name: SLOTS
          #   value: 2
          - name: WORKER_PORT
            value: 12345
          - name: START_TIMEOUT #Optional: Defaults to 600.
            value: 600
          - name: ENABLE_TIMELINE # Optional: Disabled by Default.Significantly_
          ↪ increases training duration if switched on (1).
```

(continues on next page)

(continued from previous page)

```

    value: 0
  - name: SYNC_ARTIFACTS #Mandatory: Switched on by Default.
    value: 1
  - name: WORKSPACE #Mandatory if SYNC_ARTIFACTS==1: Destination object bucket.
    ↪ to sync generated artifacts to.
    value: "<bucket_name>"
  - name: WORKSPACE_PREFIX #Mandatory if SYNC_ARTIFACTS==1: Destination object.
    ↪ bucket folder to sync generated artifacts to.
    value: "<bucket_prefix>"
  - name: HOROVOD_ARGS # Parameters for cluster tuning.
    value: "--verbose"
main:
  name: "scheduler"
  replicas: 1 #this will be always 1
worker:
  name: "worker"
  replicas: 2 #number of workers
runtime:
  kind: python
  apiVersion: v1.0
  spec:
    entryPoint: "/code/train.py" #location of user's training script in docker image.
    args: #any arguments that the training script requires.
    env:

```

**Use ads opctl to create the cluster infrastructure and run the workload:**

Do a dry run to inspect how the yaml translates to Job and Job Runs

```
ads opctl run -f train.yaml --dry-run
```

This will give output similar to this.

```

-----Entering dryrun mode-----
Creating Job with payload:
kind: job
spec:
  infrastructure:
    kind: infrastructure
    spec:
      projectId: oci.xxxx.<project_ocid>
      compartmentId: oci.xxxx.<compartment_ocid>
      displayName: HVD-Distributed-TF
      logGroupId: oci.xxxx.<log_group_ocid>
      logId: oci.xxx.<log_ocid>
      subnetId: oci.xxxx.<subnet-ocid>
      shapeName: VM.GPU2.1
      blockStorageSize: 50
    type: dataScienceJob
  name: horovod_tf
  runtime:
    kind: runtime
    spec:

```

(continues on next page)

(continued from previous page)

```

entrypoint: null
env:
- name: WORKER_PORT
  value: 12345
- name: START_TIMEOUT
  value: 600
- name: ENABLE_TIMELINE
  value: 0
- name: SYNC_ARTIFACTS
  value: 1
- name: WORKSPACE
  value: "<bucket_name>"
- name: WORKSPACE_PREFIX
  value: "<bucket_prefix>"
- name: HOROVOD_ARGS
  value: --verbose
- name: OCI__WORK_DIR
  value: oci://<bucket_name>@<bucket_namespace>/<bucket_prefix>
- name: OCI__EPHEMERAL
  value: None
- name: OCI__CLUSTER_TYPE
  value: HOROVOD
- name: OCI__WORKER_COUNT
  value: '2'
- name: OCI__START_ARGS
  value: ''
- name: OCI__ENTRY_SCRIPT
  value: /code/train.py
image: "<region>.ocir.io/<tenancy_id>/<repo_name>/<image_name>:<image_tag>"
type: container

```

```

+++++
Creating Main Job with following details:
Name: scheduler
Environment Variables:
  OCI__MODE:MAIN
~~~~~
Creating 2 worker jobs with following details:
Name: worker
Environment Variables:
 OCI__MODE:WORKER
-----Ending dryrun mode-----

```

**Test Locally:**

Before submitting the workload to jobs, you can run it locally to test your code, dependencies, configurations etc. With `-b local` flag, it uses a local backend. Further when you need to run this workload on OCI data science jobs, simply use `-b job` flag instead.

```
ads opctl run -f train.yaml -b local
```

If your code requires to use any oci services (like object bucket), you need to mount oci keys from your local host machine onto the container. This is already done for you assuming the typical location of oci keys `~/.oci`. You can

modify it though, in-case you have keys at a different location. You need to do this in the config.ini file.

```
oci_key_mnt = ~/.oci:/home/oci_dist_training/.oci
```

Note that the local backend requires the source code for your workload is available locally in the source folder specified in the config.ini file. If you specified Git repository or OCI object storage location as source code location in your workflow YAML, please make sure you have a local copy available for local testing.

#### Submit the workload:

```
ads opctl run -f train.yaml -b job
```

**Note::** This will automatically push the docker image to the OCI [container registry repo](#) .

Once running, you will see on the terminal outputs similar to the below

Listing 8: info.yaml

```
jobId: oci.xxxx.<job_ocid>
mainJobRunId:
 mainJobRunIdName: oci.xxxx.<job_run_ocid>
workDir: oci://my-bucket@my-namespace/cluster-testing/005
otherJobRunIds:
 - workerJobRunIdName_1: oci.xxxx.<job_run_ocid>
 - workerJobRunIdName_2: oci.xxxx.<job_run_ocid>
 - workerJobRunIdName_3: oci.xxxx.<job_run_ocid>
```

This information can be saved as YAML file and used as input to `ads opctl distributed-training show-config -f <info.yaml>`. You can use `--job-info` to save the job run info into YAML, for example:

```
ads opctl run -f train.yaml --job-info info.yaml
```

#### Saving Artifacts to Object Storage Buckets

In case you want to save the artifacts generated by the training process (model checkpoints, TensorBoard logs, etc.) to an object bucket you can use the 'sync' feature. The environment variable `OCI__SYNC_DIR` exposes the directory location that will be automatically synchronized to the configured object storage bucket location. Use this directory in your training script to save the artifacts.

To configure the destination object storage bucket location, use the following settings in the workload yaml file(train.yaml).

```
- name: SYNC_ARTIFACTS
 value: 1
- name: WORKSPACE
 value: "<bucket_name>"
- name: WORKSPACE_PREFIX
 value: "<bucket_prefix>"
```

**Note:** Change `SYNC_ARTIFACTS` to `0` to disable this feature. Use `OCI__SYNC_DIR` env variable in your code to save the artifacts. For Example :

```
tf.keras.callbacks.ModelCheckpoint(os.path.join(os.environ.get("OCI__SYNC_DIR"), "ckpts",
↪ 'checkpoint-{epoch}.h5'))
```

#### Monitoring the workload logs

To view the logs from a job run, you could run -

```
ads jobs watch oci.xxxx.<job_run_ocid>
```

For more monitoring options, please refer to [Monitoring Horovod Training](#)

### 11.3.5.2 Writing Distributed code with Horovod Framework

#### 11.3.5.2.1 TensorFlow

To use Horovod in TensorFlow, following modifications are required in the training script:

1. Import Horovod and initialize it.

```
import horovod.tensorflow as hvd
hvd.init()
```

2. Pin each GPU to a single process.

With **TensorFlow v1**.

```
config = tf.ConfigProto()
config.gpu_options.visible_device_list = str(hvd.local_rank())
```

With **TensorFlow v2**.

```
gpus = tf.config.experimental.list_physical_devices('GPU')
for gpu in gpus:
 tf.config.experimental.set_memory_growth(gpu, True)
if gpus:
 tf.config.experimental.set_visible_devices(gpus[hvd.local_rank()], 'GPU')
```

3. Scale the learning rate by the number of workers.

```
opt = tf.keras.optimizers.SGD(0.0005 * hvd.size())
```

4. Wrap the optimizer in `hvd.DistributedOptimizer`.

```
opt = hvd.DistributedOptimizer(opt)
```

5. Modify your code to save checkpoints(and any other artifacts) only in the rank-0 training process to prevent other workers from corrupting them.

```
if hvd.rank() == 0:
 tf.keras.callbacks.ModelCheckpoint(ckpts_path)
 tf.keras.callbacks.TensorBoard(tblogs_path)
```

6. OCI Data Science Horovod workloads are based on Elastic Horovod. In addition to above changes, the training script also needs to use [state synchronization](#). In summary, this means:

- a. Use the decorator `hvd.elastic.run` to wrap the main training process.
- b. Use `hvd.elastic.State` to add all variables that needs to be sync across workers.
- c. Save state periodically, using `hvd.elastic.State`

A complete example can be found in the [Write your training code](#) section. More examples can be found [here](#). Refer [horovod with TensorFlow](#) and [horovod with Keras](#) for more details.

### 11.3.5.2.2 PyTorch

To use Horovod in PyTorch, following modifications are required in the training script:

1. Import Horovod and initialize it.

```
import horovod.torch as hvd
hvd.init()
```

2. Pin each GPU to a single process. (use `hvd.local_rank()`)

```
torch.manual_seed(args.seed)
if args.cuda:
 # Horovod: pin GPU to local rank.
 torch.cuda.set_device(hvd.local_rank())
 torch.cuda.manual_seed(args.seed)
```

3. Scale the learning rate by the number of workers. (use `hvd.size()`)

```
optimizer = optim.SGD(model.parameters(), lr=args.lr * hvd.size(),
 momentum=args.momentum)
```

4. Wrap the optimizer in `hvd.DistributedOptimizer`.

```
optimizer = hvd.DistributedOptimizer(
 optimizer,
 named_parameters=model.named_parameters(),
 compression=compression,
 op=hvd.Adasum if args.use_adasum else hvd.Average
)
```

5. Modify your code to save checkpoints only in the rank-0 training process to prevent other workers from corrupting them.
6. Like TensorFlow, Horovod PyTorch scripts also need to use [state synchronization](#). Refer TensorFlow section [above](#). Here is a complete PyTorch sample which is inspired from examples found [here](#) and [here](#).

Listing 9: train.py

```
Script adapted from https://github.com/horovod/horovod/blob/master/examples/elastic/
↪ pytorch/pytorch_mnist_elastic.py

=====
import argparse
import os
from filelock import FileLock

import torch.nn as nn
import torch.nn.functional as F
import torch.optim as optim
from torchvision import datasets, transforms
import torch.utils.data.distributed
import horovod.torch as hvd
from torch.utils.tensorboard import SummaryWriter
```

(continues on next page)



(continued from previous page)

```

Training settings
parser = argparse.ArgumentParser(description='PyTorch MNIST Example')
parser.add_argument('--batch-size', type=int, default=64, metavar='N',
 help='input batch size for training (default: 64)')
parser.add_argument('--test-batch-size', type=int, default=1000, metavar='N',
 help='input batch size for testing (default: 1000)')
parser.add_argument('--epochs', type=int, default=10, metavar='N',
 help='number of epochs to train (default: 10)')
parser.add_argument('--lr', type=float, default=0.01, metavar='LR',
 help='learning rate (default: 0.01)')
parser.add_argument('--momentum', type=float, default=0.5, metavar='M',
 help='SGD momentum (default: 0.5)')
parser.add_argument('--no-cuda', action='store_true', default=False,
 help='disables CUDA training')
parser.add_argument('--seed', type=int, default=42, metavar='S',
 help='random seed (default: 42)')
parser.add_argument('--log-interval', type=int, default=10, metavar='N',
 help='how many batches to wait before logging training status')
parser.add_argument('--fp16-allreduce', action='store_true', default=False,
 help='use fp16 compression during allreduce')
parser.add_argument('--use-adasum', action='store_true', default=False,
 help='use adasum algorithm to do reduction')
parser.add_argument('--data-dir',
 help='location of the training dataset in the local filesystem (will_
↳ be downloaded if needed)')

args = parser.parse_args()
args.cuda = not args.no_cuda and torch.cuda.is_available()

checkpoint_format = 'checkpoint-{epoch}.pth.tar'

Horovod: initialize library.
hvd.init()
torch.manual_seed(args.seed)

if args.cuda:
 # Horovod: pin GPU to local rank.
 torch.cuda.set_device(hvd.local_rank())
 torch.cuda.manual_seed(args.seed)

Horovod: limit # of CPU threads to be used per worker.
torch.set_num_threads(1)

kwargs = {'num_workers': 1, 'pin_memory': True} if args.cuda else {}
data_dir = args.data_dir or './data'
with FileLock(os.path.expanduser("~/horovod_lock")):
 train_dataset = \
 datasets.MNIST(data_dir, train=True, download=True,
 transform=transforms.Compose([
 transforms.ToTensor(),
 transforms.Normalize((0.1307,), (0.3081,))

```

(continues on next page)

(continued from previous page)

```

]))
Horovod: use DistributedSampler to partition the training data.
train_sampler = torch.utils.data.distributed.DistributedSampler(
 train_dataset, num_replicas=hvd.size(), rank=hvd.rank())
train_loader = torch.utils.data.DataLoader(
 train_dataset, batch_size=args.batch_size, sampler=train_sampler, **kwargs)

test_dataset = \
 datasets.MNIST(data_dir, train=False, transform=transforms.Compose([
 transforms.ToTensor(),
 transforms.Normalize((0.1307,), (0.3081,))
]))
Horovod: use DistributedSampler to partition the test data.
test_sampler = torch.utils.data.distributed.DistributedSampler(
 test_dataset, num_replicas=hvd.size(), rank=hvd.rank())
test_loader = torch.utils.data.DataLoader(test_dataset, batch_size=args.test_batch_size,
 sampler=test_sampler, **kwargs)

class Net(nn.Module):
 def __init__(self):
 super(Net, self).__init__()
 self.conv1 = nn.Conv2d(1, 10, kernel_size=5)
 self.conv2 = nn.Conv2d(10, 20, kernel_size=5)
 self.conv2_drop = nn.Dropout2d()
 self.fc1 = nn.Linear(320, 50)
 self.fc2 = nn.Linear(50, 10)

 def forward(self, x):
 x = F.relu(F.max_pool2d(self.conv1(x), 2))
 x = F.relu(F.max_pool2d(self.conv2_drop(self.conv2(x)), 2))
 x = x.view(-1, 320)
 x = F.relu(self.fc1(x))
 x = F.dropout(x, training=self.training)
 x = self.fc2(x)
 return F.log_softmax(x)

model = Net()

By default, Adasum doesn't need scaling up learning rate.
lr_scaler = hvd.size() if not args.use_adasum else 1

if args.cuda:
 # Move model to GPU.
 model.cuda()
 # If using GPU Adasum allreduce, scale learning rate by local_size.
 if args.use_adasum and hvd.nccl_built():
 lr_scaler = hvd.local_size()

Horovod: scale learning rate by lr_scaler.
optimizer = optim.SGD(model.parameters(), lr=args.lr * lr_scaler,

```

(continues on next page)

(continued from previous page)

```

 momentum=args.momentum)

Horovod: (optional) compression algorithm.
compression = hvd.Compression.fp16 if args.fp16_allreduce else hvd.Compression.none

def metric_average(val, name):
 tensor = torch.tensor(val)
 avg_tensor = hvd.allreduce(tensor, name=name)
 return avg_tensor.item()

def create_dir(dir):
 if not os.path.exists(dir):
 os.makedirs(dir)
Horovod: average metrics from distributed training.
class Metric(object):
 def __init__(self, name):
 self.name = name
 self.sum = torch.tensor(0.)
 self.n = torch.tensor(0.)

 def update(self, val):
 self.sum += hvd.allreduce(val.detach().cpu(), name=self.name)
 self.n += 1

 @property
 def avg(self):
 return self.sum / self.n

@hvd.elastic.run
def train(state):
 # post synchronization event (worker added, worker removed) init ...

 artifacts_dir = os.environ.get("OCI__SYNC_DIR") + "/artifacts"
 ckpts_dir = os.path.join(artifacts_dir, "ckpts")
 logs_dir = os.path.join(artifacts_dir, "logs")
 if hvd.rank() == 0:
 print("creating dirs for checkpoints and logs")
 create_dir(ckpts_dir)
 create_dir(logs_dir)

 writer = SummaryWriter(logs_dir) if hvd.rank() == 0 else None

 for state.epoch in range(state.epoch, args.epochs + 1):
 train_loss = Metric('train_loss')
 state.model.train()

 train_sampler.set_epoch(state.epoch)
 steps_remaining = len(train_loader) - state.batch

 for state.batch, (data, target) in enumerate(train_loader):
 if state.batch >= steps_remaining:

```

(continues on next page)

(continued from previous page)

```

 break

 if args.cuda:
 data, target = data.cuda(), target.cuda()
 state.optimizer.zero_grad()
 output = state.model(data)
 loss = F.nll_loss(output, target)
 train_loss.update(loss)
 loss.backward()
 state.optimizer.step()
 if state.batch % args.log_interval == 0:
 # Horovod: use train_sampler to determine the number of examples in
 # this worker's partition.
 print('Train Epoch: {} [{}/{} ({:.0f}%)]\tLoss: {:.6f}'.format(
 state.epoch, state.batch * len(data), len(train_sampler),
 100.0 * state.batch / len(train_loader), loss.item()))
 state.commit()
 if writer:
 writer.add_scalar("Loss", train_loss.avg, state.epoch)
 if hvd.rank() == 0:
 chkpt_path = os.path.join(chkpts_dir, checkpoint_format.format(epoch=state.
→ epoch + 1))
 chkpt = {
 'model': state.model.state_dict(),
 'optimizer': state.optimizer.state_dict(),
 }
 torch.save(chkpt, chkpt_path)
 state.batch = 0

def test():
 model.eval()
 test_loss = 0.
 test_accuracy = 0.
 for data, target in test_loader:
 if args.cuda:
 data, target = data.cuda(), target.cuda()
 output = model(data)
 # sum up batch loss
 test_loss += F.nll_loss(output, target, size_average=False).item()
 # get the index of the max log-probability
 pred = output.data.max(1, keepdim=True)[1]
 test_accuracy += pred.eq(target.data.view_as(pred)).cpu().float().sum()

 # Horovod: use test_sampler to determine the number of examples in
 # this worker's partition.
 test_loss /= len(test_sampler)
 test_accuracy /= len(test_sampler)

 # Horovod: average metric values across workers.
 test_loss = metric_average(test_loss, 'avg_loss')
 test_accuracy = metric_average(test_accuracy, 'avg_accuracy')

```

(continues on next page)

(continued from previous page)

```

Horovod: print output only on first rank.
if hvd.rank() == 0:
 print('\nTest set: Average loss: {:.4f}, Accuracy: {:.2f}%\n'.format(
 test_loss, 100. * test_accuracy))

Horovod: wrap optimizer with DistributedOptimizer.
optimizer = hvd.DistributedOptimizer(optimizer,
 named_parameters=model.named_parameters(),
 compression=compression,
 op=hvd.Adasum if args.use_adasum else hvd.Average)

adjust learning rate on reset
def on_state_reset():
 for param_group in optimizer.param_groups:
 param_group['lr'] = args.lr * hvd.size()

state = hvd.elastic.TorchState(model, optimizer, epoch=1, batch=0)
state.register_reset_callbacks([on_state_reset])
train(state)
test()

```

Refer to more examples [here](#). Refer [horovod with PyTorch](#) for more details.

### Next Steps

Once you have the training code ready (either in TensorFlow or PyTorch), you can proceed to *creating Horovod workloads*.

#### 11.3.5.3 Monitoring Training

Monitoring Horovod training using TensorBoard is similar to how it is usually done for TensorFlow or PyTorch workloads. Your training script generates the TensorBoard logs and saves the logs to the directory reference by `OCI__SYNC_DIR` env variable. With `SYNC_ARTIFACTS=1`, these TensorBoard logs will be periodically synchronized with the configured object storage bucket.

Please refer *[Saving Artifacts to Object Storage Buckets](#)*.

#### Aggregating metrics:

In a distributed setup, the metrics(loss, accuracy etc.) need to be aggregated from all the workers. Horovod provides `MetricAverageCallback` callback(for TensorFlow) which should be added to the model training step. For PyTorch, refer this [Pytorch Example](#).

#### Using TensorBoard Logs:

TensorBoard can be setup on a local machine and pointed to object storage. This will enable a live monitoring setup of TensorBoard logs.

```
OCIIFS_IAM_TYPE=api_key tensorboard --logdir oci://<bucket_name>/path/to/logs
```

**Note:** The logs take some initial time (few minutes) to reflect on the tensorboard dashboard.

**Horovod Timelines:**

Horovod also provides [Timelines](#), which provides a snapshot of the training activities. Timeline files can be optionally generated with the following environment variable(part of workload yaml).

```
config:
 env:
 - name: ENABLE_TIMELINE #Disabled by Default(0).
 value: 1
```

**Note:** Creating Timelines degrades the training execution time.

### 11.3.6 PyTorch Distributed

PyTorch is an open source machine learning framework used for applications such as computer vision and natural language processing, primarily developed by Facebook’s AI Research lab. ADS supports running PyTorch’s native distributed training code (`torch.distributed` and `DistributedDataParallel`) with OCI Data Science Jobs. Provided you are following the [official PyTorch distributed data parallel guidelines](#), **no changes to your PyTorch code are required**.

PyTorch distributed training requires initialization using the `torch.distributed.init_process_group()` function. By default this function collects uses environment variables to initialize the communications for the training cluster. When using ADS to run PyTorch distributed training on OCI data science Jobs, the environment variables, including `MASTER_ADDR`, `MASTER_PORT`, `WORLD_SIZE` `RANK`, and `LOCAL_RANK` will automatically be set in the job runs. By default `MASTER_PORT` will be set to 29400.

#### 11.3.6.1 Creating PyTorch Distributed Workloads

**Prerequisites**

1. Internet Connection
2. ADS cli is installed
3. Install docker: <https://docs.docker.com/get-docker>

**Write your training code:**

For this example, the code to run was inspired from an example [found here](#)

Note that `MASTER_ADDR`, `MASTER_PORT`, `WORLD_SIZE`, `RANK`, and `LOCAL_RANK` are environment variables that will automatically be set.

Listing 10: train.py

```
Copyright (c) 2017 Facebook, Inc. All rights reserved.
BSD 3-Clause License
#
Script adapted from:
https://github.com/Azure/azureml-examples/blob/
↪ 32eeda9e9f394bd6c3b687b55e2740abc50b116c/sdk/python/jobs/single-step/pytorch/
↪ distributed-training/src/train.py
=====

import datetime
```

(continues on next page)

(continued from previous page)

```

import torch
import torchvision
import torchvision.transforms as transforms
import torch.nn as nn
import torch.nn.functional as F
import torch.optim as optim
import os, argparse

define network architecture
class Net(nn.Module):
 def __init__(self):
 super(Net, self).__init__()
 self.conv1 = nn.Conv2d(3, 32, 3)
 self.pool = nn.MaxPool2d(2, 2)
 self.conv2 = nn.Conv2d(32, 64, 3)
 self.conv3 = nn.Conv2d(64, 128, 3)
 self.fc1 = nn.Linear(128 * 6 * 6, 120)
 self.dropout = nn.Dropout(p=0.2)
 self.fc2 = nn.Linear(120, 84)
 self.fc3 = nn.Linear(84, 10)

 def forward(self, x):
 x = F.relu(self.conv1(x))
 x = self.pool(F.relu(self.conv2(x)))
 x = self.pool(F.relu(self.conv3(x)))
 x = x.view(-1, 128 * 6 * 6)
 x = self.dropout(F.relu(self.fc1(x)))
 x = F.relu(self.fc2(x))
 x = self.fc3(x)
 return x

define functions
def train(train_loader, model, criterion, optimizer, epoch, device, print_freq, rank):
 running_loss = 0.0
 for i, data in enumerate(train_loader, 0):
 # get the inputs; data is a list of [inputs, labels]
 inputs, labels = data[0].to(device), data[1].to(device)

 # zero the parameter gradients
 optimizer.zero_grad()

 # forward + backward + optimize
 outputs = model(inputs)
 loss = criterion(outputs, labels)
 loss.backward()
 optimizer.step()

 # print statistics
 running_loss += loss.item()
 if i % print_freq == 0: # print every print_freq mini-batches
 print(

```

(continues on next page)

(continued from previous page)

```

 "Rank %d: [%d, %5d] loss: %.3f"
 % (rank, epoch + 1, i + 1, running_loss / print_freq)
)
 running_loss = 0.0

def evaluate(test_loader, model, device):
 classes = (
 "plane",
 "car",
 "bird",
 "cat",
 "deer",
 "dog",
 "frog",
 "horse",
 "ship",
 "truck",
)

 model.eval()

 correct = 0
 total = 0
 class_correct = list(0.0 for i in range(10))
 class_total = list(0.0 for i in range(10))
 with torch.no_grad():
 for data in test_loader:
 images, labels = data[0].to(device), data[1].to(device)
 outputs = model(images)
 _, predicted = torch.max(outputs.data, 1)
 total += labels.size(0)
 correct += (predicted == labels).sum().item()
 c = (predicted == labels).squeeze()
 for i in range(10):
 label = labels[i]
 class_correct[label] += c[i].item()
 class_total[label] += 1

 # print total test set accuracy
 print(
 "Accuracy of the network on the 10000 test images: %d %"
 % (100 * correct / total)
)

 # print test accuracy for each of the classes
 for i in range(10):
 print(
 "Accuracy of %5s : %2d %"
 % (classes[i], 100 * class_correct[i] / class_total[i])
)

```

(continues on next page)



(continued from previous page)

```

def main(args):
 # get PyTorch environment variables
 world_size = int(os.environ["WORLD_SIZE"])
 rank = int(os.environ["RANK"])
 local_rank = int(os.environ["LOCAL_RANK"])

 distributed = world_size > 1

 if torch.cuda.is_available():
 print("CUDA is available.")
 else:
 print("CUDA is not available.")

 # set device
 if distributed:
 if torch.cuda.is_available():
 device = torch.device("cuda", local_rank)
 else:
 device = torch.device("cpu")
 else:
 device = torch.device("cuda:0" if torch.cuda.is_available() else "cpu")

 # initialize distributed process group using default env:// method
 if distributed:
 torch.distributed.init_process_group(
 backend=args.backend,
 timeout=datetime.timedelta(minutes=args.timeout)
)

 # define train and test dataset DataLoaders
 transform = transforms.Compose(
 [transforms.ToTensor(), transforms.Normalize((0.5, 0.5, 0.5), (0.5, 0.5, 0.5))]
)

 train_set = torchvision.datasets.CIFAR10(
 root=args.data_dir, train=True, download=True, transform=transform
)

 if distributed:
 train_sampler = torch.utils.data.distributed.DistributedSampler(train_set)
 else:
 train_sampler = None

 train_loader = torch.utils.data.DataLoader(
 train_set,
 batch_size=args.batch_size,
 shuffle=(train_sampler is None),
 num_workers=args.workers,
 sampler=train_sampler,
)

```

(continues on next page)

(continued from previous page)

```

test_set = torchvision.datasets.CIFAR10(
 root=args.data_dir, train=False, download=True, transform=transform
)
test_loader = torch.utils.data.DataLoader(
 test_set, batch_size=args.batch_size, shuffle=False, num_workers=args.workers
)

model = Net().to(device)

wrap model with DDP
if distributed:
 if torch.cuda.is_available():
 model = nn.parallel.DistributedDataParallel(
 model, device_ids=[local_rank], output_device=local_rank
)
 else:
 model = nn.parallel.DistributedDataParallel(model)

define loss function and optimizer
criterion = nn.CrossEntropyLoss()
optimizer = optim.SGD(
 model.parameters(), lr=args.learning_rate, momentum=args.momentum
)

train the model
for epoch in range(args.epochs):
 print("Rank %d: Starting epoch %d" % (rank, epoch))
 if distributed:
 train_sampler.set_epoch(epoch)
 model.train()
 train(
 train_loader,
 model,
 criterion,
 optimizer,
 epoch,
 device,
 args.print_freq,
 rank,
)

print("Rank %d: Finished Training" % (rank))

if not distributed or rank == 0:
 os.makedirs(args.output_dir, exist_ok=True)
 model_path = os.path.join(args.output_dir, "cifar_net.pt")
 torch.save(model.state_dict(), model_path)

evaluate on full test dataset
evaluate(test_loader, model, device)

```

(continues on next page)

(continued from previous page)

```

run script
if __name__ == "__main__":
 # setup argparse
 parser = argparse.ArgumentParser()
 parser.add_argument(
 "--data-dir", type=str, help="directory containing CIFAR-10 dataset"
)
 parser.add_argument("--epochs", default=10, type=int, help="number of epochs")
 parser.add_argument(
 "--batch-size",
 default=16,
 type=int,
 help="mini batch size for each gpu/process",
)
 parser.add_argument(
 "--workers",
 default=2,
 type=int,
 help="number of data loading workers for each gpu/process",
)
 parser.add_argument(
 "--learning-rate", default=0.001, type=float, help="learning rate"
)
 parser.add_argument("--momentum", default=0.9, type=float, help="momentum")
 parser.add_argument(
 "--output-dir", default="outputs", type=str, help="directory to save model to"
)
 parser.add_argument(
 "--print-freq",
 default=200,
 type=int,
 help="frequency of printing training statistics",
)
 parser.add_argument(
 "--backend", default="gloo", type=str,
 help="distributed communication backend, should be gloo, nccl or mpi"
)
 parser.add_argument(
 "--timeout", default=30, type=int,
 help="timeout in minutes for waiting for the initialization of distributed_
↪process group."
)
 args = parser.parse_args()

 # call main function
 main(args)

```

**Initialize a distributed-training folder:**

At this point you have create a training file (or files) - train.py in the above example. Now running the command below will download the artifacts required for building the docker image. The artifacts will be saved into the oci\_dist\_training\_artifacts/pytorch/v1 directory under your current working directory.

```
ads opctl distributed-training init --framework pytorch --version v1
```

### Containerize your code and build container:

Before you can build the image, you must set the following environment variables:

Specify image name and tag

```
export IMAGE_NAME=<region.ocir.io/my-tenancy/image-name>
export TAG=latest
```

Build the container image

```
ads opctl distributed-training build-image \
 -t $TAG \
 -reg $IMAGE_NAME \
 -df oci_dist_training_artifacts/pytorch/v1/Dockerfile
```

The code is assumed to be in the current working directory. To override the source code directory, use the `-s` flag and specify the code dir. This folder should be within the current working directory.

```
ads opctl distributed-training build-image \
 -t $TAG \
 -reg $IMAGE_NAME \
 -df oci_dist_training_artifacts/pytorch/v1/Dockerfile
 -s <code_dir>
```

If you are behind proxy, `ads opctl` will automatically use your proxy settings (defined via `no_proxy`, `http_proxy` and `https_proxy`).

### Define your workload yaml:

The `yaml` file is a declarative way to express the workload. Following is the `YAML` for running the example code, you will need to replace the values in the `spec` sections for your project:

- `infrastructure` contains `spec` for OCI Data Science Jobs. Here you need to specify a subnet that allows communications between nodes. The `VM.GPU2.1` shape is used in this example.
- `cluster` contains `spec` for the image you built and a working directory on OCI object storage, which will be used by job runs to shared internal configurations. Environment variables specified in the `cluster.spec.config` will be available in all nodes. Here the `NCCL_ASYNC_ERROR_HANDLING` is used to enable the timeout for NCCL backend. The job runs will be terminated if the nodes failed to connect to each other in certain minutes as specified in your training code when calling `init_process_group()`.
- `runtime` contains `spec` for the name of your training script, and the command line arguments for running the script. Here the `nccl` backend is used for communications between GPUs. For CPU training, you can use the `gloo` backend. The `timeout` argument specify the maximum minutes for the nodes to wait when calling `init_process_group()`. This is useful for preventing the job runs to wait forever in case of node failure.

Listing 11: `train.yaml`

```
kind: distributed
apiVersion: v1.0
spec:
 infrastructure:
 kind: infrastructure
 type: dataScienceJob
```

(continues on next page)

(continued from previous page)

```

apiVersion: v1.0
spec:
 projectId: oci.xxxx.<project_ocid>
 compartmentId: oci.xxxx.<compartment_ocid>
 displayName: PyTorch-Distributed
 logGroupId: oci.xxxx.<log_group_ocid>
 logId: oci.xxx.<log_ocid>
 subnetId: oci.xxxx.<subnet-ocid>
 shapeName: VM.GPU2.1
 blockStorageSize: 50
cluster:
 kind: pytorch
 apiVersion: v1.0
 spec:
 image: <region.ocir.io/my-tenancy/image-name>
 workDir: "oci://my-bucket@my-namespace/pytorch/distributed"
 config:
 env:
 - name: NCCL_ASYNC_ERROR_HANDLING
 value: '1'
 main:
 name: PyTorch-Distributed-main
 replicas: 1
 worker:
 name: PyTorch-Distributed-worker
 replicas: 3
runtime:
 kind: python
 apiVersion: v1.0
 spec:
 entryPoint: "train.py"
 args:
 - --data-dir
 - /home/datascience/data
 - --output-dir
 - /home/datascience/outputs
 - --backend
 - gloo
 - --timeout
 - 5

```

Use `ads opctl` to create the cluster infrastructure and dry-run the workload:

```
ads opctl run -f train.yaml --dry-run
```

the output from the dry run will show all the actions and infrastructure configuration.

Use `ads opctl` to create the cluster infrastructure and run the workload:

#### Test Locally:

Before submitting the workload to jobs, you can run it locally to test your code, dependencies, configurations etc. With `-b local` flag, it uses a local backend. Further when you need to run this workload on OCI data science jobs, simply use `-b job` flag instead.

```
ads opctl run -f train.yaml -b local
```

If your code requires to use any oci services (like object bucket), you need to mount oci keys from your local host machine onto the container. This is already done for you assuming the typical location of oci keys `~/.oci`. You can modify it though, in-case you have keys at a different location. You need to do this in the `config.ini` file.

```
oci_key_mnt = ~/.oci:/home/oci_dist_training/.oci
```

Note that the local backend requires the source code for your workload is available locally in the source folder specified in the `config.ini` file. If you specified Git repository or OCI object storage location as source code location in your workflow YAML, please make sure you have a local copy available for local testing.

#### Submit the workload:

```
ads opctl run -f train.yaml -b job
```

**Note::** This will automatically push the docker image to the OCI [container registry repo](#) .

Once running, you will see on the terminal outputs similar to the below

Listing 12: info.yaml

```
jobId: oci.xxxx.<job_ocid>
mainJobRunId:
 mainJobRunIdName: oci.xxxx.<job_run_ocid>
workDir: oci://my-bucket@my-namespace/cluster-testing/005
otherJobRunIds:
 - workerJobRunIdName_1: oci.xxxx.<job_run_ocid>
 - workerJobRunIdName_2: oci.xxxx.<job_run_ocid>
 - workerJobRunIdName_3: oci.xxxx.<job_run_ocid>
```

This information can be saved as YAML file and used as input to `ads opctl distributed-training show-config -f <info.yaml>`. You can use `--job-info` to save the job run info into YAML, for example:

```
ads opctl run -f train.yaml --job-info info.yaml
```

#### Monitoring the workload logs

To view the logs from a job run, you could run -

```
ads opctl watch oci.xxxx.<job_run_ocid>
```

You could stream the logs from any of the job run ocid using `ads opctl watch` command. You could run this command from multiple terminal to watch all of the job runs. Typically, watching `mainJobRunId` should yield most informative log.

#### Saving Artifacts to Object Storage Buckets

In case you want to save the artifacts generated by the training process (model checkpoints, TensorBoard logs, etc.) to an object bucket you can use the 'sync' feature. The environment variable `OCI__SYNC_DIR` exposes the directory location that will be automatically synchronized to the configured object storage bucket location. Use this directory in your training script to save the artifacts.

To configure the destination object storage bucket location, use the following settings in the workload yaml file(`train.yaml`).

```
- name: SYNC_ARTIFACTS
 value: 1
- name: WORKSPACE
 value: "<bucket_name>"
- name: WORKSPACE_PREFIX
 value: "<bucket_prefix>"
```

**Note:** Change SYNC\_ARTIFACTS to 0 to disable this feature. Use OCI\_\_SYNC\_DIR env variable in your code to save the artifacts. For Example :

```
model_path = os.path.join(os.environ.get("OCI__SYNC_DIR"), "model.pt")
torch.save(model, model_path)
```

## Profiling

You may want to profile your training setup for optimization/performance tuning. Profiling typically provides a detailed analysis of cpu utilization, gpu utilization, top cuda kernels, top operators etc. You can choose to profile your training setup using the native Pytorch profiler or using a third party profiler such as [Nvidia Nsights](#).

### Profiling using Pytorch Profiler

Pytorch Profiler is a native offering from Pytorch for Pytorch performance profiling. Profiling is invoked using code instrumentation using the api `torch.profiler.profile`.

Refer [this link](#) for changes that you need to do in your training script for instrumentation. You should choose the OCI\_\_SYNC\_DIR directory to save the profiling logs. For example:

```
prof = torch.profiler.profile(activities=[torch.profiler.ProfilerActivity.CPU, torch.
↪ profiler.ProfilerActivity.CUDA],
 schedule=torch.profiler.schedule(
 wait=1,
 warmup=1,
 active=3,
 repeat=1),
 on_trace_ready=torch.profiler.tensorboard_trace_handler(os.environ.get("OCI__SYNC_
↪ DIR") + "/logs"),
 with_stack=False)
prof.start()

training code
prof.end()
```

Also, the sync feature SYNC\_ARTIFACTS should be enabled '1' to sync the profiling logs to the configured object storage.

You would also need to install the Pytorch Tensorboard Plugin.

```
pip install torch-tb-profiler
```

Thereafter, use Tensorboard to view logs. Refer the [Tensorboard setup](#) for set-up on your computer.

### Profiling using Nvidia Nsights

[Nvidia Nsights](#). is a system wide profiling tool from Nvidia that can be used to profile Deep Learning workloads.

Nsights requires no change in your training code. This works on process level. You can enable this experimental feature in your training setup via the following configuration in the runtime yaml file(highlighted).

```
spec:
 image: "@image"
 workDir: "oci://@"
 name: "tf_multiworker"
 config:
 env:
 - name: WORKER_PORT
 value: 12345
 - name: SYNC_ARTIFACTS
 value: 1
 - name: WORKSPACE
 value: "<bucket_name>"
 - name: WORKSPACE_PREFIX
 value: "<bucket_prefix>"
 - name: PROFILE
 value: 1
 - name: PROFILE_CMD
 value: "nsys profile -w true -t cuda,nvtx,osrt,cudnn,cublas -s none -o /opt/
ml/nsight_report -x true"
 main:
 name: "main"
 replicas: 1
 worker:
 name: "worker"
 replicas: 1
```

Refer [this](#) for nsys profile command options. You can modify the command within the PROFILE\_CMD but remember this is all experimental. The profiling reports are generated per node. You need to download the reports to your computer manually or via the oci command.

```
oci os object bulk-download \
 -ns <namespace> \
 -bn <bucket_name> \
 --download-dir /path/on/your/computer \
 --prefix path/on/bucket/<job_id>
```

**Note:** -bn == WORKSPACE and --prefix path == WORKSPACE\_PREFIX/<job\_id> , as configured in the runtime yaml file. To view the reports, you would need to install Nsight Systems app from [here](#). Thereafter, open the downloaded reports in the Nsight Systems app.

### 11.3.7 Tensorflow

#### Distributed training with Native TensorFlow

TensorFlow is an open-source software framework for distributed deep learning training. Tensorflow has multiple strategies. The following are supported:

1. MirroredStrategy
2. MultiWorkerMirroredStrategy
3. ParameterServerStrategy



### 11.3.7.1 Creating Tensorflow Workloads

#### Prerequisites

1. Internet Connection
2. ADS cli is installed
3. Install docker: <https://docs.docker.com/get-docker>

#### Write your training code:

Your model training script needs to use one of Distributed Strategies in tensorflow.

For example, you can have the following training Tensorflow script for MultiWorkerMirroredStrategy saved as *mnist.py*:

```
Script adapted from tensorflow tutorial: https://www.tensorflow.org/tutorials/
↳distribute/multi_worker_with_keras
import tensorflow as tf
import tensorflow_datasets as tfds
import os
import sys
import time
import ads
from ocifs import OCIFileSystem
from tensorflow.data.experimental import AutoShardPolicy

BUFFER_SIZE = 10000
BATCH_SIZE_PER_REPLICA = 64

if '.' not in sys.path:
 sys.path.insert(0, '.')

def create_dir(dir):
 if not os.path.exists(dir):
 os.makedirs(dir)

def create_dirs(task_type="worker", task_id=0):
 artifacts_dir = os.environ.get("OCI__SYNC_DIR", "/opt/ml")
 model_dir = artifacts_dir + "/model"
 print("creating dirs for Model: ", model_dir)
 create_dir(model_dir)
 checkpoint_dir = write_filepath(artifacts_dir, task_type, task_id)
 return artifacts_dir, checkpoint_dir, model_dir

def write_filepath(artifacts_dir, task_type, task_id):
 if task_type == None:
 task_type = "worker"
 checkpoint_dir = artifacts_dir + "/checkpoints/" + task_type + "/" + str(task_id)
 print("creating dirs for Checkpoints: ", checkpoint_dir)
 create_dir(checkpoint_dir)
 return checkpoint_dir
```

(continues on next page)

(continued from previous page)

```

def scale(image, label):
 image = tf.cast(image, tf.float32)
 image /= 255
 return image, label

def get_data(data_bckt=None, data_dir="/code/data", num_replicas=1, num_workers=1):
 if data_bckt is not None and not os.path.exists(data_dir + '/mnist'):
 print(f"downloading data from {data_bckt}")
 ads.set_auth(os.environ.get("OCI_IAM_TYPE", "resource_principal"))
 authinfo = ads.common.auth.default_signer()
 oci_filesystem = OCIFileSystem(**authinfo)
 lck_file = os.path.join(data_dir, '.lck')
 if not os.path.exists(lck_file):
 os.makedirs(os.path.dirname(lck_file), exist_ok=True)
 open(lck_file, 'w').close()
 oci_filesystem.download(data_bckt, data_dir, recursive=True)
 else:
 print(f"data downloaded by a different process. waiting")
 time.sleep(30)

 BATCH_SIZE = BATCH_SIZE_PER_REPLICA * num_replicas * num_workers
 print("Now printing data_dir:", data_dir)
 datasets, info = tfds.load(name='mnist', with_info=True, as_supervised=True, data_
↪ dir=data_dir)
 mnist_train, mnist_test = datasets['train'], datasets['test']
 print("num_train_examples :", info.splits['train'].num_examples, " num_test_examples:
↪ ",
 info.splits['test'].num_examples)

 train_dataset = mnist_train.map(scale).cache().shuffle(BUFFER_SIZE).batch(BATCH_SIZE)
 test_dataset = mnist_test.map(scale).batch(BATCH_SIZE)
 train = shard(train_dataset)
 test = shard(test_dataset)
 return train, test, info

def shard(dataset):
 options = tf.data.Options()
 options.experimental_distribute.auto_shard_policy = AutoShardPolicy.DATA
 return dataset.with_options(options)

def decay(epoch):
 if epoch < 3:
 return 1e-3
 elif epoch >= 3 and epoch < 7:
 return 1e-4
 else:
 return 1e-5

```

(continues on next page)

(continued from previous page)

```

def get_callbacks(model, checkpoint_dir="/opt/ml/checkpoints"):
 checkpoint_prefix = os.path.join(checkpoint_dir, "ckpt_{epoch}")

 class PrintLR(tf.keras.callbacks.Callback):
 def on_epoch_end(self, epoch, logs=None):
 print('\nLearning rate for epoch {} is {}'.format(epoch + 1, model.optimizer.
→lr.numpy()), flush=True)

 callbacks = [
 tf.keras.callbacks.TensorBoard(log_dir='./logs'),
 tf.keras.callbacks.ModelCheckpoint(filepath=checkpoint_prefix,
 # save_weights_only=True
),
 tf.keras.callbacks.LearningRateScheduler(decay),
 PrintLR()
]
 return callbacks

def build_and_compile_cnn_model():
 print("TF_CONFIG in model:", os.environ.get("TF_CONFIG"))
 model = tf.keras.Sequential([
 tf.keras.layers.Conv2D(32, 3, activation='relu', input_shape=(28, 28, 1)),
 tf.keras.layers.MaxPooling2D(),
 tf.keras.layers.Flatten(),
 tf.keras.layers.Dense(64, activation='relu'),
 tf.keras.layers.Dense(10)
])

 model.compile(loss=tf.keras.losses.SparseCategoricalCrossentropy(from_logits=True),
 optimizer=tf.keras.optimizers.Adam(),
 metrics=['accuracy'])
 return model

```

And, save the following script as *train.py*

```

import tensorflow as tf
import argparse
import mnist

print(tf.__version__)

parser = argparse.ArgumentParser(description='Tensorflow Native MNIST Example')
parser.add_argument('--data-dir',
 help='location of the training dataset in the local filesystem (will_
→be downloaded if needed)',
 default='/code/data')
parser.add_argument('--data-bckt',
 help='location of the training dataset in an object storage bucket',
 default=None)

args = parser.parse_args()

```

(continues on next page)

(continued from previous page)

```

artifacts_dir, checkpoint_dir, model_dir = mnist.create_dirs()

strategy = tf.distribute.MirroredStrategy()
print('Number of devices: {}'.format(strategy.num_replicas_in_sync))

train_dataset, test_dataset, info = mnist.get_data(data_bckt=args.data_bckt, data_
↳dir=args.data_dir,
 num_replicas=strategy.num_replicas_in_
↳sync)
with strategy.scope():
 model = mnist.build_and_compile_cnn_model()

model.fit(train_dataset, epochs=2, callbacks=mnist.get_callbacks(model, checkpoint_dir))

model.save(model_dir, save_format='tf')

```

**Initialize a distributed-training folder:**

At this point you have created a training file (or files) - `train.py` from the above example. Now, run the command below.

```
ads opctl distributed-training init --framework tensorflow --version v1
```

This will download the tensorflow framework and place it inside '`oci_dist_training_artifacts`' folder.

**Note:** Whenever you change the code, you have to build, tag and push the image to repo. This is automatically done in '`ads opctl run` cli` command.

**Containerize your code and build container:**

The required python dependencies are provided inside the conda environment file `oci_dist_training_artifacts/tensorflow/v1/environments.yaml`. If your code requires additional dependency, update this file.

Also, while updating `environments.yaml` do not remove the existing libraries. You can append to the list.

Update the TAG and the IMAGE\_NAME as per your needs -

```

export IMAGE_NAME=<region.ocir.io/my-tenancy/image-name>
export TAG=latest
export MOUNT_FOLDER_PATH=.

```

Build the container image.

```

ads opctl distributed-training build-image \
 -t $TAG \
 -reg $IMAGE_NAME \
 -df oci_dist_training_artifacts/tensorflow/v1/Dockerfile \

```

The code is assumed to be in the current working directory. To override the source code directory, use the `-s` flag and specify the code dir. This folder should be within the current working directory.

```

ads opctl distributed-training build-image \
 -t $TAG \
 -reg $IMAGE_NAME \

```

(continues on next page)

(continued from previous page)

```
-df oci_dist_training_artifacts/tensorflow/v1/Dockerfile \
-s $MOUNT_FOLDER_PATH
```

If you are behind proxy, ads opctl will automatically use your proxy settings (defined via no\_proxy, http\_proxy and https\_proxy).

### Define your workload yaml:

The yaml file is a declarative way to express the workload. In this example, we bring up 1 worker node and 1 chief-worker node. The training code to run is train.py. All your training code is assumed to be present inside /code directory within the container. Additionally, you can also put any data files inside the same directory (and pass on the location ex /code/data/\*\* as an argument to your training script using runtime->spec->args).

```
kind: distributed
apiVersion: v1.0
spec:
 infrastructure:
 kind: infrastructure
 type: dataScienceJob
 apiVersion: v1.0
 spec:
 projectId: oci.xxxx.<project_ocid>
 compartmentId: oci.xxxx.<compartment_ocid>
 displayName: Tensorflow
 logGroupId: oci.xxxx.<log_group_ocid>
 subnetId: oci.xxxx.<subnet-ocid>
 shapeName: VM.GPU2.1
 blockStorageSize: 50
 cluster:
 kind: TENSORFLOW
 apiVersion: v1.0
 spec:
 image: "@image"
 workDir: "oci://<bucket_name>@<bucket_namespace>/<bucket_prefix>"
 name: "tf_multiworker"
 config:
 env:
 - name: WORKER_PORT #Optional. Defaults to 12345
 value: 12345
 - name: SYNC_ARTIFACTS #Mandatory: Switched on by Default.
 value: 1
 - name: WORKSPACE #Mandatory if SYNC_ARTIFACTS==1: Destination object bucket,
 value: "<bucket_name>"
 ↪ to sync generated artifacts to.
 - name: WORKSPACE_PREFIX #Mandatory if SYNC_ARTIFACTS==1: Destination object,
 value: "<bucket_prefix>"
 ↪ bucket folder to sync generated artifacts to.
 main:
 name: "chief"
 replicas: 1 #this will be always 1.
 worker:
 name: "worker"
 replicas: 1 #number of workers. This is in addition to the 'chief' worker. Could,
```

(continues on next page)

(continued from previous page)

```

↪ be more than 1
runtime:
 kind: python
 apiVersion: v1.0
 spec:
 entryPoint: "/code/train.py" #location of user's training script in the container.
↪ image.
 args: #any arguments that the training script requires.
 - --data-dir # assuming data folder has been bundled in the container image.
 - /code/data/
 env:

```

**Use ads opctl to create the cluster infrastructure and run the workload:**

Do a dry run to inspect how the yaml translates to Job and Job Runs

```
ads opctl run -f train.yaml --dry-run
```

This will give output similar to this.

```

-----Entering dryrun mode-----
Creating Job with payload:
kind: job
spec:
 infrastructure:
 kind: infrastructure
 spec:
 projectId: oci.xxxx.<project_ocid>
 compartmentId: oci.xxxx.<compartment_ocid>
 displayName: Tensorflow
 logGroupId: oci.xxxx.<log_group_ocid>
 logId: oci.xxx.<log_ocid>
 subnetId: oci.xxxx.<subnet-ocid>
 shapeName: VM.GPU2.1
 blockStorageSize: 50
 type: dataScienceJob
 name: tf_multiworker
 runtime:
 kind: runtime
 spec:
 entrypoint: null
 env:
 - name: WORKER_PORT
 value: 12345
 - name: SYNC_ARTIFACTS
 value: 1
 - name: WORKSPACE
 value: "<bucket_name>"
 - name: WORKSPACE_PREFIX
 value: "<bucket_prefix>"
 - name: OCI__WORK_DIR
 value: oci://<bucket_name>@<bucket_namespace>/<bucket_prefix>
 - name: OCI__EPHEMERAL

```

(continues on next page)

(continued from previous page)

```

 value: None
 - name: OCI__CLUSTER_TYPE
 value: TENSORFLOW
 - name: OCI__WORKER_COUNT
 value: '1'
 - name: OCI__START_ARGS
 value: ''
 - name: OCI__ENTRY_SCRIPT
 value: /code/train.py
 image: "<region>.ocir.io/<tenancy_id>/<repo_name>/<image_name>:<image_tag>"
 type: container

```

```

+++++
Creating Main Job Run with following details:
Name: chief
Environment Variables:
 OCI__MODE:MAIN
~~~~~
Creating Job Runs with following details:
Name: worker_0
Environment Variables:
  OCI__MODE:WORKER
-----Ending dryrun mode-----

```

**Test Locally:**

Before submitting the workload to jobs, you can run it locally to test your code, dependencies, configurations etc. With `-b local` flag, it uses a local backend. Further when you need to run this workload on OCI data science jobs, simply use `-b job` flag instead.

```
ads opctl run -f train.yaml -b local
```

If your code requires to use any oci services (like object bucket), you need to mount oci keys from your local host machine onto the container. This is already done for you assuming the typical location of oci keys `~/.oci`. You can modify it though, in-case you have keys at a different location. You need to do this in the `config.ini` file.

```
oci_key_mnt = ~/.oci:/home/oci_dist_training/.oci
```

Note that the local backend requires the source code for your workload is available locally in the source folder specified in the `config.ini` file. If you specified Git repository or OCI object storage location as source code location in your workflow YAML, please make sure you have a local copy available for local testing.

**Submit the workload:**

```
ads opctl run -f train.yaml -b job
```

**Note::** This will automatically push the docker image to the OCI [container registry repo](#) .

Once running, you will see on the terminal outputs similar to the below

Listing 13: info.yaml

```

jobId: oci.xxxx.<job_ocid>
mainJobRunId:

```

(continues on next page)

(continued from previous page)

```

mainJobRunIdName: oci.xxxx.<job_run_ocid>
workDir: oci://my-bucket@my-namespace/cluster-testing/005
otherJobRunIds:
- workerJobRunIdName_1: oci.xxxx.<job_run_ocid>
- workerJobRunIdName_2: oci.xxxx.<job_run_ocid>
- workerJobRunIdName_3: oci.xxxx.<job_run_ocid>

```

This information can be saved as YAML file and used as input to `ads opctl distributed-training show-config -f <info.yaml>`. You can use `--job-info` to save the job run info into YAML, for example:

```
ads opctl run -f train.yaml --job-info info.yaml
```

### Saving Artifacts to Object Storage Buckets

In case you want to save the artifacts generated by the training process (model checkpoints, TensorBoard logs, etc.) to an object bucket you can use the 'sync' feature. The environment variable `OCI__SYNC_DIR` exposes the directory location that will be automatically synchronized to the configured object storage bucket location. Use this directory in your training script to save the artifacts.

To configure the destination object storage bucket location, use the following settings in the workload yaml file(`train.yaml`).

```

- name: SYNC_ARTIFACTS
  value: 1
- name: WORKSPACE
  value: "<bucket_name>"
- name: WORKSPACE_PREFIX
  value: "<bucket_prefix>"

```

**Note:** Change `SYNC_ARTIFACTS` to `0` to disable this feature. Use `OCI__SYNC_DIR` env variable in your code to save the artifacts. For Example :

```

tf.keras.callbacks.ModelCheckpoint(os.path.join(os.environ.get("OCI__SYNC_DIR"), "ckpts",
↪ 'checkpoint-{epoch}.h5'))

```

### Monitoring the workload logs

To view the logs from a job run, you could run -

```
ads jobs watch oci.xxxx.<job_run_ocid>
```

### Profiling

You may want to profile your training setup for optimization/performance tuning. Profiling typically provides a detailed analysis of cpu utilization, gpu utilization, top cuda kernels, top operators etc. You can choose to profile your training setup using the native Pytorch profiler or using a third party profiler such as [Nvidia Nsights](#).

#### Profiling using Tensorflow Profiler

[Tensorflow Profiler](#) is a native offering from Tensorflow for Tensorflow performance profiling.

Profiling is invoked using code instrumentation using one of the following apis.

```

tf.keras.callbacks.TensorBoard
tf.profiler.experimental.Profile

```

Refer above links for changes that you need to do in your training script for instrumentation.



You should choose the `OCI__SYNC_DIR` directory to save the profiling logs. For example:

```
options = tf.profiler.experimental.ProfilerOptions(
    host_tracer_level=2,
    python_tracer_level=1,
    device_tracer_level=1,
    delay_ms=None)
with tf.profiler.experimental.Profile(os.environ.get("OCI__SYNC_DIR") + "/logs",
    ↪options=options):
    # training code
```

In case of keras callback:

```
tboard_callback = tf.keras.callbacks.TensorBoard(log_dir = os.environ.get("OCI__SYNC_DIR"
    ↪) + "/logs",
                                                histogram_freq = 1,
                                                profile_batch = '500,520')
model.fit(...,callbacks = [tboard_callback])
```

Also, the sync feature `SYNC_ARTIFACTS` should be enabled '1' to sync the profiling logs to the configured object storage.

Thereafter, use Tensorboard to view logs. Refer the [Tensorboard setup](#) for set-up on your computer.

### Profiling using Nvidia Nsights

**Nvidia Nsights.** is a system wide profiling tool from Nvidia that can be used to profile Deep Learning workloads.

Nsights requires no change in your training code. This works on process level. You can enable this experimental feature in your training setup via the following configuration in the runtime yaml file(highlighted).

```
spec:
  image: "@image"
  workDir: "oci://@"
  name: "tf_multiworker"
  config:
    env:
      - name: WORKER_PORT
        value: 12345
      - name: SYNC_ARTIFACTS
        value: 1
      - name: WORKSPACE
        value: "<bucket_name>"
      - name: WORKSPACE_PREFIX
        value: "<bucket_prefix>"
      - name: PROFILE
        value: 1
      - name: PROFILE_CMD
        value: "nsys profile -w true -t cuda,nvtx,osrt,cudnn,cublas -s none -o /opt/
    ↪ml/nsight_report -x true"
  main:
    name: "main"
    replicas: 1
  worker:
    name: "worker"
    replicas: 1
```

Refer [this](#) for nsys profile command options. You can modify the command within the PROFILE\_CMD but remember this is all experimental. The profiling reports are generated per node. You need to download the reports to your computer manually or via the oci command.

```
oci os object bulk-download \
  -ns <namespace> \
  -bn <bucket_name> \
  --download-dir /path/on/your/computer \
  --prefix path/on/bucket/<job_id>
```

**Note:** -bn == WORKSPACE and --prefix path == WORKSPACE\_PREFIX/<job\_id> , as configured in the runtime yaml file. To view the reports, you would need to install Nsight Systems app from [here](#). Thereafter, open the downloaded reports in the Nsight Systems app.

### Other Tensorflow Strategies supported

Tensorflow has two multi-worker strategies: MultiWorkerMirroredStrategy and ParameterServerStrategy. Let's see changes that you would need to do to run ParameterServerStrategy workload.

You can have the following training Tensorflow script for ParameterServerStrategy saved as train.py (just like mnist.py and train.py in case of MultiWorkerMirroredStrategy):

```
# Script adapted from tensorflow tutorial: https://www.tensorflow.org/tutorials/
↳ distribute/parameter_server_training

import os
import tensorflow as tf
import json
import multiprocessing

NUM_PS = len(json.loads(os.environ['TF_CONFIG']))['cluster']['ps']
global_batch_size = 64

def worker(num_workers, cluster_resolver):
    # Workers need some inter_ops threads to work properly.
    worker_config = tf.compat.v1.ConfigProto()
    if multiprocessing.cpu_count() < num_workers + 1:
        worker_config.inter_op_parallelism_threads = num_workers + 1

    for i in range(num_workers):
        print("cluster_resolver.task_id: ", cluster_resolver.task_id, flush=True)

        s = tf.distribute.Server(
            cluster_resolver.cluster_spec(),
            job_name=cluster_resolver.task_type,
            task_index=cluster_resolver.task_id,
            config=worker_config,
            protocol="grpc")
        s.join()

def ps(num_ps, cluster_resolver):
    print("cluster_resolver.task_id: ", cluster_resolver.task_id, flush=True)
    for i in range(num_ps):
```

(continues on next page)

(continued from previous page)

```

s = tf.distribute.Server(
    cluster_resolver.cluster_spec(),
    job_name=cluster_resolver.task_type,
    task_index=cluster_resolver.task_id,
    protocol="grpc")
s.join()

def create_cluster(cluster_resolver, num_workers=1, num_ps=1, mode="worker"):
    os.environ["GRPC_FAIL_FAST"] = "use_caller"

    if mode.lower() == 'worker':
        print("Starting worker server...", flush=True)
        worker(num_workers, cluster_resolver)
    else:
        print("Starting ps server...", flush=True)
        ps(num_ps, cluster_resolver)

    return cluster_resolver, cluster_resolver.cluster_spec()

def decay(epoch):
    if epoch < 3:
        return 1e-3
    elif epoch >= 3 and epoch < 7:
        return 1e-4
    else:
        return 1e-5

def get_callbacks(model):
    class PrintLR(tf.keras.callbacks.Callback):
        def on_epoch_end(self, epoch, logs=None):
            print('\nLearning rate for epoch {} is {}'.format(epoch + 1, model.optimizer.
↪lr.numpy()), flush=True)

    callbacks = [
        tf.keras.callbacks.TensorBoard(log_dir='./logs'),
        tf.keras.callbacks.LearningRateScheduler(decay),
        PrintLR()
    ]
    return callbacks

def create_dir(dir):
    if not os.path.exists(dir):
        os.makedirs(dir)

def get_artificial_data():
    x = tf.random.uniform((10, 10))
    y = tf.random.uniform((10,))

    dataset = tf.data.Dataset.from_tensor_slices((x, y)).shuffle(10).repeat()
    dataset = dataset.batch(global_batch_size)

```

(continues on next page)

(continued from previous page)

```

dataset = dataset.prefetch(2)
return dataset

cluster_resolver = tf.distribute.cluster_resolver.TFConfigClusterResolver()
if not os.environ["OCI__MODE"] == "MAIN":
    create_cluster(cluster_resolver, num_workers=1, num_ps=1, mode=os.environ["OCI__MODE"]
    ↪")
    pass

variable_partitioner = (
    tf.distribute.experimental.partitioners.MinSizePartitioner(
        min_shard_bytes=(256 << 10),
        max_shards=NUM_PS))

strategy = tf.distribute.ParameterServerStrategy(
    cluster_resolver,
    variable_partitioner=variable_partitioner)

dataset = get_artificial_data()

with strategy.scope():
    model = tf.keras.models.Sequential([tf.keras.layers.Dense(10)])
    model.compile(tf.keras.optimizers.SGD(), loss="mse", steps_per_execution=10)

callbacks = get_callbacks(model)
model.fit(dataset, epochs=5, steps_per_epoch=20, callbacks=callbacks)

```

Train.yaml: The only difference here is that the parameter server train.yaml also needs to have ps worker-pool. This will create dedicated instance(s) for Tensorflow Parameter Servers.

Use the following train.yaml:

```

kind: distributed
apiVersion: v1.0
spec:
  infrastructure:
    kind: infrastructure
    type: dataScienceJob
    apiVersion: v1.0
    spec:
      projectId: oci.xxxx.<project_ocid>
      compartmentId: oci.xxxx.<compartment_ocid>
      displayName: Distributed-TF
      logGroupId: oci.xxxx.<log_group_ocid>
      subnetId: oci.xxxx.<subnet_ocid>
      shapeName: VM.Standard2.4
      blockStorageSize: 50
  cluster:
    kind: TENSORFLOW
    apiVersion: v1.0
    spec:

```

(continues on next page)

(continued from previous page)

```

image: "@image"
workDir: "oci://<bucket_name>@<bucket_namespace>/<bucket_prefix>"
name: "tf_ps"
config:
  env:
    - name: WORKER_PORT #Optional. Defaults to 12345
      value: 12345
    - name: SYNC_ARTIFACTS #Mandatory: Switched on by Default.
      value: 1
    - name: WORKSPACE #Mandatory if SYNC_ARTIFACTS==1: Destination object bucket.
      ↪ to sync generated artifacts to.
      value: "<bucket_name>"
    - name: WORKSPACE_PREFIX #Mandatory if SYNC_ARTIFACTS==1: Destination object.
      ↪ bucket folder to sync generated artifacts to.
      value: "<bucket_prefix>"
  main:
    name: "coordinator"
    replicas: 1 #this will be always 1.
  worker:
    name: "worker"
    replicas: 1 #number of workers; any number > 0
  ps:
    name: "ps" # number of parameter servers; any number > 0
    replicas: 1
runtime:
  kind: python
  apiVersion: v1.0
  spec:
    spec:
      entryPoint: "/code/train.py" #location of user's training script in the container.
      ↪ image.
      args: #any arguments that the training script requires.
      env:

```

The rest of the steps remain the same and should be followed as it is.

### 11.3.8 Run Source Code from Git or Object Storage

#### Require ADS >=2.6.3

Running source code from Git or Object Storage requires ADS 2.6.3 or newer.

```
python3 -m pip install oracle-ads>=2.6.3 --upgrade
```

Instead of adding the training source code to the docker image, you can also fetch the code at runtime from Git repository or object storage.

### 11.3.8.1 Git Repository

To fetch code from Git repository, you can update the `runtime` section of the yaml to specify `type` as `git` and add `uri` of the Git repository to the `runtime.spec` section. For example:

```
1 runtime:
2   apiVersion: v1
3   kind: python
4   type: git
5   spec:
6     uri: git@github.com:username/repository.git
7     branch: develop
8     commit: abcdef
9     gitSecretId: ocid1.xxxxxx
10    entryPoint: "train.py"
```

The spec supports the following options:

- `uri`, the URI of the git repository. This can be `http` or `https` URI for public repository. For private repository, please use `ssh` or `git@` URI.
- `branch`, the Git branch. The default branch (usually `main`) will be used if this is not specified.
- `commit`, the Git commit. The latest commit will be used if this is not specified.
- `gitSecretId`, the OCID of secret from OCI vault, which stores the SSH key for accessing private repository.
- `entryPoint`, the file path to start the training code. The can be the relative path relative to the root of the git repository. The source code is cloned to the `/code` directory. You may also use the absolute path.

To clone the git repository, your subnet needs egress from port 80 for `http`, 443 for `https`, or 22 for `ssh`.

You can config proxy for git clone by setting the corresponding `ssh_proxy`, `http_proxy` or `https_proxy` environment variable to the proxy address. If you configured `https_proxy` or `http_proxy`, you also need to add all IP addresses in your subnet to the `no_proxy` environment variable since communications between training nodes should not go through proxy.

### 11.3.8.2 Object Storage

To fetch code from Object Storage, you can update the `runtime` section of the yaml to specify `type` as `remote` and add `uri` of the OCI object storage to the `runtime.spec` section. For example:

```
1 runtime:
2   apiVersion: v1
3   kind: python
4   type: remote
5   spec:
6     uri: oci://bucket@namespace/prefix/to/source_code_dir
7     entryPoint: "/code/source_code_dir/train.py"
```

The `uri` can be a single file or a prefix (directory). The `entryPoint` is the the file path to start the training code. When using relative path, if `uri` is a single file, `entryPoint` should be the filename. If `uri` is a directory, the `entryPoint` should contain the name of the directory like the example above. The source code is cloned to the `/code` directory. You may also use the absolute path.

### 11.3.9 YAML Schema

The distributed training workload is defined in YAML and can be launched by invoking the `ads opctl run -f path/to/yaml` command.

Following is the YAML schema for validating the YAML using [Cerberus](#):

```

1 kind:
2   type: string
3   allowed:
4     - distributed
5 apiVersion:
6   type: string
7 spec:
8   type: dict
9   schema:
10    infrastructure:
11      type: dict
12      schema:
13        kind:
14          type: string
15          allowed:
16            - infrastructure
17        type:
18          type: string
19          allowed:
20            - dataScienceJob
21      apiVersion:
22        type: string
23      spec:
24        type: dict
25        schema:
26          displayName:
27            type: string
28          compartmentId:
29            type: string
30          projectId:
31            type: string
32          logGroupId:
33            type: string
34          logId:
35            type: string
36          subnetId:
37            type: string
38          shapeName:
39            type: string
40          blockStorageSize:
41            type: integer
42            min: 50

```

(continues on next page)

(continued from previous page)

```
43 cluster:
44     type: dict
45     schema:
46         kind:
47             type: string
48         allowed:
49             - PYTORCH
50             - DASK
51             - HOROVOD
52             - dask
53             - pytorch
54             - horovod
55     apiVersion:
56         type: string
57     spec:
58         type: dict
59         schema:
60             image:
61                 type: string
62             workDir:
63                 type: string
64             name:
65                 type: string
66             config:
67                 type: dict
68                 nullable: true
69                 schema:
70                     startOptions:
71                         type: list
72                         schema:
73                             type: string
74             env:
75                 type: list
76                 nullable: true
77                 schema:
78                     type: dict
79                     schema:
80                         name:
81                             type: string
82                         value:
83                             type:
84                                 - number
85                                 - string
86     main:
87         type: dict
88         schema:
89             name:
90                 type: string
91             replicas:
92                 type: integer
93             config:
94                 type: dict
```

(continues on next page)



(continued from previous page)

```

95         nullable: true
96         schema:
97             env:
98                 type: list
99                 nullable: true
100                 schema:
101                     type: dict
102                     schema:
103                         name:
104                             type: string
105                         value:
106                             type:
107                                 - number
108                                 - string
109         worker:
110             type: dict
111             schema:
112                 name:
113                     type: string
114                 replicas:
115                     type: integer
116                 config:
117                     type: dict
118                     nullable: true
119                     schema:
120                         env:
121                             type: list
122                             nullable: true
123                             schema:
124                                 type: dict
125                                 schema:
126                                     name:
127                                         type: string
128                                     value:
129                                         type:
130                                             - number
131                                             - string
132         runtime:
133             type: dict
134             schema:
135                 kind:
136                     type: string
137                 apiVersion:
138                     type: string
139                 spec:
140                     type: dict
141                     schema:
142                         entryPoint:
143                             type: string
144                         kwargs:
145                             type: string
146                         args:

```

(continues on next page)

(continued from previous page)

```
147         type: list
148         schema:
149             type:
150                 - number
151                 - string
152     env:
153         type: list
154         nullable: true
155         schema:
156             type: dict
157             schema:
158                 name:
159                     type: string
160                 value:
161                     type:
162                         - number
163                         - string
```

### 11.3.10 Troubleshooting

Check guide for troubleshooting and known issues.

## 11.4 TensorBoard

TensorBoard helps visualizing your experiments. You bring up a TensorBoard session on your workstation and point to the directory that contains the TensorBoard logs.

### Prerequisite

1. Object storage bucket
2. Access to Object Storage bucket from your workstation
3. ocifs version 1.1.0 and above

### 11.4.1 Setting up local environment

It is required that `tensorboard` is installed in a dedicated conda environment or virtual environment. Prepare an environment yaml file for creating conda environment with following command -

```
cat <<EOF > tensorboard-dep.yaml
dependencies:
- python=3.8
- pip
- pip:
    - ocifs
    - tensorboard
name: tensorboard
EOF
```

Create the conda environment from the yaml file generated in the preceeding step

```
conda env create -f tensorboard-dep.yaml
```

This will create a conda environment called tensorboard. Activate the conda environment by running -

```
conda activate tensorboard
```

## 11.4.2 Viewing logs from your experiments

To launch a TensorBoard session on your local workstation, run -

```
export OCIFS_IAM_KEY=api_key # If you are using resource principal, set resource_
↪principal
tensorboard --logdir oci://my-bucket@my-namespace/path/to/logs
```

This will bring up TensorBoard app on your workstation. Access TensorBoard at <http://localhost:6006/>

**Note:** The logs take some initial time (few minutes) to reflect on the tensorboard dashboard.

## 11.4.3 Writing TensorBoard logs to Object Storage

### Prerequisite

1. tensorboard is installed.
2. ocifs version is 1.1.0 and above.
3. oracle-ads version 2.6.0 and above.

### 11.4.3.1 PyTorch

You could write your logs from your PyTorch experiments directly to object storage and view the logs on TensorBoard running on your local workstation in real time. Here is an example of running PyTorch experiment and writing TensorBoard logs from OCI Data Science Notebook

1. Create or Open an existing OCI Data Science Notebook session
2. Run `odsc conda install -s pytorch110_p37_cpu_v1` on terminal inside the notebook session
3. Activate conda environment - `conda activate /home/datascience/conda/pytorch110_p37_cpu_v1`
4. Install TensorBoard - `python3 -m pip install tensorboard`
5. Upgrade to latest ocifs - `python3 -m pip install ocifs --upgrade`
6. Create a notebook and select pytorch110\_p37\_cpu\_v1 kernel
7. Copy the following code into a cell and update the object storage path in the code snippet

```
# Reference: https://github.com/pytorch/tutorials/blob/master/recipes_source/recipes/
↪tensorboard_with_pytorch.py

import torch
from torch.utils.tensorboard import SummaryWriter
writer = SummaryWriter("oci://my-bucket@my-namespace/path/to/logs")

x = torch.arange(-5, 5, 0.1).view(-1, 1)
```

(continues on next page)

(continued from previous page)

```

y = -5 * x + 0.1 * torch.randn(x.size())

model = torch.nn.Linear(1, 1)
criterion = torch.nn.MSELoss()
optimizer = torch.optim.SGD(model.parameters(), lr = 0.1)

def train_model(iter):
    for epoch in range(iter):
        y1 = model(x)
        loss = criterion(y1, y)
        writer.add_scalar("Loss/train", loss, epoch)
        optimizer.zero_grad()
        loss.backward()
        optimizer.step()

train_model(10)
writer.flush()
writer.close()

```

7. Run the cell
8. View the logs from you workstation while the experiement is in progress by lauching TensorBoard with following command -

```
OCIFS_IAM_TYPE=api_key tensorboard --logdir "oci://my-bucket@my-namespace/path/to/logs"
```

For more possibilities with TensorBoard and PyTorch check this [link](#)

### 11.4.3.2 TensorFlow

Currently TensorFlow cannot write directly to object storage. However, we can create logs in the local directory and then copy the logs over to object storage, which then can be viewed from the TensorBoard running on your local workstation.

When you run a OCI Data Science Job with `ads.jobs.NotebookRuntime` or `ads.jobs.GitRuntime`, all the output is automatically copied over to the configured object storage bucket.

#### 11.4.3.2.1 OCI Data Science Notebook

Here is an example of running a TensorFlow experiment in OCI Data Science Notebook and then viewing the logs from TensorBoard

1. Create or open an existing notebook session.
2. Download notebook - [https://raw.githubusercontent.com/mayoor/stats-ml-exps/master/tensorboard\\_tf.ipynb](https://raw.githubusercontent.com/mayoor/stats-ml-exps/master/tensorboard_tf.ipynb)

```
!wget https://raw.githubusercontent.com/mayoor/stats-ml-exps/master/tensorboard_tf.ipynb
```

3. Run `odsc conda install -s tensorflow27_p37_cpu_v1` on terminal to install TensorFlow 2.6 environment.
4. Open the downloaded notebook - `tensorboard_tf.ipynb`
5. Select `tensorflow27_p37_cpu_v1` kernel.

6. Run all cells.
7. Copy TensorBoard logs folder - tflogs to object storage using oci-cli

```
oci os object bulk-upload -bn "<my-bucket>" -ns "<my-namespace>" --src-dir tflogs --
↪prefix myexperiment/tflogs/
```

View the logs from you workstation once the logs are uploaded by launching the TensorBoard with following command -

```
OCIFS_IAM_TYPE=api_key tensorboard --logdir "oci://my-bucket@my-namespace/myexperiment/
↪tflogs/"
```

#### 11.4.3.2.2 OCI Data Science Jobs

Here is an example of running a TensorFlow experiment in OCI Data Science Jobs and then viewing the logs from TensorBoard

1. Run the following code to submit a notebook to OCI Data Science Job. You could run this code snippet from your local workstation or OCI Data Science Notebook session. You need oracle-ads version >= 2.6.0.

```
from ads.jobs import Job, DataScienceJob, NotebookRuntime
# Define an OCI Data Science job to run a jupyter Python notebook
job = (
    Job(name="<job_name>")
    .with_infrastructure(
        # The same configurations as the OCI notebook session will be used.
        DataScienceJob()
        .with_log_group_id("oci.xxxx.<log_group_ocid>")
        .with_log_id("oci.xxx.<log_ocid>")
        .with_project_id("oci.xxxx.<project_ocid>")
        .with_shape_name("VM.Standard2.1")
        .with_subnet_id("oci.xxxx.<subnet-ocid>")
        .with_block_storage_size(50)
        .with_compartment_id("oci.xxxx.<compartment_ocid>")
    )
    .with_runtime(
        NotebookRuntime()
        .with_notebook("https://raw.githubusercontent.com/mayoor/stats-ml-exps/master/
↪tensorboard_tf.ipynb")
        .with_service_conda("tensorflow27_p37_cpu_v1")
        # Saves the notebook with outputs to OCI object storage.
        .with_output("oci://my-bucket@my-namespace/myexperiment/jobs/")
    )
).create()
# Run and monitor the job
run = job.run().watch()
```

View the logs from you workstation once the jobs is complete by launching the tensorboard with following command -

```
OCIFS_IAM_TYPE=api_key tensorboard --logdir "oci://my-bucket@my-namespace//myexperiment/
↪jobs/tflogs/"
```

## 11.5 Model Evaluation

With the ever-growing suite of models at the disposal of data scientists, the problems with selecting a model have grown similarly. ADS offers the Evaluation Class, a collection of tools, metrics, and charts concerned with the contradistinction of several models.

After working hard to architect and train your model, it's important to understand how it performs across a series of benchmarks. Evaluation is a set of functions that convert the output of your test data into an interpretable, standardized series of scores and charts. From the accuracy of the ROC curve and residual QQ plots.

Evaluation can help machine learning developers to:

- Quickly compare models across several industry-standard metrics.
  - For example, what's the accuracy, and F1-Score of my binary classification model?
- Discover where a model is failing to feedback into future model development.
  - For example, while accuracy is high, precision is low, which is why the examples I care about are failing.
- Increase understanding of the trade-offs of various model types.

Evaluation helps you understand where the model is likely to perform well or not. For example, model A performs well when the weather is clear, but is much more uncertain during inclement conditions.

There are three types of ADS Evaluators, binary classifier, multinomial classifier, and regression.

### 11.5.1 Quick Start

#### 11.5.1.1 Comparing Binary Classification Models

```
from sklearn.datasets import make_classification
from sklearn.model_selection import train_test_split
from sklearn.linear_model import LogisticRegression
from sklearn.ensemble import RandomForestClassifier

from ads.common.model import ADSModel
from ads.common.data import ADSData
from ads.evaluations.evaluator import ADSEvaluator

seed = 42

X, y = make_classification(n_samples=10000, n_features=25, n_classes=2, flip_y=0.1)

trainx, testx, trainy, testy = train_test_split(X, y, test_size=0.30, random_state=seed)

lr_clf = LogisticRegression(
    random_state=0, solver="lbfgs", multi_class="multinomial"
).fit(trainx, trainy)

rf_clf = RandomForestClassifier(n_estimators=50).fit(trainx, trainy)

bin_lr_model = ADSModel.from_estimator(lr_clf, classes=[0, 1])
```

(continues on next page)

(continued from previous page)

```
bin_rf_model = ADSModel.from_estimator(rf_clf, classes=[0, 1])

evaluator = ADSEvaluator(
    ADSData(testx, testy),
    models=[bin_lr_model, bin_rf_model],
    training_data=ADSData(trainx, trainy),
)

print(evaluator.metrics)
```

### 11.5.1.2 Comparing Multi Classification Models

```
from sklearn.datasets import make_classification
from sklearn.model_selection import train_test_split
from sklearn.linear_model import LogisticRegression
from sklearn.ensemble import RandomForestClassifier

from ads.common.model import ADSModel
from ads.common.data import ADSData
from ads.evaluations.evaluator import ADSEvaluator

seed = 42

X, y = make_classification(
    n_samples=10000, n_features=25, n_classes=3, flip_y=0.1, n_clusters_per_class=1
)

trainx, testx, trainy, testy = train_test_split(X, y, test_size=0.30, random_state=seed)

lr_multi_clf = LogisticRegression(
    random_state=0, solver="lbfgs", multi_class="multinomial"
).fit(trainx, trainy)

rf_multi_clf = RandomForestClassifier(n_estimators=10).fit(trainx, trainy)

multi_lr_model = ADSModel.from_estimator(lr_multi_clf)
multi_rf_model = ADSModel.from_estimator(rf_multi_clf)

evaluator = ADSEvaluator(
    ADSData(testx, testy),
    models=[multi_lr_model, multi_rf_model],
)

print(evaluator.metrics)
```

### 11.5.1.3 Comparing Regression Models

```
from sklearn.datasets import make_regression
from sklearn.model_selection import train_test_split
from sklearn.linear_model import LinearRegression, Lasso
from sklearn.ensemble import RandomForestClassifier

from ads.common.model import ADSModel
from ads.common.data import ADSData
from ads.evaluations.evaluator import ADSEvaluator

seed = 42

X, y = make_regression(n_samples=10000, n_features=10, n_informative=2, random_state=42)

trainx, testx, trainy, testy = train_test_split(X, y, test_size=0.3, random_state=seed)

lin_reg = LinearRegression().fit(trainx, trainy)

lasso_reg = Lasso(alpha=0.1).fit(trainx, trainy)

lin_reg_model = ADSModel.from_estimator(lin_reg)
lasso_reg_model = ADSModel.from_estimator(lasso_reg)

reg_evaluator = ADSEvaluator(
    ADSData(testx, testy), models=[lin_reg_model, lasso_reg_model]
)

print(reg_evaluator.metrics)
```

## 11.5.2 Binary Classification

Binary classification is a type of modeling wherein the output is binary. For example, Yes or No, Up or Down, 1 or 0. These models are a special case of multinomial classification so have specifically catered metrics.

The prevailing metrics for evaluating a binary classification model are accuracy, hamming loss, kappa score, precision, recall,  $F_1$  and AUC. Most information about binary classification uses a few of these metrics to speak to the importance of the model.

- **Accuracy:** The proportion of predictions that were correct. It is generally converted to a percentage where 100% is a perfect classifier. An accuracy of 50% is random (for a balanced dataset) and an accuracy of 0% is a perfectly wrong classifier.
- **AUC:** Area Under the Curve (AUC) refers to the area under an ROC curve. This is a numerical way to summarize the robustness of a model to its discrimination threshold. The AUC is computed by integrating the area under the ROC curve. It is akin to the probability that your model scores better on results to which it accredits a higher score. Thus 1.0 is a perfect score, 0.5 is the average score of a random classifier, and 0.0 is a perfectly backward scoring classifier.
- **$F_1$  Score:** There is generally a trade-off between the precision and recall and the  $F_1$  score is a metric that



combines them into a single number. The  $F_1$  Score is the harmonic mean of precision and recall:

$$F_1 = 2 \frac{Precision * Recall}{Precision + Recall}$$

Therefore a perfect  $F_1$  score is 1. That is, the classifier has perfect precision and recall. The worst  $F_1$  score is 0. The  $F_1$  score of a random classifier is heavily dependent on the nature of the data.

- **Hamming Loss:** The proportion of predictions that were incorrectly classified and is equivalent to  $1 - accuracy$ . This means a Hamming Loss of 0 is a perfect classifier. A score of 0.5 is a random classifier (for a balanced dataset), and 1 is a perfectly incorrect classifier.
- **Kappa Score:** Cohen's  $\kappa$  coefficient is a statistic that measures inter-annotator agreement. This function computes Cohen's  $\kappa$ , a score that expresses the level of agreement between two annotators on a classification problem. It is defined as:

$$\kappa = \frac{p_o - p_e}{1 - p_e}$$

$p_o$  is the empirical probability of agreement on the label assigned to any sample (the observed agreement ratio).  $p_e$  is the expected agreement when both annotators assign labels randomly.  $p_e$  is estimated using a per-annotator empirical prior over the class labels.

- **Precision:** The proportion of the True class that were predicted to be True and are actually in the True class  $\frac{TP}{TP+FP}$ . This is also known as Positive Predictive Value (PPV). A precision of 1.0 is perfect precision, 0.0 is *bad* precision. However, the precision of a random classifier varies highly based on the nature of the data and to a lesser extent a *bad* precision.
- **Recall:** This is the proportion of the True class predictions that were correctly predicted over the number of True predictions (correct or incorrect)  $\frac{TP}{TP+FN}$ . This is also known as True Positive Rate (TPR) or Sensitivity. A recall of 1.0 is perfect recall, 0.0 is *bad* recall. however, the recall of a random classifier varies highly based on the nature of the data and to a lesser extent a *bad* recall.

The prevailing charts and plots for binary classification are the Precision-Recall Curve, the ROC curve, the Lift Chart, the Gain Chart, and the Confusion Matrix. These are inter-related with the previously described metrics and are commonly used in the binary classification literature.

- Confusion Matrix
- Gain Chart
- Lift Chart
- Precision-Recall Curve
- ROC curve

This code snippet demonstrates how to generate the above metrics and charts. The data has to be split into a testing and training set with the features in  $X_{train}$  and  $X_{test}$  and the responses in  $y_{train}$  and  $y_{test}$ .

```
from sklearn.datasets import make_classification
from sklearn.model_selection import train_test_split
from sklearn.linear_model import LogisticRegression
from sklearn.ensemble import RandomForestClassifier

from ads.common.model import ADSModel
from ads.common.data import ADSData
from ads.evaluations.evaluator import ADSEvaluator

seed = 42
```

(continues on next page)

(continued from previous page)

```

X, y = make_classification(n_samples=10000, n_features=25, n_classes=2, flip_y=0.1)

trainx, testx, trainy, testy = train_test_split(X, y, test_size=0.30, random_state=seed)

lr_clf = LogisticRegression(
    random_state=0, solver="lbfgs", multi_class="multinomial"
).fit(trainx, trainy)

rf_clf = RandomForestClassifier(n_estimators=50).fit(trainx, trainy)

bin_lr_model = ADSModel.from_estimator(lr_clf, classes=[0, 1])
bin_rf_model = ADSModel.from_estimator(rf_clf, classes=[0, 1])

evaluator = ADSEvaluator(
    ADSData(testx, testy),
    models=[bin_lr_model, bin_rf_model],
    training_data=ADSData(trainx, trainy),
)

print(evaluator.metrics)

```

To use the ADSEvaluator the standard sklearn models into ADSModels.

The ADSModel class in the ADS package has a `from_estimator` function that takes as input a fitted estimator and converts it into an ADSModel object. With classification, the class labels also need to be provided. The ADSModel object is used for evaluation by the ADSEvaluator object.

To show all of the metrics in a table, run:

```
evaluator.metrics
```

To show all of the charts, run:

```
evaluator.show_in_notebook(perfect=True)
```

Important parameters:

- If `perfect` is set to `True`, ADS plots a perfect classifier for comparison in Lift and Gain charts.
- If `baseline` is set to `True`, ADS won't include a baseline for the comparison of various plots.
- If `use_training_data` is set `True`, ADS plots the evaluations of the training data.
- If `plots` contain a list of plot types, ADS plots only those plot types.

This code snippet demonstrates how to add a custom metric, a  $F_2$  score, to the evaluator.

```

from ads.evaluations.evaluator import ADSEvaluator
evaluator = ADSEvaluator(test, models=[modelA, modelB, modelC, modelD])

from sklearn.metrics import fbeta_score
def F2_Score(y_true, y_pred):

```

(continues on next page)

Evaluation Metrics (testing data):

	LogisticRegression	RandomForestClassifier
accuracy	0.9988	0.9991
hamming_loss	0.001156	0.0008839
kappa_score_	0.5915	0.7268
precision	0.9024	0.8814
recall	0.4405	0.619
f1	0.592	0.7273
auc	0.9245	0.9042

Evaluation Metrics (training data):

	LogisticRegression	RandomForestClassifier
accuracy	0.9989	0.9999
hamming_loss	0.001105	0.0001316
kappa_score_	0.583	0.9603
precision	0.8255	0.9926
recall	0.4512	0.9302
f1	0.5835	0.9604
auc	0.9164	1

Fig. 1: Evaluator Metrics

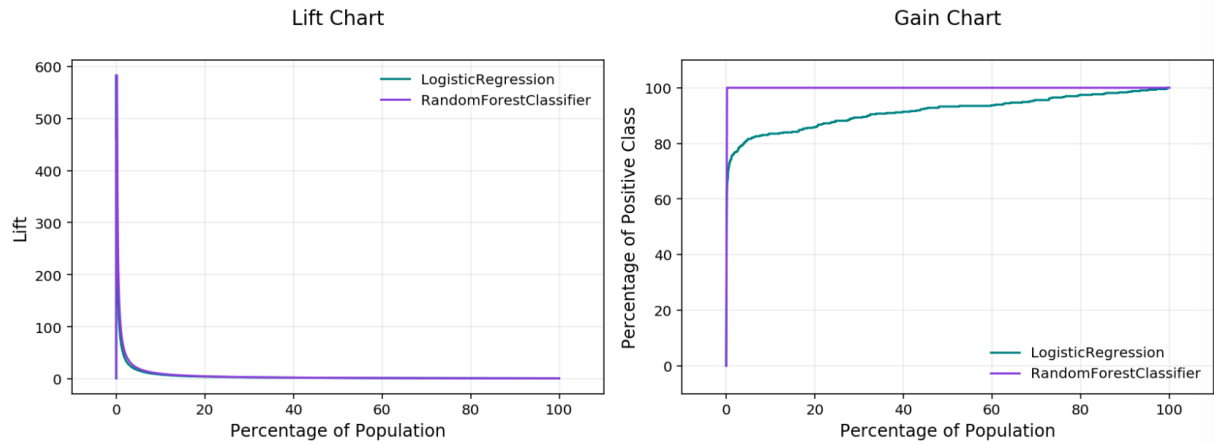


Fig. 2: Lift & Gain Chart

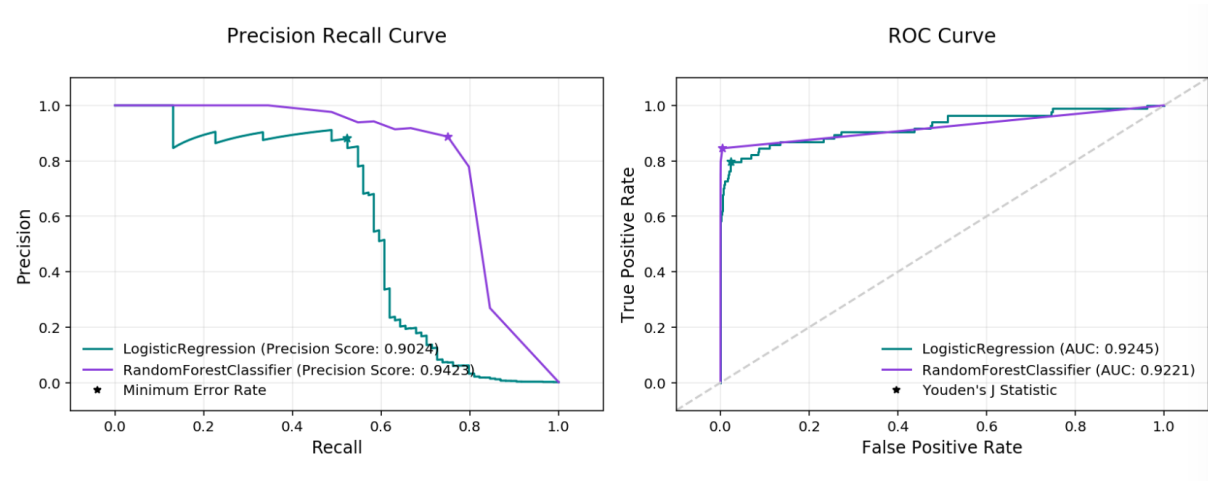


Fig. 3: Precision Recall and ROC Curves

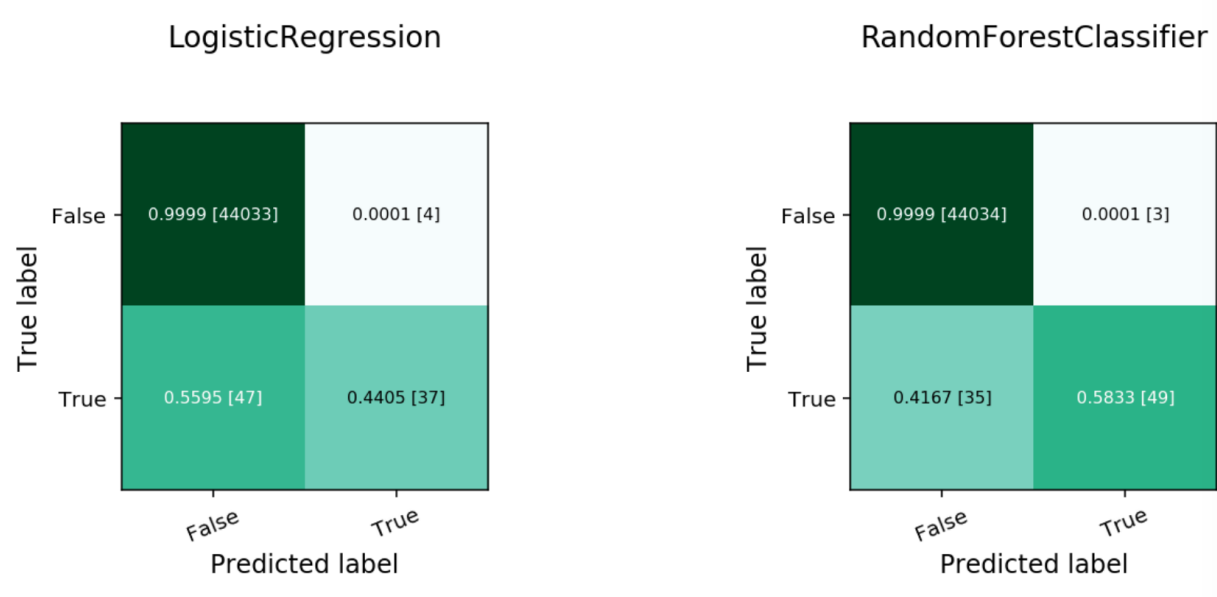


Fig. 4: Normalized Confusion Matrix

(continued from previous page)

```

return fbeta_score(y_true, y_pred, 2)
evaluator.add_metrics([F2_Score], ["F2 Score"])
evaluator.metrics

```

### 11.5.2.1 Fairness Metrics

New in version 2.6.1..

Fairness metrics will be automatically generated for any feature specified in the `protected_features` argument to the `ADSEvaluator` object. The added metrics are:

- **Equal Odds:** For each of the *protected\_features* specified, Equal Odds is a ratio between the positive rates for each class within that feature. The closer this value is to 1, the less biased the model and data are with respect to the feature, F. In other terms, for a binary feature F with classes A and B, Equal Odds is calculated using the following formula:

$$\frac{P(\hat{y} = 1 | Y = y, F = A)}{P(\hat{y} = 1 | Y = y, F = B)}$$

- **Equal Opportunity:** For each of the *protected\_features* specified, Equal Opportunity is a ratio between the true positive rates for each class within that feature. The closer this value is to 1, the less biased the model is with respect to the feature F. In other terms, for a binary feature F with classes A and B, Equal Opportunity is calculated using the following formula:

$$\frac{P(\hat{y} = 1 | Y = 1, F = A)}{P(\hat{y} = 1 | Y = 1, F = B)}$$

- **Statistical Parity:** For each of the *protected\_features* specified, Statistical Parity is a ratio between the prediction rates for each class within that feature. The closer this value is to 1, the less biased the model and data are with respect to the feature F. In other terms, for a binary feature F with classes A and B, Statistical Parity is calculated using the following formula:

$$\frac{P(\hat{y} | F = A)}{P(\hat{y} | F = B)}$$

The following plots are added to explain the fairness metrics:

- Equal Odds Bar Chart: False Positive Rate bar chart by protected feature class
- Equal Opportunity Bar Chart: True Positive Rate bar chart by protected feature class
- Statistical Parity Bar Chart: Number of positive predictions by protected feature class

If `protected_features` contains a list of column names in `data.X`, ADS will generate fairness metrics for each of those columns.

### 11.5.3 Multinomial Classification

Multinomial classification is a type of modeling wherein the output is discrete. For example, an integer 1-10, an animal at the zoo, or a primary color. These models have a specialized set of charts and metrics for their evaluation.

The prevailing metrics for evaluating a multinomial classification model are:

- **Accuracy:** The proportion of predictions that were correct. It is generally converted to a percentage where 100% is a perfect classifier. For a balanced dataset, an accuracy of  $\frac{100\%}{k}$  where  $k$  is the number of classes, is a random classifier. An accuracy of 0% is a perfectly wrong classifier.
- **F<sub>1</sub> Score (weighted, macro or micro):** There is generally a trade-off between the precision and recall and the  $F_1$  score is a metric that combines them into a single number. The per-class  $F_1$  score is the harmonic mean of precision and recall:

$$F_1 = 2 \frac{\text{Precision} * \text{Recall}}{\text{Precision} + \text{Recall}}$$

As with precision, there are a number of other versions of  $F_1$  that are used in multinomial classification. The micro and weighted  $F_1$  is computed the same as with precision, but with the per-class  $F_1$  replacing the per-class precision. However, the macro  $F_1$  is computed a little differently. The precision and recall are computed by summing the TP, FN, and FP across all classes, and then using them in the standard formulas.

- **Hamming Loss:** The proportion of predictions that were incorrectly classified and is equivalent to  $1 - \text{accuracy}$ . This means a Hamming loss score of 0 is a perfect classifier. A score of  $\frac{k-1}{k}$  is a random classifier for a balanced dataset, and 1.0 is a perfectly incorrect classifier.
- **Kappa Score:** Cohen's  $\kappa$  coefficient is a statistic that measures inter-annotator agreement. This function computes Cohen's  $\kappa$ , a score that expresses the level of agreement between two annotators on a classification problem. It is defined as:

$$\kappa = \frac{p_o - p_e}{1 - p_e}$$

$p_o$  is the empirical probability of agreement on the class assigned to any sample (the observed agreement ratio).  $p_e$  is the expected agreement when both annotators assign classes randomly.  $p_e$  is estimated using a per-annotator empirical prior over the class.

- **Precision (weighted, macro or micro):** This is the proportion of a class that was predicted to be in a given class and are actually in that class. In multinomial classification, it is common to report the precision for each class and this is called the per-class precision. It is computed using the same approach use in binary classification. For example,  $\frac{TP}{TP+FP}$ , but only the class under consideration is used. A value of 1 means that the classifier was able to perfectly predict, for that class. A value of 0 means that the classifier was never correct, for that class. There are three other versions of precision that are used in multinomial classification and they are weighted, macro and micro-precision. Weighted precision,  $P_w$ , combines the per-class precision by the number of true classes:

$$P_w = W_1 P_1 + \dots + W_n P_n$$

$W_i$  is the proportion of the true classes in class  $i$   $P_i$  is the per-class precision for the  $i^{th}$  class. The macro-precision,  $P_m$ , is the mean of all the per-class,  $P_i$ , precisions.

$$P_m = \frac{1}{n} \sum_i P_i$$

The micro-precision,  $P_\mu$ , is the same as the accuracy, micro-recall, and micro  $F_1$ .

- **Recall (weighted, macro or micro):** This is the proportion of the True class predictions that were correctly predicted over the number of True predictions (correct or incorrect)  $\frac{TP}{TP+FN}$ . This is also known as the True Positive Rate (TPR) or Sensitivity. In multinomial classification, it is common to report the recall for each class

and this is called the micro-recall. It is computed using the same approach as in the case of binary classification, but is reported for each class. A recall of 1 is perfect recall, 0 is “bad” recall.

As with precision, there are three other versions of recall that are used in multinomial classification. They are weighted, macro and micro-recall. The definitions are the same except the per-class recall replaces the per-class precision in the preceding equations.

Generally, several of these metrics are used in combination to describe the performance of a multinomial classification model.

The prevailing charts and plots for multinomial classification are the Precision-Recall Curve, the ROC curve, the Lift Chart, the Gain Chart, and the Confusion Matrix. These are inter-related with preceding metrics, and are common across most multinomial classification literature.

For multinomial classification you can view the following using `show_in_notebook()`:

- `confusion_matrix`: A matrix of the number of actual versus predicted values for each class, see [\[Read More\]](#).
- `f1_by_label`: Harmonic mean of the precision and recall by class metrics. Compute  $F_1$  for each class, see [\[Read More\]](#)
- `jaccard_by_label`: Computes the similarity for each class distribution, see [\[Read More\]](#).
- `pr_curve`: A plot of a precision versus recall (the proportion of positive class predictions that were correct versus the proportion of positive class objects that were correctly identified), see [\[Read More\]](#).
- `precision_by_label`: It considers one class as a positive class and rest as negative. Compute precision for each, precision numbers in this example, see [\[Read More\]](#).
- `recall_by_label`: It considers one class as a positive class and rest as negative. Compute recall for each, recall numbers in this example, [\[Read More\]](#).
- `roc_curve`: A plot of a true positive rate versus a false positive rate (recall vs the proportion of negative class objects that were identified incorrectly), see [\[Read More\]](#).

To generate all of these metrics and charts for a list of multinomial classification models on the test dataset, you can run the following:

```
from sklearn.datasets import make_classification
from sklearn.model_selection import train_test_split
from sklearn.linear_model import LogisticRegression
from sklearn.ensemble import RandomForestClassifier

from ads.common.model import ADSModel
from ads.common.data import ADSData
from ads.evaluations.evaluator import ADSEvaluator

seed = 42

X, y = make_classification(
    n_samples=10000, n_features=25, n_classes=3, flip_y=0.1, n_clusters_per_class=1
)

trainx, testx, trainy, testy = train_test_split(X, y, test_size=0.30, random_state=seed)

lr_multi_clf = LogisticRegression()
```

(continues on next page)

(continued from previous page)

```

    random_state=0, solver="lbfgs", multi_class="multinomial"
).fit(trainx, trainy)

rf_multi_clf = RandomForestClassifier(n_estimators=10).fit(trainx, trainy)

multi_lr_model = ADSModel.from_estimator(lr_multi_clf)
multi_rf_model = ADSModel.from_estimator(rf_multi_clf)

evaluator = ADSEvaluator(
    ADSData(testx, testy),
    models=[multi_lr_model, multi_rf_model],
)

print(evaluator.metrics)

```

To use ADSEvaluator, models have to be converted into ADSModel types.

The ADSModel class in the ADS package has a `from_estimator` function that takes as input a fitted estimator and converts it into an ADSModel object. With classification, you have to pass the class labels in the `class` argument too. The ADSModel object is used for evaluation using the ADSEvaluator object.

To show all of the metrics in a table, run:

```
evaluator.metrics
```

#### Evaluation Metrics (testing data):

	LogisticRegression	RandomForestClassifier
accuracy	0.9333	0.9333
hamming_loss	0.06667	0.06667
kappa_score_	0.8964	0.8971
precision_weighted	0.9381	0.9409
precision_micro	0.9333	0.9333
recall_weighted	0.9333	0.9333
recall_micro	0.9333	0.9333
f1_weighted	0.9338	0.9326
f1_micro	0.9333	0.9333

Fig. 5: Evaluator Metrics

```
evaluator.show_in_notebook()
```

Multinomial classification includes the following metrics:

- `accuracy`: The number of correctly classified examples divided by total examples.
- `hamming_loss`:  $1 - \text{accuracy}$



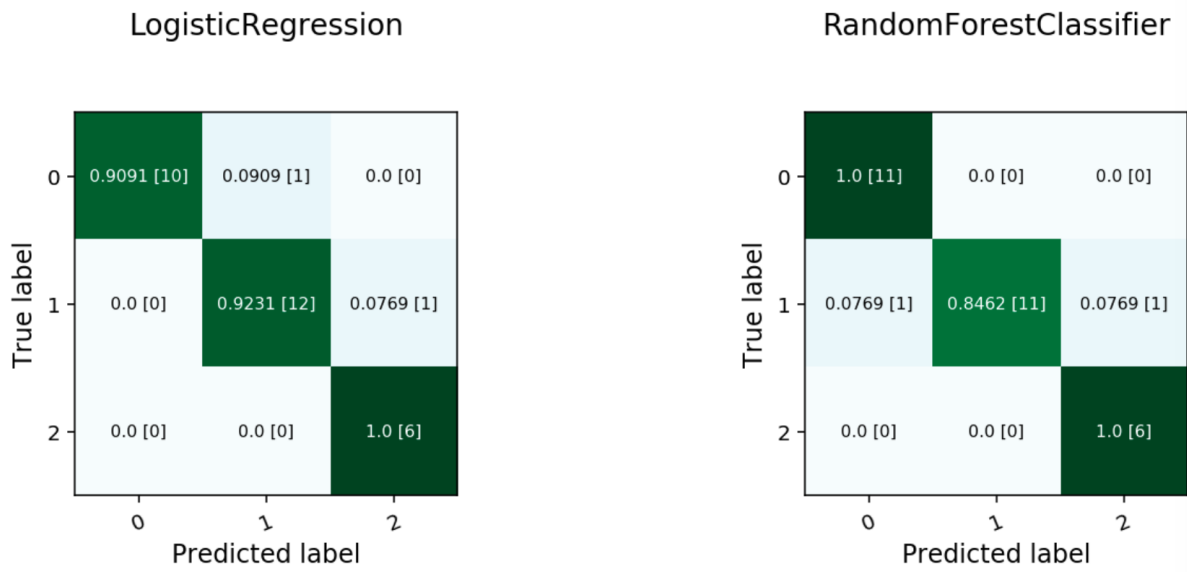


Fig. 6: Multinomial Confusion Matrix

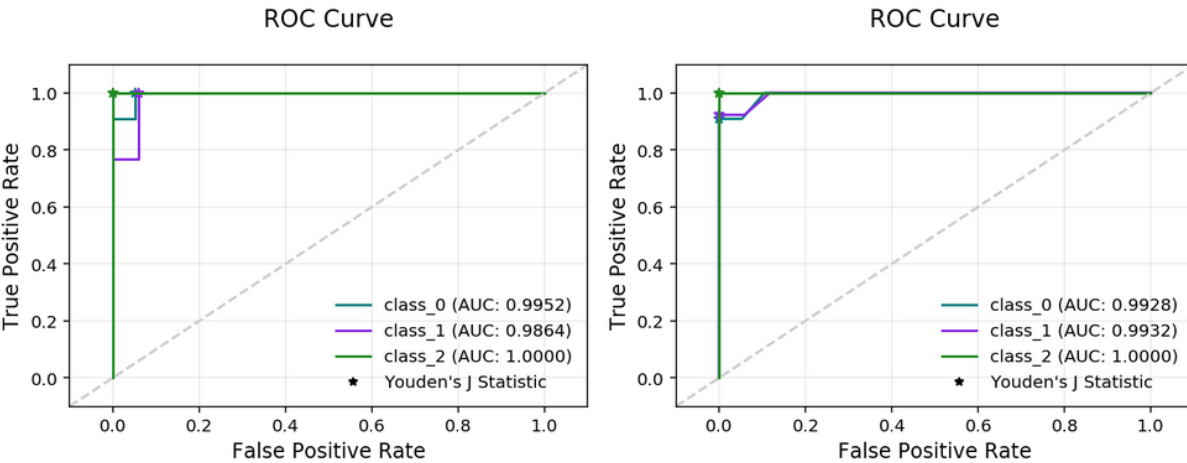


Fig. 7: Multinomial ROC Curve

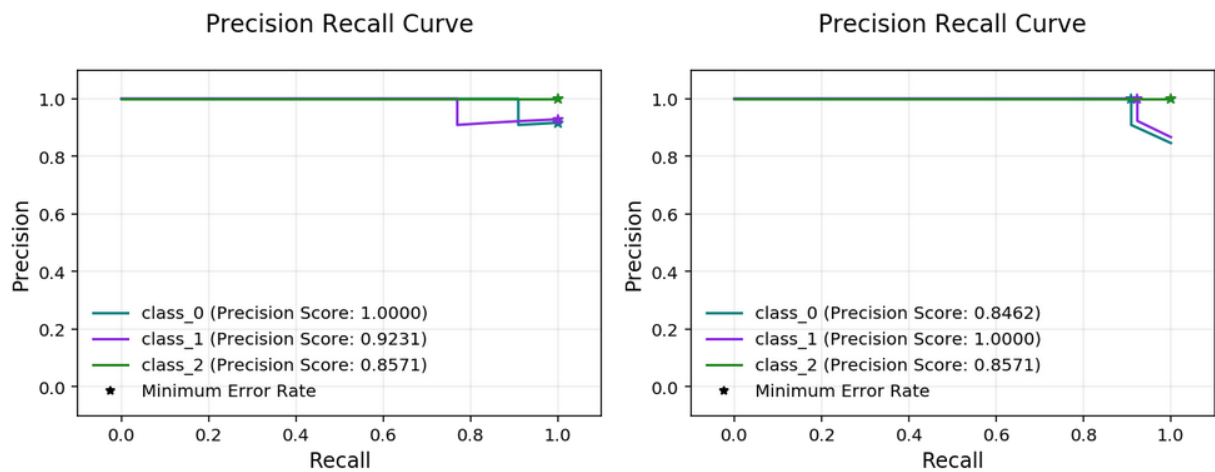


Fig. 8: Multinomial Precision Recall Curve

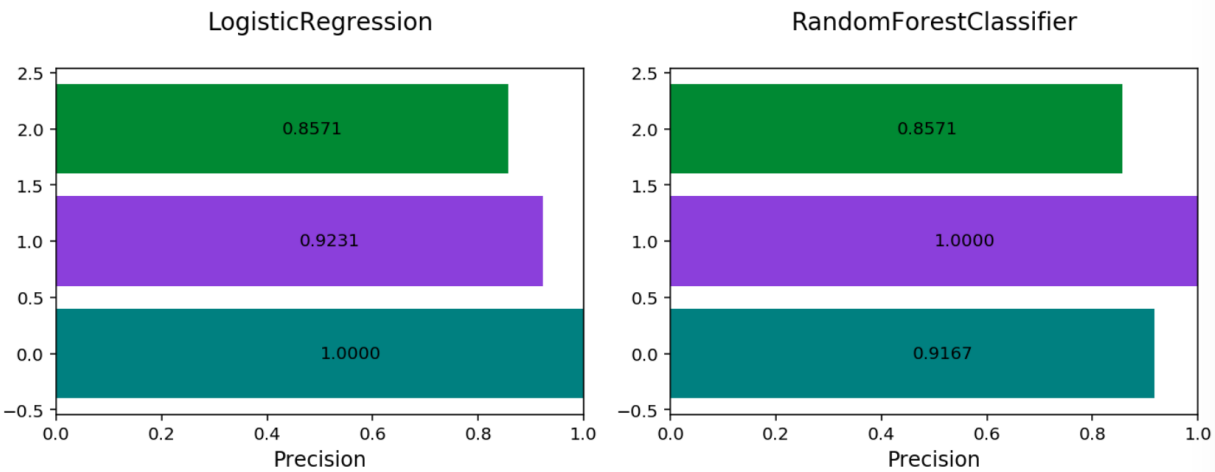


Fig. 9: Multinomial Precision By Class

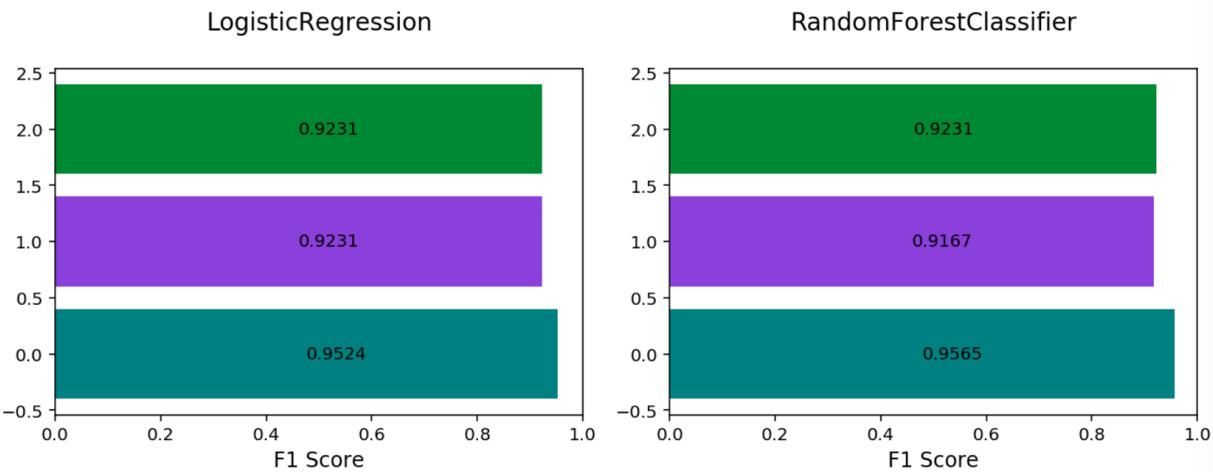


Fig. 10: Multinomial F1 By Class

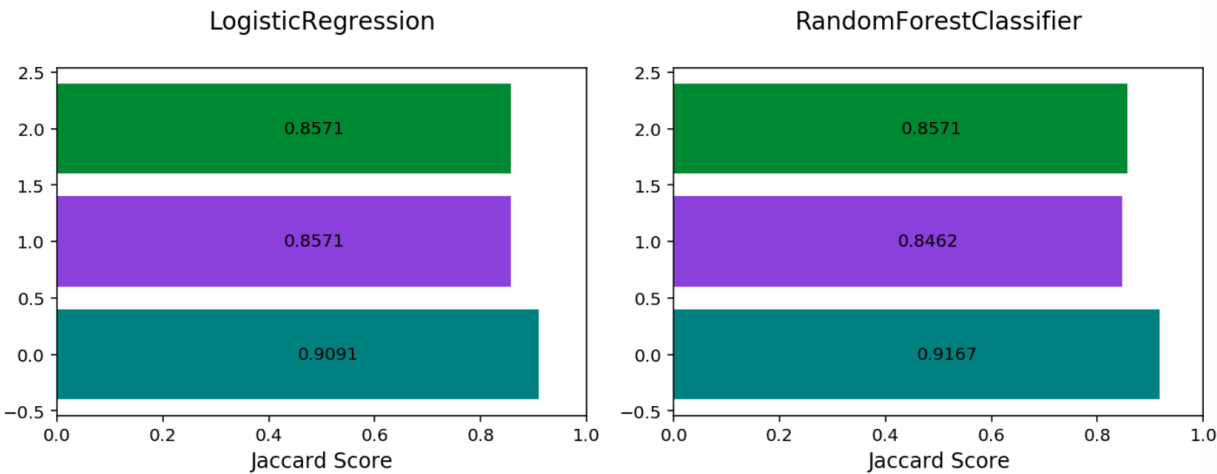


Fig. 11: Multinomial Jaccard By Class

- **precision\_weighted**: The weighted average of `precision_by_label`. Weights are proportional to the number of true instances for each class.
- **precision\_micro**: Global precision. Calculated by using global true positives and false positives.
- **recall\_weighted**: The weighted average of `recall_by_label`. Weights are proportional to the number of true instances for each class.
- **recall\_micro**: Global recall. Calculated by using global true positives and false negatives.
- **f1\_weighted**: The weighted average of `f1_by_label`. Weights are proportional to the number of true instances for each class.
- **f1\_micro**: Global  $F_1$ . It is calculated using the harmonic mean of micro precision and recall metrics.

All of these metrics can be computed directly from the confusion matrix.

If the preceding metrics don't include the specific metric you want to use, maybe an F2 score, simply add it to your evaluator object as in this example:

```
from ads.evaluations.evaluator import ADSEvaluator
evaluator = ADSEvaluator(test, models=[modelA, modelB, modelC, modelD])

from sklearn.metrics import fbeta_score
def F2_Score(y_true, y_pred):
    return fbeta_score(y_true, y_pred, 2)
evaluator.add_metrics([F2_Score], ["F2 Score"])
evaluator.metrics
```

## 11.5.4 Regression

Regression is a type of modeling wherein the output is continuous. For example, price, height, sales, length. These models have their own specific metrics that help to benchmark the model. How close is close enough?

The prevailing metrics for evaluating a regression model are:

- **Explained variance score**: The variance of the model's predictions. The mean of the squared difference between the predicted values and the true mean of the data, see [\[Read More\]](#).
- **Mean absolute error (MAE)**: The mean of the absolute difference between the true values and predicted values, see [\[Read More\]](#).
- **Mean squared error (MSE)**: The mean of the squared difference between the true values and predicted values, see [\[Read More\]](#).
- **R-squared**: Also known as the **coefficient of determination**. It is the proportion in the data of the variance that is explained by the model, see [\[Read More\]](#).
- **Root mean squared error (RMSE)**: The square root of the **mean squared error**, see [\[Read More\]](#).
- **Mean residuals**: The mean of the difference between the true values and predicted values, see [\[Read More\]](#).

The prevailing charts and plots for regression are:

- **Observed vs. predicted**: A plot of the observed, or actual values, against the predicted values output by the models.
- **Residuals QQ**: The quantile-quantile plot, shows the residuals and quantiles of a standard normal distribution. It should be close to a straight line for a good model.
- **Residuals vs observed**: A plot of residuals vs observed values. This should not carry a lot of structure in a good model.

- **Residuals vs. predicted:** A plot of residuals versus predicted values. This should not carry a lot of structure in a good model.

This code snippet demonstrates how to generate the above metrics and charts. The data has to be split into a testing and training set with the features in  $X_{train}$  and  $X_{test}$  and the responses in  $y_{train}$  and  $y_{test}$ .

```
from sklearn.datasets import make_regression
from sklearn.model_selection import train_test_split
from sklearn.linear_model import LinearRegression, Lasso
from sklearn.ensemble import RandomForestClassifier

from ads.common.model import ADSModel
from ads.common.data import ADSData
from ads.evaluations.evaluator import ADSEvaluator

seed = 42

X, y = make_regression(n_samples=10000, n_features=10, n_informative=2, random_state=42)
trainx, testx, trainy, testy = train_test_split(X, y, test_size=0.3, random_state=seed)
lin_reg = LinearRegression().fit(trainx, trainy)
lasso_reg = Lasso(alpha=0.1).fit(trainx, trainy)

lin_reg_model = ADSModel.from_estimator(lin_reg)
lasso_reg_model = ADSModel.from_estimator(lasso_reg)

reg_evaluator = ADSEvaluator(
    ADSData(testx, testy), models=[lin_reg_model, lasso_reg_model]
)

print(reg_evaluator.metrics)
```

To show all of the metrics in a table, run:

```
evaluator.metrics
```

#### Evaluation Metrics (testing data):

	LinearRegression	Lasso
<b>r2_score</b>	0.5982	0.5749
<b>mse</b>	24.94	26.39
<b>explained_variance</b>	0.5997	0.5758
<b>mae</b>	3.326	3.348

Fig. 12: Evaluator Metrics

To show all of the charts, run:

```
evaluator.show_in_notebook()
```

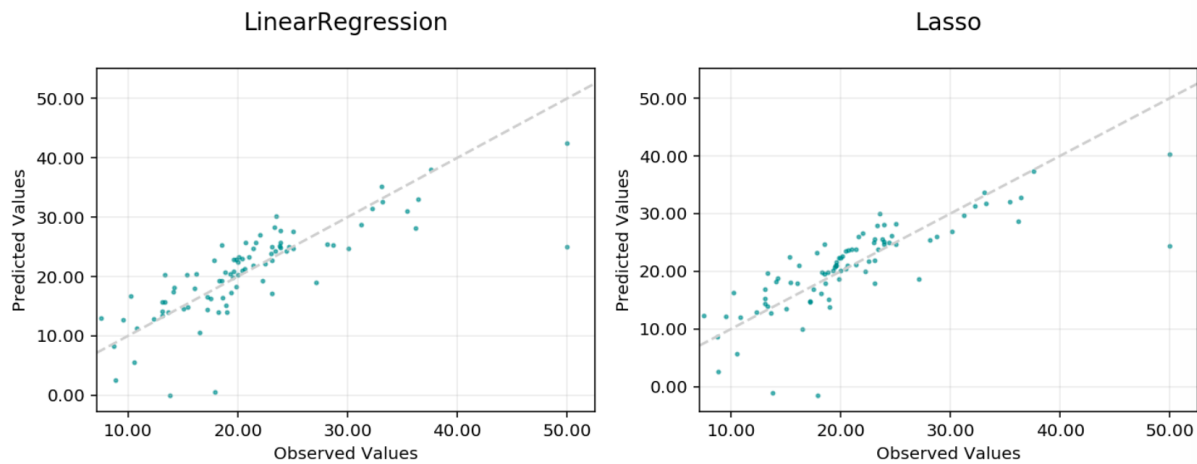


Fig. 13: Observed vs Predicted

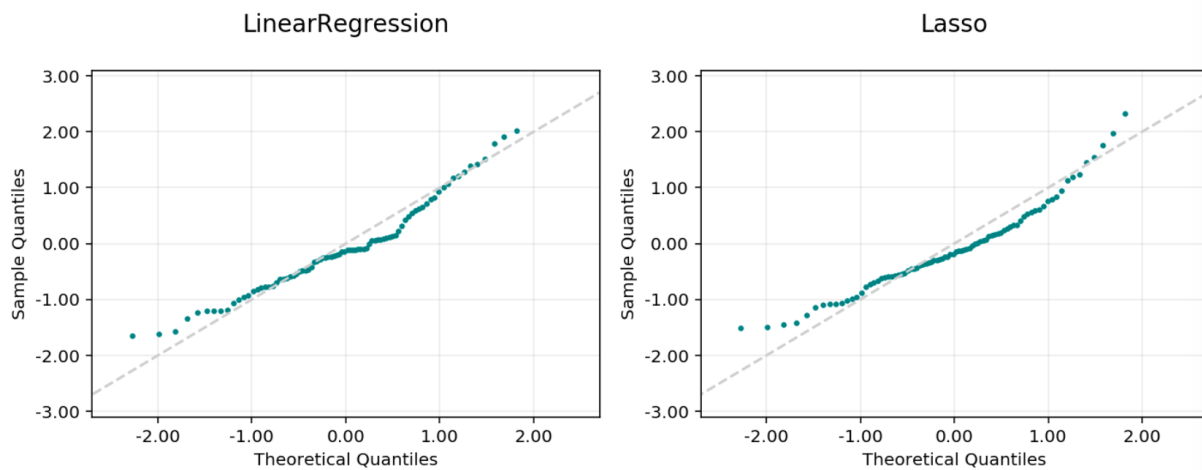


Fig. 14: Residual Q-Q Plot

This code snippet demonstrates how to add a custom metric, *Number Correct*, to the evaluator.

```
from ads.evaluations.evaluator import ADSEvaluator
evaluator = ADSEvaluator(test, models=[modelA, modelB, modelC, modelD])

def num_correct(y_true, y_pred):
    return sum(y_true == y_pred)
evaluator.add_metrics([num_correct], ["Number Correct"])
evaluator.metrics
```

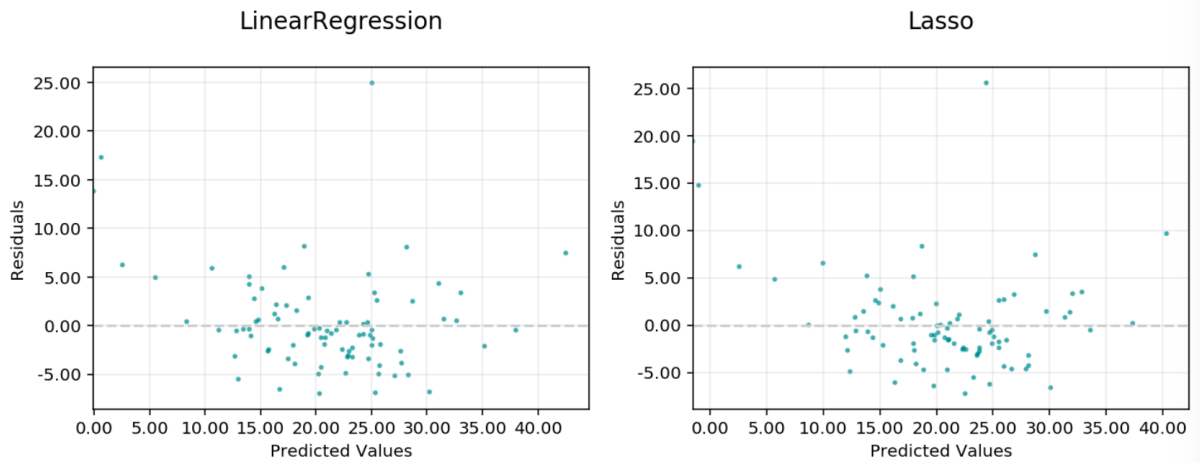


Fig. 15: Residual vs Predicted

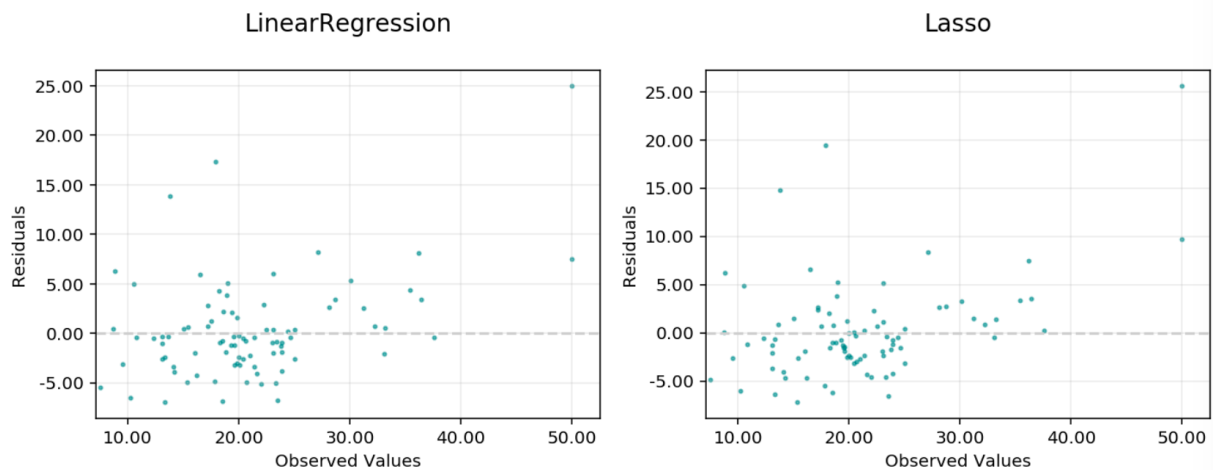


Fig. 16: Residual vs Observed

## 11.6 Oracle AutoMLx

---

**Note:** Building Oracle AutoMLx models starting with oracle-ads 2.8.2, is now performed directly with the AutoMLx library. AutoMLx documentation can be found [here](#). Oracle AutoMLx is installed in the conda pack `automlx_p38_cpu_v#`. Notebook examples are [here](#) and a migration tutorial can be found in the *Quick Start* section.

---

### 11.6.1 Quick Start

---

#### Prerequisite

You need to check if AutoMLx library is installed in your environment. For more information on the conda environments that contain AutoMLx, check [this page](#).

---

This section provides a quick introduction to build a classifier using the Oracle AutoMLx tool for Iris dataset. The dataset is a multi-class classification dataset, and more details about the dataset can be found at [Iris dataset](#). We demonstrate the preliminary steps required to train a model with the Oracle AutoMLx tool. We then explain the tuned model.

#### 11.6.1.1 Load dataset

We start by reading in the dataset from Scikit-learn.

```
>>> import pandas as pd
>>> from sklearn.datasets import load_iris
>>> data = load_iris()
>>> df = pd.DataFrame(data['data'], columns=data['feature_names'])
>>> y = pd.Series(data['target'])
```

This toy dataset only contains numerical data. We now separate the predictions ( $y$ ) from the training data ( $X$ ) for both the training (70%) and test (30%) datasets. The training set will be used to create a Machine Learning model using AutoMLx, and the test set will be used to evaluate the model's performance on unseen data.

```
>>> from sklearn.model_selection import train_test_split
>>> X_train, X_test, y_train, y_test = train_test_split(df,
                                                    y,
                                                    train_size=0.7,
                                                    random_state=0)

>>> X_train.shape, X_test.shape
((105, 4), (45, 4))
```



### 11.6.1.2 Set the AutoMLx engine

AutoMLx offers the `init()` function, which allows to initialize the parallel engine. By default, the AutoMLx pipeline uses the *dask* parallel engine. One can also set the engine to *local*, which uses python's multiprocessing library for parallelism instead.

```
>>> import automl
>>> from automl import init

>>> init(engine='local')
[2023-01-12 05:48:31,814] [automl.xengine] Local ProcessPool execution (n_jobs=36)
```

### 11.6.1.3 Train a model using AutoMLx

The Oracle AutoMLx solution provides a pipeline that automatically finds a tuned model given a prediction task and a training dataset. In particular it allows to find a tuned model for any supervised prediction task, e.g. classification or regression where the target can be binary, categorical or real-valued.

**AutoMLx consists of five main modules:**

1. **Preprocessing** : Clean, impute, engineer, and normalize features.
2. **Algorithm Selection** : Identify the right classification algorithm for a given dataset.
3. **Adaptive Sampling** : Select a subset of the data samples for the model to be trained on.
4. **Feature Selection** : Select a subset of the data features, based on the previously selected model.
5. **Hyperparameter Tuning** : Find the right model parameters that maximize score for the given dataset.

All these pieces are readily combined into a simple AutoMLx pipeline which automates the entire Machine Learning process with minimal user input/interaction.

The AutoMLx API is quite simple to work with. We create a `automl.Pipeline` instance. Next, the training data is passed to the `fit()` function which executes the previously mentioned steps.

```
>>> est = automl.Pipeline(task='classification')
>>> est.fit(X_train, y_train)
Pipeline()
```

A model is then generated (*est*) and can be used for prediction tasks. Here, we use the *F1\_score* scoring metric to evaluate the performance of this model on unseen data (*X\_test*).

```
>>> from sklearn.metrics import f1_score
>>> y_pred = est.predict(X_test)
>>> score_default = f1_score(y_test, y_pred, average='macro')
>>> print(f'Score on test data : {score_default}')
Score on test data : 0.975983436853002
```

The `automl.Pipeline` can also fit regression, forecasting and anomaly detection models. Please check out the rest of the documentation for more details about advanced configuration parameters.

#### 11.6.1.4 Explain a classifier

For a variety of decision-making tasks, getting only a prediction as model output is not sufficient. A user may wish to know why the model outputs that prediction, or which data features are relevant for that prediction. For that purpose the Oracle AutoMLx solution defines the `automl.interface.mlx.MLExplainer` object, which allows to compute a variety of model explanations for any AutoMLx-trained pipeline or scikit-learn-like model. `automl.interface.mlx.MLExplainer` takes as argument the trained model, the training data and labels, as well as the task.

```
>>> explainer = automl.MLExplainer(est,
                                   X_train,
                                   y_train,
                                   task="classification")
```

Let's explain the model's performance (relative to the provided train labels) using Global Feature Importance. This technique would change if a given feature were dropped from the dataset, without retraining the model. This notion of feature importance considers each feature independently from all other features.

The method `explain_model()` allows to compute such feature importances. It also provides 95% confidence intervals for each feature importance attribution.

```
>>> result_explain_model_default = explainer.explain_model()
>>> result_explain_model_default.to_dataframe()
```

	feature attribution	upper_bound	lower_bound	
0	petal width (cm)	0.350644	0.416850	0.284437
1	petal length (cm)	0.272190	0.309005	0.235374
2	sepal length (cm)	0.000000	0.000000	0.000000
3	sepal width (cm)	0.000000	0.000000	0.000000

The oracle AutoMLx solution offers advanced configuration options and allows one to change the effect of feature interactions and interaction evaluations. It also provides other model and prediction explanation techniques, such as:

1. **Local feature importance**, for example, using Kernel SHAP or an enhanced LIME;
2. **Feature Dependence Explanations**, such as partial dependence plots or accumulated local effects;
3. **Interactive What-IF explainers**, which let users explore a model's predictions; and
4. **Counterfactual explanations**, which show how to change a row to obtain a desired outcome.

Please check out the `automl.interface.mlx.MLExplainer` documentation for more details.

## REGISTER AND DEPLOY MODELS

You could register your model with OCI Data Science service through ADS. Alternatively, the Oracle Cloud Infrastructure (OCI) Console can be used by going to the Data Science projects page, selecting a project, then click **Models**. The models page shows the model artifacts that are in the model catalog for a given project.


After a model and its artifacts are registered, they become available for other data scientists if they have the correct permissions.

Data scientists can:

- List, read, download, and load models from the catalog to their own notebook sessions.
- Download the model artifact from the catalog, and run the model on their laptop or some other machine.
- Deploy the model artifact as a [model deployment](#).
- Document the model use case and algorithm using taxonomy metadata.
- Add custom metadata that describes the model.
- Document the model provenance including the resources and tags used to create the model (notebook session), and the code used in training.
- Document the input data schema, and the returned inference schema.
- Run introspection tests on the model artifact to ensure that common model artifact errors are flagged. Thus, they can be remediated before the model is saved to the catalog.

The ADS SDK automatically captures some of the metadata for you. It captures provenance, taxonomy, and some custom metadata.

### 12.1 Workflow

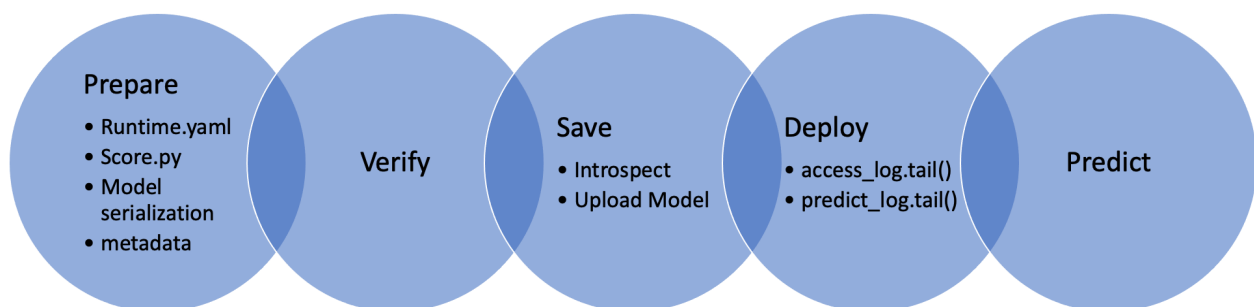

ADS has a set of framework specific classes that take your model and push it to production with a few quick steps.

The first step is to create a model serialization object. This object wraps your model and has a number of methods to assist in deploying it. There are different model classes for different model classes. For example, if you have a PyTorch model you would use the `PyTorchModel` class. If you have a TensorFlow model you would use the `TensorFlowModel` class. ADS has model serialization for many different model classes. However, it is not feasible to have a model serialization class for all model types. Therefore, the `GenericModel` can be used for any class that has a `.predict()` method.

After creating the model serialization object, the next step is to use the `.prepare()` method to create the model artifacts. The `score.py` file is created and it is customized to your model class. You may still need to modify it for your specific use case but this is generally not required. The `.prepare()` method also can be used to store metadata about the model, code used to create the model, input and output schema, and much more.

If you make changes to the `score.py` file, call the `.verify()` method to confirm that the `load_model()` and `predict()` functions in this file are working. This speeds up your debugging as you do not need to deploy a model to test it.

The `.save()` method is then used to store the model in the model catalog. A call to the `.deploy()` method creates a load balancer and the instances needed to have an HTTPS access point to perform inference on the model. Using the `.predict()` method, you can send data to the model deployment endpoint and it will return the predictions.

## 12.2 Register

### 12.2.1 Quick Start

ADS can auto generate the required files to register and deploy your models. Checkout the examples below to learn how to deploy models of different frameworks.

#### 12.2.1.1 Sklearn

```
import tempfile

import ads
from ads.model.framework.sklearn_model import SklearnModel
from sklearn.datasets import load_iris
from sklearn.linear_model import LogisticRegression
from sklearn.model_selection import train_test_split

ads.set_auth(auth="resource_principal")

# Load dataset and Prepare train and test split
iris = load_iris()
X, y = iris.data, iris.target
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)

# Train a LogisticRegression model
sklearn_estimator = LogisticRegression()
sklearn_estimator.fit(X_train, y_train)

# Instantiate ads.model.framework.sklearn_model.SklearnModel using the sklearn_
```

(continues on next page)

(continued from previous page)

```

↪LogisticRegression model
sklearn_model = SklearnModel(
    estimator=sklearn_estimator, artifact_dir=tempfile.mkdtemp()
)

# Autogenerate score.py, serialized model, runtime.yaml, input_schema.json and output_
↪schema.json
sklearn_model.prepare(
    inference_conda_env="dbexp_p38_cpu_v1",
    X_sample=X_train,
    y_sample=y_train,
)

# Verify generated artifacts
sklearn_model.verify(X_test)

# Register scikit-learn model
model_id = sklearn_model.save(display_name="Sklearn Model")

```

### 12.2.1.2 XGBoost

Create a model, prepare it, verify that it works, save it to the model catalog, deploy it, make a prediction, and then delete the deployment.

```

import tempfile

import ads
import xgboost as xgb
from ads.model.framework.xgboost_model import XGBoostModel
from sklearn.datasets import load_iris
from sklearn.datasets import make_classification
from sklearn.model_selection import train_test_split

ads.set_auth(auth="resource_principal")

# Load dataset and Prepare train and test split
iris = load_iris()
X, y = iris.data, iris.target
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)

# Train a XBoost Classifier model
xgboost_estimator = xgb.XGBClassifier()
xgboost_estimator.fit(X_train, y_train)

# Instantiate ads.model.framework.xgboost_model.XGBoostModel using the trained XGBoost_
↪Model
xgboost_model = XGBoostModel(estimator=xgboost_estimator, artifact_dir=tempfile.
↪mkdtemp())

# Autogenerate score.py, serialized model, runtime.yaml, input_schema.json and output_

```

(continues on next page)

(continued from previous page)

```

↪ schema.json
xgboost_model.prepare(
    inference_conda_env="generalml_p38_cpu_v1",
    X_sample=X_train,
    y_sample=y_train,
)

# Verify generated artifacts
xgboost_model.verify(X_test)

# Register XGBoost model
model_id = xgboost_model.save(display_name="XGBoost Model")

```

### 12.2.1.3 LightGBM

Create a model, prepare it, verify that it works, save it to the model catalog, deploy it, make a prediction, and then delete the deployment.

```

import tempfile

import ads
import lightgbm as lgb
from ads.model.framework.lightgbm_model import LightGBMModel
from sklearn.datasets import load_iris
from sklearn.model_selection import train_test_split

ads.set_auth(auth="resource_principal")

# Load dataset and Prepare train and test split
iris = load_iris()
X, y = iris.data, iris.target
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)

# Train a XBoost Classifier model
train = lgb.Dataset(X_train, label=y_train)
param = {
    'objective': 'multiclass', 'num_class': 3,
}
lightgbm_estimator = lgb.train(param, train)

# Instantiate ads.model.lightgbm_model.XGBoostModel using the trained LGBM Model
lightgbm_model = LightGBMModel(estimator=lightgbm_estimator, artifact_dir=tempfile.
↪mkdtemp())

# Autogenerate score.py, serialized model, runtime.yaml, input_schema.json and output_
↪ schema.json
lightgbm_model.prepare(
    inference_conda_env="generalml_p38_cpu_v1",
    X_sample=X_train,
    y_sample=y_train,
)

```

(continues on next page)

(continued from previous page)

```
# Verify generated artifacts
lightgbm_model.verify(X_test)

# Register LightGBM model
model_id = lightgbm_model.save(display_name="LightGBM Model")
```

#### 12.2.1.4 PyTorch

Create a model, prepare it, verify that it works, save it to the model catalog, deploy it, make a prediction, and then delete the deployment.

```
import tempfile

import ads
import torch
import torchvision
from ads.model.framework.pytorch_model import PyTorchModel

ads.set_auth(auth="resource_principal")

# Load a pre-trained resnet model
torch_estimator = torchvision.models.resnet18(pretrained=True)
torch_estimator.eval()

# create random test data
test_data = torch.randn(1, 3, 224, 224)

# Instantiate ads.model.framework.pytorch_model.PyTorchModel using the pre-trained
↪PyTorch Model
artifact_dir=tempfile.mkdtemp()
torch_model = PyTorchModel(torch_estimator, artifact_dir=artifact_dir)

# Autogenerate score.py, serialized model, runtime.yaml
# Set `use_torch_script` to `True` to save the model as Torchscript program.
torch_model.prepare(inference_conda_env="pytorch110_p38_cpu_v1", use_torch_script=True)

# Verify generated artifacts
torch_model.verify(test_data)

# Register PyTorch model
model_id = torch_model.save(display_name="PyTorch Model")
```

### 12.2.1.5 Spark Pipeline

Create a model, prepare it, verify that it works, save it to the model catalog, deploy it, make a prediction, and then delete the deployment.

```
import os
import tempfile

import ads
from ads.model.framework.spark_model import SparkPipelineModel
from pyspark.ml import Pipeline
from pyspark.ml.classification import LogisticRegression
from pyspark.ml.feature import HashingTF, Tokenizer
from ads.model.framework.spark_model import SparkPipelineModel

spark = SparkSession \
    .builder \
    .appName("Python Spark SQL basic example") \
    .getOrCreate()

# create data
training = spark.createDataFrame(
    [
        (0, "a b c d e spark", 1.0),
        (1, "b d", 0.0),
        (2, "spark f g h", 1.0),
        (3, "hadoop mapreduce", 0.0),
    ],
    ["id", "text", "label"],
)

test = spark.createDataFrame(
    [
        (4, "spark i j k"),
        (5, "l m n"),
        (6, "spark hadoop spark"),
        (7, "apache hadoop"),
    ],
    ["id", "text"],
)

# Train a Spark Pipeline model
tokenizer = Tokenizer(inputCol="text", outputCol="words")
hashingTF = HashingTF(inputCol=tokenizer.getOutputCol(), outputCol="features")
lr = LogisticRegression(maxIter=10, regParam=0.001)
pipeline = Pipeline(stages=[tokenizer, hashingTF, lr])
model = pipeline.fit(training)

# Instantite ads.model.framework.spark_model.SparkPipelineModel using the pre-trained
↳ Spark Pipeline Model
spark_model = SparkPipelineModel(estimator=model, artifact_dir=tempfile.mkdtemp())
spark_model.prepare(inference_conda_env="pyspark32_p38_cpu_v2",
                    X_sample = training,
                    force_overwrite=True)
```

(continues on next page)



(continued from previous page)

```
# Verify generated artifacts
prediction = spark_model.verify(test)

#Register Spark model
spark_model.save(display_name="Spark Pipeline Model")
```

### 12.2.1.6 TensorFlow

Create a model, prepare it, verify that it works, save it to the model catalog, deploy it, make a prediction, and then delete the deployment.

```
from ads.model.framework.tensorflow_model import TensorFlowModel
import tensorflow as tf
from uuid import uuid4

mnist = tf.keras.datasets.mnist
(x_train, y_train), (x_test, y_test) = mnist.load_data()
x_train, x_test = x_train / 255.0, x_test / 255.0

tf_estimator = tf.keras.models.Sequential(
    [
        tf.keras.layers.Flatten(input_shape=(28, 28)),
        tf.keras.layers.Dense(128, activation="relu"),
        tf.keras.layers.Dropout(0.2),
        tf.keras.layers.Dense(10),
    ]
)
loss_fn = tf.keras.losses.SparseCategoricalCrossentropy(from_logits=True)
tf_estimator.compile(optimizer="adam", loss=loss_fn, metrics=["accuracy"])
tf_estimator.fit(x_train, y_train, epochs=1)

# Instantiate ads.model.framework.tensorflow_model.TensorFlowModel using the pre-trained_
↪TensorFlow Model
tf_model = TensorFlowModel(tf_estimator, artifact_dir=f"./model-artifact-{str(uuid4())}")

# Autogenerate score.py, pickled model, runtime.yaml, input_schema.json and output_
↪schema.json
tf_model.prepare(inference_conda_env="tensorflow28_p38_cpu_v1")

# Verify generated artifacts
tf_model.verify(x_test[:1])

#Register TensorFlow model
model_id = tf_model.save(display_name="TensorFlow Model")
```

## 12.2.1.7 HuggingFace Pipelines

```

from transformers import pipeline
from ads.model import HuggingFacePipelineModel

import tempfile
import PIL.Image
from ads.common.auth import default_signer
import requests
import cloudpickle

## download the image
image_url = "https://huggingface.co/datasets/Narsil/image_dummy/raw/main/parrots.png"
image = PIL.Image.open(requests.get(image_url, stream=True).raw)

## download the pretrained model
classifier = pipeline(model="openai/clip-vit-large-patch14")
classifier(
    images=image,
    candidate_labels=["animals", "humans", "landscape"],
)

## Initiate a HuggingFacePipelineModel instance
zero_shot_image_classification_model = HuggingFacePipelineModel(classifier, artifact_
    dir=tempfile.mkdtemp())

# Autogenerate score.py, serialized model, runtime.yaml
conda_pack_path = "oci://bucket@namespace/path/to/conda/pack"
python_version = "3.x" # Remember to update 3.x with your actual python version, e.g. 3.8
zero_shot_image_classification_model.prepare(inference_conda_env=conda_pack_path,
    inference_python_version = python_version, force_overwrite=True)

## Convert payload to bytes
data = {"images": image, "candidate_labels": ["animals", "humans", "landscape"]}
body = cloudpickle.dumps(data) # convert image to bytes

# Verify generated artifacts
zero_shot_image_classification_model.verify(data=data)
zero_shot_image_classification_model.verify(data=body)

# Register HuggingFace Pipeline model
zero_shot_image_classification_model.save()

## Deploy
log_group_id = "<log_group_id>"
log_id = "<log_id>"
zero_shot_image_classification_model.deploy(deployment_bandwidth_mbps=100,
    wait_for_completion=False,
    deployment_log_group_id = log_group_id,
    deployment_access_log_id = log_id,
    deployment_predict_log_id = log_id)
zero_shot_image_classification_model.predict(data)
zero_shot_image_classification_model.predict(body)

```

(continues on next page)

(continued from previous page)

```

### Invoke the model by sending bytes
auth = default_signer()['signer']
endpoint = zero_shot_image_classification_model.model_deployment.url + "/predict"
headers = {"Content-Type": "application/octet-stream"}
requests.post(endpoint, data=body, auth=auth, headers=headers).json()

```

### 12.2.1.8 Other Frameworks

```

import tempfile
from ads.model.generic_model import GenericModel

# Create custom framework model
class Toy:
    def predict(self, x):
        return x ** 2
model = Toy()

# Instantiate ads.model.generic_model.GenericModel using the trained Custom Model
generic_model = GenericModel(estimator=model, artifact_dir=tempfile.mkdtemp())
generic_model.summary_status()

# Autogenerate score.py, pickled model, runtime.yaml, input_schema.json and output_
↳ schema.json
generic_model.prepare(
    inference_conda_env="dbexp_p38_cpu_v1",
    model_file_name="toy_model.pkl",
    force_overwrite=True
)

# Check if the artifacts are generated correctly.
# The verify method invokes the ``predict`` function defined inside ``score.py`` in the
↳ artifact_dir
generic_model.verify([2])

# Register the model
model_id = generic_model.save(display_name="Custom Framework Model")

```

### 12.2.1.9 With Model Version Set

```

import tempfile
from ads.model.generic_model import GenericModel

# Create custom framework model
class Toy:
    def predict(self, x):
        return x ** 2
model = Toy()

```

(continues on next page)

(continued from previous page)

```
# Instantiate ads.model.generic_model.GenericModel using the trained Custom Model
generic_model = GenericModel(estimator=model, artifact_dir=tempfile.mkdtemp())
generic_model.summary_status()

# Within the context manager, you can save the :ref:`Model Serialization` model without
↳ specifying the ``model_version_set`` parameter because it's taken from the model context
↳ manager. If the model version set doesn't exist in the model catalog, the example
↳ creates a model version set named ``my_model_version_set``. If the model version set
↳ exists in the model catalog, the models are saved to that model version set.
with ads.model.experiment(name="my_model_version_set", create_if_not_exists=True):

    # Autogenerate score.py, pickled model, runtime.yaml, input_schema.json and output_
    ↳ schema.json
    generic_model.prepare(
        inference_conda_env="dbexp_p38_cpu_v1",
        model_file_name="toy_model.pkl",
        force_overwrite=True
    )

    # Check if the artifacts are generated correctly.
    # The verify method invokes the ``predict`` function defined inside ``score.py`` in the
    ↳ artifact_dir
    generic_model.verify([2])

    # Register the model
    model_id = generic_model.save(display_name="Custom Framework Model")
```

## 12.2.2 Model Registration

### 12.2.2.1 Model Artifact

To save a trained model on OCI Data Science, prepare a **Model Artifact**.

Model Artifact is a zip file which contains the following artifacts -

- Serialized model or models
- runtime.yaml - This yaml captures provenance information and deployment conda environment
- score.py - Entry module which is used by the model deployment server to load the model and run prediction
- input\_schema.json - Describes the schema of the features that will be used within predict function
- output\_schema.json - Describes the schem of the prediction values
- Any other artifcat that are required during inference time.

ADS can auto generate all the mandatory files to help save the models that are compliant with the OCI Data Science Model Deployment service.

Auto generation of score.py with framework specific code for loading models and fetching prediction is available for following frameworks-

- scikit-learn
- XGBoost

- LightGBM
- PyTorch
- SparkPipelineModel
- TensorFlow

To accomodate for other frameworks that are unknown to ADS, a template code for `score.py` is generated in the provided artifact directory location.

### 12.2.2.2 Prepare the Model Artifact

To prepare the model artifact -

- Train a model using the framework of your choice
- Create a Model object from one of the framework specific Models available under `ads.model.framework.*`. The Model class takes two parameters - estimator object and a directory location to store autogenerated artifacts.
- call `prepare()` to generate all the files.

See [API documentation](#) for more details about the parameters.

Here is an example for preparing a model artifact for TensorFlow model.

```
from ads.model.framework.tensorflow_model import TensorFlowModel
from uuid import uuid4
import tensorflow as tf
from ads.common.model_metadata import UseCaseType

mnist = tf.keras.datasets.mnist
(x_train, y_train), (x_test, y_test) = mnist.load_data()
x_train, x_test = x_train / 255.0, x_test / 255.0

tf_estimator = tf.keras.models.Sequential(
    [
        tf.keras.layers.Flatten(input_shape=(28, 28)),
        tf.keras.layers.Dense(128, activation="relu"),
        tf.keras.layers.Dropout(0.2),
        tf.keras.layers.Dense(10),
    ]
)
loss_fn = tf.keras.losses.SparseCategoricalCrossentropy(from_logits=True)
tf_estimator.compile(optimizer="adam", loss=loss_fn, metrics=["accuracy"])
tf_estimator.fit(x_train, y_train, epochs=1)

tf_model = TensorFlowModel(tf_estimator, artifact_dir=f"./model-artifact-{str(uuid4())}")

# Autogenerate score.py, pickled model, runtime.yaml, input_schema.json and output_
# schema.json
tf_model.prepare(inference_conda_env="generalml_p38_cpu_v1",
                 use_case_type=UseCaseType.MULTINOMIAL_CLASSIFICATION,
                 X_sample=trainx,
                 y_sample=trainy
                )
```

(continues on next page)

(continued from previous page)

```
# Verify generated artifacts
tf_model.verify(x_test[:1])

# Register TensorFlow model
model_id = tf_model.save()
```

```
['output_schema.json', 'score.py', 'runtime.yaml', 'model.h5', '.model-ignore', 'input_
↪ schema.json']
```

ADS automatically captures:

- Provenance metadata - commit id, git branch, etc
- Taxonomy metadata such as model hyperparameters, framework name.
- Custom metadata such as Data science conda environment when available, Model artifact inventory, model serialization format, etc.
- Schema of input and target variables. This requires input sample and target sample to be passed while calling prepare

**Note:**

- UseCaseType in metadata\_taxonomy cannot be automatically populated. One way to populate the use case is to pass use\_case\_type to the prepare method.
- Model introspection is automatically triggered.

### 12.2.2.3 score.py

In the prepare step, the service automatically generates a `score.py` file in the artifact directory.

`score.py` is used by the Data Science Model Deployment service to generate predictions in the input feature. Here is a minimal `score.py` implementation -

```
import joblib
model_name = "model.joblib"

def load_model(): # load_model must mandatorily return ``not None`` object.

    model = None
    with open(os.path.join(os.path.dirname(os.path.realpath(__file__)), model_file_name),
↪ "rb") as mfile:
        model = joblib.load(mfile)
    return model

def predict(data, model=load_model()):
    return model.predict(data).tolist()
```

ADS autogenerates framework specific `score.py` which provides following functionality -

- Parse the input data and convert to pandas dataframe/numpy array/list
- Ensure the data type after converting to pandas dataframe matches the training time. This is achieved using the schema definition generated during prepare step.
- Serialize prediction generated by the model such that it is json serializable to avoid deployment runtime errors

You could customize the `score.py` to fit your use case. The most common use case for changing the `score.py` file is to add preprocessing and postprocessing steps to the `predict()` method.

Refer Cusotmization section for how to change and verify the model artifacts.

The `score.py` consists of multiple functions among which the `load_model` and `predict` are most important.

#### 12.2.2.3.1 load\_model

During deployment, the `load_model` method loads the serialized model. The `load_model` method is always fully populated, except when you set `serialize=False` for `GenericModel`.

- For the `GenericModel` class, if you choose `serialize=True` in the `init` function, the model is pickled and the `score.py` is fully auto-populated to support loading the pickled model. Otherwise, the user is responsible to fill the `load_model`.
- For other frameworks, this part is fully populated.

**Note:** `load_model` should return not `None` value for successful deployment.

#### 12.2.2.3.2 predict

The `predict` method is triggered every time a payload is sent to the model deployment endpoint. The method takes the payload and the loaded model as inputs. Based on the payload, the method returns the predicted results output by the model.

#### 12.2.2.3.3 pre\_inference

If the payload passed to the endpoint needs preprocessing, this function does the preprocessing step. The user is fully responsible for the preprocessing step.

#### 12.2.2.3.4 post\_inference

If the predicted result from the model needs some postprocessing, the user can put the logic in this function.

#### 12.2.2.3.5 deserialize

When you use the `.verify()` or `.predict()` methods from model classes such as `GenericModel` or `SklearnModel`, if the data passed in is not in bytes or `JsonSerializable`, the models try to serialize the data. For example, if a pandas dataframe is passed and not accepted by the deployment endpoint, the pandas dataframe is converted to JSON internally. When the `X_sample` variable is passed into the `.prepare()` function, the data type of pandas dataframe is passed to the endpoint, and the schema of the dataframe is recorded in the `input_schema.json` file. Then, the JSON payload is sent to the endpoint. Because the model expects to take a pandas dataframe, the `.deserialize()` method converts the JSON back to the pandas dataframe using the schema and the data type. For all frameworks except for the `GenericModel` class, the `.deserialize()` method is auto-populated. Note that for each framework, only specific data types are supported.

Starting from .. versionadded:: 2.6.3, you can send the bytes to the endpoint directly. If the bytes payload is sent to the endpoint, bytes are passed directly to the model. If the model expects a specific data format, you need to write the conversion logic yourself.

### 12.2.2.3.6 fetch\_data\_type\_from\_schema

This function is used to load the schema from the `input_schema.json` when needed.

### 12.2.2.4 Model Introspection

The `.introspect()` method runs some sanity checks on the `runtime.yaml`, and `score.py` files. This is to help you identify potential errors that might occur during model deployment. It checks fields such as environment path, validates the path's existence on the Object Storage, checks if the `.load_model()`, and `.predict()` functions are defined in `score.py`, and so on. The result of model introspection is automatically saved to the taxonomy metadata and model artifacts.

```
tf_model.introspect()
```

```
['output_schema.json', 'runtime.yaml', 'model.joblib', 'input_schema.json', 'score.py']
```

	Test key	Test name	Result	Message
0	runtime_env_path	Check that field MODEL_DEPLOYMENT.INFERENCE_ENV_PATH is set	Passed	
1	runtime_env_python	Check that field MODEL_DEPLOYMENT.INFERENCE_PYTHON_VERSION is set to a value of 3.6 or higher	Passed	
2	runtime_env_slug	Check that field MODEL_DEPLOYMENT.INFERENCE_ENV_SLUG is set	Passed	
3	runtime_env_type	Check that field MODEL_DEPLOYMENT.INFERENCE_ENV_TYPE is set to a value in (published, data_science)	Passed	
4	runtime_path_exist	If MODEL_DEPLOYMENT.INFERENCE_ENV_TYPE is data_science and MODEL_DEPLOYMENT.INFERENCE_ENV_SLUG is set, check that the file path in MODEL_DEPLOYMENT.INFERENCE_ENV_PATH is correct.	Skipped	
5	runtime_slug_exist	If MODEL_DEPLOYMENT.INFERENCE_ENV_TYPE is data_science, check that the slug listed in MODEL_DEPLOYMENT.INFERENCE_ENV_SLUG exists.	Skipped	
6	runtime_version	Check that field MODEL_ARTIFACT_VERSION is set to 3.0	Passed	
7	runtime_yaml	Check that the file "runtime.yaml" exists and is in the top level directory of the artifact directory	Passed	
8	score_load_model	Check that load_model() is defined	Passed	
9	score_predict	Check that predict() is defined	Passed	
10	score_predict_arg	Check that all other arguments in predict() are optional and have default values	Passed	
11	score_predict_data	Check that the only required argument for predict() is named "data"	Passed	
12	score_py	Check that the file "score.py" exists and is in the top level directory of the artifact directory	Passed	
13	score_syntax	Check for Python syntax errors	Passed	

Reloading model artifacts automatically invokes model introspection. However, you can invoke introspection manually by calling `tf_model.introspect()`:

The `ArtifactTestResults` field is populated in `metadata_taxonomy` when `instrospect` is triggered:

```
tf_model.metadata_taxonomy['ArtifactTestResults']
```

```
key: ArtifactTestResults
```

```
value:
```

```
  runtime_env_path:
```

```
    category: conda_env
```

```
    description: Check that field MODEL_DEPLOYMENT.INFERENCE_ENV_PATH is set
```

```
  . . .
```



### 12.2.2.5 Save Model

The `.save()` method saves the model artifacts, introspection results, schema, metadata, etc on OCI Data Science Service and returns a model OCID. See [API documentation](#) for more details.

```
model_catalog_id = tf_model.save(display_name='TF Model')
```

You can print a model to see some details about it.

```
print(tf_model)
```

You can also print a summary status of the model.

```
lgbm_model.summary_status()
```

### 12.2.2.6 Save Large Model

New in version 2.6.4.

Large models are models with artifacts between 2 and 6 GB. You must first upload large models to an Object Storage bucket, and then transfer them to a model catalog.

ADS *framework specific wrapper* classes save large models using a process almost identical to model artifacts that are less than 2GB. An Object Storage bucket is required with Data Science service access granted to that bucket.

If you don't have an Object Storage bucket, create one using the OCI SDK or the Console. Create an [Object Storage bucket](#). Make a note of the namespace, compartment, and bucket name. Configure the following policies to allow the Data Science service to read and write the model artifact to the Object Storage bucket in your tenancy. An administrator must configure these policies in [IAM](#) in the Console.

```
Allow service datascience to manage object-family in compartment <compartment> where ALL
↪ {target.bucket.name='<bucket_name>'}
```

```
Allow service objectstorage-<region_identifier> to manage object-family in compartment
↪ <compartment> where ALL {target.bucket.name='<bucket_name>'}
```

Because Object Storage is a regional service, you must authorize the Object Storage service for each region. To determine the region identifier value of an Oracle Cloud Infrastructure region, see [Regions and Availability Domains](#). See [API documentation](#) for more details.

The following saves the *framework specific wrapper* object, model, to the model catalog and returns the OCID from the model catalog:

```
model_catalog_id = tf_model.save(
    display_name='TF Model'
    bucket_uri=<oci://<bucket_name>@<namespace>/<path>/>,
    overwrite_existing_artifact = True,
    remove_existing_artifact = True,
)
```

### 12.2.2.7 Export Model Artifact to Object Storage

The model artifacts can be uploaded to the Object Storage bucket. The `.upload_artifact()` method archives all files located in the artifact folder and uploads it to the Object Storage bucket.

```
tf_model.upload_artifact(uri="oci://bucket@namespace/prefix/tf_model.zip")
```

Uploaded artifacts can be used to *load* and recreate *framework specific wrapper* objects from the existing model artifact archive. To construct the model back from the existing artifact, use the `.from_model_artifact()` method.

```
from ads.model.framework.tensorflow_model import TensorFlowModel

tf_model = TensorFlowModel.from_model_artifact(
    "oci://bucket@namespace/prefix/tf_model.zip"
)
```

### 12.2.3 Model Schema

The data schema provides a definition of the format and nature of the data that the model expects. It also defines the output data from the model inference. The `.populate_schema()` method accepts the parameters, `data_sample` or `X_sample`, and `y_sample`. When using these parameters, the model artifact gets populated the input and output data schemas.

The `.schema_input` and `.schema_output` properties are Schema objects that define the schema of each input column and the output. The Schema object contains these fields:

- **description:** Description of the data in the column.
- **domain:** A data structure that defines the domain of the data. The restrictions on the data and summary statistics of its distribution.
  - **constraints:** A data structure that is a list of expression objects that defines the constraints of the data.
    - \* **expression:** A string representation of an expression that can be evaluated by the language corresponding to the value provided in `language` attribute. The default value for `language` is `python`.
      - **expression:** Required. Use the `string.Template` format for specifying the expression. `$x` is used to represent the variable.
      - **language:** The default value is `python`. Only `python` is supported.
  - **stats:** A set of summary statistics that defines the distribution of the data. These are determined using the feature type statistics as defined in ADS.
  - **values:** A description of the values of the data.
- **dtype:** Pandas data type
- **feature\_type:** The primary feature type as defined by ADS.
- **name:** Name of the column.
- **required:** Boolean value indicating if a value is always required.
- **description:** Number of matching socks in your dresser drawer.
- **domain:**
  - **constraints:**
    - **expression:** (`$x <= 10`) and (`$x > 0`)
    - **language:** `python`

(continues on next page)

(continued from previous page)

```

- expression: $x in [2, 4, 6, 8, 10]
  language: python
stats:
  count: 465.0
  lower_quartile: 3.2
  mean: 6.3
  median: 7.0
  sample_maximum: 10.0
  sample_minimum: 2.0
  standard_deviation: 2.5
  upper_quartile: 8.2
  values: Natural even numbers that are less than or equal to 10.
dtype: int64
feature_type: EvenNatural10
name: sock_count
required: true

```

### 12.2.3.1 Schema Model

```

{
  "description": {
    "nullable": true,
    "required": false,
    "type": "string"
  },
  "domain": {
    "nullable": true,
    "required": false,
    "schema": {
      "constraints": {
        "nullable": true,
        "required": false,
        "type": "list"
      },
      "stats": {
        "nullable": true,
        "required": false,
        "type": "dict"
      },
      "values": {
        "nullable": true,
        "required": false,
        "type": "string"
      }
    },
    "type": "dict"
  },
  "dtype": {
    "nullable": false,
    "required": true,

```

(continues on next page)

(continued from previous page)

```

        "type": "string"
    },
    "feature_type": {
        "nullable": true,
        "required": false,
        "type": "string"
    },
    "name": {
        "nullable": false,
        "required": true,
        "type": [
            "string",
            "number"
        ]
    },
    "order": {
        "nullable": true,
        "required": false,
        "type": "integer"
    },
    "required": {
        "nullable": false,
        "required": true,
        "type": "boolean"
    }
}

```

### 12.2.3.2 Generating Schema

To auto generate schema from the training data, provide X sample and the y sample while preparing the model artifact.

Eg.

```

import tempfile
from ads.model.framework.sklearn_model import SklearnModel
from sklearn.datasets import load_iris
from sklearn.linear_model import LogisticRegression
from sklearn.model_selection import train_test_split

# Load dataset and Prepare train and test split
iris = load_iris()
X, y = iris.data, iris.target
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)

# Train a LogisticRegression model
sklearn_estimator = LogisticRegression()
sklearn_estimator.fit(X_train, y_train)

# Instantiate ads.model.SklearnModel using the sklearn LogisticRegression model
sklearn_model = SklearnModel(estimator=sklearn_estimator, artifact_dir=tempfile.
↪mkdtemp())

```

(continues on next page)

(continued from previous page)

```
# Autogenerate score.py, pickled model, runtime.yaml, input_schema.json and output_
↪ schema.json
sklearn_model.prepare(inference_conda_env="dataexpl_p37_cpu_v3", X_sample=trainx, y_
↪ sample=trainy)
```

Calling `.schema_input` or `.schema_output` shows the schema in a YAML format.

Alternatively, you can check the `output_schema.json` file for the content of the `schema_output`:

```
with open(path.join(path_to_artifact_dir, "output_schema.json"), 'r') as f:
    print(f.read())
```

```
{
  "schema": [
    {
      "dtype": "int64",
      "feature_type": "Integer",
      "name": "class",
      "domain": {
        "values": "Integer",
        "stats": {
          "count": 465.0,
          "mean": 0.5225806451612903,
          "standard deviation": 0.5000278079030275,
          "sample minimum": 0.0,
          "lower quartile": 0.0,
          "median": 1.0,
          "upper quartile": 1.0,
          "sample maximum": 1.0
        },
        "constraints": []
      },
      "required": true,
      "description": "class"
    }
  ]
}
```

### 12.2.3.3 Update the Schema

You can update the fields in the schema:

```
sklearn_model.schema_output[<class name>].description = 'target variable'
sklearn_model.schema_output[<class name>].feature_type = 'Category'
```

You can specify a constraint for your data using Expression, and call `evaluate` to check if the data satisfies the constraint:

```
sklearn_model.schema_input['col01'].domain.constraints.append(Expression('($x < 20) and (
↪ $x > -20)'))
```

0 is between -20 and 20, so evaluate should return True:

```
sklearn_model.schema_input['col01'].domain.constraints[0].evaluate(x=0)
```

**True**

You can directly populate the schema by calling `populate_schema()`:

```
sklearn_model.model_artifact.populate_schema(X_sample=test.X, y_sample=test.y)
```

You can also load your schema from a JSON or YAML file:

```
cat <<EOF > schema.json
{
  "schema": [
    {
      "dtype": "int64",
      "feature_type": "Category",
      "name": "class",
      "domain": {
        "values": "Category type.",
        "stats": {
          "count": 465.0,
          "unique": 2},
        "constraints": [
          {"expression": "($x <= 1) and ($x >= 0)", "language": "python"},
          {"expression": "$x in [0, 1]", "language": "python"}]],
        "required": true,
        "description": "target to predict."
      }
    ]
  }
}
EOF
```

```
sklearn_model.schema_output = Schema.from_file('schema.json'))
```

## 12.2.4 Model Metadata

When you register a model, you can add metadata to help with the documentation of the model. Service defined metadata fields are known as `Taxonomy Metadata` and user defined metadata fields are known as `Custom Metadata`

### 12.2.4.1 Taxonomy Metadata

Taxonomy metadata includes the type of the model, use case type, libraries, framework, and so on. This metadata provides a way of documenting the schema of the model. The `UseCaseType`, `FrameWork`, `FrameWorkVersion`, `Algorithm`, and `Hyperparameters` are fixed taxonomy metadata. These fields are automatically populated when the `.prepare()` method is called. You can also manually update the values of those fields.

- `ads.common.model_metadata.UseCaseType`: The machine learning problem associated with the Estimator class. The `UseCaseType.values()` method returns the most current list. This is a list of allowed values.:
  - `UseCaseType.ANOMALY_DETECTION`

- `UseCaseType.BINARY_CLASSIFICATION`
  - `UseCaseType.CLUSTERING`
  - `UseCaseType.DIMENSIONALITY_REDUCTION`
  - `UseCaseType.IMAGE_CLASSIFICATION`
  - `UseCaseType.MULTINOMIAL_CLASSIFICATION`
  - `UseCaseType.NER`
  - `UseCaseType.OBJECT_LOCALIZATION`
  - `UseCaseType.OTHER`
  - `UseCaseType.RECOMMENDER`
  - `UseCaseType.REGRESSION`
  - `UseCaseType.SENTIMENT_ANALYSIS`
  - `UseCaseType.TIME_SERIES_FORECASTING`
  - `UseCaseType.TOPIC_MODELING`
- `ads.common.model_metadata.FrameWork`: The `FrameWork` of the estimator object. You can get the list of allowed values using `Framework.values()`:
    - `FrameWork.BERT`
    - `FrameWork.CUML`
    - `FrameWork.EMCEE`
    - `FrameWork.ENSEMBLE`
    - `FrameWork.FLAIR`
    - `FrameWork.GENSIM`
    - `FrameWork.H2O`
    - `FrameWork.KERAS`
    - `FrameWork.LIGHTgbm`
    - `FrameWork.MXNET`
    - `FrameWork.NLTK`
    - `FrameWork.ORACLE_AUTOML`
    - `FrameWork.OTHER`
    - `FrameWork.PROPHET`
    - `FrameWork.PYOD`
    - `FrameWork.PYMC3`
    - `FrameWork.PYSTAN`
    - `FrameWork.PYTORCH`
    - `FrameWork.SCIKIT_LEARN`
    - `FrameWork.SKTIME`
    - `FrameWork.SPACY`

- Framework.STATSMODELS
- Framework.TENSORFLOW
- Framework.TRANSFORMERS
- Framework.WORD2VEC
- Framework.XGBOOST

- FrameworkVersion: The framework version of the estimator object. For example, 2.3.1.
- Algorithm: The model class.
- Hyperparameters: The hyperparameters of the estimator object.

You can't add or delete any of the fields, or change the key of those fields.

You can populate the `use_case_type` by passing it in the `.prepare()` method. Or you can set and update it directly.

```
import tempfile
from ads.model.framework.sklearn_model import SklearnModel
from sklearn.datasets import load_iris
from sklearn.linear_model import LogisticRegression
from sklearn.model_selection import train_test_split
from ads.common.model_metadata import UseCaseType

# Load dataset and Prepare train and test split
iris = load_iris()
X, y = iris.data, iris.target
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)

# Train a LogisticRegression model
sklearn_estimator = LogisticRegression()
sklearn_estimator.fit(X_train, y_train)

# Instantiate ads.model.SklearnModel using the sklearn LogisticRegression model
sklearn_model = SklearnModel(estimator=sklearn_estimator, artifact_dir=tempfile.
    ↪mkdtemp())

# Autogenerate score.py, pickled model, runtime.yaml, input_schema.json and output_
    ↪schema.json
sklearn_model.prepare(inference_conda_env="dataexpl_p37_cpu_v3", X_sample=trainx, y_
    ↪sample=trainy)

sklearn_model.metadata_taxonomy['UseCaseType'].value = UseCaseType.BINARY_CLASSIFICATION
```

### Update metadata\_taxonomy

Update any of the taxonomy fields with allowed values:

```
sklearn_model.metadata_taxonomy['FrameworkVersion'].value = '0.24.2'
sklearn_model.metadata_taxonomy['UseCaseType'].update(value=UseCaseType.BINARY_
    ↪CLASSIFICATION)
```

You can view the `metadata_taxonomy` in the dataframe format by calling `to_dataframe`:

```
sklearn_model.metadata_taxonomy.to_dataframe()
```



	Key	Value
0	Algorithm	RandomForestClassifier
1	ArtifactTestResults	<pre>{'score_py': {'key': 'score_py', 'category': 'Mandatory Files Check', 'description': 'Check that the file "score.py" exists and is in the top level directory of the artifact directory', 'error_msg': 'The file "score.py" is missing.', 'success': True}, 'runtime_yaml': {'category': 'Mandatory Files Check', 'description': 'Check that the file "runtime.yaml" exists and is in the top level directory of the artifact directory', 'error_msg': 'The file "runtime.yaml" is missing.', 'success': True}, 'score_syntax': {'category': 'score.py', 'description': 'Check for Python syntax errors', 'error_msg': 'There is Syntax error in score.py.', 'success': True}, 'score_load_model': {'category': 'score.py', 'description': 'Check that load_model() is defined', 'error_msg': 'Function load_model is not present in score.py.', 'success': True}, 'score_predict': {'category': 'score.py', 'description': 'Check that predict() is defined', 'error_msg': 'Function predict is not present in score.py.', 'success': True}, 'score_predict_data': {'category': 'score.py', 'description': 'Check that the only required argument for predict() is named "data"', 'error_msg': 'The predict function in score.py must have a formal argument named "data"', 'success': True}, 'score_predict_arg': {'category': 'score.py', 'description': 'Check that all other arguments in predict() are optional and have default values', 'error_msg': 'All formal arguments in the predict function must have default values, except that "data" argument.', 'success': True}, 'runtime_version': {'category': 'runtime.yaml', 'description': 'Check that field MODEL_ARTIFACT_VERSION is set to 3.0', 'error_msg': 'In runtime.yaml, the key MODEL_ARTIFACT_VERSION must be set to 3.0.', 'success': True}, 'runtime_env_python': {'category': 'conda_env', 'description': 'Check that field MODEL_DEPLOYMENT.INFERENCE_PYTHON_VERSION is set to a value of 3.6 or higher', 'error_msg': 'In runtime.yaml, the key MODEL_DEPLOYMENT.INFERENCE_PYTHON_VERSION must be set to a value of 3.6 or higher.', 'success': True, 'value': '3.7.10'}, 'runtime_env_type': {'category': 'conda_env', 'description': 'Check that field MODEL_DEPLOYMENT.INFERENCE_ENV_TYPE is set to a value in (published, data_science)', 'error_msg': 'In runtime.yaml, the key MODEL_DEPLOYMENT.INFERENCE_ENV_TYPE must be set to published or data_science.', 'success': True, 'value': 'published'}, 'runtime_env_slug': {'category': 'conda_env', 'description': 'Check that field MODEL_DEPLOYMENT.INFERENCE_ENV_SLUG is set', 'error_msg': 'In runtime.yaml, the key MODEL_DEPLOYMENT.INFERENCE_ENV_SLUG must have a value.', 'success': True, 'value': 'oci://licence_checker@ociodscdev/conda_environments/cpu/Oracle Database/1.0/database_p37_cpu_v1.0'}, 'runtime_path_exist': {'category': 'conda_env', 'description': 'Check that field MODEL_DEPLOYMENT.INFERENCE_ENV_PATH is set', 'error_msg': 'In runtime.yaml, the key MODEL_DEPLOYMENT.INFERENCE_ENV_PATH must have a value.', 'success': True, 'value': 'oci://licence_checker@ociodscdev/conda_environments/cpu/Oracle Database/1.0/database_p37_cpu_v1.0'}, 'runtime_slug_exist': {'category': 'conda_env', 'description': 'If MODEL_DEPLOYMENT.INFERENCE_ENV_TYPE is data_science and MODEL_DEPLOYMENT.INFERENCE_ENV_PATH does not exist.', 'error_msg': 'In runtime.yaml, the key MODEL_DEPLOYMENT.INFERENCE_ENV_PATH does not exist.'}, 'runtime_slug_exists': {'category': 'conda_env', 'description': 'If MODEL_DEPLOYMENT.INFERENCE_ENV_TYPE is data_science, check that the slug listed in MODEL_DEPLOYMENT.INFERENCE_ENV_SLUG exists.', 'error_msg': 'In runtime.yaml, the value of the key INFERECE_ENV_SLUG is "slug_value" and it doesn't exist in the bucket "bucket_url". Ensure that the value INFERECE_ENV_SLUG and the bucket url are correct.'}}</pre>
2	Framework	scikit-learn
3	FrameworkVersion	0.24.2
4	Hyperparameters	<pre>{'bootstrap': True, 'ccp_alpha': 0.0, 'class_weight': None, 'criterion': 'gini', 'max_depth': None, 'max_features': 'auto', 'max_leaf_nodes': None, 'max_samples': None, 'min_impurity_decrease': 0.0, 'min_impurity_split': None, 'min_samples_leaf': 1, 'min_samples_split': 2, 'min_weight_fraction_leaf': 0.0, 'n_estimators': 10, 'n_jobs': None, 'oob_score': False, 'random_state': None, 'verbose': 0, 'warm_start': False}</pre>
5	UseCaseType	binary_classification

Alternatively, you can view it directly in a YAML format:

```
sklearn_model.metadata.taxonomy
```

data:

- key: FrameworkVersion  
value: 0.24.2
- key: ArtifactTestResults  
value:
  - runtime\_env\_path:
    - category: conda\_env
    - description: Check that field MODEL\_DEPLOYMENT.INFERENCE\_ENV\_PATH is set
    - error\_msg: In runtime.yaml, the key MODEL\_DEPLOYMENT.INFERENCE\_ENV\_PATH must have a value.
    - success: true
    - value: oci://licence\_checker@ociodscdev/conda\_environments/cpu/Oracle Database/1.0/database\_p37\_cpu\_v1.0
  - runtime\_env\_python:
    - category: conda\_env
    - description: Check that field MODEL\_DEPLOYMENT.INFERENCE\_PYTHON\_VERSION is set to a value of 3.6 or higher
    - error\_msg: In runtime.yaml, the key MODEL\_DEPLOYMENT.INFERENCE\_PYTHON\_VERSION must be set to a value of 3.6 or higher.
    - success: true
    - value: 3.7.10
  - runtime\_env\_slug:
    - category: conda\_env
    - description: Check that field MODEL\_DEPLOYMENT.INFERENCE\_ENV\_SLUG is set
    - error\_msg: In runtime.yaml, the key MODEL\_DEPLOYMENT.INFERENCE\_ENV\_SLUG must have a value.
    - success: true
    - value: database\_p37\_cpu\_v1.0
  - runtime\_env\_type:
    - category: conda\_env
    - description: Check that field MODEL\_DEPLOYMENT.INFERENCE\_ENV\_TYPE is set to a value in (published, data\_science)

```
error_msg: In runtime.yaml, the key MODEL_DEPLOYMENT.INFERENCE_ENV_TYPE must
  be set to published or data_science.
success: true
value: published
runtime_path_exist:
  category: conda_env
  description: If MODEL_DEPLOYMENT.INFERENCE_ENV_TYPE is data_science and MODEL_
↪DEPLOYMENT.INFERENCE_ENV_SLUG
    is set, check that the file path in MODEL_DEPLOYMENT.INFERENCE_ENV_PATH is
    correct.
  error_msg: In runtime.yaml, the key MODEL_DEPLOYMENT.INFERENCE_ENV_PATH does
    not exist.
runtime_slug_exist:
  category: conda_env
  description: If MODEL_DEPLOYMENT.INFERENCE_ENV_TYPE is data_science, check that
    the slug listed in MODEL_DEPLOYMENT.INFERENCE_ENV_SLUG exists.
  error_msg: In runtime.yaml, the value of the key INFERENCE_ENV_SLUG is slug_value
    and it doesn't exist in the bucket bucket_url. Ensure that the value INFERENCE_
↪ENV_SLUG
    and the bucket url are correct.
runtime_version:
  category: runtime.yaml
  description: Check that field MODEL_ARTIFACT_VERSION is set to 3.0
  error_msg: In runtime.yaml, the key MODEL_ARTIFACT_VERSION must be set to 3.0.
  success: true
runtime_yaml:
  category: Mandatory Files Check
  description: Check that the file "runtime.yaml" exists and is in the top level
    directory of the artifact directory
  error_msg: The file 'runtime.yaml' is missing.
  success: true
score_load_model:
  category: score.py
  description: Check that load_model() is defined
  error_msg: Function load_model is not present in score.py.
  success: true
score_predict:
  category: score.py
  description: Check that predict() is defined
  error_msg: Function predict is not present in score.py.
  success: true
score_predict_arg:
  category: score.py
  description: Check that all other arguments in predict() are optional and have
    default values
  error_msg: All formal arguments in the predict function must have default values,
    except that 'data' argument.
  success: true
score_predict_data:
  category: score.py
  description: Check that the only required argument for predict() is named "data"
  error_msg: The predict function in score.py must have a formal argument named
    'data'.
  success: true
```

```

score_py:
  category: Mandatory Files Check
  description: Check that the file "score.py" exists and is in the top level_
↳directory
  of the artifact directory
  error_msg: The file 'score.py' is missing.
  key: score_py
  success: true
score_syntax:
  category: score.py
  description: Check for Python syntax errors
  error_msg: 'There is Syntax error in score.py: '
  success: true
- key: Framework
  value: scikit-learn
- key: UseCaseType
  value: binary_classification
- key: Algorithm
  value: RandomForestClassifier
- key: Hyperparameters
  value:
    bootstrap: true
    ccp_alpha: 0.0
    class_weight: null
    criterion: gini
    max_depth: null
    max_features: auto
    max_leaf_nodes: null
    max_samples: null
    min_impurity_decrease: 0.0
    min_impurity_split: null
    min_samples_leaf: 1
    min_samples_split: 2
    min_weight_fraction_leaf: 0.0
    n_estimators: 10
    n_jobs: null
    oob_score: false
    random_state: null
    verbose: 0
    warm_start: false

```

#### 12.2.4.2 Custom Metadata

Update your custom metadata using the key, value, category, and description fields. The key, and value fields are required.

You can see the allowed values for custom metadata category using `MetadataCustomCategory.values()`:

- `MetadataCustomCategory.PERFORMANCE`
- `MetadataCustomCategory.TRAINING_PROFILE`
- `MetadataCustomCategory.TRAINING_AND_VALIDATION_DATASETS`
- `MetadataCustomCategory.TRAINING_ENVIRONMENT`

- MetadataCustomCategory.OTHER

### Add New Custom Metadata

To add a new custom metadata, call `.add()`:

```
sklearn_model.metadata_custom.add(key='test', value='test',
↪category=MetadataCustomCategory.OTHER, description='test', replace=True)
```

### Update Custom Metadata

Use the `.update()` method to update the fields of a specific key ensuring that you pass all the values you need in the update:

```
sklearn_model.metadata_custom['test'].update(value='test1', description=None,
↪category=MetadataCustomCategory.TRAINING_ENV)
```

Alternatively, you can set it directly:

```
sklearn_model.metadata_custom['test'].value = 'test1'
sklearn_model.metadata_custom['test'].description = None
sklearn_model.metadata_custom['test'].category = MetadataCustomCategory.TRAINING_ENV
```

You can view the custom metadata in the dataframe by calling `.to_dataframe()`:

```
sklearn_model.metadata_custom.to_dataframe()
```

	Key	Value	Description	Category
0	ClientLibrary	ADS		Other
1	CondaEnvironment	database_p37_cpu_v1.0	The conda env where model was trained	Training Environment
2	CondaEnvironmentPath	oci://licence_checker@ociodscdev/conda_environments/cpu/Oracle Database/1.0/database_p37_cpu_v1.0	The oci path of the conda env where model was trained	Training Environment
3	EnvironmentType	published	The env type, could be published conda or datascience conda	Training Environment
4	ModelArtifacts	score.py, runtime.yaml, onnx_data_transformer.json, model.onnx, .model-ignore	The list of files located in artifacts folder	Training Environment
5	ModelSerializationFormat	onnx	The model serialization format	Training Profile
6	SlugName	database_p37_cpu_v1.0	The slug name of the conda env where model was trained	Training Environment
7	test	test1	None	Training Environment

Alternatively, you can view the custom metadata in YAML format by calling `.metadata_custom`:

```
sklearn_model.metadata_custom
```

```
data:
- category: Training Environment
  description: The conda env where model was trained
  key: CondaEnvironment
  value: database_p37_cpu_v1.0
- category: Training Environment
  description: null
  key: test
  value: test1
- category: Training Environment
  description: The env type, could be published conda or datascience conda
  key: EnvironmentType
```

(continues on next page)

(continued from previous page)

```

value: published
- category: Training Environment
  description: The list of files located in artifacts folder
  key: ModelArtifacts
  value: score.py, runtime.yaml, onnx_data_transformer.json, model.onnx, .model-ignore
- category: Training Environment
  description: The slug name of the conda env where model was trained
  key: SlugName
  value: database_p37_cpu_v1.0
- category: Training Environment
  description: The oci path of the conda env where model was trained
  key: CondaEnvironmentPath
  value: oci://licence_checker@ociodscdev/conda_environments/cpu/Oracle Database/1.0/
↪ database_p37_cpu_v1.0
- category: Other
  description: ''
  key: ClientLibrary
  value: ADS
- category: Training Profile
  description: The model serialization format
  key: ModelSerializationFormat
  value: onnx

```

When the combined total size of `metadata_custom` and `metadata_taxonomy` exceeds 32000 bytes, an error occurs when you save the model to the model catalog. You can save the `metadata_custom` and `metadata_taxonomy` to the artifacts folder:

```
sklearn_model.metadata_custom.to_json_file(path_to_ADS_model_artifact)
```

You can also save individual items from the custom and taxonomy metadata:

```
sklearn_model.metadata_taxonomy['Hyperparameters'].to_json_file(path_to_ADS_model_
↪ artifact)
```

If you already have the training or validation dataset saved in Object Storage and want to document this information in this model artifact object, you can add that information into `metadata_custom`:

```
sklearn_model.metadata_custom.set_training_data(path='oci://bucket_name@namespace/train_
↪ data_filename', data_size='(200,100)')
sklearn_model.metadata_custom.set_validation_data(path='oci://bucket_name@namespace/
↪ validation_data_filename', data_size='(100,100)')
```

## 12.2.5 Customizing the Model

### 12.2.5.1 Customize `score.py`

Here is an example for preparing a model artifact for TensorFlow model which is trained on the minsit dataset. The final layer in the model produces 10 values corresponding to each digit. The default `score.py` will produce an array of 10 elements for each input vector. Suppose you want to change the default behavior of `predict` function in `score.py` to return most likely digit instead of returning a probability distribution over all the digits. To do so we can return the position corresponding to the maximum value within the output array. Here are the steps to customize the `score.py` -

Step1: Train your estimator and then generate the Model artifact as shown below -

```
from ads.catalog.model import ModelCatalog
from ads.model.framework.tensorflow_model import TensorFlowModel
import tensorflow as tf
from uuid import uuid4
from ads.common.model_metadata import UseCaseType

mnist = tf.keras.datasets.mnist
(x_train, y_train), (x_test, y_test) = mnist.load_data()
x_train, x_test = x_train / 255.0, x_test / 255.0

tf_estimator = tf.keras.models.Sequential(
    [
        tf.keras.layers.Flatten(input_shape=(28, 28)),
        tf.keras.layers.Dense(128, activation="relu"),
        tf.keras.layers.Dropout(0.2),
        tf.keras.layers.Dense(10),
    ]
)
loss_fn = tf.keras.losses.SparseCategoricalCrossentropy(from_logits=True)
tf_estimator.compile(optimizer="adam", loss=loss_fn, metrics=["accuracy"])
tf_estimator.fit(x_train, y_train, epochs=1)

tf_model = TensorFlowModel(tf_estimator, artifact_dir=f"./model-artifact-{str(uuid4())}")

# Autogenerate score.py, pickled model, runtime.yaml, input_schema.json and output_
# schema.json
tf_model.prepare(inference_conda_env="generalml_p38_cpu_v1",
                 use_case_type=UseCaseType.MULTINOMIAL_CLASSIFICATION,
                 X_sample=trainx,
                 y_sample=trainy
                )
```

Verify the output produced by the autogenerated score.py by calling verify on Model object.

```
print(tensorflow_model.verify(testx[:3])['prediction'])
```

```
[[-2.9461750984191895, -5.293642997741699, 0.4030594229698181, 3.0270071029663086, -6.
↳ 470805644989014, -2.07453989982605, -9.646402359008789, 9.256569862365723, -2.
↳ 6433541774749756, -0.8167083263397217],
[-3.4297854900360107, 2.4863781929016113, 8.968724250793457, 3.162344217300415, -11.
↳ 153030395507812, 0.15335027873516083, -0.5451826453208923, -7.817524433135986, -1.
↳ 0585914850234985, -10.736929893493652],
[-4.420501232147217, 5.841022491455078, -0.17066864669322968, -1.0071465969085693, -2.
↳ 261953592300415, -3.0983355045318604, -2.0874621868133545, 1.0745809078216553, -1.
↳ 2511857748031616, -2.273810625076294]]
```

The default score.py in tf\_model.artifact\_dir location is -

```
import os
import sys
from functools import lru_cache
import pandas as pd
```

(continues on next page)

(continued from previous page)

```

import numpy as np
import json
import tensorflow as tf
from io import BytesIO
import base64

model_name = 'model.h5'

"""
Inference script. This script is used for prediction by scoring server when schema is
↪known.
"""

@lru_cache(maxsize=10)
def load_model(model_file_name=model_name):
    """
    Loads model from the serialized format

    Returns
    -----
    model: a model instance on which predict API can be invoked
    """
    model_dir = os.path.dirname(os.path.realpath(__file__))
    if model_dir not in sys.path:
        sys.path.insert(0, model_dir)
    contents = os.listdir(model_dir)
    if model_file_name in contents:
        print(f'Start loading {model_file_name} from model directory {model_dir} ...')
        loaded_model = tf.keras.models.load_model(os.path.join(model_dir, model_file_
↪name))

        print("Model is successfully loaded.")
        return loaded_model
    else:
        raise Exception(f'{model_file_name} is not found in model directory {model_dir}')

@lru_cache(maxsize=1)
def fetch_data_type_from_schema(input_schema_path=os.path.join(os.path.dirname(os.path.
↪realpath(__file__)), "input_schema.json")):
    """
    Returns data type information fetch from input_schema.json.

    Parameters
    -----
    input_schema_path: path of input schema.

    Returns
    -----
    data_type: data type fetch from input_schema.json.

```

(continues on next page)

(continued from previous page)

```

"""
data_type = {}
if os.path.exists(input_schema_path):
    schema = json.load(open(input_schema_path))
    for col in schema['schema']:
        data_type[col['name']] = col['dtype']
else:
    print("input_schema has to be passed in in order to recover the same data type.
↳pass `X_sample` in `ads.model.framework.tensorflow_model.TensorFlowModel.prepare`
↳function to generate the input_schema. Otherwise, the data type might be changed after
↳serialization/deserialization.")
    return data_type

def deserialize(data, input_schema_path):
    """
    Deserialize json-serialized data to data in original type when sent to
    predict.

    Parameters
    -----
    data: serialized input data.
    input_schema_path: path of input schema.

    Returns
    -----
    data: deserialized input data.

    """
    data_type = data.get('data_type', '')
    json_data = data.get('data', data)

    if "numpy.ndarray" in data_type:
        load_bytes = BytesIO(base64.b64decode(json_data.encode('utf-8')))
        return np.load(load_bytes, allow_pickle=True)
    if "pandas.core.series.Series" in data_type:
        return pd.Series(json_data)
    if "pandas.core.frame.DataFrame" in data_type:
        return pd.read_json(json_data, dtype=fetch_data_type_from_schema(input_schema_
↳path))
    if "tensorflow.python.framework.ops.EagerTensor" in data_type:
        load_bytes = BytesIO(base64.b64decode(json_data.encode('utf-8')))
        return tf.convert_to_tensor(np.load(load_bytes, allow_pickle=True))

    return json_data

def pre_inference(data, input_schema_path):
    """
    Preprocess json-serialized data to feed into predict function.

    Parameters

```

(continues on next page)



(continued from previous page)

```

-----
data: Data format as expected by the predict API of the core estimator.
input_schema_path: path of input schema.

Returns
-----
data: Data format after any processing.
"""
data = deserialize(data, input_schema_path)

# Add further data preprocessing if needed
return data

def post_inference(yhat):
    """
    Post-process the model results.

    Parameters
    -----
    yhat: Data format after calling model.predict.

    Returns
    -----
    yhat: Data format after any processing.

    """

    return yhat.numpy().tolist()

def predict(data, model=load_model(), input_schema_path=os.path.join(os.path.dirname(os.
↪ path.realpath(__file__)), "input_schema.json")):
    """
    Returns prediction given the model and data to predict.

    Parameters
    -----
    model: Model instance returned by load_model API
    data: Data format as expected by the predict API of the core estimator.
    input_schema_path: path of input schema.

    Returns
    -----
    predictions: Output from scoring server
        Format: {'prediction': output from model.predict method}

    """
    inputs = pre_inference(data, input_schema_path)

    yhat = post_inference(
        model(inputs)
    )
    return {'prediction': yhat}

```

Step 2: Update `post_inference` method in `score.py` to find the index corresponding the maximum value and return. We can use `argmax` function from `tensorflow` to achieve that. Here is the modified code -

```

1  import os
2  import sys
3  from functools import lru_cache
4  import pandas as pd
5  import numpy as np
6  import json
7  import tensorflow as tf
8  from io import BytesIO
9  import base64
10
11 model_name = 'model.h5'
12
13
14 """
15 Inference script. This script is used for prediction by scoring server when schema is
16 ↪known.
17 """
18
19 @lru_cache(maxsize=10)
20 def load_model(model_file_name=model_name):
21     """
22     Loads model from the serialized format
23
24     Returns
25     -----
26     model: a model instance on which predict API can be invoked
27     """
28     model_dir = os.path.dirname(os.path.realpath(__file__))
29     if model_dir not in sys.path:
30         sys.path.insert(0, model_dir)
31     contents = os.listdir(model_dir)
32     if model_file_name in contents:
33         print(f'Start loading {model_file_name} from model directory {model_dir} ...')
34         loaded_model = tf.keras.models.load_model(os.path.join(model_dir, model_file_
35 ↪name))
36
37         print("Model is successfully loaded.")
38         return loaded_model
39     else:
40         raise Exception(f'{model_file_name} is not found in model directory {model_dir}')
41
42 @lru_cache(maxsize=1)
43 def fetch_data_type_from_schema(input_schema_path=os.path.join(os.path.dirname(os.path.
44 ↪realpath(__file__)), "input_schema.json")):
45     """
46     Returns data type information fetch from input_schema.json.
47
48     Parameters

```

(continues on next page)

(continued from previous page)

```

48  -----
49  input_schema_path: path of input schema.
50
51  Returns
52  -----
53  data_type: data type fetch from input_schema.json.
54
55  """
56  data_type = {}
57  if os.path.exists(input_schema_path):
58      schema = json.load(open(input_schema_path))
59      for col in schema['schema']:
60          data_type[col['name']] = col['dtype']
61  else:
62      print("input_schema has to be passed in in order to recover the same data type.↳
↳pass `X_sample` in `ads.model.framework.tensorflow_model.TensorFlowModel.prepare`↳
↳function to generate the input_schema. Otherwise, the data type might be changed after↳
↳serialization/deserialization.")
63      return data_type
64
65
66  def deserialize(data, input_schema_path):
67      """
68      Deserialize json-serialized data to data in original type when sent to
69  predict.
70
71      Parameters
72      -----
73      data: serialized input data.
74      input_schema_path: path of input schema.
75
76      Returns
77      -----
78      data: deserialized input data.
79
80      """
81      data_type = data.get('data_type', '')
82      json_data = data.get('data', data)
83
84      if "numpy.ndarray" in data_type:
85          load_bytes = BytesIO(base64.b64decode(json_data.encode('utf-8')))
86          return np.load(load_bytes, allow_pickle=True)
87      if "pandas.core.series.Series" in data_type:
88          return pd.Series(json_data)
89      if "pandas.core.frame.DataFrame" in data_type:
90          return pd.read_json(json_data, dtype=fetch_data_type_from_schema(input_schema_
↳path))
91      if "tensorflow.python.framework.ops.EagerTensor" in data_type:
92          load_bytes = BytesIO(base64.b64decode(json_data.encode('utf-8')))
93          return tf.convert_to_tensor(np.load(load_bytes, allow_pickle=True))
94
95      return json_data

```

(continues on next page)

(continued from previous page)

```

96
97 def pre_inference(data, input_schema_path):
98     """
99     Preprocess json-serialized data to feed into predict function.
100
101     Parameters
102     -----
103     data: Data format as expected by the predict API of the core estimator.
104     input_schema_path: path of input schema.
105
106     Returns
107     -----
108     data: Data format after any processing.
109     """
110     data = deserialize(data, input_schema_path)
111
112     # Add further data preprocessing if needed
113     return data
114
115 def post_inference(yhat):
116     """
117     Post-process the model results.
118
119     Parameters
120     -----
121     yhat: Data format after calling model.predict.
122
123     Returns
124     -----
125     yhat: Data format after any processing.
126
127     """
128     yhat = tf.argmax(yhat, axis=1) # Get the index of the max value
129     return yhat.numpy().tolist()
130
131 def predict(data, model=load_model(), input_schema_path=os.path.join(os.path.dirname(os.
132     ↪ path.realpath(__file__)), "input_schema.json")):
133     """
134     Returns prediction given the model and data to predict.
135
136     Parameters
137     -----
138     model: Model instance returned by load_model API
139     data: Data format as expected by the predict API of the core estimator.
140     input_schema_path: path of input schema.
141
142     Returns
143     -----
144     predictions: Output from scoring server
145                 Format: {'prediction': output from model.predict method}
146     """

```

(continues on next page)

(continued from previous page)

```

147     inputs = pre_inference(data, input_schema_path)
148
149     yhat = post_inference(
150         model(inputs)
151     )
152     return {'prediction': yhat}

```

Step 3: Verify the changes

```
print(tensorflow_model.verify(testx[:3])['prediction'])
```

```

Start loading model.h5 from model directory /tmp/tmppkco6xrt ...
Model is successfully loaded.
[7, 2, 1]

```

Step 4: Register the model

```
model_id = tensorflow_model.save()
```

Step 5: Deploy and generate the endpoint

```

>>> # Deploy and create an endpoint for the TensorFlow model
>>> tensorflow_model.deploy(
    display_name="TensorFlow Model For Classification",
    deployment_log_group_id = "ocid1.loggroup.oc1.xxx.xxxxx",
    deployment_access_log_id = "ocid1.log.oc1.xxx.xxxxx",
    deployment_predict_log_id = "ocid1.log.oc1.xxx.xxxxx"
)
>>> print(f"Endpoint: {tensorflow_model.model_deployment.url}")
https://modeldeployment.{region}.oci.customer-oci.com/ocid1.datasciencemodeldeployment.
  ↪ oc1.xxx.xxxxx

```

Step 6: Run prediction from the endpoint

```
print(tensorflow_model.predict(testx[:3])['prediction'])
```

```
[7, 2, 1]
```

## 12.2.6 Model Version Set

### 12.2.6.1 Overview

The normal workflow of a data scientist is to create a model and push it into production. While in production the data scientist learns what the model is doing well and what it isn't. Using this information the data scientist creates an improved model. These models are linked using model version sets. A model version set is a collection of models that are related to each other. A model version set is a way to track the relationships between models. As a container, the model version set takes a collection of models. Those models are assigned a sequential version number based on the order they are entered into the model version set.

In ADS the class `ModelVersionSet` is used to represent the model version set. An object of `ModelVersionSet` references a model version set in the Data Science service. The `ModelVersionSet` class supports two APIs: the builder

pattern and the traditional parameter-based pattern. You can use either of these API frameworks interchangeably and examples for both patterns are included.

Use the `.create()` method to create a model version set in your tenancy. If the model version set already exists in the model catalog, use the `.from_id()` or `.from_name()` method to get a `ModelVersionSet` object based on the specified model version set. If you make changes to the metadata associated with the model version set, use the `.update()` method to push those changes to the model catalog. The `.list()` method lists all model version sets. To add an existing model to a model version set, use the `.add_model()` method. The `.models()` method lists the models in the model version set. Use the `.delete()` method to delete a model version set from the model catalog.

### 12.2.6.2 Quick Start

The following creates a model and model version set, and then performs some common operations on the model version set:

```
import tempfile
from ads.model import SklearnModel
from ads.model import ModelVersionSet
from sklearn.datasets import load_iris
from sklearn.linear_model import LogisticRegression
from sklearn.model_selection import train_test_split

# Create a model version set
mvs = ModelVersionSet(
    name = "my_test_model_version_set",
    description = "A test creating the model version set using ModelVersionSet")
mvs.create()

# Create a Sklearn model
iris = load_iris()
X, y = iris.data, iris.target
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)
sklearn_estimator = LogisticRegression()
sklearn_estimator.fit(X_train, y_train)

# Create an SklearnModel object
sklearn_model = SklearnModel(estimator=sklearn_estimator, artifact_dir=tempfile.
    mkdtemp())
sklearn_model.prepare(inference_conda_env="dbexp_p38_cpu_v1")

# Save the model and add it to the model version set
model_id = sklearn_model.save(
    display_name="Quickstart model",
    model_version_set=mvs,
    version_label="Version 1")

# Print a list of models in the model version set
for item in ModelVersionSet.list():
    print(item)
    print("-----")

# Update the model version set
```

(continues on next page)

(continued from previous page)

```

mvs.description = "Updated description of the model version set"
mvs.update()

# Delete the model version set and associated models
# mvs.delete(delete_model=True)

```

### 12.2.6.3 Associate a Model

Model version sets are a collection of models. After a model is associated with a model version set, the model can't be associated with a different model version set. Further, the model can't be disassociated with the model version set.

When a model is associated with a model version set, a version label can be assigned to the set. This version is different than the model version that is maintained by the model version set.

There are a number of ways to associate a model with a model version set. Which approach you use depends on the workflow.

#### 12.2.6.3.1 ModelVersionSet Object

For a model not associated with a model version set, use the `.model_add()` method on a `ModelVersionSet` object to associate the model with the model version set. The `.model_add()` requires that you provide the model OCID and optionally a version label.

```

mvs = ModelVersionSet.from_id(id="<model_version_set_id>")
mvs.model_add(<your_model_id>, version_label="Version 1")

```

#### 12.2.6.3.2 Model Serialization

The Model Serialization classes allow a model to be associated with a model version set at the time that it is saved to the model catalog. You do this with the `model_version_set` parameter in the `.save()` method. In addition, you can add the model's version label with the `version_label` parameter.

The `model_version_set` parameter accepts a model version set's OCID or name. The parameter also accepts a `ModelVersionSet` object.

In the following, the `model` variable is a Model Serialization object that is to be saved to the model catalog, and at the same time associated with a model version set.

```

model.save(
    display_name='Model attached to a model version set',
    version_label = "Version 1",
    model_version_set="<model_version_set_id>"
)

```

### 12.2.6.3.3 Context Manager

To associate several models with a model version set, use a context manager. The `ads.model.experiment()` method requires a `name` parameter. If the model catalog has a matching model version set name, the model catalog uses that model version set. If the parameter `create_if_not_exists` is `True`, the `experiment()` method attempts to match the model version set name with name in the model catalog. If the name does not exist, the method creates a new model version set.

Within the context manager, you can save multiple Model Serialization models without specifying the `model_version_set` parameter because it's taken from the model context manager. The following example assumes that `model_1`, `model_2`, and `model_3` are Model Serialization objects. If the model version set doesn't exist in the model catalog, the example creates a model version set named `my_model_version_set`. If the model version set exists in the model catalog, the models are saved to that model version set.

```
with ads.model.experiment(name="my_model_version_set", create_if_not_exists=True):
    # experiment 1
    model_1.save(
        display_name='Generic Model Experiment 1',
        version_label = "Experiment 1"
    )

    # experiment 2
    model_2.save(
        display_name='Generic Model Experiment 2',
        version_label = "Experiment 2"
    )

    # experiment 3
    model_3.save(
        display_name='Generic Model Experiment 3',
        version_label = "Experiment 3"
    )
```

### 12.2.6.4 Create

The `.create()` method on a `ModelVersionSet` object creates a model version set in the model catalog. The properties of the `ModelVersionSet` are used to create the model version set in the model catalog.

The following examples create a `ModelVersionSet`, define the properties of the model version set, and then create a model version set in the model catalog.

```
mvs = ModelVersionSet(
    compartment_id = os.environ["PROJECT_COMPARTMENT_OCID"],
    name = "my_model_version_set",
    projectId = os.environ["PROJECT_OCID"],
    description = "Sample model version set")
mvs.create()
```

```
mvs = (ModelVersionSet()
    .with_compartment_id(os.environ["PROJECT_COMPARTMENT_OCID"])
    .with_project_id(os.environ["PROJECT_OCID"])
    .with_name("my_model_version_set"))
```

(continues on next page)



(continued from previous page)

```
.with_description("Sample model version set"))
mvs.create()
```

### 12.2.6.5 Delete

To delete a model version set, all the associated models must be deleted or in a terminated state. You can set the `delete_model` parameter to `True` to delete all of the models in the model version set, and then delete the model version set. The `.delete()` method on a `ModelVersionSet` object initiates an asynchronous delete operation. You can check the `.status` method on the `ModelVersionSet` object to determine the status of the delete request.

The following example deletes a model version set and its associated models.

The `status` property has the following values:

- `ModelVersionSet.LIFECYCLE_STATE_ACTIVE`
- `ModelVersionSet.LIFECYCLE_STATE_DELETED`
- `ModelVersionSet.LIFECYCLE_STATE_DELETING`
- `ModelVersionSet.LIFECYCLE_STATE_FAILED`

### 12.2.6.6 Download

Create a `ModelVersionSet` object by downloading the metadata from the model catalog. The `ModelVersionSet` class has a `.from_id()` method that accepts the model version set OCID. The `.from_name()` method takes the name of the model version set.

```
mvs = ModelVersionSet.from_id(id="<model_version_set_id>")
```

```
mvs = ModelVersionSet.from_name(name="<model_version_set_name>")
```

### 12.2.6.7 List

#### 12.2.6.7.1 ModelVersionSet

The `.list()` method on the `ModelVersionSet` class takes a compartment ID and lists the model version sets in that compartment. If the compartment isn't given, then the compartment of the notebook session is used.

The following example uses context manager to iterate over the collection of model version sets:

```
for model_version_set in ModelVersionSet.list():
    print(model_version_set)
    print("-----")
```

### 12.2.6.7.2 Model

You can get the list of models associated with a model version set by calling the `.models()` method on a `ModelVersionSet` object. A list of models that are associated with that model version set is returned. First, you must obtain a `ModelVersionSet` object. Use the `.from_id()` method if you know the model version set OCID. Alternatively, use the `.from_name()` method if you know the name of the model version set.

```
mvs = ModelVersionSet.from_id(id="<model_version_set_id>")
models = mvs.models()

for dsc_model in models:
    print(dsc_model.display_name, dsc_model.id, dsc_model.status)
```

### 12.2.6.8 Update

#### 12.2.6.8.1 ModelVersionSet Properties

The `ModelVersionSet` object has a number of properties that you can be update. When the properties in a `ModelVersionSet` object are updated, the model version set in the model catalog are not automatically updated. You must call the `.update()` method to commit the changes.

The properties that you can be update are:

- `compartment_id`: The OCID of the compartment that the model version set belongs to.
- `description`: A description of the models in the collection.
- `freeform_tags`: A dictionary of string values.
- `name`: Name of the model version set.
- `project_id`: The OCID of the data science project that the model version set belongs to.

The following demonstrates how to update these values of a model version set using the various API interfaces:

#### Parameter-based Pattern

```
mvs = ModelVersionSet.from_id(id="<model_version_set_id>")
mvs.compartement_id = os.environ["PROJECT_COMPARTMENT_OCID"]
mvs.description = "An updated description"
mvs.freeform_tags = {'label_1': 'value 1', 'label_2': 'value 2'}
mvs.name = "new_set_name"
mvs.project_id = os.environ["PROJECT_OCID"]
mvs.update()
```

## Builder Pattern

```
mvs = ModelVersionSet.from_id(id="<model_version_set_id>")
mvs = (mvs.with_compartment_id(os.environ["PROJECT_COMPARTMENT_OCID"])
      .with_description("An updated description")
      .with_freeform_tags(label_1="value 1", label_2="value 2")
      .with_name("new_set_name")
      .with_project_id(os.environ["PROJECT_OCID"])
      .update())
```

### 12.2.6.8.2 Version Label

The version label is associated with the model, and not the model version set. To change the version label, you must have a Model object. Then, you can change the `version_label` for the registered model.

The following example gets a registered Model object by model's OCID. Then, the object updates the version label property.

```
from ads.model import LightGBMModel

lgbm_model = LightGBMModel.from_id(
    "ocid1.datasciencemodel.oc1.xxx.xxxxx",
    model_file_name="model.joblib",
    artifact_dir="lgbm-download-test",
    force_overwrite=True,
)

lgbm_model.update(version_label="MyNewVersionLabel")
```

## 12.3 Deploying model

### 12.3.1 Deploy Model with Conda Runtime

Once you have ADS Model object, you can call `deploy` function to deploy the model and generate the endpoint.

Here is an example of deploying LightGBM model:

```
import lightgbm as lgb
import tempfile
from ads.common.model_metadata import UseCaseType
from ads.model.framework.lightgbm_model import LightGBMModel
from sklearn.datasets import load_iris
from sklearn.model_selection import train_test_split

# Load dataset and Prepare train and test split
iris = load_iris()
X, y = iris.data, iris.target
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)

# Train a LightGBM Classifier model
```

(continues on next page)

(continued from previous page)

```

train = lgb.Dataset(X_train, label=y_train)
param = {
    'objective': 'multiclass', 'num_class': 3,
}
lightgbm_estimator = lgb.train(param, train)

# Instantiate ads.model.LightGBMModel using the trained LGBM Model
lightgbm_model = LightGBMModel(estimator=lightgbm_estimator, artifact_dir=tempfile.
    ↪mkdtemp())

# Autogenerate score.py, pickled model, runtime.yaml, input_schema.json and output_
    ↪schema.json
lightgbm_model.prepare(
    inference_conda_env="generalml_p38_cpu_v1",
    X_sample=X_train,
    y_sample=y_train,
    use_case_type=UseCaseType.BINARY_CLASSIFICATION,
)

# Verify generated artifacts
lightgbm_model.verify(X_test)

# Register LightGBM model
model_id = lightgbm_model.save()

# Deploy LightGBM model
lightgbm_model.deploy(
    display_name="LightGBM Model",
    deployment_log_group_id="ocid1.loggroup.oc1.xxx.xxxxx",
    deployment_access_log_id="ocid1.log.oc1.xxx.xxxxx",
    deployment_predict_log_id="ocid1.log.oc1.xxx.xxxxx",
)

# Get endpoint of deployed model
model_deployment_url = lightgbm_model.model_deployment.url

# Generate prediction by invoking the deployed endpoint
lightgbm_model.predict(X_test)["prediction"]

```

Here example retrieve predictions from model deployment endpoint using oci-cli:

```

export model_deployment_url=<model_deployment_url>/predict
oci raw-request --http-method POST \
    --target-uri $model_deployment_url \
    --request-body '{"data": [[5.6, 2.7, 4.2, 1.3]]}'

```

Find more information about oci raw-request command [here](#).

### 12.3.1.1 Deploy

You can use the `.deploy()` method to deploy a model. You must first save the model to the model catalog, and then deploy it.

The `.deploy()` method returns a `ModelDeployment` object. Specify deployment attributes such as display name, instance type, number of instances, maximum router bandwidth, and logging groups. The API takes the following parameters:

See [API documentation](#) for more details about the parameters.

---

#### Tips

- Providing `deployment_access_log_id` and `deployment_predict_log_id` helps in debugging your model inference setup.
  - Default Load Balancer configuration has bandwidth of 10 Mbps. [Refer service document to help you choose the right setup.](#)
  - Check for supported instance shapes [here](#).
- 

### 12.3.1.2 Predict

To invoke the endpoint of your deployed model, call the `.predict()` method. The `.predict()` method sends a request to the deployed endpoint, and computes the inference values based on the data that you input in the `.predict()` method.

See how to deploy and invoke deployed endpoint for different frameworks [here](#).

See [API documentation](#) for more details about the parameters.

### 12.3.1.3 Observability

tail or head logs generated by the model deployment instances -

```
lightgbm_model.model_deployment.logs().tail()
```

You can also call the `.watch()` from model deployment instance to stream the logs

```
lightgbm_model.model_deployment.watch()
```

### 12.3.1.4 Update Model Deployment

You can update the existing Model Deployment by using `.update_deployment()` method. See [API documentation](#) for more details.

```
lightgbm_model.update_deployment(
    properties=ModelDeploymentProperties(
        access_log_id="ocidl.log.oc1.xxx.xxxxx",
        description="Description for Custom Model",
        freeform_tags={"key": "value"},
    )
    wait_for_completion = True,
)
```

## 12.3.2 Deploy Model with Container Runtime

The ADS `GenericModel` and `ModelDeployment` classes allow you to deploy model using container images.

To deploy model on container runtime, you need to first build a docker container image. See [Bring Your Own Container](#) for the end-to-end example. Once you have the image, push it to [OCI container registry](#). See [Creating a Repository](#) and [Pushing Images Using the Docker CLI](#) for more details.

### 12.3.2.1 Deploy Using GenericModel Class

When the container runtime is ready, you can call `deploy` function to deploy the model and generate the endpoint. You must specify the container `deployment_image`. You can optionally specify the `entrypoint` and `cmd` for running the container (See [Understand how CMD and ENTRYPOINT interact](#)). For more details regarding the parameters allowed for container runtime, see [BYOC Required Interfaces](#).

Below is an example of deploying Sklearn model on container runtime using `SklearnModel` class:

```
import os
import pandas as pd
from joblib import load
from ads.model import SklearnModel

# Load data
data = pd.read_json(<path_to_data>)
data_test = data.transpose()
X = data_test.drop(data_test.loc[:, "Line":"# Letter"].columns, axis=1)
X_test = X.iloc[int("12"), :].values.reshape(1, -1)

# Load model
clf_lda = load(<path_to_model>)

# Instantiate ads.model.SklearnModel
sklearn_model = SklearnModel(estimator=clf_lda, artifact_dir=<path_to_artifact_directory>
→)

# Prepare related artifacts
sklearn_model.prepare(
    model_file_name=<model_file_name>,
    ignore_conda_error=True, # make sure to set ignore_conda_error=True for container_
→runtime
)

# Verify model locally
sklearn_model.verify(X_test)

# Register Sklearn model
sklearn_model.save()

# Deploy Sklearn model on container runtime
sklearn_model.deploy(
    display_name="Sklearn Model BYOC",
    deployment_log_group_id="ocid1.loggroup.oc1.xxx.xxxxx",
    deployment_access_log_id="ocid1.log.oc1.xxx.xxxxx",
    deployment_predict_log_id="ocid1.log.oc1.xxx.xxxxx",
```

(continues on next page)

(continued from previous page)

```

deployment_image="iad.ocir.io/<namespace>/<image>:<tag>",
entrypoint=["python", "/opt/ds/model/deployed_model/api.py"],
server_port=5000,
health_check_port=5000,
environment_variables={"test_key": "test_value"},
)

# Get endpoint of deployed model
model_deployment_url = sklearn_model.model_deployment.url

# Generate prediction by invoking the deployed endpoint
sklearn_model.predict(data={"line": "12"})

```

### 12.3.2.2 Deploy Using ModelDeployment Class

To deploy a model deployment, you can define a `ModelDeployment` object and call the `.deploy()` of it. You could either use API or YAML to define the `ModelDeployment` object.

When configuring the `ModelDeploymentContainerRuntime` object, you must specify the container *image*. You can optionally specify the *entrypoint* and *cmd* for running the container (See [Understand how CMD and ENTRYPOINT interact](#)). For more details regarding the parameters allowed for container runtime, see [BYOC Required Interfaces](#).

Below is an example of deploying model on container runtime using `ModelDeployment` class:

Listing 1: Python

```

from ads.model.deployment import ModelDeployment, ModelDeploymentInfrastructure, \
    ModelDeploymentContainerRuntime

# configure model deployment infrastructure
infrastructure = (
    ModelDeploymentInfrastructure()
    .with_project_id("<PROJECT_OCID>")
    .with_compartment_id("<COMPARTMENT_OCID>")
    .with_shape_name("VM.Standard.E4.Flex")
    .with_shape_config_details(
        ocpus=1,
        memory_in_gbs=16
    )
    .with_replica(1)
    .with_bandwidth_mbps(10)
    .with_web_concurrency(10)
    .with_access_log(
        log_group_id="<ACCESS_LOG_GROUP_OCID>",
        log_id="<ACCESS_LOG_OCID>"
    )
    .with_predict_log(
        log_group_id="<PREDICT_LOG_GROUP_OCID>",
        log_id="<PREDICT_LOG_OCID>"
    )
)

```

(continues on next page)

(continued from previous page)

```

# configure model deployment runtime
container_runtime = (
    ModelDeploymentContainerRuntime()
    .with_image("iad.ocir.io/<namespace>/<image>:<tag>")
    .with_image_digest("<IMAGE_DIGEST>")
    .with_entrypoint(["python", "/opt/ds/model/deployed_model/api.py"])
    .with_server_port(5000)
    .with_health_check_port(5000)
    .with_env({"key": "value"})
    .with_deployment_mode("HTTPS_ONLY")
    .with_model_uri("<MODEL_URI>")
)

# configure model deployment
deployment = (
    ModelDeployment()
    .with_display_name("Model Deployment Demo using ADS")
    .with_description("The model deployment description")
    .with_freeform_tags({"key1": "value1"})
    .with_infrastructure(infrastructure)
    .with_runtime(container_runtime)
)

# Deploy model on container runtime
deployment.deploy()

# Generate prediction by invoking the deployed endpoint
deployment.predict(data=<data>)

```

Listing 2: YAML

```

from ads.model.deployment import ModelDeployment

yaml_string = """
kind: deployment
spec:
  displayName: Model Deployment Demo using ADS
  description: The model deployment description
  freeform_tags:
    key1: value1
  infrastructure:
    kind: infrastructure
    type: datascienceModelDeployment
    spec:
      compartmentId: <COMPARTMENT_OCID>
      projectId: <PROJECT_OCID>
      accessLog:
        logGroupId: <ACCESS_LOG_GROUP_OCID>
        logId: <ACCESS_LOG_OCID>
      predictLog:
        logGroupId: <PREDICT_LOG_GROUP_OCID>
        logId: <PREDICT_LOG_OCID>

```

(continues on next page)



(continued from previous page)

```

    shapeName: VM.Standard.E4.Flex
    shapeConfigDetails:
        memoryInGBs: 16
        ocpus: 1
        replica: 1
        bandwidthMbps: 10
        webConcurrency: 10
runtime:
    kind: runtime
    type: container
    spec:
        modelUri: <MODEL_URI>
        image: iad.ocir.io/<namespace>/<image>:<tag>
        imageDigest: <IMAGE_DIGEST>
        entrypoint: ["python", "/opt/ds/model/deployed_model/api.py"]
        serverPort: 5000
        healthCheckPort: 5000
        env:
            WEB_CONCURRENCY: "10"
        deploymentMode: HTTPS_ONLY
"""

# Initialize ads.ModelDeployment
deployment = ModelDeployment.from_yaml(yaml_string)

# Deploy model on container runtime
deployment.deploy()

# Generate prediction by invoking the deployed endpoint
deployment.predict(data=<data>)

```

## 12.4 Loading model

### 12.4.1 Load Registered Model

Load and recreate *framework specific wrapper* objects using the `ocid` value of your model.

The loaded artifact can be used for running inference in local environment. You can update the artifact files to change your `score.py` or model and then register as a new model. See [here](#) to learn how to change `score.py`

Here is an example for loading back a LightGBM model that was previously registered. See [API documentation](#) for more details.

```

from ads.model import LightGBMModel

lgbm_model = LightGBMModel.from_model_catalog(
    "ocid1.datasciencemodel.oc1.xxx.xxxxx",
    model_file_name="model.joblib",
    artifact_dir="lgbm-download-test",
)

```

You can print a model to see some details about it.

```
print(lgbm_model)

algorithm: null
artifact_dir: lgbm-download-test:
-   - model.pkl
    - output_schema.json
    - runtime.yaml
    - score.py
    - input_schema.json
framework: null
model_deployment_id: null
model_id: ocid1.datasciencemodel.oc1.iad.xxx
```

You can call the `.summary_status()` method after a model serialization instance such as `GenericModel`, `SklearnModel`, `TensorFlowModel`, or `PyTorchModel` is created. The `.summary_status()` method returns a Pandas dataframe that guides you through the entire workflow. It shows which methods are available to call and which ones aren't. Plus it outlines what each method does. If extra actions are required, it also shows those actions.

The following image displays an example summary status table created after a user initiates a model instance. The table's Step column displays a Status of Done for the initiate step. And the Details column explains what the initiate step did such as generating a `score.py` file. The Step column also displays the `prepare()`, `verify()`, `save()`, `deploy()`, and `predict()` methods for the model. The Status column displays which method is available next. After the initiate step, the `prepare()` method is available. The next step is to call the `prepare()` method.

Actions Needed		
Step	Status	Details
initiate	Done	Initiated the model
prepare()	Available	Generated runtime.yaml
		Generated score.py
		Serialized model
		Populated metadata(Custom, Taxonomy and Provenance)
verify()	Not Available	Local tested .predict from score.py
save()	Not Available	Conducted Introspect Test
		Uploaded artifact to model catalog
deploy()	Not Available	Deployed the model
predict()	Not Available	Called deployment predict endpoint

New in version 2.6.9.

Alternatively the `.from_id()` method can be used to load a model. In future releases, the `.from_model_catalog()` method will be deprecated and replaced with the `from_id()`. See [API documentation](#) for more details.

```
from ads.model import LightGBMModel
```

(continues on next page)

(continued from previous page)

```
lgbm_model = LightGBMModel.from_id(
    "ocid1.datasciencemodel.oc1.xxx.xxxxx",
    model_file_name="model.joblib",
    artifact_dir="lgbm-download-test",
    bucket_uri=<oci://<bucket_name>@<namespace>/prefix/>,
    force_overwrite=True,
    remove_existing_artifact=True,
)
```

## 12.4.2 Load Deployed Model

Load and recreate *framework specific wrapper* objects using the `ocid` value of your OCI Model Deployment instance.

The loaded artifact can be used for running inference in local environment. You can update the artifact files to change your `score.py` or model and then register as a new model. See [here](#) to learn how to change `score.py`

Here is an example for loading back a LightGBM model that was previously deployed. See [API doc](#) for more information.

```
from ads.model import LightGBMModel

lgbm_model = LightGBMModel.from_model_deployment(
    "ocid1.datasciencemodel.oc1.xxx.xxxxx",
    model_file_name="model.joblib",
    artifact_dir="lgbm-download-test",
)
```

You can print a model to see some details about it.

```
print(lgbm_model)
```

```
algorithm: null
artifact_dir: lgbm-download-test:
-   - model.pkl
    - output_schema.json
    - runtime.yaml
    - score.py
    - input_schema.json
framework: null
model_deployment_id: null
model_id: ocid1.datasciencemodel.oc1.iad.xxx
```

New in version 2.6.9.

Alternatively the `.from_id()` method can be used to load a model from the Model Deployment. In future releases, the `.from_model_deployment()` method will be deprecated and replaced with the `from_id()`. See [API documentation](#) for more details.

```
from ads.model import LightGBMModel

lgbm_model = LightGBMModel.from_id(
    "ocid1.datasciencemodeldeployment.oc1.xxx",
    model_file_name="model.joblib",
```

(continues on next page)

(continued from previous page)

```

    artifact_dir="lgbm-download-test",
    bucket_uri=<oci://<bucket_name>@<namespace>/prefix/>,
    force_overwrite=True,
    remove_existing_artifact=True,
)

```

### 12.4.3 Load Model From Object Storage

Load and recreate *framework specific wrapper* objects from the existing model artifact archive.

The loaded artifact can be used for running inference in local environment. You can update the artifact files to change your `score.py` or model and then register as a new model. See [here](#) to learn how to change `score.py`

Here is an example for loading back a LightGBM model that was previously saved to the Object Storage. See [API doc](#) for more information.

```

from ads.model import LightGBMModel

lgbm_model = LightGBMModel.from_model_artifact(
    <oci://<bucket_name>@<namespace>/prefix/lgbm_model_artifact.zip>,
    model_file_name="model.joblib",
    artifact_dir="lgbm-download-test",
    force_overwrite=True
)

```

A model loaded from an artifact archive can be registered and deployed.

You can print a model to see some details about it.

```
print(lgbm_model)
```

```

algorithm: null
artifact_dir: lgbm-download-test:
-   - model.pkl
    - output_schema.json
    - runtime.yaml
    - score.py
    - input_schema.json
framework: null
model_deployment_id: null
model_id: ocid1.datasciencemodel.oc1.iad.xxx

```

### 12.4.4 Large Model Artifacts

New in version 2.6.4.

Large models are models with artifacts between 2 and 6 GB. You must first download large models from the model catalog to an Object Storage bucket, and then transfer them to local storage. For model artifacts that are less than 2 GB, you can use the same approach, or download them directly to local storage. An Object Storage bucket is required with Data Science service access granted to that bucket.

If you don't have an Object Storage bucket, create one using the OCI SDK or the Console. Create an [Object Storage bucket](#). Make a note of the namespace, compartment, and bucket name. Configure the following policies to allow the

Data Science service to read and write the model artifact to the Object Storage bucket in your tenancy. An administrator must configure these policies in [IAM](#) in the Console.

```
Allow service datascience to manage object-family in compartment <compartment> where ALL
↪ {target.bucket.name='<bucket_name>'}
```

```
Allow service objectstorage to manage object-family in compartment <compartment> where
↪ ALL {target.bucket.name='<bucket_name>'}
```

The following example loads a model using the large model artifact approach. The `bucket_uri` has the following syntax: `oci://<bucket_name>@<namespace>/<path>/` See [API documentation](#) for more details.

```
from ads.model import LightGBMModel

lgbm_model = LightGBMModel.from_model_catalog(
    "ocid1.datasciencemodel.oc1.xxx.xxxxx",
    model_file_name="model.joblib",
    artifact_dir="lgbm-download-test",
    bucket_uri=<oci://<bucket_name>@<namespace>/prefix/>,
    force_overwrite=True,
    remove_existing_artifact=True,
)
```

Here is an example for loading back a LightGBM model with large artifact from Model Deployment. See [API doc](#) for more information.

```
from ads.model import LightGBMModel

lgbm_model = LightGBMModel.from_model_deployment(
    "ocid1.datasciencemodel.oc1.xxx.xxxxx",
    model_file_name="model.joblib",
    artifact_dir="lgbm-download-test",
    bucket_uri=<oci://<bucket_name>@<namespace>/prefix/>,
    force_overwrite=True,
    remove_existing_artifact=True,
)
```

New in version 2.6.9.

Alternatively the `.from_id()` method can be used to load registered or deployed model. In future releases, the `.from_model_catalog()` and `.from_model_deployment()` methods will be deprecated and replaced with the `from_id()`. See [API documentation](#) for more details.

```
from ads.model import LightGBMModel

lgbm_model = LightGBMModel.from_id(
    "ocid1.datasciencemodel.oc1.xxx.xxxxx",
    model_file_name="model.joblib",
    artifact_dir="lgbm-download-test",
    bucket_uri=<oci://<bucket_name>@<namespace>/prefix/>,
    force_overwrite=True,
    remove_existing_artifact=True,
)
```

## 12.5 Frameworks

New in version 2.5.9.

### 12.5.1 SklearnModel

See [API Documentation](#)

#### 12.5.1.1 Overview

The `SklearnModel` class in ADS is designed to allow you to rapidly get a Scikit-learn model into production. The `.prepare()` method creates the model artifacts that are needed to deploy a functioning model without you having to configure it or write code. However, you can customize the required `score.py` file.

The `.verify()` method simulates a model deployment by calling the `load_model()` and `predict()` methods in the `score.py` file. With the `.verify()` method, you can debug your `score.py` file without deploying any models. The `.save()` method deploys a model artifact to the model catalog. The `.deploy()` method deploys a model to a REST endpoint.

The following steps take your trained scikit-learn model and deploy it into production with a few lines of code.

#### Create a Scikit-learn Model

```
from sklearn.ensemble import RandomForestClassifier
from sklearn.datasets import make_classification
from sklearn.model_selection import train_test_split

seed = 42

X, y = make_classification(n_samples=10000, n_features=15, n_classes=2, flip_y=0.05)
trainx, testx, trainy, testy = train_test_split(X, y, test_size=30, random_state=seed)
model = RandomForestClassifier(
    n_estimators=100, random_state=42
)
model.fit(
    trainx,
    trainy,
)
```

#### 12.5.1.2 Prepare Model Artifact

```
from ads.model.framework.sklearn_model import SklearnModel
from ads.common.model_metadata import UseCaseType

sklearn_model = SklearnModel(estimator=model, artifact_dir="~/sklearn_artifact_dir")
sklearn_model.prepare(
    inference_conda_env="generalml_p38_cpu_v1",
    training_conda_env="generalml_p38_cpu_v1",
    X_sample=trainx,
    y_sample=trainy,
    use_case_type=UseCaseType.BINARY_CLASSIFICATION,
)
```

Instantiate a `ads.model.framework.sklearn_model.SklearnModel()` object with an Scikit-learn model. Each instance accepts the following parameters:

- `artifact_dir`: `str`: Artifact directory to store the files needed for deployment.
- `auth`: (`Dict`, optional): Defaults to `None`. The default authentication is set using the `ads.set_auth` API. To override the default, use `ads.common.auth.api_keys()` or `ads.common.auth.resource_principal()` and create the appropriate authentication signer and the `**kwargs` required to instantiate the `IdentityClient` object.
- `estimator`: (`Callable`): Trained Scikit-learn model or Scikit-learn pipeline.
- `properties`: (`ModelProperties`, optional): Defaults to `None`. The `ModelProperties` object required to save and deploy a model.

The `properties` is an instance of the `ModelProperties` class and has the following predefined fields:

- `bucket_uri`: `str`
- `compartment_id`: `str`
- `deployment_access_log_id`: `str`
- `deployment_bandwidth_mbps`: `int`
- `deployment_instance_count`: `int`
- `deployment_instance_shape`: `str`
- `deployment_log_group_id`: `str`
- `deployment_predict_log_id`: `str`
- `deployment_memory_in_gbs`: `Union[float, int]`
- `deployment_ocpus`: `Union[float, int]`
- `inference_conda_env`: `str`
- `inference_python_version`: `str`
- `overwrite_existing_artifact`: `bool`
- `project_id`: `str`
- `remove_existing_artifact`: `bool`
- `training_conda_env`: `str`
- `training_id`: `str`
- `training_python_version`: `str`
- `training_resource_id`: `str`
- `training_script_path`: `str`

By default, `properties` is populated from the environment variables when not specified. For example, in notebook sessions the environment variables are preset and stored in project id (`PROJECT_OCID`) and compartment id (`NB_SESSION_COMPARTMENT_OCID`). So `properties` populates these environment variables, and uses the values in methods such as `.save()` and `.deploy()`. Pass in values to overwrite the defaults. When you use a method that includes an instance of `properties`, then `properties` records the values that you pass in. For example, when you pass `inference_conda_env` into the `.prepare()` method, then `properties` records the value. To reuse the `properties` file in different places, you can export the `properties` file using the `.to_yaml()` method then reload it into a different machine using the `.from_yaml()` method.

### 12.5.1.3 Summary Status

You can call the `.summary_status()` method after a model serialization instance such as `GenericModel`, `SklearnModel`, `TensorFlowModel`, or `PyTorchModel` is created. The `.summary_status()` method returns a Pandas dataframe that guides you through the entire workflow. It shows which methods are available to call and which ones aren't. Plus it outlines what each method does. If extra actions are required, it also shows those actions.

The following image displays an example summary status table created after a user initiates a model instance. The table's Step column displays a Status of Done for the initiate step. And the Details column explains what the initiate step did such as generating a `score.py` file. The Step column also displays the `prepare()`, `verify()`, `save()`, `deploy()`, and `predict()` methods for the model. The Status column displays which method is available next. After the initiate step, the `prepare()` method is available. The next step is to call the `prepare()` method.

		Actions Needed
Step	Status	Details
initiate	Done	Initiated the model
prepare()	Available	Generated runtime.yaml
		Generated score.py
		Serialized model
		Populated metadata(Custom, Taxonomy and Provenance)
verify()	Not Available	Local tested .predict from score.py
save()	Not Available	Conducted Introspect Test
		Uploaded artifact to model catalog
deploy()	Not Available	Deployed the model
predict()	Not Available	Called deployment predict endpoint

### 12.5.1.4 Register Model

```
>>> # Register the model
>>> model_id = sklearn_model.save()

Start loading model.joblib from model directory /tmp/tmp9l0uhtbb ...
Model is successfully loaded.
['output_schema.json', 'runtime.yaml', 'model.joblib', 'score.py', 'input_schema.json']

'ocid1.datasciencemodel.oc1.xxx.xxxxx'
```



### 12.5.1.5 Deploy and Generate Endpoint

```
>>> # Deploy and create an endpoint for the Random Forest model
>>> sklearn_model.deploy(
    display_name="Random Forest Model For Classification",
    deployment_log_group_id="ocid1.loggroup.oc1.xxx.xxxxx",
    deployment_access_log_id="ocid1.log.oc1.xxx.xxxxx",
    deployment_predict_log_id="ocid1.log.oc1.xxx.xxxxx",
)
>>> print(f"Endpoint: {sklearn_model.model_deployment.url}")
https://modeldeployment.{region}.oci.customer-oci.com/ocid1.datasciencemodeldeployment.
↳ oc1.xxx.xxxxx
```

### 12.5.1.6 Run Prediction against Endpoint

```
>>> # Generate prediction by invoking the deployed endpoint
>>> sklearn_model.predict(testx)['prediction']
[1,0,...,1]
```

### 12.5.1.7 Run Prediction with oci raw-request command

Model deployment endpoints can be invoked with the OCI-CLI. The below examples invoke a model deployment with the CLI with different types of payload: `json`, `numpy.ndarray`, `pandas.core.frame.DataFrame` or `dict`.

#### 12.5.1.7.1 json payload example

```
>>> # Prepare data sample for prediction
>>> data = testx[[10]]
>>> data
array([[ 0.41330051,  0.67658927, -0.39189561,  0.21879805, -0.79208514,
         0.0906022 , -1.60595137,  1.65853693, -1.61337437,  0.82302124,
        -0.87032051,  0.70721209, -1.81956653, -0.26537296, -0.25471684]])
```

Use output of the data and endpoint to invoke prediction with raw-request command in terminal:

```
export uri=https://modeldeployment.{region}.oci.customer-oci.com/ocid1.
↳ datasciencemodeldeployment.oc1.xxx.xxxxx/predict
export data='{"data": [[ 0.41330051,  0.67658927, ... , -0.25471684]]}'
oci raw-request \
  --http-method POST \
  --target-uri $uri \
  --request-body "$data"
```

### 12.5.1.7.2 *numpy.ndarray* payload example

```
>>> # Prepare data sample for prediction
>>> from io import BytesIO
>>> import base64
>>> import numpy as np

>>> data = testx[[10]]
>>> np_bytes = BytesIO()
>>> np.save(np_bytes, data, allow_pickle=True)
>>> data = base64.b64encode(np_bytes.getvalue()).decode("utf-8")
>>> print(data)
k05VTVBZAQB2AHsnZGVzY.....4UdN0L8=
```

Use printed output of `base64` data and endpoint to invoke prediction with `raw-request` command in terminal:

```
export uri=https://modeldeployment.{region}.oci.customer-oci.com/ocid1.
↳ datasciencemodeldeployment.oc1.xxx.xxxx/predict
export data='{"data":"k05VTVBZQB2AHsnZGVzY.....4UdN0L8=", "data_type": "numpy.ndarray"}'
↳ '
oci raw-request \
  --http-method POST \
  --target-uri $uri \
  --request-body "$data"
```

### 12.5.1.7.3 *pandas.core.frame.DataFrame* payload example

```
>>> # Prepare data sample for prediction
>>> import pandas as pd

>>> df = pd.DataFrame(testx[[10]])
>>> print(json.dumps(df.to_json()))
'{"0": {"0": 0.4133005141}, "1": {"0": 0.676589266}, ..., "14": {"0": -0.2547168443}}'
```

Use printed output of DataFrame data and endpoint to invoke prediction with raw-request command in terminal:

```
export uri=https://modeldeployment.{region}.oci.customer-oci.com/ocid1.
↳ datasciencemodeldeployment.oc1.xxx.xxxxx/predict
export data='{"data": "{\\"0\\": {\\"0\\": 0.4133005141}, ..., \\"14\\": {\\"0\\": -0.2547168443}}",
↳ "data_type": "pandas.core.frame.DataFrame"}'
oci raw-request \
  --http-method POST \
  --target-uri $uri \
  --request-body "$data"
```

#### 12.5.1.7.4 *dict* payload example

```
>>> # Prepare data sample for prediction
>>> import pandas as pd
```

```
>>> df = pd.DataFrame(testx[[10]])
>>> print(json.dumps(df.to_dict()))
{"0": {"0": 0.413300514080485}, "1": {"0": 0.6765892660311731}, ..., "14": {"0": -0.
↪ 2547168443271222}}
```

Use printed output of *dict* data and endpoint to invoke prediction with raw-request command in terminal:

```
export uri=https://modeldeployment.{region}.oci.customer-oci.com/ocid1.
↪ datasciencemodeldeployment.oc1.xxx.xxxxx/predict
export data='{"data": {"0": {"0": 0.413300514080485}, ..., "14": {"0": -0.
↪ 2547168443271222}}}'
oci raw-request \
  --http-method POST \
  --target-uri $uri \
  --request-body "$data"
```

#### 12.5.1.7.5 Expected output of raw-request command

```
{
  "data": {
    "prediction": [
      0
    ]
  },
  "headers": {
    "Connection": "keep-alive",
    "Content-Length": "18",
    "Content-Type": "application/json",
    "Date": "Wed, 07 Dec 2022 18:31:39 GMT",
    "X-Content-Type-Options": "nosniff",
    "opc-request-id": "E1125E17AE084DFAB6BCCFA045C16966/0BBB65235292EE0817B67BD9141A620A/
↪ 5956FE428CBAB2878EBA605CEECAD39D",
    "server": "uvicorn"
  },
  "status": "200 OK"
}
```

## 12.5.1.8 Examples

```

from ads.model.framework.sklearn_model import SklearnModel
from ads.common.model_metadata import UseCaseType

from sklearn.ensemble import RandomForestClassifier
from sklearn.datasets import make_classification
from sklearn.model_selection import train_test_split

import tempfile

seed = 42

# Create a classification dataset
X, y = make_classification(n_samples=10000, n_features=15, n_classes=2, flip_y=0.05)
trainx, testx, trainy, testy = train_test_split(X, y, test_size=30, random_state=seed)

# Train LGBM model
model = RandomForestClassifier(n_estimators=100, random_state=42)
model.fit(
    trainx,
    trainy,
)

# Deploy the model, test it and clean up.
# Prepare Model Artifact for RandomForest Classifier model
artifact_dir = tempfile.mkdtemp()
sklearn_model = SklearnModel(estimator=model, artifact_dir=artifact_dir)
sklearn_model.prepare(
    inference_conda_env="generalml_p38_cpu_v1",
    training_conda_env="generalml_p38_cpu_v1",
    use_case_type=UseCaseType.BINARY_CLASSIFICATION,
    X_sample=trainx,
    y_sample=trainy,
    force_overwrite=True,
)

# Check if the artifacts are generated correctly.
# The verify method invokes the ``predict`` function defined inside ``score.py`` in the
↳ artifact_dir

sklearn_model.verify(testx[:10])["prediction"]
sklearn_model.save(display_name="SKLearn Model")

# Deploy and create an endpoint for the RandomForest model
sklearn_model.deploy(
    display_name="Random Forest Model For Classification",
    deployment_log_group_id="ocid1.loggroup.oc1.xxx.xxxx",
    deployment_access_log_id="ocid1.log.oc1.xxx.xxxx",
    deployment_predict_log_id="ocid1.log.oc1.xxx.xxxx",
)

```

(continues on next page)

(continued from previous page)

```
print(f"Endpoint: {sklearn_model.model_deployment.url}")

sklearn_model.predict(testx)["prediction"]

# To delete the deployed endpoint uncomment the following line
# sklearn_model.delete_deployment(wait_for_completion=True)
```

## 12.5.2 PyTorchModel

See [API Documentation](#)

### 12.5.2.1 Overview

The `ads.model.framework.pytorch_model.PyTorchModel` class in ADS is designed to allow you to rapidly get a PyTorch model into production. The `.prepare()` method creates the model artifacts that are needed to deploy a functioning model without you having to configure it or write code. However, you can customize the required `score.py` file.

The `.verify()` method simulates a model deployment by calling the `load_model()` and `predict()` methods in the `score.py` file. With the `.verify()` method, you can debug your `score.py` file without deploying any models. The `.save()` method deploys a model artifact to the model catalog. The `.deploy()` method deploys a model to a REST endpoint.

The following steps take your trained PyTorch model and deploy it into production with a few lines of code.

#### Create a PyTorch Model

Load a [ResNet18](#) model and put it into evaluation mode.

```
import torch
import torchvision

model = torchvision.models.resnet18(pretrained=True)
model.eval()
```

### 12.5.2.2 Prepare Model Artifact

#### 12.5.2.2.1 Save as TorchScript

New in version 2.6.9.

Serializing model in TorchScript program by setting `use_torch_script` to `True`, you can load the model and run inference without defining the model class.

```
from ads.common.model_metadata import UseCaseType
from ads.model.framework.pytorch_model import PyTorchModel

import tempfile

# Prepare the model
```

(continues on next page)

(continued from previous page)

```

artifact_dir = "pytorch_model_artifact"
pytorch_model = PyTorchModel(model, artifact_dir=artifact_dir)
pytorch_model.prepare(
    inference_conda_env="pytorch110_p38_cpu_v1",
    training_conda_env="pytorch110_p38_cpu_v1",
    use_case_type=UseCaseType.IMAGE_CLASSIFICATION,
    force_overwrite=True,
    use_torch_script=True,
)
# You don't need to modify the score.py generated. The model can be loaded without
# defining the model class.
# More info here - https://pytorch.org/tutorials/beginner/saving\_loading\_models.html
# export-load-model-in-torchscript-format

```

#### 12.5.2.2.2 Save state\_dict

```

from ads.common.model_metadata import UseCaseType
from ads.model.framework.pytorch_model import PyTorchModel

import tempfile

# Prepare the model
artifact_dir = "pytorch_model_artifact"
pytorch_model = PyTorchModel(model, artifact_dir=artifact_dir)
pytorch_model.prepare(
    inference_conda_env="pytorch110_p38_cpu_v1",
    training_conda_env="pytorch110_p38_cpu_v1",
    use_case_type=UseCaseType.IMAGE_CLASSIFICATION,
    force_overwrite=True,
)

# The score.py generated requires you to create the class instance of the Model before
# the weights are loaded.
# More info here - https://pytorch.org/tutorials/beginner/saving\_loading\_models.html
# save-load-state-dict-recommended

```

Open `pytorch_model_artifact/score.py` and edit the code to instantiate the model class. The edits are highlighted -

```

import os
import sys
from functools import lru_cache
import torch
import json
from typing import Dict, List
import numpy as np
import pandas as pd
from io import BytesIO
import base64
import logging

```

(continues on next page)

(continued from previous page)

```

import torchvision
the_model = torchvision.models.resnet18()

model_name = 'model.pt'

"""
Inference script. This script is used for prediction by scoring server when schema is
↪known.
"""

@lru_cache(maxsize=10)
def load_model(model_file_name=model_name):
    """
    Loads model from the serialized format

    Returns
    -----
    model: a model instance on which predict API can be invoked
    """
    model_dir = os.path.dirname(os.path.realpath(__file__))
    if model_dir not in sys.path:
        sys.path.insert(0, model_dir)
    contents = os.listdir(model_dir)
    if model_file_name in contents:
        print(f'Start loading {model_file_name} from model directory {model_dir} ...')
        model_state_dict = torch.load(os.path.join(model_dir, model_file_name))
        print(f"loading {model_file_name} is complete.")
    else:
        raise Exception(f'{model_file_name} is not found in model directory {model_dir}')

    # User would need to provide reference to the TheModelClass and
    # construct the the_model instance first before loading the parameters.
    # the_model = TheModelClass(*args, **kwargs)
    try:
        the_model.load_state_dict(model_state_dict)
    except NameError as e:
        raise NotImplementedError("TheModelClass instance must be constructed before
↪loading the parameters. Please modify the load_model() function in score.py." )
    except Exception as e:
        raise e

    the_model.eval()
    print("Model is successfully loaded.")

    return the_model

```

Instantiate a `PyTorchModel()` object with a PyTorch model. Each instance accepts the following parameters:

- `artifact_dir`: str. Artifact directory to store the files needed for deployment.
- `auth`: (Dict, optional): Defaults to None. The default authentication is set using the ads.

`set_auth` API. To override the default, use `ads.common.auth.api_keys()` or `ads.common.auth.resource_principal()` and create the appropriate authentication signer and the `**kwargs` required to instantiate the `IdentityClient` object.

- `estimator`: Callable. Any model object generated by the PyTorch framework.
- `properties`: (`ModelProperties`, optional). Defaults to `None`. The `ModelProperties` object required to save and deploy model.

The `properties` is an instance of the `ModelProperties` class and has the following predefined fields:

- `bucket_uri`: str
- `compartment_id`: str
- `deployment_access_log_id`: str
- `deployment_bandwidth_mbps`: int
- `deployment_instance_count`: int
- `deployment_instance_shape`: str
- `deployment_log_group_id`: str
- `deployment_predict_log_id`: str
- `deployment_memory_in_gbs`: Union[float, int]
- `deployment_ocpus`: Union[float, int]
- `inference_conda_env`: str
- `inference_python_version`: str
- `overwrite_existing_artifact`: bool
- `project_id`: str
- `remove_existing_artifact`: bool
- `training_conda_env`: str
- `training_id`: str
- `training_python_version`: str
- `training_resource_id`: str
- `training_script_path`: str

By default, `properties` is populated from the environment variables when not specified. For example, in notebook sessions the environment variables are preset and stored in project id (`PROJECT_OCID`) and compartment id (`NB_SESSION_COMPARTMENT_OCID`). So `properties` populates these environment variables, and uses the values in methods such as `.save()` and `.deploy()`. Pass in values to overwrite the defaults. When you use a method that includes an instance of `properties`, then `properties` records the values that you pass in. For example, when you pass `inference_conda_env` into the `.prepare()` method, then `properties` records the value. To reuse the `properties` file in different places, you can export the `properties` file using the `.to_yaml()` method then reload it into a different machine using the `.from_yaml()` method.



### 12.5.2.3 Verify Changes to Score.py

Download and load an image for prediction

```
# Download an image
import urllib.request
url, filename = ("https://github.com/pytorch/hub/raw/master/images/dog.jpg", "dog.jpg")
try: urllib.URLopener().retrieve(url, filename)
except: urllib.request.urlretrieve(url, filename)

# Preprocess the image and convert to torch.Tensor
from PIL import Image
from torchvision import transforms
input_image = Image.open(filename)
preprocess = transforms.Compose([
    transforms.Resize(256),
    transforms.CenterCrop(224),
    transforms.ToTensor(),
    transforms.Normalize(mean=[0.485, 0.456, 0.406], std=[0.229, 0.224, 0.225]),
])
input_tensor = preprocess(input_image)
input_batch = input_tensor.unsqueeze(0) # create a mini-batch as expected by the model
```

Verify score.py changes by running inference locally

```
>>> prediction = pytorch_model.verify(input_batch)["prediction"]
>>> import numpy as np
>>> np.argmax(prediction)
258
```

### 12.5.2.4 Summary Status

You can call the `.summary_status()` method after a model serialization instance such as `GenericModel`, `SklearnModel`, `TensorFlowModel`, or `PyTorchModel` is created. The `.summary_status()` method returns a Pandas dataframe that guides you through the entire workflow. It shows which methods are available to call and which ones aren't. Plus it outlines what each method does. If extra actions are required, it also shows those actions.

The following image displays an example summary status table created after a user initiates a model instance. The table's Step column displays a Status of Done for the initiate step. And the Details column explains what the initiate step did such as generating a `score.py` file. The Step column also displays the `prepare()`, `verify()`, `save()`, `deploy()`, and `predict()` methods for the model. The Status column displays which method is available next. After the initiate step, the `prepare()` method is available. The next step is to call the `prepare()` method.

### 12.5.2.5 Register Model

```
>>> # Register the model
>>> model_id = pytorch_model.save()

Start loading model.pt from model directory /tmp/tmpf11gnx9c ...
loading model.pt is complete.
Model is successfully loaded.
['.score.py.swp', 'score.py', 'model.pt', 'runtime.yaml']
```

(continues on next page)

		Actions Needed
Step	Status	Details
initiate	Done	Initiated the model
prepare()	Available	Generated runtime.yaml
		Generated score.py
		Serialized model
		Populated metadata(Custom, Taxonomy and Provenance)
verify()	Not Available	Local tested .predict from score.py
save()	Not Available	Conducted Introspect Test
		Uploaded artifact to model catalog
deploy()	Not Available	Deployed the model
predict()	Not Available	Called deployment predict endpoint

(continued from previous page)

```
'ocid1.datasciencemodel.oc1.xxx.xxxxx'
```

12.5.2.6 Deploy and Generate Endpoint

```
>>> # Deploy and create an endpoint for the PyTorch model
>>> pytorch_model.deploy(
    display_name="PyTorch Model For Classification",
    deployment_log_group_id="ocid1.loggroup.oc1.xxx.xxxxx",
    deployment_access_log_id="ocid1.log.oc1.xxx.xxxxx",
    deployment_predict_log_id="ocid1.log.oc1.xxx.xxxxx",
)

>>> print(f"Endpoint: {pytorch_model.model_deployment.url}")

https://modeldeployment.{region}.oci.customer-oci.com/ocid1.datasciencemodeldeployment.
↳ oc1.xxx.xxxxx
```

### 12.5.2.7 Run Prediction against Endpoint

```
# Download an image
import urllib.request
url, filename = ("https://github.com/pytorch/hub/raw/master/images/dog.jpg", "dog.jpg")
try: urllib.URLopener().retrieve(url, filename)
except: urllib.request.urlretrieve(url, filename)

# Preprocess the image and convert to torch.Tensor
from PIL import Image
from torchvision import transforms
input_image = Image.open(filename)
preprocess = transforms.Compose([
    transforms.Resize(256),
    transforms.CenterCrop(224),
    transforms.ToTensor(),
    transforms.Normalize(mean=[0.485, 0.456, 0.406], std=[0.229, 0.224, 0.225]),
])
input_tensor = preprocess(input_image)
input_batch = input_tensor.unsqueeze(0) # create a mini-batch as expected by the model

# Generate prediction by invoking the deployed endpoint
prediction = pytorch_model.predict(input_batch)['prediction']
print(np.argmax(prediction))
```

258

#### 12.5.2.7.1 Predict with Image

New in version 2.6.7.

Predict Image by passing a uri, which can be http(s), local path, or other URLs (e.g. starting with “oci://”, “s3://”, and “gcs://”), of the image or a PIL.Image.Image object using the `image` argument in `predict()` to predict a single image. The image will be converted to a tensor and then serialized so it can be passed to the endpoint. You can catch the tensor in `score.py` to perform further transformation.

---

**Note:** The payload size limit is 10 MB. Read more about invoking a model deployment [here](#).

---

Given the size limitation, the example below is with resized image. To pass an image and invoke prediction, additional code inside `score.py` is required to preprocess the data. Open `pytorch_model_artifact/score.py` and update the `pre_inference()` method. The edits are highlighted:

```
def pre_inference(data, input_schema_path):
    """
    Preprocess json-serialized data to feed into predict function.

    Parameters
    -----
    data: Data format as expected by the predict API of the core estimator.
    input_schema_path: path of input schema.
```

(continues on next page)

(continued from previous page)

```

Returns
-----
data: Data format after any processing.
"""
data = deserialize(data, input_schema_path)
import torchvision.transforms as transforms
preprocess = transforms.Compose([
    transforms.Resize(256),
    transforms.CenterCrop(224),
    transforms.Normalize(
        mean=[0.485, 0.456, 0.406],
        std=[0.229, 0.224, 0.225]
    ),
])
input_tensor = preprocess(data)
input_batch = input_tensor.unsqueeze(0)
return input_batch

```

Save `score.py` and verify prediction works:

```

>>> uri = ("https://github.com/oracle-samples/oci-data-science-ai-samples/tree/master/
↳model_deploy_examples/images/dog_resized.jpg")
>>> prediction = pytorch_model.verify(image=uri)["prediction"]
>>> import numpy as np
>>> np.argmax(prediction)
258

```

Re-deploy model with updated `score.py`:

```

pytorch_model.deploy(
    display_name="PyTorch Model For Classification",
    deployment_log_group_id="ocid1.loggroup.oc1.xxx.xxxxxx",
    deployment_access_log_id="ocid1.log.oc1.xxx.xxxxxx",
    deployment_predict_log_id="ocid1.log.oc1.xxx.xxxxxx",
)

```

Run prediction with the image provided:

```

uri = ("https://github.com/oracle-samples/oci-data-science-ai-samples/tree/master/model_
↳deploy_examples/images/dog_resized.jpg")

# Generate prediction by invoking the deployed endpoint
prediction = pytorch_model.predict(image=uri)['prediction']

```

### 12.5.2.8 Run Prediction with oci raw-request command

Model deployment endpoints can be invoked with the OCI-CLI. This example invokes a model deployment with the CLI with a `torch.Tensor` payload:

#### 12.5.2.8.1 *torch.Tensor* payload example

```
>>> # Prepare data sample for prediction and save it to file 'data-payload'
>>> from io import BytesIO
>>> import base64

>>> buffer = BytesIO()
>>> torch.save(input_batch, buffer)
>>> data = base64.b64encode(buffer.getvalue()).decode("utf-8")
>>> with open('data-payload', 'w') as f:
>>>     f.write('{"data": "' + data + '", "data_type": "torch.Tensor"}')
```

File `data-payload` will have this information:

```
{"data": "UESDBAAACAgAAAAAAAAAAAAAAAAAAAAAAQ .....
.....
...AAAAEAAABQSwUGAAAAAAAAAAwC3AAAA0jEJAAAA", "data_type": "torch.Tensor"}
```

Use file `data-payload` with `data` and `endpoint` to invoke prediction with `raw-request` command in terminal:

```
export uri=https://modeldeployment.{region}.oci.customer-oci.com/ocid1.
datasciencemodeldeployment.oc1.xxx.xxxx/predict
oci raw-request \
  --http-method POST \
  --target-uri $uri \
  --request-body file://data-payload
```

#### 12.5.2.8.2 Expected output of raw-request command

```
{
  "data": {
    "prediction": [
      [
        0.0159152802079916,
        -1.5496551990509033,
        .....
        2.5116958618164062
      ]
    ]
  },
  "headers": {
    "Connection": "keep-alive",
    "Content-Length": "19398",
    "Content-Type": "application/json",
    "Date": "Thu, 08 Dec 2022 18:28:41 GMT",
```

(continues on next page)

(continued from previous page)

```

    "X-Content-Type-Options": "nosniff",
    "opc-request-id": "BD80D931A6EA4C718636ECE00730B255/86111E71C1B33C24988C59C27F15ECDE/
    ↪E94BBB27AC3F48CB68F41135073FF46B",
    "server": "uvicorn"
  },
  "status": "200 OK"
}

```

Copy prediction output into *argmax* to retrieve result of the image prediction:

```

>>> print(np.argmax([[0.0159152802079916,
>>>                    -1.5496551990509033,
>>>                    .....
>>>                    2.5116958618164062]]))
258

```

### 12.5.2.9 Example

```

from ads.common.model_metadata import UseCaseType
from ads.model.framework.pytorch_model import PyTorchModel

import numpy as np
from PIL import Image

import tempfile
import torchvision
from torchvision import transforms

import urllib

# Load a pretrained PyTorch Model
model = torchvision.models.resnet18(pretrained=True)
model.eval()

# Prepare Model Artifact for PyTorch Model
artifact_dir = tempfile.mkdtemp()
pytorch_model = PyTorchModel(model, artifact_dir=artifact_dir)
pytorch_model.prepare(
    inference_conda_env="pytorch110_p38_cpu_v1",
    training_conda_env="pytorch110_p38_cpu_v1",
    use_case_type=UseCaseType.IMAGE_CLASSIFICATION,
    force_overwrite=True,
    use_torch_script=True
)

# Download an image for running inference
url, filename = ("https://github.com/pytorch/hub/raw/master/images/dog.jpg", "dog.jpg")
urllib.request.urlretrieve(url, filename)

```

(continues on next page)

(continued from previous page)

```

# Load image
input_image = Image.open(filename)
preprocess = transforms.Compose(
    [
        transforms.Resize(256),
        transforms.CenterCrop(224),
        transforms.ToTensor(),
        transforms.Normalize(mean=[0.485, 0.456, 0.406], std=[0.229, 0.224, 0.225]),
    ]
)
input_tensor = preprocess(input_image)
input_batch = input_tensor.unsqueeze(0) # create a mini-batch as expected by the model

# Check if the artifacts are generated correctly.
# The verify method invokes the ``predict`` function defined inside ``score.py`` in the
↳ artifact_dir
prediction = pytorch_model.verify(input_batch)["prediction"]
print(np.argmax(prediction))

# Register the model
model_id = pytorch_model.save(display_name="PyTorch Model")

# Deploy and create an endpoint for the PyTorch model
pytorch_model.deploy(
    display_name="PyTorch Model For Classification",
    deployment_log_group_id="ocid1.loggroup.oc1.xxx.xxxxxx",
    deployment_access_log_id="ocid1.log.oc1.xxx.xxxxxx",
    deployment_predict_log_id="ocid1.log.oc1.xxx.xxxxxx",
)

# Generate prediction by invoking the deployed endpoint
prediction = pytorch_model.predict(input_batch)["prediction"]

print(np.argmax(prediction))

# To delete the deployed endpoint uncomment the line below
# pytorch_model.delete_deployment(wait_for_completion=True)

```

### 12.5.3 TensorFlowModel

See [API Documentation](#)

### 12.5.3.1 Overview

The `ads.model.framework.tensorflow_model.TensorFlowModel` class in ADS is designed to allow you to rapidly get a TensorFlow model into production. The `.prepare()` method creates the model artifacts that are needed to deploy a functioning model without you having to configure it or write code. However, you can customize the required `score.py` file.

The `.verify()` method simulates a model deployment by calling the `load_model()` and `predict()` methods in the `score.py` file. With the `.verify()` method, you can debug your `score.py` file without deploying any models. The `.save()` method deploys a model artifact to the model catalog. The `.deploy()` method deploys a model to a REST endpoint.

The following steps take your trained TensorFlow model and deploy it into production with a few lines of code.

#### Create a TensorFlow Model

```
import tensorflow as tf

mnist = tf.keras.datasets.mnist
(trainx, trainy), (testx, testy) = mnist.load_data()
trainx, testx = trainx / 255.0, testx / 255.0

model = tf.keras.models.Sequential(
    [
        tf.keras.layers.Flatten(input_shape=(28, 28)),
        tf.keras.layers.Dense(128, activation="relu"),
        tf.keras.layers.Dropout(0.2),
        tf.keras.layers.Dense(10),
    ])
loss_fn = tf.keras.losses.SparseCategoricalCrossentropy(from_logits=True)
model.compile(optimizer="adam", loss=loss_fn, metrics=["accuracy"])
model.fit(trainx, trainy, epochs=1)
```

### 12.5.3.2 Prepare Model Artifact

```
from ads.common.model_metadata import UseCaseType
from ads.model.framework.tensorflow_model import TensorFlowModel
from uuid import uuid4

tensorflow_model = TensorFlowModel(estimator=model, artifact_dir=f"./model-artifact-
↳ {str(uuid4())}")
tensorflow_model.prepare(
    inference_conda_env="tensorflow28_p38_cpu_v1",
    training_conda_env="tensorflow28_p38_cpu_v1",
    X_sample=trainx,
    y_sample=trainy,
    use_case_type=UseCaseType.MULTINOMIAL_CLASSIFICATION,
)
```

Instantiate a `ads.model.framework.tensorflow_model.TensorFlowModel()` object with a TensorFlow model. Each instance accepts the following parameters:

- `artifact_dir`: str: Artifact directory to store the files needed for deployment.



- `auth`: (Dict, optional): Defaults to None. The default authentication is set using the `ads.set_auth` API. To override the default, use `ads.common.auth.api_keys()` or `ads.common.auth.resource_principal()` and create the appropriate authentication signer and the `**kwargs` required to instantiate the `IdentityClient` object.
- `estimator`: Callable: Any model object generated by the TensorFlow framework.
- `properties`: (ModelProperties, optional): Defaults to None. The `ModelProperties` object required to save and deploy a model.

The `properties` is an instance of the `ModelProperties` class and has the following predefined fields:

- `bucket_uri`: str
- `compartment_id`: str
- `deployment_access_log_id`: str
- `deployment_bandwidth_mbps`: int
- `deployment_instance_count`: int
- `deployment_instance_shape`: str
- `deployment_log_group_id`: str
- `deployment_predict_log_id`: str
- `deployment_memory_in_gbs`: Union[float, int]
- `deployment_ocpus`: Union[float, int]
- `inference_conda_env`: str
- `inference_python_version`: str
- `overwrite_existing_artifact`: bool
- `project_id`: str
- `remove_existing_artifact`: bool
- `training_conda_env`: str
- `training_id`: str
- `training_python_version`: str
- `training_resource_id`: str
- `training_script_path`: str

By default, `properties` is populated from the environment variables when not specified. For example, in notebook sessions the environment variables are preset and stored in project id (`PROJECT_OCID`) and compartment id (`NB_SESSION_COMPARTMENT_OCID`). So `properties` populates these environment variables, and uses the values in methods such as `.save()` and `.deploy()`. Pass in values to overwrite the defaults. When you use a method that includes an instance of `properties`, then `properties` records the values that you pass in. For example, when you pass `inference_conda_env` into the `.prepare()` method, then `properties` records the value. To reuse the `properties` file in different places, you can export the `properties` file using the `.to_yaml()` method then reload it into a different machine using the `.from_yaml()` method.

### 12.5.3.3 Summary Status

You can call the `.summary_status()` method after a model serialization instance such as `GenericModel`, `SklearnModel`, `TensorFlowModel`, or `PyTorchModel` is created. The `.summary_status()` method returns a Pandas dataframe that guides you through the entire workflow. It shows which methods are available to call and which ones aren't. Plus it outlines what each method does. If extra actions are required, it also shows those actions.

The following image displays an example summary status table created after a user initiates a model instance. The table's Step column displays a Status of Done for the initiate step. And the Details column explains what the initiate step did such as generating a `score.py` file. The Step column also displays the `prepare()`, `verify()`, `save()`, `deploy()`, and `predict()` methods for the model. The Status column displays which method is available next. After the initiate step, the `prepare()` method is available. The next step is to call the `prepare()` method.

		Actions Needed
Step	Status	Details
initiate	Done	Initiated the model
prepare()	Available	Generated runtime.yaml
		Generated score.py
		Serialized model
		Populated metadata(Custom, Taxonomy and Provenance)
verify()	Not Available	Local tested .predict from score.py
save()	Not Available	Conducted Introspect Test
		Uploaded artifact to model catalog
deploy()	Not Available	Deployed the model
predict()	Not Available	Called deployment predict endpoint

In `TensorFlowModel`, data serialization is supported for JSON serializable objects. Plus, there is support for a dictionary, string, list, `np.ndarray`, and `tf.python.framework.ops.EagerTensor`. Not all these objects are JSON serializable, however, support to automatically serializes and deserialized is provided.

### 12.5.3.4 Register Model

```
>>> # Register the model
>>> model_id = tensorflow_model.save()
```

```
Start loading model.h5 from model directory /tmp/tmpapjjzeol ...
Model is successfully loaded.
['runtime.yaml', 'model.h5', 'score.py']

'ocid1.datasciencemodel.oc1.xxx.xxxxx'
```

### 12.5.3.5 Deploy and Generate Endpoint

```
>>> # Deploy and create an endpoint for the TensorFlow model
>>> tensorflow_model.deploy(
    display_name="TensorFlow Model For Classification",
    deployment_log_group_id="ocid1.loggroup.oc1.xxx.xxxxx",
    deployment_access_log_id="ocid1.log.oc1.xxx.xxxxx",
    deployment_predict_log_id="ocid1.log.oc1.xxx.xxxxx",
)

>>> print(f"Endpoint: {tensorflow_model.model_deployment.url}")

https://modeldeployment.{region}.oci.customer-oci.com/ocid1.datasciencemodeldeployment.
↳ oc1.xxx.xxxxx
```

### 12.5.3.6 Run Prediction against Endpoint

```
# Generate prediction by invoking the deployed endpoint
tensorflow_model.predict(testx[:3])['prediction']

[[-2.9461750984191895, -5.293642997741699, 0.4030594229698181, 3.0270071029663086, -6.
↳ 470805644989014, -2.07453989982605, -9.646402359008789, 9.256569862365723, -2.
↳ 6433541774749756, -0.8167083263397217],
[-3.4297854900360107, 2.4863781929016113, 8.968724250793457, 3.162344217300415, -11.
↳ 153030395507812, 0.15335027873516083, -0.5451826453208923, -7.817524433135986, -1.
↳ 0585914850234985, -10.736929893493652],
[-4.420501232147217, 5.841022491455078, -0.17066864669322968, -1.0071465969085693, -2.
↳ 261953592300415, -3.0983355045318604, -2.0874621868133545, 1.0745809078216553, -1.
↳ 2511857748031616, -2.273810625076294]]
```

#### 12.5.3.6.1 Predict with Image

New in version 2.6.7.

Predict Image by passing a uri, which can be http(s), local path, or other URLs (e.g. starting with “oci://”, “s3://”, and “gcs://”), of the image or a PIL.Image.Image object using the `image` argument in `predict()` to predict a single image. The image will be converted to a tensor and then serialized so it can be passed to the endpoint. You can catch the tensor in `score.py` to perform further transformation.

Common example for model deployment prediction with image passed:

```
# Generate prediction by invoking the deployed endpoint
prediction = tensorflow_model.predict(image=<uri>)['prediction']
```

See the “Predict with Image” example [here](#).

### 12.5.3.7 Run Prediction with oci raw-request command

Model deployment endpoints can be invoked with the OCI-CLI. This example invokes a model deployment with the CLI with a `numpy.ndarray` payload:

#### 12.5.3.7.1 `numpy.ndarray` payload example

```
>>> # Prepare data sample for prediction and save it to file 'data-payload'
>>> from io import BytesIO
>>> import base64
>>> import numpy as np

>>> data = testx[:3]
>>> np_bytes = BytesIO()
>>> np.save(np_bytes, data, allow_pickle=True)
>>> data = base64.b64encode(np_bytes.getvalue()).decode("utf-8")
>>> with open('data-payload', 'w') as f:
>>>     f.write('{"data": "' + data + '", "data_type": "numpy.ndarray"}')
```

File `data-payload` will have this information:

```
{"data": "k05VTVBZAQB2AHsnZGVzY3InOiAnPGY4JywgJ2ZvcnRyYW5fb3JkZXInOi...
.....AAAAAAAAAAAAAAAAAAAAAA=", "data_type": "numpy.ndarray"}
```

Use file `data-payload` with data and endpoint to invoke prediction with `raw-request` command in terminal:

```
export uri=https://modeldeployment.{region}.oci.customer-oci.com/ocid1.
↪datasciencemodeldeployment.oc1.xxx.xxxx/predict
oci raw-request \
  --http-method POST \
  --target-uri $uri \
  --request-body file://data-payload
```

#### 12.5.3.7.2 Expected output of raw-request command

```
{
  "data": {
    "prediction": [
      [
        -1.8818638324737549,
        -6.04175329208374,
        .....,
        -1.1257498264312744
      ],
      [
        1.2170600891113281,
        1.6379727125167847,
        .....,
        -9.877771377563477
      ]
    ]
  }
}
```

(continues on next page)

(continued from previous page)

```

    ],
    [
        -4.255424499511719,
        5.320354461669922,
        .....,
        -2.85855555343628
    ]
]
},
"headers": {
    "Connection": "keep-alive",
    "Content-Length": "594",
    "Content-Type": "application/json",
    "Date": "Thu, 08 Dec 2022 23:25:47 GMT",
    "X-Content-Type-Options": "nosniff",
    "opc-request-id": "E70002DAA3024F46B074F9B53DB6BEBB/421B34FCB12CF33F23C85D5619A62926/
↪ CAABF4A269C63B112482B2E57463CA13",
    "server": "uvicorn"
},
"status": "200 OK"
}

```

### 12.5.3.8 Example

```

from ads.common.model_metadata import UseCaseType
from ads.model.framework.tensorflow_model import TensorFlowModel

import tensorflow as tf
from uuid import uuid4

# Load MNIST Data
mnist = tf.keras.datasets.mnist
(trainx, trainy), (testx, testy) = mnist.load_data()
trainx, testx = trainx / 255.0, testx / 255.0

# Train TensorFlow model
model = tf.keras.models.Sequential(
    [
        tf.keras.layers.Flatten(input_shape=(28, 28)),
        tf.keras.layers.Dense(128, activation="relu"),
        tf.keras.layers.Dropout(0.2),
        tf.keras.layers.Dense(10),
    ]
)
loss_fn = tf.keras.losses.SparseCategoricalCrossentropy(from_logits=True)
model.compile(optimizer="adam", loss=loss_fn, metrics=["accuracy"])
model.fit(trainx, trainy, epochs=1)

# Prepare Model Artifact for TensorFlow model
tensorflow_model = TensorFlowModel(estimator=model, artifact_dir=f"./model-artifact-

```

(continues on next page)

(continued from previous page)

```

↪{str(uuid4())})"
tensorflow_model.prepare(
    inference_conda_env="tensorflow28_p38_cpu_v1",
    training_conda_env="tensorflow28_p38_cpu_v1",
    X_sample=trainx,
    y_sample=trainy,
    use_case_type=UseCaseType.MULTINOMIAL_CLASSIFICATION,
)

# Check if the artifacts are generated correctly.
# The verify method invokes the ``predict`` function defined inside ``score.py`` in the
↪artifact_dir
tensorflow_model.verify(testx[:10])["prediction"]

# Register the model
model_id = tensorflow_model.save(display_name="TensorFlow Model")

# Deploy and create an endpoint for the TensorFlow model
tensorflow_model.deploy(
    display_name="TensorFlow Model For Classification",
    deployment_log_group_id="ocid1.loggroup.oc1.xxx.xxxxx",
    deployment_access_log_id="ocid1.log.oc1.xxx.xxxxx",
    deployment_predict_log_id="ocid1.log.oc1.xxx.xxxxx",
)

# Generate prediction by invoking the deployed endpoint
tensorflow_model.predict(testx)["prediction"]

# To delete the deployed endpoint uncomment the line below
# tensorflow_model.delete_deployment(wait_for_completion=True)

```

## 12.5.4 SparkPipelineModel

See [API Documentation](#)

### 12.5.4.1 Overview

The `SparkPipelineModel` class in ADS is designed to allow you to rapidly get a PySpark model into production. The `.prepare()` method creates the model artifacts that are needed to deploy a functioning model without you having to configure it or write code. However, you can customize the required `score.py` file.

The `.verify()` method simulates a model deployment by calling the `load_model()` and `predict()` methods in the `score.py` file. With the `.verify()` method, you can debug your `score.py` file without deploying any models. The `.save()` method deploys a model artifact to the model catalog. The `.deploy()` method deploys a model to a REST endpoint.

The following steps take your trained PySpark model and deploy it into production with a few lines of code.

#### Create a Spark Pipeline Model

Generate a synthetic dataset:

```

from pyspark.sql import SparkSession

spark = SparkSession \
    .builder \
    .appName("Python Spark SQL basic example") \
    .getOrCreate()
training = spark.createDataFrame(
    [
        (0, "a b c d e spark", 1.0),
        (1, "b d", 0.0),
        (2, "spark f g h", 1.0),
        (3, "hadoop mapreduce", 0.0),
    ],
    ["id", "text", "label"],
)
test = spark.createDataFrame(
    [
        (4, "spark i j k"),
        (5, "l m n"),
        (6, "spark hadoop spark"),
        (7, "apache hadoop"),
    ],
    ["id", "text"],
)

```

Create a Spark Pipeline. (Note that a Spark Pipeline can be made with just 1 stage.)

```

from pyspark.ml import Pipeline
from pyspark.ml.classification import LogisticRegression
from pyspark.ml.feature import HashingTF, Tokenizer

tokenizer = Tokenizer(inputCol="text", outputCol="words")
hashingTF = HashingTF(inputCol=tokenizer.getOutputCol(), outputCol="features")
lr = LogisticRegression(maxIter=10, regParam=0.001)

pipeline = Pipeline(stages=[tokenizer, hashingTF, lr])
model = pipeline.fit(training)

```

#### 12.5.4.2 Prepare Model Artifact

```

import tempfile
from ads.model.framework.spark_model import SparkPipelineModel
from ads.common.model_metadata import UseCaseType

artifact_dir=tempfile.mkdtemp()
spark_model = SparkPipelineModel(estimator=model, artifact_dir=artifact_dir)

spark_model.prepare(inference_conda_env="pyspark32_p38_cpu_v2",
                    X_sample=training,
                    force_overwrite=True,
                    use_case_type=UseCaseType.BINARY_CLASSIFICATION)

```

Instantiate a `SparkPipelineModel()` object with a PySpark model. Each instance accepts the following parameters:

- `artifact_dir`: str. Artifact directory to store the files needed for deployment.
- `auth`: (Dict, optional): Defaults to None. The default authentication is set using the `ads.set_auth` API. To override the default, use `ads.common.auth.api_keys()` or `ads.common.auth.resource_principal()` and create the appropriate authentication signer and the `**kwargs` required to instantiate the `IdentityClient` object.
- `estimator`: Callable. Any model object generated by the PySpark framework.
- `properties`: (ModelProperties, optional). Defaults to None. The `ModelProperties` object required to save and deploy model.

The `properties` is an instance of the `ModelProperties` class and has the following predefined fields:

- `bucket_uri`: str
- `compartment_id`: str
- `deployment_access_log_id`: str
- `deployment_bandwidth_mbps`: int
- `deployment_instance_count`: int
- `deployment_instance_shape`: str
- `deployment_log_group_id`: str
- `deployment_predict_log_id`: str
- `deployment_memory_in_gbs`: Union[float, int]
- `deployment_ocpus`: Union[float, int]
- `inference_conda_env`: str
- `inference_python_version`: str
- `overwrite_existing_artifact`: bool
- `project_id`: str
- `remove_existing_artifact`: bool
- `training_conda_env`: str
- `training_id`: str
- `training_python_version`: str
- `training_resource_id`: str
- `training_script_path`: str

By default, `properties` is populated from the environment variables when not specified. For example, in notebook sessions the environment variables are preset and stored in project id (`PROJECT_OCID`) and compartment id (`NB_SESSION_COMPARTMENT_OCID`). So `properties` populates these environment variables, and uses the values in methods such as `.save()` and `.deploy()`. Pass in values to overwrite the defaults. When you use a method that includes an instance of `properties`, then `properties` records the values that you pass in. For example, when you pass `inference_conda_env` into the `.prepare()` method, then `properties` records the value. To reuse the `properties` file in different places, you can export the `properties` file using the `.to_yaml()` method then reload it into a different machine using the `.from_yaml()` method.



### 12.5.4.3 Summary Status

You can call the `.summary_status()` method after a model serialization instance such as `GenericModel`, `SklearnModel`, `TensorFlowModel`, or `PyTorchModel` is created. The `.summary_status()` method returns a Pandas dataframe that guides you through the entire workflow. It shows which methods are available to call and which ones aren't. Plus it outlines what each method does. If extra actions are required, it also shows those actions.

The following image displays an example summary status table created after a user initiates a model instance. The table's Step column displays a Status of Done for the initiate step. And the Details column explains what the initiate step did such as generating a `score.py` file. The Step column also displays the `prepare()`, `verify()`, `save()`, `deploy()`, and `predict()` methods for the model. The Status column displays which method is available next. After the initiate step, the `prepare()` method is available. The next step is to call the `prepare()` method.

		Actions Needed
Step	Status	Details
initiate	Done	Initiated the model
prepare()	Available	Generated runtime.yaml
		Generated score.py
		Serialized model
		Populated metadata(Custom, Taxonomy and Provenance)
verify()	Not Available	Local tested .predict from score.py
save()	Not Available	Conducted Introspect Test
		Uploaded artifact to model catalog
deploy()	Not Available	Deployed the model
predict()	Not Available	Called deployment predict endpoint

### 12.5.4.4 Register Model

```
model_id = spark_model.save()
```

```
Start loading model.joblib from model directory /tmp/tmp8dofn3 ...
```

```
Model is successfully loaded.
```

```
['input_schema.json', 'runtime.yaml', 'model_input_data_schema.json', 'model', 'score.py']
```

```
'ocid1.datasciencemodel.oc1.xxx.xxxxx'
```

#### 12.5.4.5 Deploy and Generate Endpoint

```
spark_model.deploy(  
    display_name="Spark Pipeline Model For Classification",  
    deployment_log_group_id="ocid1.loggroup.oc1.xxx.xxxxx",  
    deployment_access_log_id="ocid1.log.oc1.xxx.xxxxx",  
    deployment_predict_log_id="ocid1.log.oc1.xxx.xxxxx",  
)  
  
print(f"Endpoint: {spark_model.model_deployment.url}")  
  
# https://modeldeployment.{region}.oci.customer-oci.com/ocid1.datasciencemodeldeployment.  
  ↪ oc1.xxx.xxxxx
```

#### 12.5.4.6 Run Prediction against Endpoint

```
spark_model.predict(test)['prediction']  
# [0.0, 0.0, 1.0, 0.0]
```

#### 12.5.4.7 Run Prediction with oci raw-request command

Model deployment endpoints can be invoked with the OCI-CLI. This example invokes a model deployment with the CLI with a json payload:

##### 12.5.4.7.1 json payload example

```
>>> # Prepare data sample for prediction and save it to file 'payload'  
>>> print(json.dumps(test.toJSON().collect()))  
[{"id":4,"text":"spark i j k"}, {"id":5,"text":"l m n"},  
{"id":6,"text":"spark hadoop spark"}, {"id":7,"text":"apache hadoop"}]
```

Use printed output of the data and endpoint to invoke prediction with raw-request command in terminal:

```
export uri=https://modeldeployment.{region}.oci.customer-oci.com/ocid1.  
  ↪ datasciencemodeldeployment.oc1.xxx.xxxxx/predict  
export data='{"data": [{"id":4,"text":"spark i j k"}, ... {"id":7,"text":"  
  ↪ apache hadoop"}]}'  
oci raw-request \  
  --http-method POST \  
  --target-uri $uri \  
  --request-body "$data"
```

#### 12.5.4.7.2 Expected output of raw-request command

```
{
  "data": {
    "prediction": [
      0.0,
      0.0,
      1.0,
      0.0
    ]
  },
  "headers": {
    "Connection": "keep-alive",
    "Content-Length": "32",
    "Content-Type": "application/json",
    "Date": "Thu, 08 Dec 2022 18:45:12 GMT",
    "X-Content-Type-Options": "nosniff",
    "opc-request-id": "C2E73B1679B34BAD8358B49D20619055/0EE2E5F93F48142725525D7A5BA7F5FB/049A66AA38AA0163DBBC70F225285851",
    "server": "uvicorn"
  },
  "status": "200 OK"
}
```

#### 12.5.4.8 Example

Adapted from an example provided by Apache in the PySpark API Reference Documentation.

```
import tempfile
from pyspark.ml import Pipeline
from pyspark.ml.classification import LogisticRegression
from pyspark.ml.feature import HashingTF, Tokenizer
from pyspark.sql import SparkSession
from ads.model.framework.spark_model import SparkPipelineModel
from ads.common.model_metadata import UseCaseType

spark = SparkSession \
    .builder \
    .appName("Python Spark SQL basic example") \
    .getOrCreate()

artifact_dir=tempfile.mkdtemp()

training = spark.createDataFrame(
    [
        (0, "a b c d e spark", 1.0),
        (1, "b d", 0.0),
        (2, "spark f g h", 1.0),
        (3, "hadoop mapreduce", 0.0),
    ],
    ["id", "text", "label"],
)
```

(continues on next page)

(continued from previous page)

```

test = spark.createDataFrame(
    [
        (4, "spark i j k"),
        (5, "l m n"),
        (6, "spark hadoop spark"),
        (7, "apache hadoop"),
    ],
    ["id", "text"],
)

tokenizer = Tokenizer(inputCol="text", outputCol="words")
hashingTF = HashingTF(inputCol=tokenizer.getOutputCol(), outputCol="features")
lr = LogisticRegression(maxIter=10, regParam=0.001)
pipeline = Pipeline(stages=[tokenizer, hashingTF, lr])

model = pipeline.fit(training)

spark_model = SparkPipelineModel(estimator=model, artifact_dir=artifact_dir)

spark_model.prepare(inference_conda_env="pyspark32_p38_cpu_v2",
                    X_sample=training,
                    force_overwrite=True,
                    use_case_type=UseCaseType.BINARY_CLASSIFICATION)

# Check if the artifacts are generated correctly.
# The verify method invokes the ``predict`` function defined inside ``score.py`` in the
# artifact_dir
prediction = spark_model.verify(test)

# Register the model
spark_model.save(display_name="Spark Pipeline Model")

# Deploy and create an endpoint for the Spark model
spark_model.deploy(
    display_name="Spark Pipeline Model For Classification",
    deployment_log_group_id="ocid1.loggroup.oc1.xxx.xxxxx",
    deployment_access_log_id="ocid1.log.oc1.xxx.xxxxx",
    deployment_predict_log_id="ocid1.log.oc1.xxx.xxxxx",
)

# Generate prediction by invoking the deployed endpoint
spark_model.predict(test)["prediction"]

# To delete the deployed endpoint uncomment the line below
# spark_model.delete_deployment(wait_for_completion=True)

```

## 12.5.5 LightGBMModel

See [API Documentation](#)

### 12.5.5.1 Overview

The `ads.model.framework.lightgbm_model.LightGBMModel` class in ADS is designed to allow you to rapidly get a LightGBM model into production. The `.prepare()` method creates the model artifacts that are needed to deploy a functioning model without you having to configure it or write code. However, you can customize the required `score.py` file.

The `.verify()` method simulates a model deployment by calling the `load_model()` and `predict()` methods in the `score.py` file. With the `.verify()` method, you can debug your `score.py` file without deploying any models. The `.save()` method deploys a model artifact to the model catalog. The `.deploy()` method deploys a model to a REST endpoint.

The following steps take your trained LightGBM model and deploy it into production with a few lines of code.

The `LightGBMModel` module in ADS supports serialization for models generated from both the [Training API](#) using `lightgbm.train()` and the [Scikit-Learn API](#) using `lightgbm.LGBMClassifier()`. Both of these interfaces are defined by `LightGBM`.

The Training API in `LightGBM` contains training and cross-validation routines. The `Dataset` class is an internal data structure that is used by `LightGBM` when using the `lightgbm.train()` method. You can also create `LightGBM` models using the Scikit-Learn Wrapper interface. The `LightGBMModel` class handles the differences between the `LightGBM` Training and SciKit-Learn APIs seamlessly.

#### Create LightGBM Model

```
import lightgbm as lgb
from sklearn.datasets import make_classification
from sklearn.model_selection import train_test_split

seed = 42

X, y = make_classification(n_samples=10000, n_features=15, n_classes=2, flip_y=0.05)
trainx, testx, trainy, testy = train_test_split(X, y, test_size=30, random_state=seed)
model = lgb.LGBMClassifier(
    n_estimators=100, learning_rate=0.01, random_state=42
)
model.fit(
    trainx,
    trainy,
)
```

### 12.5.5.2 Prepare Model Artifact

```
from ads.common.model_metadata import UseCaseType
from ads.model.framework.lightgbm_model import LightGBMModel

artifact_dir = tempfile.mkdtemp()
lightgbm_model = LightGBMModel(estimator=model, artifact_dir=artifact_dir)
lightgbm_model.prepare(
    inference_conda_env="generalml_p38_cpu_v1",
```

(continues on next page)

(continued from previous page)

```
training_conda_env="generalml_p38_cpu_v1",
X_sample=trainx,
y_sample=trainy,
use_case_type=UseCaseType.BINARY_CLASSIFICATION,
)
```

Instantiate a `ads.model.framework.lightgbm_model.LightGBMModel()` object with a LightGBM model. Each instance accepts the following parameters:

- `artifact_dir`: `str`: Artifact directory to store the files needed for deployment.
- `auth`: (`Dict`, optional): Defaults to `None`. The default authentication is set using the `ads.set_auth` API. To override the default, use `ads.common.auth.api_keys()` or `ads.common.auth.resource_principal()` and create the appropriate authentication signer and the `**kwargs` required to instantiate the `IdentityClient` object.
- `estimator`: (`Callable`): Trained LightGBM model using the Training API or the Scikit-Learn Wrapper interface.
- `properties`: (`ModelProperties`, optional): Defaults to `None`. The `ModelProperties` object required to save and deploy a model.

The `properties` is an instance of the `ModelProperties` class and has the following predefined fields:

- `bucket_uri`: `str`
- `compartment_id`: `str`
- `deployment_access_log_id`: `str`
- `deployment_bandwidth_mbps`: `int`
- `deployment_instance_count`: `int`
- `deployment_instance_shape`: `str`
- `deployment_log_group_id`: `str`
- `deployment_predict_log_id`: `str`
- `deployment_memory_in_gbs`: `Union[float, int]`
- `deployment_ocpus`: `Union[float, int]`
- `inference_conda_env`: `str`
- `inference_python_version`: `str`
- `overwrite_existing_artifact`: `bool`
- `project_id`: `str`
- `remove_existing_artifact`: `bool`
- `training_conda_env`: `str`
- `training_id`: `str`
- `training_python_version`: `str`
- `training_resource_id`: `str`
- `training_script_path`: `str`

By default, `properties` is populated from the environment variables when not specified. For example, in notebook sessions the environment variables are preset and stored in project id (`PROJECT_OCID`) and compartment id (`NB_SESSION_COMPARTMENT_OCID`). So `properties` populates these environment variables, and uses the values in methods such as `.save()` and `.deploy()`. Pass in values to overwrite the defaults. When you use a method that includes an instance of `properties`, then `properties` records the values that you pass in. For example, when you pass `inference_conda_env` into the `.prepare()` method, then `properties` records the value. To reuse the `properties` file in different places, you can export the `properties` file using the `.to_yaml()` method then reload it into a different machine using the `.from_yaml()` method.

### 12.5.5.3 Summary Status

You can call the `.summary_status()` method after a model serialization instance such as `GenericModel`, `SklearnModel`, `TensorFlowModel`, or `PyTorchModel` is created. The `.summary_status()` method returns a Pandas dataframe that guides you through the entire workflow. It shows which methods are available to call and which ones aren't. Plus it outlines what each method does. If extra actions are required, it also shows those actions.

The following image displays an example summary status table created after a user initiates a model instance. The table's Step column displays a Status of Done for the initiate step. And the Details column explains what the initiate step did such as generating a `score.py` file. The Step column also displays the `prepare()`, `verify()`, `save()`, `deploy()`, and `predict()` methods for the model. The Status column displays which method is available next. After the initiate step, the `prepare()` method is available. The next step is to call the `prepare()` method.

		Actions Needed
Step	Status	Details
initiate	Done	Initiated the model
prepare()	Available	Generated runtime.yaml
		Generated score.py
		Serialized model
		Populated metadata(Custom, Taxonomy and Provenance)
verify()	Not Available	Local tested .predict from score.py
save()	Not Available	Conducted Introspect Test
		Uploaded artifact to model catalog
deploy()	Not Available	Deployed the model
predict()	Not Available	Called deployment predict endpoint

#### 12.5.5.4 Register Model

```
>>> # Register the model
>>> model_id = lightgbm_model.save()

Start loading model.joblib from model directory /tmp/tmp9l0uhtbb ...
Model is successfully loaded.
['runtime.yaml', 'model.joblib', 'score.py', 'input_schema.json']

'ocid1.datasciencemodel.oc1.xxx.xxxxx'
```

#### 12.5.5.5 Deploy and Generate Endpoint

```
>>> # Deploy and create an endpoint for the LightGBM model
>>> lightgbm_model.deploy(
    display_name="LightGBM Model For Classification",
    deployment_log_group_id="ocid1.loggroup.oc1.xxx.xxxxx",
    deployment_access_log_id="ocid1.log.oc1.xxx.xxxxx",
    deployment_predict_log_id="ocid1.log.oc1.xxx.xxxxx",
)

>>> print(f"Endpoint: {lightgbm_model.model_deployment.url}")

https://modeldeployment.{region}.oci.customer-oci.com/ocid1.datasciencemodeldeployment.
↪oc1.xxx.xxxxx
```

#### 12.5.5.6 Run Prediction against Endpoint

```
# Generate prediction by invoking the deployed endpoint
lightgbm_model.predict(testx)['prediction']
```

```
[1,0,...,1]
```



### 12.5.5.7 Run Prediction with oci raw-request command

Model deployment endpoints can be invoked with the OCI-CLI. The below examples invoke a model deployment with the CLI with different types of payload: `json`, `numpy.ndarray`, `pandas.core.frame.DataFrame` or `dict`.

#### 12.5.5.7.1 *json* payload example

```
>>> # Prepare data sample for prediction
>>> data = testx[[11]]
>>> data
array([[ 0.59990614,  0.95516275, -1.22366985, -0.89270887, -1.14868768,
        -0.3506047 ,  0.28529227,  2.00085413,  0.31212668,  0.39411511,
         0.87301082, -0.01743923, -1.15089633,  1.03461823,  1.50228029]])
```

Use printed output of the data and endpoint to invoke prediction with raw-request command in terminal:

```
export uri=https://modeldeployment.{region}.oci.customer-oci.com/ocid1.
↳datasciencemodeldeployment.oc1.xxx.xxxxx/predict
export data='{"data": [[ 0.59990614,  0.95516275, ... , 1.50228029]]}'
oci raw-request \
  --http-method POST \
  --target-uri $uri \
  --request-body "$data"
```

#### 12.5.5.7.2 *numpy.ndarray* payload example

```
>>> # Prepare data sample for prediction
>>> from io import BytesIO
>>> import base64
>>> import numpy as np

>>> data = testx[[10]]
>>> np_bytes = BytesIO()
>>> np.save(np_bytes, data, allow_pickle=True)
>>> data = base64.b64encode(np_bytes.getvalue()).decode("utf-8")
>>> print(data)
k05VTVBZAQB2AHsnZGVzY.....D1cJ+D8=
```

Use printed output of *base64* data and endpoint to invoke prediction with raw-request command in terminal:

```
export uri=https://modeldeployment.{region}.oci.customer-oci.com/ocid1.
↳datasciencemodeldeployment.oc1.xxx.xxxxx/predict
export data='{"data": "k05VTVBZAQB2AHsnZGVzY.....4UdN0L8=", "data_type": "numpy.ndarray"}'
↳
oci raw-request \
  --http-method POST \
  --target-uri $uri \
  --request-body "$data"
```

#### 12.5.5.7.3 *pandas.core.frame.DataFrame* payload example

```
>>> # Prepare data sample for prediction
>>> import pandas as pd

>>> df = pd.DataFrame(testx[[10]])
>>> print(json.dumps(df.to_json()))
"{\"0\": {\"0\": 0.4133005141}, \"1\": {\"0\": 0.676589266}, ..., \"14\": {\"0\": -0.2547168443}}"
```

Use printed output of DataFrame data and endpoint to invoke prediction with raw-request command in terminal:

```
export uri=https://modeldeployment.{region}.oci.customer-oci.com/ocid1.
↪datasciencemodeldeployment.oc1.xxx.xxxx/predict
export data='{"data": {"0": {"0": 0.4133005141}, ..., "14": {"0": -0.2547168443}}',
↪"data_type": "pandas.core.frame.DataFrame"}'
oci raw-request \
  --http-method POST \
  --target-uri $uri \
  --request-body "$data"
```

#### 12.5.5.7.4 *dict* payload example

```
>>> # Prepare data sample for prediction
>>> import pandas as pd
```

```
>>> df = pd.DataFrame(testx[[11]])
>>> print(json.dumps(df.to_dict()))
{"0": {"0": 0.5999061426438217}, "1": {"0": 0.9551627492226553}, ..., "14": {"0": 1.
↪5022802918908846}}
```

Use printed output of dict data and endpoint to invoke prediction with raw-request command in terminal:

```
export uri=https://modeldeployment.{region}.oci.customer-oci.com/ocid1.
↪datasciencemodeldeployment.oc1.xxx.xxxx/predict
export data='{"data": {"0": {"0": 0.5999061426438217}, ..., "14": {"0": 1.
↪5022802918908846}}}'
oci raw-request \
  --http-method POST \
  --target-uri $uri \
  --request-body "$data"
```

#### 12.5.5.7.5 Expected output of raw-request command

```
{
  "data": {
    "prediction": [
      1
    ]
  },
}
```

(continues on next page)

(continued from previous page)

```

"headers": {
  "Connection": "keep-alive",
  "Content-Length": "18",
  "Content-Type": "application/json",
  "Date": "Wed, 07 Dec 2022 18:31:05 GMT",
  "X-Content-Type-Options": "nosniff",
  "opc-request-id": "B67EED723ADD43D7BBA1AD5AFCCBD0C6/03F218FF833BC8A2D6A5BDE4AB8B7C12/
↪6ACBC4E5C5127AC80DA590568D628B60",
  "server": "uvicorn"
},
"status": "200 OK"
}

```

### 12.5.5.8 Example

```

from ads.model.framework.lightgbm_model import LightGBMModel
from ads.common.model_metadata import UseCaseType

import lightgbm as lgb

from sklearn.datasets import make_classification
from sklearn.model_selection import train_test_split

import tempfile

seed = 42

# Create a classification dataset
X, y = make_classification(n_samples=10000, n_features=15, n_classes=2, flip_y=0.05)

trainx, testx, trainy, testy = train_test_split(X, y, test_size=30, random_state=seed)

# Train LGBM model
model = lgb.LGBMClassifier(n_estimators=100, learning_rate=0.01, random_state=42)
model.fit(
    trainx,
    trainy,
)

# Prepare Model Artifact for LightGBM model
artifact_dir = tempfile.mkdtemp()
lightgbm_model = LightGBMModel(estimator=model, artifact_dir=artifact_dir)
lightgbm_model.prepare(
    inference_conda_env="generalml_p38_cpu_v1",
    training_conda_env="generalml_p38_cpu_v1",
    X_sample=trainx,
    y_sample=trainy,
    force_overwrite=True,
    use_case_type=UseCaseType.BINARY_CLASSIFICATION,
)

```

(continues on next page)

(continued from previous page)

```

# Check if the artifacts are generated correctly.
# The verify method invokes the ``predict`` function defined inside ``score.py`` in the
↪ artifact_dir
lightgbm_model.verify(testx[:10])["prediction"]

# Register the model
model_id = lightgbm_model.save(display_name="LightGBM Model")

# Deploy and create an endpoint for the LightGBM model
lightgbm_model.deploy(
    display_name="LightGBM Model For Classification",
    deployment_log_group_id="ocid1.loggroup.oc1.xxx.xxxxx",
    deployment_access_log_id="ocid1.log.oc1.xxx.xxxxx",
    deployment_predict_log_id="ocid1.log.oc1.xxx.xxxxx",
)

print(f"Endpoint: {lightgbm_model.model_deployment.url}")

# Generate prediction by invoking the deployed endpoint
lightgbm_model.predict(testx)["prediction"]

# To delete the deployed endpoint uncomment the line below
# lightgbm_model.delete_deployment(wait_for_completion=True)

```

## 12.5.6 XGBoostModel

See [API Documentation](#)

### 12.5.6.1 Overview

The `ads.model.framework.xgboost_model.XGBoostModel` class in ADS is designed to allow you to rapidly get a XGBoost model into production. The `.prepare()` method creates the model artifacts that are needed to deploy a functioning model without you having to configure it or write code. However, you can customize the required `score.py` file.

The `.verify()` method simulates a model deployment by calling the `load_model()` and `predict()` methods in the `score.py` file. With the `.verify()` method, you can debug your `score.py` file without deploying any models. The `.save()` method deploys a model artifact to the model catalog. The `.deploy()` method deploys a model to a REST endpoint.

The following steps take your trained XGBoost model and deploy it into production with a few lines of code.

The XGBoostModel module in ADS supports serialization for models generated from both the [Learning API](#) using `xgboost.train()` and the [Scikit-Learn API](#) using `xgboost.XGBClassifier()`. Both of these interfaces are defined by XGBoost.

#### Create XGBoost Model

```

from ads.model.framework.xgboost_model import XGBoostModel
from ads.common.model_metadata import UseCaseType

```

(continues on next page)

(continued from previous page)

```

from sklearn.datasets import make_classification
from sklearn.model_selection import train_test_split

import tempfile

import xgboost

seed = 42

X, y = make_classification(n_samples=10000, n_features=15, n_classes=2, flip_y=0.05)
trainx, testx, trainy, testy = train_test_split(X, y, test_size=30, random_state=seed)
model = xgboost.XGBClassifier(
    n_estimators=100, learning_rate=0.01, random_state=42, use_label_encoder=False
)
model.fit(
    trainx,
    trainy,
)

```

#### 12.5.6.2 Prepare Model Artifact

```

from ads.model.framework.xgboost_model import XGBoostModel
from ads.common.model_metadata import UseCaseType

artifact_dir = tempfile.mkdtemp()
xgb_model = XGBoostModel(estimator=model, artifact_dir=artifact_dir)
xgb_model.prepare(
    inference_conda_env="generalml_p38_cpu_v1",
    training_conda_env="generalml_p38_cpu_v1",
    X_sample=trainx,
    y_sample=trainy,
    use_case_type=UseCaseType.BINARY_CLASSIFICATION,
)

```

Instantiate a `ads.model.framework.xgboost_model.XGBoostModel` object with an XGBoost model. Each instance accepts the following parameters:

- `artifact_dir`: str: Artifact directory to store the files needed for deployment.
- `auth`: (Dict, optional): Defaults to None. The default authentication is set using the `ads.set_auth` API. To override the default, use `ads.common.auth.api_keys()` or `ads.common.auth.resource_principal()` and create the appropriate authentication signer and the `**kwargs` required to instantiate the `IdentityClient` object.
- `estimator`: (Callable): Trained XGBoost model either using the Learning API or the Scikit-Learn Wrapper interface.
- `properties`: (ModelProperties, optional): Defaults to None. The `ModelProperties` object required to save and deploy a model.

The `properties` is an instance of the `ModelProperties` class and has the following predefined fields:

- `bucket_uri`: str

- `compartment_id`: str
- `deployment_access_log_id`: str
- `deployment_bandwidth_mbps`: int
- `deployment_instance_count`: int
- `deployment_instance_shape`: str
- `deployment_log_group_id`: str
- `deployment_predict_log_id`: str
- `deployment_memory_in_gbs`: Union[float, int]
- `deployment_ocpus`: Union[float, int]
- `inference_conda_env`: str
- `inference_python_version`: str
- `overwrite_existing_artifact`: bool
- `project_id`: str
- `remove_existing_artifact`: bool
- `training_conda_env`: str
- `training_id`: str
- `training_python_version`: str
- `training_resource_id`: str
- `training_script_path`: str

By default, `properties` is populated from the environment variables when not specified. For example, in notebook sessions the environment variables are preset and stored in project id (`PROJECT_OCID`) and compartment id (`NB_SESSION_COMPARTMENT_OCID`). So `properties` populates these environment variables, and uses the values in methods such as `.save()` and `.deploy()`. Pass in values to overwrite the defaults. When you use a method that includes an instance of `properties`, then `properties` records the values that you pass in. For example, when you pass `inference_conda_env` into the `.prepare()` method, then `properties` records the value. To reuse the `properties` file in different places, you can export the `properties` file using the `.to_yaml()` method then reload it into a different machine using the `.from_yaml()` method.

### 12.5.6.3 Summary Status

You can call the `.summary_status()` method after a model serialization instance such as `GenericModel`, `SklearnModel`, `TensorFlowModel`, or `PyTorchModel` is created. The `.summary_status()` method returns a Pandas dataframe that guides you through the entire workflow. It shows which methods are available to call and which ones aren't. Plus it outlines what each method does. If extra actions are required, it also shows those actions.

The following image displays an example summary status table created after a user initiates a model instance. The table's `Step` column displays a Status of `Done` for the initiate step. And the `Details` column explains what the initiate step did such as generating a `score.py` file. The `Step` column also displays the `prepare()`, `verify()`, `save()`, `deploy()`, and `predict()` methods for the model. The `Status` column displays which method is available next. After the initiate step, the `prepare()` method is available. The next step is to call the `prepare()` method.

		Actions Needed
Step	Status	Details
initiate	Done	Initiated the model
prepare()	Available	Generated runtime.yaml
		Generated score.py
		Serialized model
		Populated metadata(Custom, Taxonomy and Provenance)
verify()	Not Available	Local tested .predict from score.py
save()	Not Available	Conducted Introspect Test
		Uploaded artifact to model catalog
deploy()	Not Available	Deployed the model
predict()	Not Available	Called deployment predict endpoint

#### 12.5.6.4 Register Model

```
>>> # Register the model
>>> model_id = xgb_model.save()

Start loading model.joblib from model directory /tmp/tmp9l0uhtbb ...
Model is successfully loaded.
['runtime.yaml', 'model.joblib', 'score.py', 'input_schema.json']

'ocid1.datasciencemodel.oc1.xxx.xxxxx'
```

#### 12.5.6.5 Deploy and Generate Endpoint

```
>>> # Deploy and create an endpoint for the XGBoost model
>>> xgb_model.deploy(
    display_name="XGBoost Model For Classification",
    deployment_log_group_id="ocid1.loggroup.oc1.xxx.xxxxx",
    deployment_access_log_id="ocid1.log.oc1.xxx.xxxxx",
    deployment_predict_log_id="ocid1.log.oc1.xxx.xxxxx",
)

>>> print(f"Endpoint: {xgb_model.model_deployment.url}")

https://modeldeployment.{region}.oci.customer-oci.com/ocid1.datasciencemodeldeployment.
↳ oc1.xxx.xxxxx
```

### 12.5.6.6 Run Prediction against Endpoint

```
# Generate prediction by invoking the deployed endpoint
>>> xgb_model.predict(testx)['prediction']
[0.22879330813884735, 0.2054443359375, 0.20657016336917877, ..., 0.8005291223526001]
```

### 12.5.6.7 Run Prediction with oci raw-request command

Model deployment endpoints can be invoked with the OCI-CLI. The below examples invoke a model deployment with the CLI with different types of payload: `json`, `numpy.ndarray`, `pandas.core.frame.DataFrame` or `dict`.

#### 12.5.6.7.1 json payload example

```
>>> # Prepare data sample for prediction
>>> data = testx[[12]]
>>> data
array([[ 0.66098176, -1.06487896, -0.88581208,  0.05667259,  0.42884393,
        -0.52552184,  0.75322749, -0.58112776, -0.81102029, -1.35854886,
        -1.16440502, -0.67791303, -0.04810906,  0.72970972, -0.24120756]])
```

Use printed output of the data and endpoint to invoke prediction with raw-request command in terminal:

```
export uri=https://modeldeployment.{region}.oci.customer-oci.com/ocid1.
↳datasciencemodeldeployment.oc1.xxx.xxxxx/predict
export data='{"data": [[ 0.66098176, -1.06487896, ... , -0.24120756]]}'
oci raw-request \
  --http-method POST \
  --target-uri $uri \
  --request-body "$data"
```

#### 12.5.6.7.2 numpy.ndarray payload example

```
>>> # Prepare data sample for prediction
>>> from io import BytesIO
>>> import base64
>>> import numpy as np

>>> data = testx[[12]]
>>> np_bytes = BytesIO()
>>> np.save(np_bytes, data, allow_pickle=True)
>>> data = base64.b64encode(np_bytes.getvalue()).decode("utf-8")
>>> print(data)
k05VTVBZAQB2AHsnZGVzY.....pePfzr8=
```

Use printed output of base64 data and endpoint to invoke prediction with raw-request command in terminal:

```
export uri=https://modeldeployment.{region}.oci.customer-oci.com/ocid1.
↳datasciencemodeldeployment.oc1.xxx.xxxxx/predict
export data='{"data": "k05VTVBZAQB2AHsnZGVzY.....pePfzr8=", "data_type": "numpy.ndarray"}'
```

(continues on next page)



(continued from previous page)

```

❏ '
oci raw-request \
  --http-method POST \
  --target-uri $uri \
  --request-body "$data"

```

### 12.5.6.7.3 *pandas.core.frame.DataFrame* payload example

```

>>> # Prepare data sample for prediction
>>> import pandas as pd

>>> df = pd.DataFrame(testx[[12]])
>>> print(json.dumps(df.to_json()))
{"0":{"0":{"0":0.6609817554},"1":{"0":-1.0648789569},...,"14":{"0":-0.2412075575}}
❏ "

```

Use printed output of *DataFrame* data and endpoint to invoke prediction with raw-request command in terminal:

```

export uri=https://modeldeployment.{region}.oci.customer-oci.com/ocid1.
❏ datasciencemodeldeployment.oc1.xxx.xxxxx/predict
export data='{"data":{"0":{"0":0.6609817554},...,"14":{"0":-0.2412075575}}',
❏ "data_type":"pandas.core.frame.DataFrame"}'
oci raw-request \
  --http-method POST \
  --target-uri $uri \
  --request-body "$data"

```

### 12.5.6.7.4 *dict* payload example

```

>>> # Prepare data sample for prediction
>>> import pandas as pd

```

```

>>> df = pd.DataFrame(testx[[12]])
>>> print(json.dumps(df.to_dict()))
{"0": {"0": -0.6712208871908425}, "1": {"0": 0.5266565978285116}, ..., "14": {"0": 0.
❏ 9062102978188604}}

```

Use printed output of dict data and endpoint to invoke prediction with raw-request command in terminal:

```

export uri=https://modeldeployment.{region}.oci.customer-oci.com/ocid1.
❏ datasciencemodeldeployment.oc1.xxx.xxxxx/predict
export data='{"data": {"0": {"0": -0.6712208871908425}, ..., "14": {"0": 0.
❏ 9062102978188604}}}'
oci raw-request \
  --http-method POST \
  --target-uri $uri \
  --request-body "$data"

```

#### 12.5.6.7.5 Expected output of raw-request command

```
{
  "data": {
    "prediction": [
      0.5611757040023804
    ]
  },
  "headers": {
    "Connection": "keep-alive",
    "Content-Length": "35",
    "Content-Type": "application/json",
    "Date": "Wed, 07 Dec 2022 17:27:17 GMT",
    "X-Content-Type-Options": "nosniff",
    "opc-request-id": "19E90A7F2AFE401BB437DBC6168D2F1C/4A1CC9969F40B9F0656DD0497A28B51A/FEB42D1B690E8A665244046C7A151AB5",
    "server": "uvicorn"
  },
  "status": "200 OK"
}
```

#### 12.5.6.8 Example

```
from ads.model.framework.xgboost_model import XGBoostModel
from ads.common.model_metadata import UseCaseType

from sklearn.datasets import make_classification
from sklearn.model_selection import train_test_split

import tempfile

import xgboost

seed = 42

# Create a classification dataset
X, y = make_classification(n_samples=10000, n_features=15, n_classes=2, flip_y=0.05)
trainx, testx, trainy, testy = train_test_split(X, y, test_size=30, random_state=seed)

# Train XGBoost model
model = xgboost.XGBClassifier(n_estimators=100, learning_rate=0.01, random_state=42)
model.fit(
    trainx,
    trainy,
)

artifact_dir = tempfile.mkdtemp()
xgb_model = XGBoostModel(estimator=model, artifact_dir=artifact_dir)
xgb_model.prepare(
    inference_conda_env="generalml_p38_cpu_v1",
    training_conda_env="generalml_p38_cpu_v1",
)
```

(continues on next page)

(continued from previous page)

```

X_sample=trainx,
y_sample=trainy,
use_case_type=UseCaseType.BINARY_CLASSIFICATION,
)

# Check if the artifacts are generated correctly.
# The verify method invokes the ``predict`` function defined inside ``score.py`` in the
↪ artifact_dir
xgb_model.verify(testx)

# Register the model
model_id = xgb_model.save(display_name="XGBoost Model")

# Deploy and create an endpoint for the XGBoost model
xgb_model.deploy(
    display_name="XGBoost Model For Classification",
    deployment_log_group_id="ocid1.loggroup.oc1.xxx.xxxxx",
    deployment_access_log_id="ocid1.log.oc1.xxx.xxxxx",
    deployment_predict_log_id="ocid1.log.oc1.xxx.xxxxx",
)

print(f"Endpoint: {xgb_model.model_deployment.url}")

# Generate prediction by invoking the deployed endpoint
xgb_model.predict(testx)["prediction"]

# To delete the deployed endpoint uncomment the line below
# xgb_model.delete_deployment(wait_for_completion=True)

```

## 12.5.7 HuggingFacePipelineModel

New in version 2.8.2.

See [API Documentation](#)

### 12.5.7.1 Overview

The `ads.model.framework.huggingface_model.HuggingFacePipelineModel` class in ADS is designed to allow you to rapidly get a HuggingFace pipelines into production. The `.prepare()` method creates the model artifacts that are needed to deploy a functioning pipeline without you having to configure it or write code. However, you can customize the required `score.py` file.

The `.verify()` method simulates a model deployment by calling the `load_model()` and `predict()` methods in the `score.py` file. With the `.verify()` method, you can debug your `score.py` file without deploying any models. The `.save()` method deploys a model artifact to the model catalog. The `.deploy()` method deploys a model to a REST endpoint.

The following steps take your trained `HuggingFacePipelineModel` model and deploy it into production with a few lines of code.

#### Create a HuggingFace Pipeline

Load a [ImageSegmentationPipeline](#) pretrained model.

```
>>> from transformers import pipeline

>>> segmenter = pipeline(task="image-segmentation", model="facebook/detr-resnet-50-
↳panoptic", revision="fc15262")
>>> preds = segmenter(
...     "https://huggingface.co/datasets/huggingface/documentation-images/resolve/main/
↳pipeline-cat-chonk.jpeg"
... )
>>> preds
[{'score': 0.987885,
  'label': 'LABEL_184',
  'mask': <PIL.Image.Image image mode=L size=960x686>},
 {'score': 0.997345,
  'label': 'snow',
  'mask': <PIL.Image.Image image mode=L size=960x686>},
 {'score': 0.997247,
  'label': 'cat',
  'mask': <PIL.Image.Image image mode=L size=960x686>}]
```

### 12.5.7.2 Prepare a Custom Conda Pack

To do a image segmentation model, you can start with the PyTorch conda pack with slug `pytorch110_p38_cpu_v1`.

1. Run `pip install timm` since image segmentation model requires `timm`.
2. Then use `odsc conda init -b your_bucket_name -n bucket_namespace` to config where to store the published conda pack if you have not done this yet.
3. Lastly, run `odsc conda publish -s pytorch110_p38_cpu_v1`.
4. Once it's done, you can find the path of the published conda pack under the Environment Explorer Published tab. Refresh the page if you cannot find it.

### 12.5.7.3 Prepare Model Artifact

```
>>> from ads.common.model_metadata import UseCaseType
>>> from ads.model import HuggingFacePipelineModel

>>> import tempfile

>>> # Prepare the model
>>> artifact_dir = "huggingface_pipeline_model_artifact"
>>> huggingface_pipeline_model = HuggingFacePipelineModel(model, artifact_dir=artifact_
↳dir)
>>> huggingface_pipeline_model.prepare(
...     inference_conda_env="<your-conda-pack-path>",
...     inference_python_version="<your-python-version>",
...     training_conda_env="<your-conda-pack-path>",
...     use_case_type=UseCaseType.OTHER,
...     force_overwrite=True,
... )
# You don't need to modify the score.py generated. The model can be loaded by the_
```

(continues on next page)

(continued from previous page)

```

↪ transformers.pipeline.
# More info here - https://huggingface.co/docs/transformers/main_classes/pipelines
↪ #transformers.pipeline

```

Instantiate a `HuggingFacePipelineModel()` object with HuggingFace pipelines. All the pipelines related files are saved under the `artifact_dir`.

For more detailed information on what parameters that `HuggingFacePipelineModel` takes, refer to the [API Documentation](#)

#### 12.5.7.4 Summary Status

You can call the `.summary_status()` method after a model serialization instance such as `GenericModel`, `SklearnModel`, `TensorFlowModel`, or `PyTorchModel` is created. The `.summary_status()` method returns a Pandas dataframe that guides you through the entire workflow. It shows which methods are available to call and which ones aren't. Plus it outlines what each method does. If extra actions are required, it also shows those actions.

The following image displays an example summary status table created after a user initiates a model instance. The table's Step column displays a Status of Done for the initiate step. And the Details column explains what the initiate step did such as generating a `score.py` file. The Step column also displays the `prepare()`, `verify()`, `save()`, `deploy()`, and `predict()` methods for the model. The Status column displays which method is available next. After the initiate step, the `prepare()` method is available. The next step is to call the `prepare()` method.

		Actions Needed
Step	Status	Details
initiate	Done	Initiated the model
prepare()	Available	Generated runtime.yaml
		Generated score.py
		Serialized model
		Populated metadata(Custom, Taxonomy and Provenance)
verify()	Not Available	Local tested .predict from score.py
save()	Not Available	Conducted Introspect Test
		Uploaded artifact to model catalog
deploy()	Not Available	Deployed the model
predict()	Not Available	Called deployment predict endpoint

### 12.5.7.5 Register Model

```
>>> # Register the model
>>> model_id = huggingface_pipeline_model.save()

Model is successfully loaded.
['.model-ignore', 'score.py', 'config.json', 'runtime.yaml', 'preprocessor_config.json',
↪ 'pytorch_model.bin']

'ocid1.datasciencemodel.oc1.xxx.xxxxx'
```

### 12.5.7.6 Deploy and Generate Endpoint

```
>>> # Deploy and create an endpoint for the huggingface_pipeline_model
>>> huggingface_pipeline_model.deploy(
...     display_name="HuggingFace Pipeline Model For Image Segmentation",
...     deployment_log_group_id="ocid1.loggroup.oc1.xxx.xxxxx",
...     deployment_access_log_id="ocid1.log.oc1.xxx.xxxxx",
...     deployment_predict_log_id="ocid1.log.oc1.xxx.xxxxx",
... )
>>> print(f"Endpoint: {huggingface_pipeline_model.model_deployment.url}")
```

### 12.5.7.7 Run Prediction against Endpoint

```
>>> # Download an image
>>> import PIL.Image
>>> import requests
>>> import cloudpickle
>>> image_url = "https://huggingface.co/datasets/huggingface/documentation-images/
↪ resolve/main/pipeline-cat-chonk.jpeg"
>>> image = PIL.Image.open(requests.get(image_url, stream=True).raw)

>>> # Generate prediction by invoking the deployed endpoint
>>> preds = huggingface_pipeline_model.predict(image)["prediction"]
>>> print([{"score": round(pred["score"], 4), "label": pred["label"]} for pred in preds])
[{'score': 0.9879, 'label': 'LABEL_184'},
{'score': 0.9973, 'label': 'snow'},
{'score': 0.9972, 'label': 'cat'}]
```

#### 12.5.7.7.1 Predict with Image

Predict Image by passing a `PIL.Image.Image` object using the `data` argument in `predict()` to predict a single image. The image will be converted to bytes using `cloudpickle` so it can be passed to the endpoint. It will be loaded back to `PIL.Image.Image` in `score.py` before pass into the pipeline.

---

**Note:**

- The payload size limit is 10 MB. Read more about invoking a model deployment [here](#).
- Model deployment currently does not support internet(coming soon), hence you cannot pass in a url.

### 12.5.7.7.2 Predict with Multiple Arguments

If your model takes more than one argument, you can pass in through dictionary with the keys as the argument name and values as the value of the argument.

```
>>> your_huggingface_pipeline_model.verify({"parameter_name_1": "parameter_value_1", ...,
↪ "parameter_name_n": "parameter_value_n"})
>>> your_huggingface_pipeline_model.predict({"parameter_name_1": "parameter_value_1", ...
↪, "parameter_name_n": "parameter_value_n"})
```

### 12.5.7.8 Run Prediction with oci sdk

Model deployment endpoints can be invoked with the oci sdk. This example invokes a model deployment with the oci sdk with a bytes payload:

#### 12.5.7.8.1 bytes payload example

```
>>> # The OCI SDK must be installed for this example to function properly.
>>> # Installation instructions can be found here: https://docs.oracle.com/en-us/iaas/Content/API/SDKDocs/pythonsdk.htm
↪
>>> import requests
>>> import oci
>>> from ads.common.auth import default_signer
>>> import cloudpickle
>>> import PIL.Image
>>> import cloudpickle
>>> headers = {"Content-Type": "application/octet-stream"}
>>> endpoint = huggingface_pipeline_model.model_deployment.url + "/predict"

>>> ## download the image
>>> image_url = "https://huggingface.co/datasets/Narsil/image_dummy/raw/main/parrots.png"
>>> image = PIL.Image.open(requests.get(image_url, stream=True).raw)
>>> image_bytes = cloudpickle.dumps(image)

>>> preds = requests.post(endpoint, data=image_bytes, auth=default_signer()['signer'],
↪ headers=headers).json()
>>> print([{"score": round(pred["score"], 4), "label": pred["label"]} for pred in preds[
↪ 'prediction']])
[{'score': 0.9879, 'label': 'LABEL_184'},
{'score': 0.9973, 'label': 'snow'},
{'score': 0.9972, 'label': 'cat'}]
```

## 12.5.7.9 Example

```

from transformers import pipeline
from ads.model import HuggingFacePipelineModel

import tempfile
import PIL.Image
from ads.common.auth import default_signer
import requests
import cloudpickle

## download the image
image_url = "https://huggingface.co/datasets/Narsil/image_dummy/raw/main/parrots.png"
image = PIL.Image.open(requests.get(image_url, stream=True).raw)

## download the pretrained model
classifier = pipeline(model="openai/clip-vit-large-patch14")
classifier(
    images=image,
    candidate_labels=["animals", "humans", "landscape"],
)

## Initiate a HuggingFacePipelineModel instance
zero_shot_image_classification_model = HuggingFacePipelineModel(classifier, artifact_
    ↪dir=tempfile.mkdtemp())

# Autogenerate score.py, serialized model, runtime.yaml
conda_pack_path = "oci://bucket@namespace/path/to/conda/pack" # your published conda pack
python_version = "3.x" # Remember to update 3.x with your actual python version, e.g. 3.8
zero_shot_image_classification_model.prepare(inference_conda_env=conda_pack_path,
    ↪inference_python_version = python_version, force_overwrite=True)

## Convert payload to bytes
data = {"images": image, "candidate_labels": ["animals", "humans", "landscape"]}
body = cloudpickle.dumps(data) # convert image to bytes

# Verify generated artifacts
zero_shot_image_classification_model.verify(data=data)
zero_shot_image_classification_model.verify(data=body)

# Register HuggingFace Pipeline model
zero_shot_image_classification_model.save()

## Deploy
log_group_id = "<log_group_id>"
log_id = "<log_id>"
zero_shot_image_classification_model.deploy(deployment_bandwidth_mbps=100,
    wait_for_completion=False,
    deployment_log_group_id = log_group_id,
    deployment_access_log_id = log_id,
    deployment_predict_log_id = log_id)
zero_shot_image_classification_model.predict(data)
zero_shot_image_classification_model.predict(body)

```

(continues on next page)



(continued from previous page)

```

### Invoke the model by sending bytes
auth = default_signer()['signer']
endpoint = zero_shot_image_classification_model.model_deployment.url + "/predict"
headers = {"Content-Type": "application/octet-stream"}
requests.post(endpoint, data=body, auth=auth, headers=headers).json()

```

## 12.5.8 AutoMLModel

Working with AutoML has moved from within ADS to working directly with the automlx library. To deploy an AutoMLx model, use `GenericModel` class.

The following example takes your trained AutoML model using `GenericModel` and deploys it into production.

### 12.5.8.1 Example

```

import pandas as pd
import numpy as np
from sklearn.datasets import fetch_openml
from sklearn.model_selection import train_test_split

import ads
import automl
from automl import init
from ads.model import GenericModel
from ads.common.model_metadata import UseCaseType

dataset = fetch_openml(name='adult', as_frame=True)
df, y = dataset.data, dataset.target

# Several of the columns are incorrectly labeled as category type in the original dataset
numeric_columns = ['age', 'capitalgain', 'capitalloss', 'hoursperweek']
for col in df.columns:
    if col in numeric_columns:
        df[col] = df[col].astype(int)

X_train, X_test, y_train, y_test = train_test_split(df,
                                                    y.map({'>50K': 1, '<=50K': 0}).
                                                    ↪astype(int),
                                                    train_size=0.7,
                                                    random_state=0)

init(engine='local')
est = automl.Pipeline(task='classification')
est.fit(X_train, y_train)

ads.set_auth("resource_principal")
automl_model = GenericModel(estimator=est, artifact_dir="automl_model_artifact")
automl_model.prepare(inference_conda_env="automlx_p38_cpu_v1",
                    training_conda_env="automlx_p38_cpu_v1",

```

(continues on next page)

(continued from previous page)

```

use_case_type=UseCaseType.BINARY_CLASSIFICATION,
X_sample=X_test,
force_overwrite=True)

```

Open `automl_model_artifact/score.py` and edit the code to instantiate the model class. The edits are highlighted

```

# score.py 1.0 generated by ADS 2.8.1 on 20230226_214703
import json
import os
import sys
import importlib
from cloudpickle import cloudpickle
from functools import lru_cache
from io import StringIO
import logging
import sys
import automl
import pandas as pd
import numpy as np

model_name = 'model.pkl'

"""
Inference script. This script is used for prediction by scoring server when schema is
known.
"""

def init_automl_logger():
    logger = logging.getLogger("automl")
    handler = logging.StreamHandler(sys.stdout)
    handler.setLevel(logging.ERROR)
    formatter = logging.Formatter(
        "%(asctime)s - %(name)s - %(levelname)s - %(message)s"
    )
    handler.setFormatter(formatter)
    logger.addHandler(handler)
    automl.init(engine="local", engine_opts={"n_jobs": 1}, logger=logger)

@lru_cache(maxsize=10)
def load_model(model_file_name=model_name):
    """
    Loads model from the serialized format

    Returns
    -----
    model: a model instance on which predict API can be invoked
    """
    init_automl_logger()
    model_dir = os.path.dirname(os.path.realpath(__file__))
    if model_dir not in sys.path:
        sys.path.insert(0, model_dir)

```

(continues on next page)

(continued from previous page)

```

contents = os.listdir(model_dir)
if model_file_name in contents:
    print(f'Start loading {model_file_name} from model directory {model_dir} ...')
    with open(os.path.join(os.path.dirname(os.path.realpath(__file__)), model_file_
↪name), "rb") as file:
        loaded_model = cloudpickle.load(file)

    print("Model is successfully loaded.")
    return loaded_model
else:
    raise Exception(f'{model_file_name} is not found in model directory {model_dir}')

@lru_cache(maxsize=1)
def fetch_data_type_from_schema(input_schema_path=os.path.join(os.path.dirname(os.path.
↪realpath(__file__)), "input_schema.json")):
    """
    Returns data type information fetch from input_schema.json.

    Parameters
    -----
    input_schema_path: path of input schema.

    Returns
    -----
    data_type: data type fetch from input_schema.json.

    """
    data_type = {}
    if os.path.exists(input_schema_path):
        schema = json.load(open(input_schema_path))
        for col in schema['schema']:
            data_type[col['name']] = col['dtype']
    else:
        print("input_schema has to be passed in in order to recover the same data type.↵
↪pass `X_sample` in `ads.model.framework.automl_model.AutoMLModel.prepare` function to↵
↪generate the input_schema. Otherwise, the data type might be changed after↵
↪serialization/deserialization.")
        return data_type

def deserialize(data, input_schema_path, task=None):
    """
    Deserialize json serialization data to data in original type when sent to predict.

    Parameters
    -----
    data: serialized input data.
    input_schema_path: path of input schema.
    task: Machine learning task, supported: classification, regression, anomaly_
↪detection, forecasting. Defaults to None.

    Returns
    -----

```

(continues on next page)

(continued from previous page)

```

data: deserialized input data.

"""

if isinstance(data, bytes):
    return pd.read_json(StringIO(data.decode("utf-8")))

data_type = data.get('data_type', '') if isinstance(data, dict) else ''
json_data = data.get('data', data) if isinstance(data, dict) else data

if task and task == "forecasting":
    try:
        data_type = data_type.split("'")[1]
        module, spec = ".".join(data_type.split(".")[:-1]), data_type.split(".")[-1]
        lib = importlib.import_module(name=module)
        func = getattr(lib, spec)
        return pd.DataFrame(index=func(json_data))
    except:
        logging.warning("Cannot autodetect the type of the model input data. By
↳ default, convert input data to pd.DatetimeIndex and feed the model with an empty
↳ pandas DataFrame with index as input data. If assumption is not correct, modify the
↳ score.py and check with .verify() before saving model with .save().")
        return pd.DataFrame(index=pd.DatetimeIndex(json_data))

if "pandas.core.series.Series" in data_type:
    return pd.Series(json_data)
if "pandas.core.frame.DataFrame" in data_type or isinstance(json_data, str):
    return pd.read_json(json_data, dtype=fetch_data_type_from_schema(input_schema_
↳ path))
if isinstance(json_data, dict):
    return pd.DataFrame.from_dict(json_data)

return json_data

def pre_inference(data, input_schema_path, task=None):
    """
    Preprocess data

    Parameters
    -----
    data: Data format as expected by the predict API of the core estimator.
    input_schema_path: path of input schema.
    task: Machine learning task, supported: classification, regression, anomaly_
↳ detection, forecasting. Defaults to None.

    Returns
    -----
    data: Data format after any processing.

    """
    data = deserialize(data, input_schema_path, task)
    return data

```

(continues on next page)

(continued from previous page)

```

def post_inference(yhat):
    """
    Post-process the model results

    Parameters
    -----
    yhat: Data format after calling model.predict.

    Returns
    -----
    yhat: Data format after any processing.

    """
    if isinstance(yhat, pd.core.frame.DataFrame):
        yhat = yhat.values
    return yhat.tolist()

def predict(data, model=load_model(), input_schema_path=os.path.join(os.path.dirname(os.
↪ path.realpath(__file__)), "input_schema.json")):
    """
    Returns prediction given the model and data to predict

    Parameters
    -----
    model: Model instance returned by load_model API
    data: Data format as expected by the predict API of the core estimator. For eg. in_
↪ case of skit models it could be numpy array/List of list/Pandas DataFrame
    input_schema_path: path of input schema.

    Returns
    -----
    predictions: Output from scoring server
        Format: {'prediction': output from model.predict method}

    """
    task = model.task if hasattr(model, "task") else None
    features = pre_inference(data, input_schema_path, task)
    yhat = post_inference(
        model.predict(features)
    )
    return {'prediction': yhat}

```

Verify score.py changes by running inference locally.

```
automl_model.verify(X_test.iloc[:2], auto_serialize_data=True)
```

Save the model, and Deploy the model. After it is successfully deployed, invoke the endpoint by calling .predict() function.

```

model_id = automl_model.save(display_name='Demo AutoMLModel model')
deploy = automl_model.deploy(display_name='Demo AutoMLModel deployment')
automl_model.predict(X_test.iloc[:2], auto_serialize_data=True)

```

## 12.5.9 Other Frameworks

See [API Documentation](#)

### 12.5.9.1 Overview

The `ads.model.generic_model.GenericModel` class in ADS provides an efficient way to serialize almost any model class. This section demonstrates how to use the `GenericModel` class to prepare model artifacts, verify models, save models to the model catalog, deploy models, and perform predictions on model deployment endpoints.

The `GenericModel` class works with any unsupported model framework that has a `.predict()` method. For the most common model classes such as scikit-learn, XGBoost, LightGBM, TensorFlow, and PyTorch, we recommend that you use the ADS provided, framework-specific serializations models. For example, for a scikit-learn model, use `SKLearnmodel`. For other models, use the `GenericModel` class.

The `.verify()` method simulates a model deployment by calling the `load_model()` and `predict()` methods in the `score.py` file. With the `.verify()` method, you can debug your `score.py` file without deploying any models. The `.save()` method deploys a model artifact to the model catalog. The `.deploy()` method deploys a model to a REST endpoint.

These simple steps take your trained model and will deploy it into production with just a few lines of code.

### 12.5.9.2 Prepare Model Artifact

Instantiate a `GenericModel()` object by giving it any model object. It accepts the following parameters:

- `artifact_dir`: `str`: Artifact directory to store the files needed for deployment.
- `auth`: (`Dict`, optional): Defaults to `None`. The default authentication is set using the `ads.set_auth` API. To override the default, use `ads.common.auth.api_keys()` or `ads.common.auth.resource_principal()` and create the appropriate authentication signer and the `**kwargs` required to instantiate the `IdentityClient` object.
- `estimator`: (`Callable`): Trained model.
- `properties`: (`ModelProperties`, optional): Defaults to `None`. `ModelProperties` object required to save and deploy the model.
- `serialize`: (`bool`, optional): Defaults to `True`. If `True` the model will be serialized into a pickle file. If `False`, you must set the `model_file_name` in the `.prepare()` method, serialize the model manually, and save it in the `artifact_dir`. You will also need to update the `score.py` file to work with this model.

The `properties` is an instance of the `ModelProperties` class and has the following predefined fields:

- `bucket_uri`: `str`
- `compartment_id`: `str`
- `deployment_access_log_id`: `str`
- `deployment_bandwidth_mbps`: `int`
- `deployment_instance_count`: `int`
- `deployment_instance_shape`: `str`
- `deployment_log_group_id`: `str`
- `deployment_predict_log_id`: `str`
- `deployment_memory_in_gbs`: `Union[float, int]`

- `deployment_ocpus`: `Union[float, int]`
- `inference_conda_env`: `str`
- `inference_python_version`: `str`
- `overwrite_existing_artifact`: `bool`
- `project_id`: `str`
- `remove_existing_artifact`: `bool`
- `training_conda_env`: `str`
- `training_id`: `str`
- `training_python_version`: `str`
- `training_resource_id`: `str`
- `training_script_path`: `str`

By default, `properties` is populated from the environment variables when not specified. For example, in notebook sessions the environment variables are preset and stored in project id (`PROJECT_OCID`) and compartment id (`NB_SESSION_COMPARTMENT_OCID`). So `properties` populates these environment variables, and uses the values in methods such as `.save()` and `.deploy()`. Pass in values to overwrite the defaults. When you use a method that includes an instance of `properties`, then `properties` records the values that you pass in. For example, when you pass `inference_conda_env` into the `.prepare()` method, then `properties` records the value. To reuse the `properties` file in different places, you can export the `properties` file using the `.to_yaml()` method then reload it into a different machine using the `.from_yaml()` method.

### 12.5.9.3 Summary Status

You can call the `.summary_status()` method after a model serialization instance such as `GenericModel`, `SklearnModel`, `TensorFlowModel`, or `PyTorchModel` is created. The `.summary_status()` method returns a Pandas dataframe that guides you through the entire workflow. It shows which methods are available to call and which ones aren't. Plus it outlines what each method does. If extra actions are required, it also shows those actions.

The following image displays an example summary status table created after a user initiates a model instance. The table's Step column displays a Status of Done for the initiate step. And the Details column explains what the initiate step did such as generating a `score.py` file. The Step column also displays the `prepare()`, `verify()`, `save()`, `deploy()`, and `predict()` methods for the model. The Status column displays which method is available next. After the initiate step, the `prepare()` method is available. The next step is to call the `prepare()` method.

### 12.5.9.4 Example

By default, the `GenericModel` serializes to a pickle file. The following example, the user creates a model. In the prepare step, the user saves the model as a pickle file with the name `toy_model.pkl`. Then the user verifies the model, saves it to the model catalog, deploys the model and makes a prediction. Finally, the user deletes the model deployment and then deletes the model.

```
import tempfile
from ads.model.generic_model import GenericModel

class Toy:
    def predict(self, x):
        return x ** 2
model = Toy()
```

(continues on next page)

		Actions Needed
Step	Status	Details
initiate	Done	Initiated the model
prepare()	Available	Generated runtime.yaml
		Generated score.py
		Serialized model
		Populated metadata(Custom, Taxonomy and Provenance)
verify()	Not Available	Local tested .predict from score.py
save()	Not Available	Conducted Introspect Test
		Uploaded artifact to model catalog
deploy()	Not Available	Deployed the model
predict()	Not Available	Called deployment predict endpoint

(continued from previous page)

```

generic_model = GenericModel(estimator=model, artifact_dir=tempfile.mkdtemp())
generic_model.summary_status()

generic_model.prepare(
    inference_conda_env="dbexp_p38_cpu_v1",
    model_file_name="toy_model.pkl",
    force_overwrite=True
)

# Check if the artifacts are generated correctly.
# The verify method invokes the ``predict`` function defined inside ``score.py`` in the
# artifact_dir
generic_model.verify(2)

# Register the model
model_id = generic_model.save(display_name="Custom Model")

# Deploy and create an endpoint for the XGBoost model
generic_model.deploy(
    display_name="My Custom Model",
    deployment_log_group_id="ocidl.loggroup.oc1.xxx.xxxxx",
    deployment_access_log_id="ocidl.log.oc1.xxx.xxxxx",
    deployment_predict_log_id="ocidl.log.oc1.xxx.xxxxx",
)

print(f"Endpoint: {generic_model.model_deployment.url}")

# Generate prediction by invoking the deployed endpoint
generic_model.predict(2)

```

(continues on next page)



(continued from previous page)

```
# To delete the deployed endpoint uncomment the line below
# generic_model.delete_deployment(wait_for_completion=True)
```

You can also use the shortcut `.prepare_save_deploy()` instead of calling `.prepare()`, `.save()` and `.deploy()` separately.

```
import tempfile
from ads.model.generic_model import GenericModel

class Toy:
    def predict(self, x):
        return x ** 2
estimator = Toy()

model = GenericModel(estimator=estimator)
model.summary_status()

# If you are running the code inside a notebook session and using a service pack,
↪ `inference_conda_env` can be omitted.
model.prepare_save_deploy(inference_conda_env="dbexp_p38_cpu_v1")
model.verify(2)

# Generate prediction by invoking the deployed endpoint
model.predict(2)

# To delete the deployed endpoint uncomment the line below
# model.delete_deployment(wait_for_completion=True)
```

#### 12.5.9.5 Example – CatBoost

Here is a more realistic example using CatBoost model.

```
import tempfile
import ads
from ads.model.generic_model import GenericModel
from catboost import CatBoostRegressor

ads.set_auth(auth="resource_principal")

# Initialize data

X_train = [[1, 4, 5, 6],
            [4, 5, 6, 7],
            [30, 40, 50, 60]]

X_test = [[2, 4, 6, 8],
           [1, 4, 50, 60]]

y_train = [10, 20, 30]
```

(continues on next page)

(continued from previous page)

```

# Initialize CatBoostRegressor
catboost_estimator = CatBoostRegressor(iterations=2,
                                       learning_rate=1,
                                       depth=2)
# Train a CatBoostRegressor model
catboost_estimator.fit(X_train, y_train)

# Get predictions
preds = catboost_estimator.predict(X_test)

# Instantiate ads.model.generic_model.GenericModel using the trained Custom Model using
↳ the trained CatBoost Classifier model
catboost_model = GenericModel(estimator=catboost_estimator,
                              artifact_dir=tempfile.mkdtemp(),
                              model_save_serializer="cloudpickle",
                              model_input_serializer="json")

# Autogenerate score.py, pickled model, runtime.yaml, input_schema.json and output_
↳ schema.json
catboost_model.prepare(
    inference_conda_env="oci://bucket@namespace/path/to/your/conda/pack",
    inference_python_version="your_python_version",
    X_sample=X_train,
    y_sample=y_train,
)

# Verify generated artifacts. Payload looks like this: [[2, 4, 6, 8], [1, 4, 50, 60]]
catboost_model.verify(X_test, auto_serialize_data=True)

# Register CatBoostRegressor model
model_id = catboost_model.save(display_name="CatBoost Model")
catboost_model.deploy()
catboost_model.predict(X_test)
catboost_model.delete_deployment(wait_for_completion=True)
catboost_model.delete() # delete the model

```

#### 12.5.9.6 Example – Save Your Own Model

By default, the `serialize` in `GenericModel` class is `True`, and it will serialize the model using `cloudpickle`. However, you can set `serialize=False` to disable it. And serialize the model on your own. You just need to copy the serialized model into the `.artifact_dir`. This example shows step by step how you can do that. The example is illustrated using a `Sklearn` model.

```

import tempfile
from ads import set_auth
from ads.model import GenericModel
from sklearn.datasets import load_iris
from sklearn.linear_model import LogisticRegression
from sklearn.model_selection import train_test_split

set_auth(auth="resource_principal")

```

(continues on next page)

(continued from previous page)

```

# Load dataset and Prepare train and test split
iris = load_iris()
X, y = iris.data, iris.target
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)

# Train a LogisticRegression model
sklearn_estimator = LogisticRegression()
sklearn_estimator.fit(X_train, y_train)

# Serialize your model. You can choose your own way to serialize your model.
import cloudpickle
with open("./model.pkl", "wb") as f:
    cloudpickle.dump(sklearn_estimator, f)

model = GenericModel(sklearn_estimator, artifact_dir = "model_artifact_folder",
    ↳serialize=False)
model.prepare(inference_conda_env="generalml_p38_cpu_v1", force_overwrite=True, model_
    ↳file_name="model.pkl", X_sample=X_test)

```

Now copy the model.pkl file and paste into the model\_artifact\_folder folder. And open the score.py in the model\_artifact\_folder folder to add implementation of the load\_model function. You can also add your pre-processing steps in pre\_inference function and postprocessing steps in post\_inference function. Below is an example implementation of the score.py. Replace your score.py with the code below.

```

# score.py 1.0 generated by ADS 2.8.2 on 20230301_065458
import os
import sys
import json
from functools import lru_cache

model_name = 'model.pkl'

"""
Inference script. This script is used for prediction by scoring server when schema is
    ↳known.
"""

@lru_cache(maxsize=10)
def load_model(model_file_name=model_name):
    """
    Loads model from the serialized format

    Returns
    -----
    model: a model instance on which predict API can be invoked
    """
    model_dir = os.path.dirname(os.path.realpath(__file__))
    if model_dir not in sys.path:
        sys.path.insert(0, model_dir)
    contents = os.listdir(model_dir)

```

(continues on next page)

(continued from previous page)

```

    if model_file_name in contents:
        import cloudpickle
        with open(os.path.join(model_dir, model_name), "rb") as f:
            model = cloudpickle.load(f)
        return model
    else:
        raise Exception(f'{model_file_name} is not found in model directory {model_dir}')

@lru_cache(maxsize=1)
def fetch_data_type_from_schema(input_schema_path=os.path.join(os.path.dirname(os.path.
↪realpath(__file__)), "input_schema.json")):
    """
    Returns data type information fetch from input_schema.json.

    Parameters
    -----
    input_schema_path: path of input schema.

    Returns
    -----
    data_type: data type fetch from input_schema.json.

    """
    data_type = {}
    if os.path.exists(input_schema_path):
        schema = json.load(open(input_schema_path))
        for col in schema['schema']:
            data_type[col['name']] = col['dtype']
    else:
        print("input_schema has to be passed in in order to recover the same data type.↵
↪pass `X_sample` in `ads.model.framework.sklearn_model.SklearnModel.prepare` function.↵
↪to generate the input_schema. Otherwise, the data type might be changed after↵
↪serialization/deserialization.")
        return data_type

def deserialize(data, input_schema_path):
    """
    Deserialize json serialization data to data in original type when sent to predict.

    Parameters
    -----
    data: serialized input data.
    input_schema_path: path of input schema.

    Returns
    -----
    data: deserialized input data.

    """

    import pandas as pd
    import numpy as np

```

(continues on next page)

(continued from previous page)

```

import base64
from io import BytesIO
if isinstance(data, bytes):
    return data

data_type = data.get('data_type', '') if isinstance(data, dict) else ''
json_data = data.get('data', data) if isinstance(data, dict) else data

if "numpy.ndarray" in data_type:
    load_bytes = BytesIO(base64.b64decode(json_data.encode('utf-8')))
    return np.load(load_bytes, allow_pickle=True)
if "pandas.core.series.Series" in data_type:
    return pd.Series(json_data)
if "pandas.core.frame.DataFrame" in data_type or isinstance(json_data, str):
    return pd.read_json(json_data, dtype=fetch_data_type_from_schema(input_schema_
↪path))
if isinstance(json_data, dict):
    return pd.DataFrame.from_dict(json_data)
return json_data

def pre_inference(data, input_schema_path):
    """
    Preprocess data

    Parameters
    -----
    data: Data format as expected by the predict API of the core estimator.
    input_schema_path: path of input schema.

    Returns
    -----
    data: Data format after any processing.

    """
    return deserialize(data, input_schema_path)

def post_inference(yhat):
    """
    Post-process the model results

    Parameters
    -----
    yhat: Data format after calling model.predict.

    Returns
    -----
    yhat: Data format after any processing.

    """
    return yhat.tolist()

def predict(data, model=load_model(), input_schema_path=os.path.join(os.path.dirname(os.

```

(continues on next page)

(continued from previous page)

```

↪path.realpath(__file__)), "input_schema.json")):
    """
    Returns prediction given the model and data to predict

    Parameters
    -----
    model: Model instance returned by load_model API.
    data: Data format as expected by the predict API of the core estimator. For eg. in_
↪case of skit models it could be numpy array/List of list/Pandas DataFrame.
    input_schema_path: path of input schema.

    Returns
    -----
    predictions: Output from scoring server
    Format: {'prediction': output from model.predict method}

    """
    features = pre_inference(data, input_schema_path)
    yhat = post_inference(
        model.predict(features)
    )
    return {'prediction': yhat}

```

Save the score.py and now call `.verify()` to check if it works locally.

```
model.verify(X_test[:2], auto_serialize_data=True)
```

After verify run successfully, you can save the model to model catalog, deploy and call predict to invoke the endpoint.

```

model_id = model.save(display_name='Demo Sklearn model')
deploy = model.deploy(display_name='Demo Sklearn deployment')
model.predict(X_test[:2].tolist())

```

You can also use the shortcut `.prepare_save_deploy()` instead of calling `.prepare()`, `.save()` and `.deploy()` separately.

```

import tempfile
from ads.catalog.model import ModelCatalog
from ads.model.generic_model import GenericModel

class Toy:
    def predict(self, x):
        return x ** 2
estimator = Toy()

model = GenericModel(estimator=estimator)
model.summary_status()
# If you are running the code inside a notebook session and using a service pack,
↪`inference_conda_env` can be omitted.
model.prepare_save_deploy(inference_conda_env="dataexpl_p37_cpu_v3")
model.verify(2)
model.predict(2)

```

(continues on next page)

(continued from previous page)

```
model.delete_deployment(wait_for_completion=True)
model.delete()
```





## APACHE SPARK

---

### DataFlow

Oracle Cloud Infrastructure (OCI) Data Flow is a fully managed, serverless, and on-demand Apache Spark Service that performs data processing or model training tasks on extremely large datasets without infrastructure to deploy or manage.

#### Getting Started with Data Flow

---

ads integrates with OCI Data Flow allowing users to submit and monitor Spark jobs from Notebook Sessions or from their local machine.

## 13.1 Quick Start

Data Flow is a hosted Apache Spark server. It is quick to start, and can scale to handle large datasets in parallel. ADS provides a convenient API for creating and maintaining workloads on Data Flow.

### 13.1.1 Submit a Toy Python Script to DataFlow

#### 13.1.1.1 From a Python Environment

Submit a python script to DataFlow entirely from your python environment. The following snippet uses a toy python script that prints “Hello World” followed by the spark version, 3.2.1.

```
from ads.jobs import DataFlow, Job, DataFlowRuntime
from uuid import uuid4
import os
import tempfile

SCRIPT_CONTENT = """
import pyspark

def main():
    print("Hello World")
    print("Spark version is", pyspark.__version__)

if __name__ == "__main__":
    main()
```

(continues on next page)

(continued from previous page)

```

"""
with tempfile.TemporaryDirectory() as td:
    with open(os.path.join(td, "script.py"), "w") as f:
        f.write(SCRIPT_CONTENT)
    name = f"dataflow-app-{str(uuid4())}"
    dataflow_configs = (
        DataFlow()
        .with_compartment_id("oci.xx.<compartment_id>")
        .with_logs_bucket_uri("oci://<mybucket>@<mynamespace>/<dataflow-logs-prefix>")
        .with_driver_shape("VM.Standard.E4.Flex")
        .with_driver_shape_config(ocpus=2, memory_in_gbs=32)
        .with_executor_shape("VM.Standard.E4.Flex")
        .with_executor_shape_config(ocpus=4, memory_in_gbs=64)
        .with_spark_version("3.2.1")
    )
    runtime_config = (
        DataFlowRuntime()
        .with_script_uri(os.path.join(td, "script.py"))
        .with_script_bucket("oci://<mybucket>@<mynamespace>/<subdir_to_put_and_get_
↪script>")
    )
    df = Job(name=name, infrastructure=dataflow_configs, runtime=runtime_config)
    df.create()
    df_run = df.run()

```

### 13.1.1.2 From the Command Line

The same result can be achieved from the command line using `ads CLI` and a `yaml` file.

Assuming you have the following two files written in your current directory as `script.py` and `dataflow.yaml` respectively:

```

# script.py
import pyspark
def main():
    print("Hello World")
    print("Spark version is", pyspark.__version__)
if __name__ == "__main__":
    main()

```

```

# dataflow.yaml
kind: job
spec:
  name: dataflow-app-<uuid>
  infrastructure:
    kind: infrastructure
    spec:
      compartmentId: oci.xx.<compartment_id>
      logsBucketUri: oci://<mybucket>@<mynamespace>/<dataflow-logs-prefix>
      driverShape: VM.Standard.E4.Flex

```

(continues on next page)

(continued from previous page)

```

    driverShapeConfig:
      ocpus: 2
      memory_in_gbs: 32
    executorShape: VM.Standard.E4.Flex
    executorShapeConfig:
      ocpus: 4
      memory_in_gbs: 64
    sparkVersion: 3.2.1
    numExecutors: 1
  type: dataFlow
runtime:
  kind: runtime
  spec:
    scriptUri: script.py
    scriptBucket: oci://<mybucket>@<mynamespace>/<subdir_to_put_and_get_script>

```

```
ads jobs run -f dataflow.yaml
```

### 13.1.2 Real Data Flow Example with Conda Environment

From PySpark v3.0.0 and onwards, Data Flow allows a published conda environment as the [Spark runtime environment](#) when built with ADS. Data Flow supports published conda environments only. Conda packs are tar'd conda environments. When you publish your own conda packs to object storage, ensure that the DataFlow Resource has access to read the object or bucket. Below is a more built-out example using conda packs:

#### 13.1.2.1 From a Python Environment

```

from ads.jobs import DataFlow, Job, DataFlowRuntime
from uuid import uuid4
import os
import tempfile

with tempfile.TemporaryDirectory() as td:
    with open(os.path.join(td, "script.py"), "w") as f:
        f.write(
'''
from pyspark.sql import SparkSession
import click

@click.command()
@click.argument("app_name")
@click.option(
    "--limit", "-l", help="max number of row to print", default=10, required=False
)
@click.option("--verbose", "-v", help="print out result in verbose mode", is_flag=True)
def main(app_name, limit, verbose):
    Create a Spark session
    spark = SparkSession.builder.appName(app_name).getOrCreate()
'''
        )

```

(continues on next page)

(continued from previous page)

```

Load a csv file from dataflow public storage
df = (
    spark.read.format("csv")
    .option("header", "true")
    .option("multiLine", "true")
    .load(
        "oci://oow_2019_dataflow_lab@bigdatadatasciencelarge/usercontent/kaggle_
↪berlin_airbnb_listings_summary.csv"
    )
)

Create a temp view and do some SQL operations
df.createOrReplaceTempView("berlin")
query_result_df = spark.sql(
    """
    SELECT
        city,
        zipcode,
        CONCAT(latitude,',', longitude) AS lat_long
    FROM berlin
    """
).limit(limit)

# Convert the filtered Spark DataFrame into JSON format
# Note: we are writing to the spark stdout log so that we can retrieve the log later.
↪at the end of the notebook.
if verbose:
    rows = query_result_df.toJSON().collect()
    for i, row in enumerate(rows):
        print(f"record {i}")
        print(row)

if __name__ == "__main__":
    main()
"""
)
name = f"dataflow-app-{str(uuid4())}"
dataflow_configs = (
    DataFlow()
    .with_compartment_id("oci.xx.<compartment_id>")
    .with_logs_bucket_uri("oci://<mybucket>@<mynamespace>/<dataflow-logs-prefix>")
    .with_driver_shape("VM.Standard.E4.Flex")
    .with_driver_shape_config(ocpus=2, memory_in_gbs=32)
    .with_executor_shape("VM.Standard.E4.Flex")
    .with_executor_shape_config(ocpus=4, memory_in_gbs=64)
    .with_spark_version("3.2.1")
)
runtime_config = (
    DataFlowRuntime()
    .with_script_uri(os.path.join(td, "script.py"))
    .with_script_bucket("oci://<mybucket>@<mynamespace>/<subdir_to_put_and_get_
↪script>")

```

(continues on next page)

(continued from previous page)

```

        .with_custom_conda(uri="oci://<mybucket>@<mynamespace>/<path_to_conda_pack>")
        .with_arguments(["run-test", "-v", "-l", "5"])
    )
    df = Job(name=name, infrastructure=dataflow_configs, runtime=runtime_config)
    df.create()
    df_run = df.run()

```

### 13.1.2.2 From the Command Line

Again, assume you have the following two files written in your current directory as `script.py` and `dataflow.yaml` respectively:

```

# script.py
from pyspark.sql import SparkSession
import click

@click.command()
@click.argument("app_name")
@click.option(
    "--limit", "-l", help="max number of row to print", default=10, required=False
)
@click.option("--verbose", "-v", help="print out result in verbose mode", is_flag=True)
def main(app_name, limit, verbose):
    Create a Spark session
    spark = SparkSession.builder.appName(app_name).getOrCreate()

    Load a csv file from dataflow public storage
    df = (
        spark.read.format("csv")
        .option("header", "true")
        .option("multiLine", "true")
        .load(
            "oci://oow_2019_dataflow_lab@bigdatadatasciencelarge/usercontent/kaggle_
            ↪berlin_airbnb_listings_summary.csv"
        )
    )

    Create a temp view and do some SQL operations
    df.createOrReplaceTempView("berlin")
    query_result_df = spark.sql(
        """
        SELECT
            city,
            zipcode,
            CONCAT(latitude,',', longitude) AS lat_long
        FROM berlin
        """
    ).limit(limit)

    # Convert the filtered Spark DataFrame into JSON format
    # Note: we are writing to the spark stdout log so that we can retrieve the log later.

```

(continues on next page)

(continued from previous page)

*↪ at the end of the notebook.*

```

if verbose:
    rows = query_result_df.toJSON().collect()
    for i, row in enumerate(rows):
        print(f"record {i}")
        print(row)

if __name__ == "__main__":
    main()

```

```

# dataflow.yaml
kind: job
spec:
  name: dataflow-app-<uuid>
  infrastructure:
    kind: infrastructure
    spec:
      compartmentId: oci.xx.<compartment_id>
      logsBucketUri: oci://<mybucket>@<mynamespace>/<dataflow-logs-prefix>
      driverShape: VM.Standard.E4.Flex
      driverShapeConfig:
        ocpus: 2
        memory_in_gbs: 32
      executorShape: VM.Standard.E4.Flex
      executorShapeConfig:
        ocpus: 4
        memory_in_gbs: 64
      sparkVersion: 3.2.1
      numExecutors: 1
    type: dataFlow
  runtime:
    kind: runtime
    spec:
      scriptUri: script.py
      scriptBucket: oci://<mybucket>@<mynamespace>/<subdir_to_put_and_get_script>
      conda:
        uri: oci://<mybucket>@<mynamespace>/<path_to_conda_pack>
        type: published
      args:
        - "run-test"
        - "-v"
        - "-l"
        - "5"

```

```
ads jobs run -f dataflow.yaml
```

## 13.2 Setup and Installation

### 13.2.1 Notebook Session Development

Follow these set up instructions to submit Spark Jobs to Data Flow from an OCI Notebook Session.

#### 13.2.1.1 Pyspark Environment

To setup PySpark environment, install one of the PySpark conda environments from the [Environment Explorer](#)  
Example -

```
odsc conda install -s pyspark30_p37_cpu_v5
```

Find the information about the latest pyspark conda environment [here](#)

Activate the conda environment to upgrade to the latest oracle-ads

```
conda activate /home/datascience/conda/pyspark30_p37_cpu_v5
pip install oracle-ads[data_science, data, opctl] --upgrade
```

#### 13.2.1.2 Configuring core-site.xml

When the conda environment is installed, a templated version of *core-site.xml* is also installed. You can update the *core-site.xml* file using an automated configuration or manually.

##### Authentication with Resource Principals

Authentication to Object Storage can be done with a resource principal.

For automated configuration, run the following command in a terminal

```
odsc core-site config -a resource_principal
```

This command will populate the file `~/spark_conf_dir/core-site.xml` with the values needed to connect to Object Storage.

The following command line options are available:

- *-a, --authentication* Authentication mode. Supports *resource\_principal* and *api\_key* (default).
- *-r, --region* Name of the region.
- *-o, --overwrite* Overwrite *core-site.xml*.
- *-O, --output* Output path for *core-site.xml*.
- *-q, --quiet* Suppress non-error output.
- *-h, --help* Show help message and exit.

To manually configure the *core-site.xml* file, you edit the file, and then specify these values:

`fs.oci.client.hostname:` The Object Storage endpoint for your region. See <https://docs.oracle.com/iaas/api/#/en/objectstorage/20160918/> for available endpoints.

`fs.oci.client.custom.authenticator:` Set the value to *com.oracle.bmc.hdfs.auth.ResourcePrincipalsCustomAuthenticator*.

When using resource principals, these properties don't need to be configured:

- `fs.oci.client.auth.tenantId`
- `fs.oci.client.auth.userId`
- `fs.oci.client.auth.fingerprint`
- `fs.oci.client.auth.pemfilepath`

The following example *core-site.xml* file illustrates using resource principals for authentication to access Object Storage:

```
<?xml version="1.0"?>
<configuration>
  <property>
    <name>fs.oci.client.hostname</name>
    <value>https://objectstorage.us-ashburn-1.oraclecloud.com</value>
  </property>
  <property>
    <name>fs.oci.client.custom.authenticator</name>
    <value>com.oracle.bmc.hdfs.auth.ResourcePrincipalsCustomAuthenticator</value>
  </property>
</configuration>
```

For details, see [HDFS connector for Object Storage #using resource principals for authentication](#).

### Authentication with API Keys

When using authentication with **API keys**, the *core-site.xml* file is be updated in two ways, automated or manual configuration.

For automated configuration, you use the *odsc* command line tool. With an OCI configuration file, you can run

```
odsc core-site config -o
```

By default, this command uses the OCI configuration file stored in `~/.oci/config`, automatically populates the *core-site.xml* file, and then saves it to `~/spark_conf_dir/core-site.xml`.

The following command line options are available:

- *-a, --authentication* Authentication mode. Supports *resource\_principal* and *api\_key* (default).
- *-c, --configuration* Path to the OCI configuration file.
- *-p, --profile* Name of the profile.
- *-r, --region* Name of the region.
- *-o, --overwrite* Overwrite *core-site.xml*.
- *-O, --output* Output path for *core-site.xml*.
- *-q, --quiet* Suppress non-error output.
- *-h, --help* Show help message and exit.

To manually configure the *core-site.xml* file, you must specify these parameters:

`fs.oci.client.hostname`: Address of Object Storage. For example, `https://objectstorage.us-ashburn-1.oraclecloud.com`. You must replace `us-ashburn-1` with the region you are in. `fs.oci.client.auth.tenantId`: OCID of your tenancy. `fs.oci.client.auth.userId`: Your user OCID. `fs.oci.client.auth.fingerprint`: Fingerprint for the key pair. `fs.oci.client.auth.pemfilepath`: The fully qualified file name of the private key used for authentication.

The values of these parameters are found in the OCI configuration file.



## 13.2.2 Local Development

Follow these set up instructions to submit Spark Jobs to Data Flow from your local machine.

### 13.2.2.1 PySpark Environment

#### Prerequisite

You have completed *Local Development Environment Setup*

Use ADS CLI to setup a PySpark conda environment. Currently, the ADS CLI only supports fetching conda packs published by you. If you haven't already published a conda pack, you can create one using ADS CLI

To install from your published environment source -

```
ads conda install oci://mybucket@mynamespace/path/to/pyspark/env
```

To create a conda pack for your local use -

```
cat <<EOF> pyspark.yaml

dependencies:
  - pyspark
  - pip
  - pip:
    - oracle-ads
name: pysparkenv
EOF
```

```
ads create -f pyspark.yaml
```

```
ads publish -s pysparkenv
```

### 13.2.2.2 Developing in Visual Studio Code

#### Prerequisites

1. Setup Visual Studio Code development environment by following steps from *Local Development Environment Setup*
2. `ads conda install <oci uri of pyspark conda environment>`. Currently, we cannot access service pack directly. You can instead publish a pyspark service pack to your object storage and use the URI for the pack in OCI Object Storage.

Once the development environment is setup, you could write your code and run it from the terminal of the Visual Studio Code.

`core-site.xml` is setup automatically when you install a pyspark conda pack.

### 13.2.3 Logging From DataFlow

If using the ADS Python SDK,

To create and run a Data Flow application, you must specify a compartment and a bucket for storing logs under the same compartment:

```
compartment_id = "<compartment_id>"
logs_bucket_uri = "<logs_bucket_uri>"
```

Ensure that you set up the correct policies. For instance, for Data Flow to access logs bucket, use a policy like:

```
ALLOW SERVICE dataflow TO READ objects IN tenancy WHERE target.bucket.name='dataflow-logs'
```

For more information, see the [Data Flow documentation](#).

## 13.3 Running your Spark Application on OCI Data Flow

Submit your code to DataFlow for workloads that require larger resources.

### 13.3.1 Notebook Extension

For most Notebook users, local or OCI Notebook Sessions, the notebook extension is the most straightforward integration with dataflow. It's a "Set It and Forget It" API with options to update ad-hoc. You can configure your dataflow runs by running `ads opctl configure` in the terminal.

After setting up your dataflow config, you can return to the Notebook. Import `ads` and `DataFlowConfig`:

```
import ads
from ads.jobs.utils import DataFlowConfig
```

Load the dataflow extension inside the notebook cell -

```
%load_ext ads.jobs.extension
```

Define config. If you have not yet configured your dataflow setting, or would like to amend the defaults, you can modify as shown below:

```
dataflow_config = DataFlowConfig()
dataflow_config.compartment_id = "ocid1.compartment.<your compartment ocid>"
dataflow_config.driver_shape = "VM.Standard.E4.Flex"
dataflow_config.driver_shape_config = oci.data_flow.models.ShapeConfig(ocpus=2, memory_
↳ in_gbs=32)
dataflow_config.executor_shape = "VM.Standard.E4.Flex"
dataflow_config.executor_shape_config = oci.data_flow.models.ShapeConfig(ocpus=4, memory_
↳ in_gbs=64)
dataflow_config.logs_bucket_uri = "oci://<my-bucket>@<my-tenancy>/"
dataflow_config.spark_version = "3.2.1"
dataflow_config.configuration = {"spark.driver.memory": "512m"}
dataflow_config.private_endpoint_id = "ocid1.dataflowprivateendpoint.oc1.iad.<your_
↳ private endpoint ocid>"
```

Use the config defined above to submit the cell.

### Tip

Get more information about the dataflow extension by running `%dataflow -h`

Call the dataflow magic command in the first line of your cell to run it on dataflow.

```
%%dataflow run -f a_script.py -c {dataflow_config} -w -o -- abc -l 5 -v
```

This header will: - save the cell as a file called `script.py` and store it in your `dataflow_config.script_bucket`  
- After the `--` notation, all parameters are sent to your script. For example `abc` is a positional argument, and `l` and `v` are named arguments.

Below is a full example:

```
%%dataflow run -f a_script.py -c {dataflow_config} -w -o -- abc -l 5 -v
from pyspark.sql import SparkSession
import click

@click.command()
@click.argument("app_name")
@click.option(
    "--limit", "-l", help="max number of rows to print", default=10, required=False
)
@click.option("--verbose", "-v", help="print out result in verbose mode", is_flag=True)
def main(app_name, limit, verbose):
    # Create a Spark session
    spark = SparkSession.builder.appName(app_name).getOrCreate()

    # Load a csv file from dataflow public storage
    df = (
        spark.read.format("csv")
        .option("header", "true")
        .option("multiLine", "true")
        .load(
            "oci://oow_2019_dataflow_lab@bigdatadatasciencelarge/usercontent/kaggle_
            berlin_airbnb_listings_summary.csv"
        )
    )

    # Create a temp view and do some SQL operations
    df.createOrReplaceTempView("berlin")
    query_result_df = spark.sql(
        """
        SELECT
            city,
            zipcode,
            CONCAT(latitude,',', longitude) AS lat_long
        FROM berlin
        """
    ).limit(limit)
```

(continues on next page)

(continued from previous page)

```
# Convert the filtered Spark DataFrame into JSON format
# Note: we are writing to the spark stdout log so that we can retrieve the log later.
↳ at the end of the notebook.
if verbose:
    rows = query_result_df.toJSON().collect()
    for i, row in enumerate(rows):
        print(f"record {i}")
        print(row)

if __name__ == "__main__":
    main()
```

### 13.3.2 ADS CLI

#### Prerequisites

1. *Install ADS CLI*
2. *Configure Defaults*

---

#### Tip

If, for some reason, you are unable to use CLI, instead skip to the [Create, Run Data Flow Application Using ADS Python SDK](#) section below.

Sometimes your code is too complex to run in a single cell, and it's better run as a notebook or file. In that case, use the ADS Opctl CLI.

To submit your notebook to DataFlow using the ads CLI, run:

```
ads opctl run -s <folder where notebook is located> -e <notebook name> -b dataflow
```

---

#### Tip

You can avoid running cells that are not DataFlow environment compatible by tagging the cells and then providing the tag names to ignore. In the following example cells that are tagged `ignore` and `remove` will be ignored - `--exclude-tag ignore --exclude-tag remove`

---

#### Tip

You can run the notebook in your local pyspark environment before submitting to DataFlow using the same CLI with `-b local`

```
# Activate the Pyspark conda environment in local
ads opctl run -s <notebook directory> -e <notebook file> -b local
```

You could submit a notebook using ADS SDK APIs. Here is an example to submit a notebook -

```

from ads.jobs import Job, DataFlow, DataFlowNotebookRuntime

df = (
    DataFlow()
    .with_compartment_id(
        "ocid1.compartment.oc1.<your compartment id>"
    )
    .with_driver_shape("VM.Standard.E4.Flex")
        .with_driver_shape_config(ocpus=2, memory_in_gbs=32)
        .with_executor_shape("VM.Standard.E4.Flex")
        .with_executor_shape_config(ocpus=4, memory_in_gbs=64)
    .with_logs_bucket_uri("oci://mybucket@mytenancy/")
    .with_private_endpoint_id("ocid1.dataflowprivateendpoint.oc1.iad.<your private_
↪endpoint ocid>")
    .with_configuration({
        "spark.driverEnv.myEnvVariable": "value1",
        "spark.executorEnv.myEnvVariable": "value2",
    })
)
rt = (
    DataFlowNotebookRuntime()
    .with_notebook(
        "<path to notebook>"
    ) # This could be local path or http path to notebook ipynb file
    .with_script_bucket("<my-bucket>")
    .with_exclude_tag(["ignore", "remove"]) # Cells to Ignore
)
job = Job(infrastructure=df, runtime=rt).create(overwrite=True)
df_run = job.run(wait=True)

```

### 13.3.3 ADS Python SDK

To create a Data Flow application using the ADS Python API you need two components:

- DataFlow, a subclass of Infrastructure.
- DataFlowRuntime, a subclass of Runtime.

DataFlow stores properties specific to Data Flow service, such as compartment\_id, logs\_bucket\_uri, and so on. You can set them using the with\_{property} functions:

- with\_compartment\_id
- with\_configuration
- with\_driver\_shape
- with\_driver\_shape\_config
- with\_executor\_shape
- with\_executor\_shape\_config
- with\_language
- with\_logs\_bucket\_uri
- with\_metastore\_id(doc)

- `with_num_executors`
- `with_spark_version`
- `with_warehouse_bucket_uri`
- `with_private_endpoint_id` ([doc](#))

For more details, see [DataFlow class documentation](#).

DataFlowRuntime stores properties related to the script to be run, such as the path to the script and CLI arguments. Likewise all properties can be set using `with_{property}`. The DataFlowRuntime properties are:

- `with_script_uri`
- `with_script_bucket`
- `with_archive_uri` ([doc](#))
- `with_archive_bucket`
- `with_custom_conda`
- `with_configuration`

For more details, see the [runtime class documentation](#).

Since service configurations remain mostly unchanged across multiple experiments, a DataFlow object can be reused and combined with various DataFlowRuntime parameters to create applications.

In the following “hello-world” example, DataFlow is populated with `compartment_id`, `driver_shape`, `driver_shape_config`, `executor_shape`, `executor_shape_config` and `spark_version`. DataFlowRuntime is populated with `script_uri` and `script_bucket`. The `script_uri` specifies the path to the script. It can be local or remote (an Object Storage path). If the path is local, then `script_bucket` must be specified additionally because Data Flow requires a script to be available in Object Storage. ADS performs the upload step for you, as long as you give the bucket name or the Object Storage path prefix to upload the script. Either can be given to `script_bucket`. For example, either `with_script_bucket("<bucket_name>")` or `with_script_bucket("oci://<bucket_name>@<namespace>/<prefix>")` is accepted. In the next example, the prefix is given for `script_bucket`.

```
from ads.jobs import DataFlow, Job, DataFlowRuntime
from uuid import uuid4
import os
import tempfile

with tempfile.TemporaryDirectory() as td:
    with open(os.path.join(td, "script.py"), "w") as f:
        f.write(
            """
import pyspark

def main():
    print("Hello World")
    print("Spark version is", pyspark.__version__)

if __name__ == "__main__":
    main()
            """
        )
    name = f"dataflow-app-{str(uuid4())}"
```

(continues on next page)

(continued from previous page)

```

dataflow_configs = (
    DataFlow()
    .with_compartment_id("oci.xx.<compartment_id>")
    .with_logs_bucket_uri("oci://mybucket@mynamespace/dflogs")
    .with_driver_shape("VM.Standard.E4.Flex")
        .with_driver_shape_config(ocpus=2, memory_in_gbs=32)
        .with_executor_shape("VM.Standard.E4.Flex")
        .with_executor_shape_config(ocpus=4, memory_in_gbs=64)
    .with_spark_version("3.0.2")
)
runtime_config = (
    DataFlowRuntime()
    .with_script_uri(os.path.join(td, "script.py"))
    .with_script_bucket("oci://mybucket@namespace/prefix")
    .with_custom_conda("oci://<mybucket>@<mynamespace>/<path/to/conda_pack>")
    .with_configuration({
        "spark.driverEnv.myEnvVariable": "value1",
        "spark.executorEnv.myEnvVariable": "value2",
    })
)
df = Job(name=name, infrastructure=dataflow_configs, runtime=runtime_config)
df.create()

```

To run this application, you could use:

```
df_run = df.run()
```

After the run completes, check the stdout log from the application by running:

```
print(df_run.logs.application.stdout)
```

You should this in the log:

```

Hello World
Spark version is 3.0.2

```

### Note on Policy

```
ALLOW SERVICE dataflow TO READ objects IN tenancy WHERE target.bucket.name='dataflow-logs'
```

Data Flow supports adding third-party libraries using a ZIP file, usually called `archive.zip`, see the [Data Flow documentation](#) about how to create ZIP files. Similar to scripts, you can specify an archive ZIP for a Data Flow application using `with_archive_uri`. In the next example, `archive_uri` is given as an Object Storage location. `archive_uri` can also be local so you must specify `with_archive_bucket` and follow the same rule as `with_script_bucket`.

```

from ads.jobs import DataFlow, DataFlowRun, DataFlowRuntime, Job
from uuid import uuid4
import tempfile
import os

with tempfile.TemporaryDirectory() as td:
    with open(os.path.join(td, "script.py"), "w") as f:

```

(continues on next page)

(continued from previous page)

```

        f.write(
            """
from pyspark.sql import SparkSession
import click

@click.command()
@click.argument("app_name")
@click.option(
    "--limit", "-l", help="max number of row to print", default=10, required=False
)
@click.option("--verbose", "-v", help="print out result in verbose mode", is_flag=True)
def main(app_name, limit, verbose):
    # Create a Spark session
    spark = SparkSession.builder.appName(app_name).getOrCreate()

    # Load a csv file from dataflow public storage
    df = (
        spark.read.format("csv")
        .option("header", "true")
        .option("multiLine", "true")
        .load(
            "oci://oow_2019_dataflow_lab@bigdatadatasciencelarge/usercontent/kaggle_
↪berlin_airbnb_listings_summary.csv"
        )
    )

    # Create a temp view and do some SQL operations
    df.createOrReplaceTempView("berlin")
    query_result_df = spark.sql(
        """
        SELECT
            city,
            zipcode,
            CONCAT(latitude,',', longitude) AS lat_long
        FROM berlin
        """
    ).limit(limit)

    # Convert the filtered Spark DataFrame into JSON format
    # Note: we are writing to the spark stdout log so that we can retrieve the log later.
↪at the end of the notebook.
    if verbose:
        rows = query_result_df.toJSON().collect()
        for i, row in enumerate(rows):
            print(f"record {i}")
            print(row)

if __name__ == "__main__":
    main()
            """

```

(continues on next page)



(continued from previous page)

```

    )

    name = f"dataflow-app-{str(uuid4())}"
    dataflow_configs = (
        DataFlow()
        .with_compartment_id("oci1.xxx.<compartment_ocid>")
        .with_logs_bucket_uri("oci://mybucket@mynamespace/prefix")
        .with_driver_shape("VM.Standard.E4.Flex")
            .with_driver_shape_config(ocpus=2, memory_in_gbs=32)
            .with_executor_shape("VM.Standard.E4.Flex")
            .with_executor_shape_config(ocpus=4, memory_in_gbs=64)
        .with_spark_version("3.0.2")
        .with_configuration({
            "spark.driverEnv.myEnvVariable": "value1",
            "spark.executorEnv.myEnvVariable": "value2",
        })
    )
    runtime_config = (
        DataFlowRuntime()
        .with_script_uri(os.path.join(td, "script.py"))
        .with_script_bucket("oci://<bucket>@<namespace>/prefix/path")
        .with_archive_uri("oci://<bucket>@<namespace>/prefix/archive.zip")
        .with_custom_conda(uri="oci://<mybucket>@<mynamespace>/<my-conda-uri>")
    )
    df = Job(name=name, infrastructure=dataflow_configs, runtime=runtime_config)
    df.create()

```

You can pass arguments to a Data Flow run as a list of strings:

```
df_run = df.run(args=["run-test", "-v", "-l", "5"])
```

You can save the application specification into a YAML file for future reuse. You could also use the json format.

```
print(df.to_yaml("sample-df.yaml"))
```

You can also load a Data Flow application directly from the YAML file saved in the previous example:

```
df2 = Job.from_yaml(uri="sample-df.yaml")
```

Creating a new job and a run:

```
df_run2 = df2.create().run()
```

Deleting a job cancels associated runs:

```
df2.delete()
df_run2.status
```

You can also load a Data Flow application from an OCID:

```
df3 = Job.from_dataflow_job(df.id)
```

Creating a run under the same application:

```
df_run3 = df3.run()
```

Now there are 2 runs under the df application:

```
assert len(df.run_list()) == 2
```

When you run a Data Flow application, a `DataFlowRun` object is created. You can check the status, wait for a run to finish, check its logs afterwards, or cancel a run in progress. For example:

```
df_run.status
df_run.wait()
```

`watch` is an alias of `wait`, so you can also call `df_run.watch()`.

There are three types of logs for a run:

- application log
- driver log
- executor log

Each log consists of `stdout` and `stderr`. For example, to access `stdout` from application log, you could use:

```
df_run.logs.application.stdout
```

Then you could check it with:

```
df_run.logs.application.stderr
df_run.logs.executor.stdout
df_run.logs.executor.stderr
```

You can also examine `head` or `tail` of the log, or download it to a local path. For example,

```
log = df_run.logs.application.stdout
log.head(n=1)
log.tail(n=1)
log.download(<local-path>)
```

For the sample script, the log prints first five rows of a sample dataframe in JSON and it looks like:

```
record 0
{"city":"Berlin","zipcode":"10119","lat_long":"52.53453732241747,13.402556926822387"}
record 1
{"city":"Berlin","zipcode":"10437","lat_long":"52.54851279221664,13.404552826587466"}
record 2
{"city":"Berlin","zipcode":"10405","lat_long":"52.534996191586714,13.417578665333295"}
record 3
{"city":"Berlin","zipcode":"10777","lat_long":"52.498854933130026,13.34906453348717"}
record 4
{"city":"Berlin","zipcode":"10437","lat_long":"52.5431572633131,13.415091104515707"}
```

Calling `log.head(n=1)` returns this:

```
'record 0'
```

Calling `log.tail(n=1)` returns this:

```
{"city":"Berlin","zipcode":"10437","lat_long":"52.5431572633131,13.415091104515707"}
```

A link to run the page in the OCI Console is given using the `run_details_link` property:

```
df_run.run_details_link
```

To list Data Flow applications, a compartment id must be given with any optional filtering criteria. For example, you can filter by name of the application:

```
Job.dataflow_job(compartment_id=compartment_id, display_name=name)
```

### 13.3.3.1 YAML

You can create a Data Flow job directly from a YAML string. You can pass a YAML string into the `Job.from_yaml()` function to build a Data Flow job:

```
kind: job
spec:
  id: <dataflow_app_ocid>
  infrastructure:
    kind: infrastructure
    spec:
      compartmentId: <compartment_id>
      driverShape: VM.Standard.E4.Flex
      driverShapeConfig:
        ocpus: 2
        memory_in_gbs: 32
      executorShape: VM.Standard.E4.Flex
      executorShapeConfig:
        ocpus: 4
        memory_in_gbs: 64
      id: <dataflow_app_ocid>
      language: PYTHON
      logsBucketUri: <logs_bucket_uri>
      numExecutors: 1
      sparkVersion: 3.2.1
      privateEndpointId: <private_endpoint_ocid>
      type: dataFlow
  name: dataflow_app_name
  runtime:
    kind: runtime
    spec:
      configuration:
        spark.driverEnv.myEnvVariable: value1
        spark.executorEnv.myEnvVariable: value2
      scriptBucket: bucket_name
      scriptPathURI: oci://<bucket_name>@<namespace>/<prefix>
      type: dataFlow
```

#### Data Flow Infrastructure YAML Schema

```
kind:
  allowed:
    - infrastructure
  required: true
  type: string
spec:
  required: true
  type: dict
  schema:
    compartmentId:
      required: false
      type: string
    displayName:
      required: false
      type: string
    driverShape:
      required: false
      type: string
    driverShapeConfig:
      required: false
      type: dict
      schema:
        ocpus:
          required: true
          type: float
        memory_in_gbs:
          required: true
          type: float
    executorShape:
      required: false
      type: string
    executorShapeConfig:
      required: false
      type: dict
      schema:
        ocpus:
          required: true
          type: float
        memory_in_gbs:
          required: true
          type: float
    id:
      required: false
      type: string
    language:
      required: false
      type: string
    logsBucketUri:
      required: false
      type: string
    metastoreId:
      required: false
      type: string
```

(continues on next page)

(continued from previous page)

```

    numExecutors:
      required: false
      type: integer
    sparkVersion:
      required: false
      type: string
    privateEndpointId:
      required: false
      type: string
    configuration:
      required: false
      type: dict
  type:
    allowed:
      - dataFlow
    required: true
    type: string

```

#### Data Flow Runtime YAML Schema

```

kind:
  allowed:
    - runtime
  required: true
  type: string
spec:
  required: true
  type: dict
  schema:
    archiveBucket:
      required: false
      type: string
    archiveUri:
      required: false
      type: string
    args:
      nullable: true
      required: false
      schema:
        type: string
      type: list
    conda:
      nullable: false
      required: false
      type: dict
      schema:
        slug:
          required: true
          type: string
        type:
          allowed:
            - service

```

(continues on next page)

(continued from previous page)

```

        required: true
        type: string
    configuration:
        required: false
        type: dict
    freeform_tag:
        required: false
        type: dict
    scriptBucket:
        required: false
        type: string
    scriptPathURI:
        required: false
        type: string
type:
    allowed:
        - dataFlow
    required: true
    type: string

```

## 13.4 spark-defaults.conf

The `spark-defaults.conf` file is used to define the properties that are used by Spark. This file can be configured manually or with the aid of the `odsc` command-line tool. The best practice is to use the `odsc data-catalog config` command-line tool when you want to connect to Data Catalog. It gathers information about your environment and uses that to build the file.

The `odsc data-catalog config` command-line tool uses the `--metastore` option to define the Data Catalog Meta-store OCID. There are no required command-line options. Default values are used or values are taken from your notebook session environment and OCI configuration file. Below is a discussion of common parameters that you may need to override.

The `--authentication` option sets the authentication mode. It supports resource principal and API keys. The preferred method for authentication is resource principal and this is sent with `--authentication resource_principal`. If you want to use API keys then use the option `--authentication api_key`. If the `--authentication` is not specified, API keys will be used. When API keys are used, information from the OCI configuration file is used to create the `spark-defaults.conf` file.

The Object Storage and Data Catalog are regional services. By default, the region is set to the region that your notebook session is in. This information is taken from the environment variable `NB_REGION`. Use the `--region` option to override this behavior.

The default location of the `spark-defaults.conf` file is in the `~/spark_conf_dir` directory, as defined in the `SPARK_CONF_DIR` environment variable. Use the `--output` option to define the directory where the file is to be written.

### 13.4.1 odsc Command-line

The `odsc data-catalog config` command-line tool is ideal for setting up the `spark-defaults.conf` file as it gathers information about your environment and uses that to build the file.

You will need to determine what settings are appropriate for your configuration. However, the following will work for most configurations.

```
odsc data-catalog config --authentication resource_principal
```

If the option `--authentication api_key` is used, it will extract information from the OCI configuration file that is stored in `~/.oci/config`. Use the `--config` option to change the path and the `--profile` option to specify what OCI configuration profile will be used. The default profile is `DEFAULT`.

A default Data Catalog Metastore OCID can be set using the `--metastore` option. This value can be overridden at run-time.

```
odsc data-catalog config --authentication resource_principal --metastore <metastore_id>
```

The `<metastore_id>` must be replaced with the OCID for the Data Catalog Metastore that is to be used.

For details on the command-line option use the command:

```
odsc data-catalog config --help
```

### 13.4.2 Manual

The `odsc` command-line tool is the preferred method for configuring the `spark-defaults.conf` file. However, if you are not in a notebook session or if you have special requirements, you may need to manually configure the file. This section will guide you through the steps.

When a Data Science Conda environment is installed, it includes a template of the `spark-defaults.conf` file. The following sections provide guidance to make the required changes.

These parameters define the Object Storage address that backs the Data Catalog entry. This is the location of the data warehouse. You also need to define the address of the Data Catalog Metastore.

- `spark.hadoop.fs.oci.client.hostname`: Address of Object Storage for the data warehouse. For example, `https://objectstorage.us-ashburn-1.oraclecloud.com`. Replace `us-ashburn-1` with the region you are in.
- `spark.hadoop.oci.metastore.uris`: The address of Data Catalog Metastore. For example, `https://datacatalog.us-ashburn-1.oci.oraclecloud.com/`. Replace `us-ashburn-1` with the region you are in.

You can set a default metastore with the following parameter. This can be overridden at run time. Setting it is optional.

- `spark.hadoop.oracle.dcat.metastore.id`: The OCID of Data Catalog Metastore. For example, `ocid1.datacatalogmetastore...<unique_id>`

Depending on the authentication method that is to be used there are additional parameters that need to be set. See the following sections for guidance.

### 13.4.2.1 Resource Principal

Update the `spark-defaults.conf` file parameters to use resource principal to authenticate:

- `spark.hadoop.fs.oci.client.custom.authenticator`: Set the value to `com.oracle.bmc.hdfs.auth.ResourcePrincipalsCustomAuthenticator`.
- `spark.hadoop.oracle.dcat.metastore.client.custom.authentication_provider`: Set the value to `com.oracle.bmc.hdfs.auth.ResourcePrincipalsCustomAuthenticator`.

### 13.4.2.2 API Keys

Update the `spark-defaults.conf` file parameters to use API keys to authenticate:

- `spark.hadoop.OCI_FINGERPRINT_METADATA`: Fingerprint for the key pair being used.
- `spark.hadoop.OCI_PASSPHRASE_METADATA`: Passphrase used for the key if it is encrypted.
- `spark.hadoop.OCI_PVT_KEY_FILE_PATH`: The full path and file name of the private key used for authentication.
- `spark.hadoop.OCI_REGION_METADATA`: An Oracle Cloud Infrastructure region. Example: `us-ashburn-1`
- `spark.hadoop.OCI_USER_METADATA`: Your user OCID.
- `spark.hadoop.fs.oci.client.auth.fingerprint`: Fingerprint for the key pair being used.
- `spark.hadoop.fs.oci.client.auth.passphrase`: Passphrase used for the key if it is encrypted.
- `spark.hadoop.fs.oci.client.auth.pemfilepath`: The full path and file name of the private key used for authentication.
- `spark.hadoop.fs.oci.client.auth.tenantId`: OCID of your tenancy.
- `spark.hadoop.fs.oci.client.auth.userId`: Your user OCID.
- `spark.hadoop.fs.oci.client.custom.authenticator`: Set the value to `com.oracle.pic.dcat.metastore.common.auth.provider.UserPrincipalsCustomAuthenticationDetailsProvider`
- `spark.hadoop.spark.hadoop.OCI_TENANT_METADATA`: OCID of your tenancy.

The values of these parameters are found in the OCI configuration file.

## 13.5 Data Catalog Metastore

This section demonstrates how to configure the `spark-defaults.conf` file so that you can connect with the Oracle Cloud Infrastructure (OCI) [Data Catalog Metastore](#). This connection is used to run a [PySpark](#) application using OCI [Data Flow](#) and [Data Science Jobs](#). The data will be stored in OCI [Object Storage](#). Thus, you will work with data that is stored in Object Storage, information about the location and structure of that data will be managed by Data Catalog Metastore, compute will be provided by Data Flow and all of this will be run in a Job.

OCI [Data Catalog](#) is a metadata management service that helps data professionals discover data and support data governance. The [Data Catalog Metastore](#) provides schema definitions for objects in structured and unstructured data assets that reside in Object Storage. Use the metastore as a central metadata repository to manage data tables that are backed by files in Object Storage.

OCI [Data Flow](#) is a fully managed [Apache Spark](#) service. This section demonstrates how to use PySpark to create Spark applications.

[Data Science Jobs](#) allows you to run customized tasks outside of a notebook session. A Job is a template that describes a task that you want to perform. In this section, that task is to run a PySpark application using Data Flow. Since the



Job is run outside of a notebook, command-line arguments can be passed to the Job such that it performs customized activities. [OCI Logging](#) is used to capture events. You can also read and write data to Object Storage directly or with the aid of Data Catalog.

Data Flow can access the Data Catalog Metastore to securely store and retrieve schema definitions for unstructured and structured data assets in Object Storage. For integration with Data Flow, the metastore provides an invocation endpoint. This endpoint is a Hive Metastore interface.

[Apache Hive](#) is a data warehousing framework that facilitates read, write, or manage operations on large datasets residing in distributed file systems. The Data Catalog Metastore is backed by the Apache Hive Metastore. A Hive Metastore is the central repository of metadata for a Hive cluster. It stores metadata for data structures such as databases, tables, and partitions in a relational database, backed by files maintained in Object Storage. [Apache Spark SQL](#) makes use of a Hive Metastore for this purpose.

### 13.5.1 Prerequisite

To access the data in the Data Catalog or work with Data Flow, there are a number of steps that need to be completed.

To configure Data Flow you will need to:

- DataFlow requires a bucket to store the logs, and a data warehouse bucket. Refer to the Data Flow documentation for [setting up storage](#).
- DataFlow requires policies to be set in IAM to access resources to manage and run applications/sessions. Refer to the Data Flow documentation on how to [setup policies](#).
- DataFlow natively supports conda packs published to OCI Object Storage. Ensure the Data Flow Resource has read access to the bucket or path of your published conda pack, and that the spark version  $\geq 3$  when running your Data Flow Application/Session.
- The `core-site.xml` file needs to be configured.

To configure Data Catalog you will need to:

- Data Catalog requires policies to be set in IAM. Refer to the Data Catalog documentation on how to [setup policies](#).
- The `spark-defaults.conf` file needs to be configured.

### 13.5.2 Quick Start

#### 13.5.2.1 Data Flow

```
from ads.jobs import DataFlow, DataFlowRun, DataFlowRuntime

# Update these values
job_name = "<job_name>"
logs_bucket = "oci://<bucket_name>@<namespace>/<prefix>"
metastore_id = "<metastore_id>"
script_bucket = "oci://<bucket_name>@<namespace>/<prefix>"

compartment_id = os.environ.get("NB_SESSION_COMPARTMENT_OCID")
driver_shape = "VM.Standard.E4.Flex"
driver_shape_config = {"ocpus":2, "memory_in_gbs":32}
executor_shape = "VM.Standard.E4.Flex"
executor_shape_config = {"ocpus":4, "memory_in_gbs":64}
spark_version = "3.2.1"
```

(continues on next page)

(continued from previous page)

```

# A python script to be run in Data Flow
script = '''
from pyspark.sql import SparkSession

def main():

    database_name = "employee_attrition"
    table_name = "orcl_attrition"

    # Create a Spark session
    spark = SparkSession \\\
        .builder \\\
        .appName("Python Spark SQL basic example") \\\
        .enableHiveSupport() \\\
        .getOrCreate()

    # Load a CSV file from a public Object Storage bucket
    df = spark \\\
        .read \\\
        .format("csv") \\\
        .option("header", "true") \\\
        .option("multiLine", "true") \\\
        .load("oci://hosted-ds-datasets@bigdatadatasciencelarge/synthetic/orcl_attrition.
↪ csv")

    print(f"Creating {database_name}")
    spark.sql(f"DROP DATABASE IF EXISTS {database_name} CASCADE")
    spark.sql(f"CREATE DATABASE IF NOT EXISTS {database_name}")

    # Write the data to the database
    df.write.mode("overwrite").saveAsTable(f"{database_name}.{table_name}")

    # Use Spark SQL to read from the database.
    query_result_df = spark.sql(f"""
        SELECT EducationField, SalaryLevel, JobRole FROM
↪ {database_name}.{table_name} limit 10
        """)

    # Convert the filtered Apache Spark DataFrame into JSON format and write it out to
↪ stdout
    # so that it can be captured in the log.
    print('\n'.join(query_result_df.toJSON().collect()))

if __name__ == '__main__':
    main()
'''

# Saves the python script to local path.
dataflow_base_folder = tempfile.mkdtemp()
script_uri = os.path.join(dataflow_base_folder, "example.py")

```

(continues on next page)

(continued from previous page)

```

with open(script_uri, 'w') as f:
    print(script.strip(), file=f)

dataflow_configs = DataFlow(
    {
        "compartment_id": compartment_id,
        "driver_shape": driver_shape,
        "driver_shape_config": driver_shape_config,
        "executor_shape": executor_shape,
        "executor_shape_config": executor_shape_config,
        "logs_bucket_uri": log_bucket_uri,
        "metastore_id": metastore_id,
        "spark_version": spark_version
    }
)

runtime_config = DataFlowRuntime(
    {
        "script_uri": pyspark_file_path,
        "script_bucket": script_uri
    }
)

# creates a Data Flow application with DataFlow and DataFlowRuntime.
df_job = Job(name=job_name,
             infrastructure=dataflow_configs,
             runtime=runtime_config)
df_app = df_job.create()
df_run = df_app.run()

# check a job log
df_run.watch()

```

### 13.5.2.2 Interactive Spark

```

from pyspark.sql import SparkSession

# Update these values
warehouse_uri = "<warehouse_uri>"
metastore_id = "<metastore_id>"

database_name = "ODSC_DEMO"
table_name = "ODSC_PYSPARK_METASTORE_DEMO"

# create a spark session
spark = SparkSession \
    .builder \
    .appName("Python Spark SQL Hive integration example") \
    .config("spark.sql.warehouse.dir", warehouse_uri) \
    .config("spark.hadoop.oracle.dcat.metastore.id", metastore_id) \

```

(continues on next page)

(continued from previous page)

```

        .enableHiveSupport() \
        .getOrCreate()
spark.sparkContext.setLogLevel("ERROR")

# show the databases in the warehouse:
spark.sql("SHOW DATABASES").show()
spark.sql(f"DROP DATABASE IF EXISTS {database_name} CASCADE")
spark.sql(f"CREATE DATABASE {database_name}")

# Load the Employee Attrition data file from OCI Object Storage into a Spark DataFrame:
file_path = "oci://hosted-ds-datasets@bigdatadatasciencelarge/synthetic/orcl_attrition.
↳ csv"
input_dataframe = spark.read.option("header", "true").csv(file_path)
input_dataframe.write.mode("overwrite").saveAsTable(f"{database_name}.{table_name}")

# explore data
spark_df = spark.sql(f"""
                        SELECT EducationField, SalaryLevel, JobRole FROM {database_name}.
↳ {table_name} limit 10
                        """)
spark_df.show()

```

### 13.5.3 Data Flow

This example demonstrates how to create a Data Flow application that is connected to the Data Catalog Metastore. It creates a PySpark script, then a Data Flow application. This application can be run by directly by Data Flow or as part of a Job.

This section runs Hive queries using Data Flow. When the Data Catalog is being used the only changes that need to be made are to provide the metastore OCID.

#### 13.5.3.1 PySpark Script

A PySpark script is needed for the Data Flow application. The following code creates that script. The script will use Spark to load a CSV file from a public Object Storage bucket. It will then create a database and write the file to Object Storage. Finally, it will use Spark SQL to query the database and print the records in JSON format.

There is nothing in the PySpark script that is specific to using Data Catalog Metastore. The script treats the database as a standard Hive database.

```

script = '''
from pyspark.sql import SparkSession

def main():

    database_name = "employee_attrition"
    table_name = "orcl_attrition"

    # Create a Spark session
    spark = SparkSession \
        .builder \

```

(continues on next page)

(continued from previous page)

```

        .appName("Python Spark SQL basic example") \\\
        .enableHiveSupport() \\\
        .getOrCreate()

# Load a CSV file from a public Object Storage bucket
df = spark \\\
    .read \\\
    .format("csv") \\\
    .option("header", "true") \\\
    .option("multiLine", "true") \\\
    .load("oci://hosted-ds-datasets@bigdatadatasciencelarge/synthetic/orcl_attrition.
↪csv")

print(f"Creating {database_name}")
spark.sql(f"DROP DATABASE IF EXISTS {database_name} CASCADE")
spark.sql(f"CREATE DATABASE IF NOT EXISTS {database_name}")

# Write the data to the database
df.write.mode("overwrite").saveAsTable(f"{database_name}.{table_name}")

# Use Spark SQL to read from the database.
query_result_df = spark.sql(f"""
    SELECT EducationField, SalaryLevel, JobRole FROM
↪{database_name}.{table_name} limit 10
    """)

# Convert the filtered Apache Spark DataFrame into JSON format and write it out to
↪stdout
# so that it can be captured in the log.
print('\n'.join(query_result_df.toJSON().collect()))

if __name__ == '__main__':
    main()
'''

# Save the PySpark script to a file
dataflow_base_folder = tempfile.mkdtemp()
script_uri = os.path.join(dataflow_base_folder, "example.py")

with open(script_uri, 'w') as f:
    print(script.strip(), file=f)

```

### 13.5.3.2 Create Application

To create a Data Flow application you will need `DataFlow` and `DataFlowRuntime` objects. A `DataFlow` object stores the properties that are specific to the Data Flow service. These would be things such as the compartment OCID, the URI to the Object Storage bucket for the logs, the type of hardware to be used, the version of Spark, and much more. If you are using a Data Catalog Metastore to manage a database, the metastore OCID is stored in this object. The `DataFlowRuntime` object stores properties related to the script to be run. This would be the bucket to be used for the script, the location of the PySpark script, and any command-line arguments.

Update the `script_bucket`, `log_bucket`, and `metastore_id` variables to match your tenancy's configuration.

```
# Update values
log_bucket_uri = "oci://<bucket_name>@<namespace>/<prefix>"
metastore_id = "<metastore_id>"
script_bucket = "oci://<bucket_name>@<namespace>/<prefix>"

compartment_id = os.environ.get("NB_SESSION_COMPARTMENT_OCID")
driver_shape = "VM.Standard.E4.Flex"
driver_shape_config = {"ocpus":2, "memory_in_gbs":32}
executor_shape = "VM.Standard.E4.Flex"
executor_shape_config = {"ocpus":4, "memory_in_gbs":64}
spark_version = "3.2.1"
```

In the following example, a `DataFlow` is created and populated with the information that it needs to define the Data Flow service. Since, we are connecting to the Data Catalog Metastore to work with a Hive database, the metastore OCID must be given.

```
from ads.jobs import DataFlow, DataFlowRun, DataFlowRuntime

dataflow_configs = DataFlow(
    {"compartment_id": compartment_id,
     "driver_shape": driver_shape,
     "driver_shape_config": driver_shape_config,
     "executor_shape": executor_shape,
     "executor_shape_config": executor_shape_config,
     "logs_bucket_uri": log_bucket_uri,
     "metastore_id": metastore_id,
     "spark_version": spark_version}
)
```

In the following example, a `DataFlowRuntime` is created and populated with the URI to the PySpark script and the URI for the script bucket. The script URI specifies the path to the script. It can be local or remote (an Object Storage path). If the path is local, then a URI to the script bucket must also be specified. This is because Data Flow requires a script to be in Object Storage. If the specified path to the PySpark script is on a local drive, ADS will upload it for you.

```
runtime_config = DataFlowRuntime(
    {
        "script_bucket": script_uri
        "script_uri": pyspark_file_path,
    }
)
```

### 13.5.3.3 Run

The recommended approach for running Data Flow applications is to use a Job. This will prevent your notebook from being blocked.

A Job requires a name, infrastructure, and runtime settings. Update the following code to give the job a unique name. The infrastructure takes a DataFlow object and the runtime parameter takes a DataFlowRuntime object.

```
# Update values
job_name = "<job_name>"

df_job = Job(name=job_name,
              infrastructure=dataflow_configs,
              runtime=runtime_config)
df_app = df_job.create()
df_run = df_app.run()
```

### 13.5.4 Interactive Spark

This section demonstrates how to make connections to the Data Catalog Metastore and Object Storage. It uses Spark to load data from a public Object Storage file and creates a database. The metadata for the database is managed by the Data Catalog Metastore and the data is copied to your data warehouse bucket. Finally, Spark is used to make a Spark SQL query on the database.

Specify the bucket URI that will act as the data warehouse. Use the `warehouse_uri` variable and it should have the following format `oci://<bucket_name>@<namespace_name>/<prefix>`. Update the variable `metastore_id` with the OCID of the Data Catalog Metastore.

Create a Spark session that connects to the Data Catalog Metastore and the Object Storage that will act as the data warehouse.

```
from pyspark.sql import SparkSession

warehouse_uri = "<warehouse_uri>"
metastore_id = "<metastore_id>"

spark = SparkSession \
    .builder \
    .appName("Python Spark SQL Hive integration example") \
    .config("spark.sql.warehouse.dir", warehouse_uri) \
    .config("spark.hadoop.oracle.dcat.metastore.id", metastore_id) \
    .enableHiveSupport() \
    .getOrCreate()
spark.sparkContext.setLogLevel("ERROR")
```

Load a data file from Object Storage into a Spark DataFrame. Create a database in the Data Catalog Metastore and then save the dataframe as a table. This will write the files to the location specified by the `warehouse_uri` variable.

```
database_name = "ODSC_DEMO"
table_name = "ODSC_PYSPARK_METASTORE_DEMO"
file_path = "oci://hosted-ds-datasets@bigdatadatasciencelarge/synthetic/orcl_attrition.
↳ csv"

input_dataframe = spark.read.option("header", "true").csv(file_path)
```

(continues on next page)

(continued from previous page)

```
spark.sql(f"DROP DATABASE IF EXISTS {database_name} CASCADE")
spark.sql(f"CREATE DATABASE {database_name}")
input_dataframe.write.mode("overwrite").saveAsTable(f"{database_name}.{table_name}")
```

Use Spark SQL to read from the database.

```
spark_df = spark.sql(f"""
                    SELECT EducationField, SalaryLevel, JobRole FROM {database_name}.
↪{table_name} limit 10
                    """)
spark_df.show()
```

## 13.6 OCI Data Flow Studio

This section demonstrates how to run interactive Spark workloads on a long lasting [Oracle Cloud Infrastructure Data Flow](#) cluster through [Apache Livy](#) integration.

**Data Flow Studio allows you to:**

- Run Spark code against a Data Flow remote Spark cluster
- Create a Data Flow Spark session with SparkContext and HiveContext against a Data Flow remote Spark cluster
- Capture the output of Spark queries as a local Pandas data frame to interact easily with other Python libraries (e.g. matplotlib)

**Key Features & Benefits:**

- Data Flow sessions support auto-scaling Data Flow cluster capabilities
- Data Flow sessions support the use of conda environments as customizable Spark runtime environments

**Limitations:**

- Data Flow sessions can last up to 7 days or 10,080 mins (maxDurationInMinutes).
- Data Flow Sessions can only be accessed through OCI Data Science Notebook Sessions.
- Not all SparkMagic commands are currently supported. To see the full list, run the `%help` command in a notebook cell.

**Notebook Examples:**

- [Introduction to the Oracle Cloud Infrastructure Data Flow Studio](#)
- [Spark NLP within Oracle Cloud Infrastructure Data Flow Studio](#)

### 13.6.1 Prerequisite

Data Flow Sessions are accessible through the following conda environment:

- PySpark 3.2 and Data Flow 2.0 (pyspark32\_p38\_cpu\_v2)

You can customize `pyspark32_p38_cpu_v1`, publish it, and use it as a runtime environment for a Data Flow Session.



### 13.6.1.1 Policies

Data Flow requires policies to be set in IAM to access resources to manage and run sessions. Refer to the [Data Flow Studio Policies](#) documentation on how to setup policies.

## 13.6.2 Quick Start

```
import ads
ads.set_auth("resource_principal")

%load_ext dataflow.magics

%create_session -l python -c '{\
  "compartmentId": "<compartment_id>",\
  "displayName": "TestDataFlowSession",\
  "sparkVersion": "3.2.1",\
  "driverShape": "VM.Standard.E4.Flex",\
  "executorShape": "VM.Standard.E4.Flex",\
  "numExecutors": 1,\
  "driverShapeConfig": {"ocpus": 1, "memoryInGBs": 16},\
  "executorShapeConfig": {"ocpus": 1, "memoryInGBs": 16},\
  "logsBucketUri" : "oci://<bucket_name>@<namespace>/"}'

%%spark
print(sc.version)
```

### 13.6.3 Data Flow Spark Magic

Data Flow Spark Magic is used for interactively working with remote Spark clusters through Livy, a Spark REST server, in Jupyter notebooks. It is a JupyterLab extension that you need to activate in your notebook.

```
%load_ext dataflow.magics
```

Use the `%help` method to get a list of all the available commands, along with a list of their arguments and example calls.

```
%help
```

---

#### Tip

To access the docstrings of any magic command and figure out what arguments to provide, simply add `?` at the end of the command. For instance: `%create_session?`

---

### 13.6.3.1 Create Session

#### Example command for Flex shapes

To create a new Data Flow cluster session use the `%create_session` magic command.

```
%create_session -l python -c '{\
  "compartmentId": "<compartment_id>",\
  "displayName": "TestDataFlowSession",\
  "sparkVersion": "3.2.1",\
  "driverShape": "VM.Standard.E4.Flex",\
  "executorShape": "VM.Standard.E4.Flex",\
  "numExecutors": 1,\
  "driverShapeConfig": {"ocpus": 1, "memoryInGBs": 16},\
  "executorShapeConfig": {"ocpus": 1, "memoryInGBs": 16},\
  "logsBucketUri" : "oci://<bucket_name>@<namespace>/"}
```

#### Example command for Spark dynamic allocation (aka auto-scaling)

To help you save resources and reduce time on management, Spark [dynamic allocation](#) is now enabled in Data Flow. You can define a Data Flow cluster based on a range of executors, instead of just a fixed number of executors. Spark provides a mechanism to dynamically adjust the resources the application occupies based on the workload. The application might relinquish resources if they are no longer used and request them again later when there is demand.

```
%create_session -l python -c '{\
  "compartmentId": "<compartment_id>",\
  "displayName": "TestDataFlowSession",\
  "sparkVersion": "3.2.1",\
  "driverShape": "VM.Standard.E4.Flex",\
  "executorShape": "VM.Standard.E4.Flex",\
  "numExecutors": 1,\
  "driverShapeConfig": {"ocpus": 1, "memoryInGBs": 16},\
  "executorShapeConfig": {"ocpus": 1, "memoryInGBs": 16},\
  "logsBucketUri" : "oci://<bucket_name>@<namespace>/"\
  "configuration": {\
    "spark.dynamicAllocation.enabled": "true",\
    "spark.dynamicAllocation.shuffleTracking.enabled": "true",\
    "spark.dynamicAllocation.minExecutors": "1",\
    "spark.dynamicAllocation.maxExecutors": "4",\
    "spark.dynamicAllocation.executorIdleTimeout": "60",\
    "spark.dynamicAllocation.schedulerBacklogTimeout": "60",\
    "spark.dataflow.dynamicAllocation.quotaPolicy": "min"}}'
```

#### Example command with third-party libraries

The Data Flow Sessions support [custom dependencies](#) in the form of Python wheels or virtual environments. You might want to make native code or other assets available within your Spark runtime. The dependencies can be attached by using the `archiveUri` attribute.

```
%create_session -l python -c '{\
  "compartmentId": "<compartment_id>",\
  "displayName": "TestDataFlowSession",\
  "sparkVersion": "3.2.1",\
  "driverShape": "VM.Standard.E4.Flex",\
  "executorShape": "VM.Standard.E4.Flex",\
```

(continues on next page)

(continued from previous page)

```
"numExecutors":1,\
"driverShapeConfig":{"ocpus":1,"memoryInGBs":16},\
"executorShapeConfig":{"ocpus":1,"memoryInGBs":16},\
"archiveUri":"oci://<bucket_name>@<namespace>/<zip_archive>\",\
"logsBucketUri" : "oci://<bucket_name>@<namespace>/"}'
```

### Example command with the Data Catalog Hive Metastore

The [Data Catalog Hive Metastore](#) provides schema definitions for objects in structured and unstructured data assets. Use the *metastoreId* to access the Data Catalog Metastore.

```
%create_session -l python -c '{\
  "compartmentId":"<compartment_id>\",\
  "displayName":"TestDataFlowSession",\
  "sparkVersion":"3.2.1",\
  "driverShape":"VM.Standard.E4.Flex",\
  "executorShape":"VM.Standard.E4.Flex",\
  "numExecutors":1,\
  "driverShapeConfig":{"ocpus":1,"memoryInGBs":16},\
  "executorShapeConfig":{"ocpus":1,"memoryInGBs":16},\
  "metastoreId": "<ocid1.datacatalogmetastore...>\",\
  "logsBucketUri" : "oci://<bucket_name>@<namespace>/"}'
```

### Example command with the published conda environment

You can use a published conda environment as a Data Flow runtime environment.

- [Creating a Custom Conda Environment](#)
- [How to create a new conda environment in OCI Data Science](#)
- [Publishing a Conda Environment to an Object Storage Bucket in Your Tenancy](#)

The path to the published conda environment can be copied from the [Environment Explorer](#).

Example path : `oci://<your-bucket>@<your-tenancy-namespace>/conda_environments/cpu/PySpark 3.2 and Data Flow/2.0/pyspark32_p38_cpu_v2#conda`

```
%create_session -l python -c '{\
  "compartmentId":"<compartment_id>\",\
  "displayName":"TestDataFlowSession",\
  "sparkVersion":"3.2.1",\
  "driverShape":"VM.Standard.E4.Flex",\
  "executorShape":"VM.Standard.E4.Flex",\
  "numExecutors":1,\
  "driverShapeConfig":{"ocpus":1,"memoryInGBs":16},\
  "executorShapeConfig":{"ocpus":1,"memoryInGBs":16},\
  "logsBucketUri" : "oci://<bucket_name>@<namespace>/"\
  "configuration":{\
    "spark.archives": "oci://<your-bucket>@<your-tenancy-namespace>/conda_environments/\
    ↪cpu/PySpark 3.2 and Data Flow/2.0/pyspark32_p38_cpu_v2#conda"}'}
```

### 13.6.3.2 Update Session

You can modify the configuration of your running session using the `%update_session` command. For example, Data Flow sessions can last up to 7 days or 10080 mins (168 hours) (**maxDurationInMinutes**) and have default idle timeout value of 480 mins (8 hours)(**idleTimeoutInMinutes**). Only those two can be updated on a running cluster without re-creating the cluster.

```
%update_session -i '{"maxDurationInMinutes": 1440, "idleTimeoutInMinutes": 420}'
```

### 13.6.3.3 Configure Session

The existing session can be reconfigured with the `%configure_session` command. The new configuration will be applied the next time the session is started. Use the force flag `-f` to immediately drop and recreate the running cluster session.

```
%configure_session -f -i '{\n  "driverShape": "VM.Standard.E4.Flex",\n  "executorShape": "VM.Standard.E4.Flex",\n  "numExecutors": 2,\n  "driverShapeConfig": {"ocpus": 1, "memoryInGBs": 16},\n  "executorShapeConfig": {"ocpus": 1, "memoryInGBs": 16}}'
```

### 13.6.3.4 Stop Session

To stop the current session, use the `%stop_session` magic command. You don't need to provide any arguments for this command. The current active cluster will be stopped. All data in memory will be lost.

```
%stop_session
```

### 13.6.3.5 Activate Session

To re-activate the existing session, use the `%activate_session` magic command. The `application_id` can be taken from the console UI.

```
%activate_session -l python -c '{\n  "compartmentId": "<compartment_id>",\n  "displayName": "TestDataFlowSession",\n  "applicationId": "<application_id>"}'
```

### 13.6.3.6 Use Existing Session

To connect to the existing session use the `%use_session` magic command.

```
%use_session -s <application_id>
```

### 13.6.4 Basic Spark Usage Examples

A SparkContext (sc) and HiveContext (sqlContext) are automatically created in the session cluster. The magic commands include the %%spark command to run Spark commands in the cluster. You can access information about the Spark application, define a dataframe where results are to be stored, modify the configuration, and so on.

The %%spark magic command comes with a number of parameters that allow you to interact with the Data Flow Spark cluster. Any cell content that starts with the %%spark command will be executed in the remote Spark cluster.

Check the Spark context version:

```
%%spark
print(sc.version)
```

A toy example of how to use sc in a Data Flow Spark Magic cell:

```
%%spark
numbers = sc.parallelize([4, 3, 2, 1])
print(f"First element of numbers is {numbers.first()}")
print(f"The RDD, numbers, has the following description\n{numbers.toDebugString()}")
```

#### 13.6.4.1 Spark SQL

Using the -c sql option allows you to run Spark SQL commands in a cell. In this section, the [NYC Taxi and Limousine Commission \(TLC\) Data](#) dataset is used. The size of the dataset is around **35GB**.

The next cell reads the dataset into a Spark dataframe, and then saves it as a view used to demonstrate Spark SQL.

Use the -c sql option to run Spark SQL commands in a cell.

The next example demonstrates how a dataset can be created on the fly:

```
%%spark
df_nyc_tlc = spark.read.parquet("oci://hosted-ds-datasets@bigdatadatasciencelarge/nyc_
↳ tlc/201[1,2,3,4,5,6,7,8]/**/data.parquet", header=False, inferSchema=True)
df_nyc_tlc.show()
df_nyc_tlc.createOrReplaceTempView("nyc_tlc")
```

The following cell uses the -c sql option to tell Data Flow Spark Magic that the contents of the cell is SparkSQL. The -o <variable> option takes the results of the Spark SQL operation and stores it in the defined variable. In this case, the df\_people will be a Pandas dataframe that is available to be used in the notebook.

```
%%spark -c sql -o df_nyc_tlc
SELECT vendor_id, passenger_count, trip_distance, payment_type FROM nyc_tlc LIMIT 1000;
```

Check the result:

```
print(type(df_nyc_tlc))
df_nyc_tlc.head()
```

## 13.7 [Legacy]

Deprecated since version v2.6.3: July 2022

ADS can be used to create and run PySpark applications directly from a notebook session.

### 13.7.1 Prerequisite

To access , there are a number of steps that are needed to be completed.

- DataFlow requires a bucket to store the logs, and a data warehouse bucket. Refer to the Data Flow documentation for [setting up storage](#).
- DataFlow requires policies to be set in IAM to access resources to manage and run applications/sessions. Refer to the Data Flow documentation on how to [setup policies](#).
- DataFlow natively supports conda packs published to OCI Object Storage. Ensure the Data Flow Resource has read access to the bucket or path of your published conda pack, and that the spark version  $\geq 3$  when running your Data Flow Application/Session.
- The `core-site.xml` file needs to be configured.

### 13.7.2 Create a Instance

First, you create a DataFlow object instance.

By default, all artifacts are stored using the `dataflow_base_folder` optional argument. By default, all artifacts are stored in `/home/datascience/dataflow`. The `dataflow_base_folder` directory contains multiple subdirectories, each one corresponds to a different application. The name of the subdirectory corresponds to the application name that a random string is added as a suffix. In each application directory, artifacts generated by separate runs are stored in different folders. Each folder is identified by the run display name and the run creation time. All the run specific artifacts including the script, the run configuration, and the run logs are saved in the corresponding run folder.

Also, you can choose to use a specific compartment using the optional `compartment_id` argument when creating the dataflow instance. Otherwise, it uses the **same** compartment as **your notebook session** to create the instance.

```
from ads.dataflow.dataflow import DataFlow
data_flow = DataFlow(
    compartment_id="<compartmentA_OCID>",
    dataflow_base_folder="<my_dataflow_dir>"
)
```

### 13.7.3 Generate a Script Using a Template

We provide simple PySpark or `sparksql` templates for you to get started with . You can use `data_flow.template()` to generate a pre-written template.

We support these templates:

The `standard_pyspark` template is used for standard PySpark jobs.

The `sparksql` template is used for `sparksql` jobs.

```
from ads.dataflow.dataflow import DataFlow
data_flow = DataFlow()
data_flow.template(job_type='standard_pyspark')
```

`data_flow.template()` returns the local path to the script you have generated.

### 13.7.4 Create a Application

The application creation process has two stages, preparation and creation.

In the preparation stage, you prepare the configuration object necessary to create a application. You must provide values for these three parameters:

- `display_name`: The name you give your application.
- `pyspark_file_path`: The local path to your PySpark script.
- `script_bucket`: The bucket used to read/write the PySpark script in Object Storage.

ADS checks that the bucket exists, and that you can write to it from your notebook session. Optionally, you can change values for these parameters:

- `compartment_id`: The OCID of the compartment to create a application. If it's not provided, the same compartment as your dataflow object is used.
- `driver_shape`: The driver shape used to create the application. The default value is "VM.Standard2.4".
- `executor_shape`: The executor shape to create the application. The default value is "VM.Standard2.4".
- `logs_bucket`: The bucket used to store run logs in Object Storage. The default value is "dataflow-logs".
- `num_executors`: The number of executor VMs requested. The default value is 1.

---

**Note:** If you want to use a private bucket as the `logs_bucket`, ensure that you add a corresponding service policy using ``Identity: Policy Set Up <https://docs.cloud.oracle.com/en-us/iaas/data-flow/using/dfs\_getting\_started.htm#policy\_set\_up>``.

---

Then you can use `prepare_app()` to create the configuration object necessary to create the application.

```
from ads.dataflow.dataflow import DataFlow

data_flow = DataFlow()
app_config = data_flow.prepare_app(
    display_name="<app-display-name>",
    script_bucket="<your-script-bucket>" ,
    pyspark_file_path="<your-script-path>"
)
```

After you have the application configured, you can create a application using `create_app`:

```
app = data_flow.create_app(app_config)
```

Your local script is uploaded to the script bucket in this application creation step. Object Storage supports file versioning that creates an object version when the content changes, or the object is deleted. You can enable Object Versioning in your bucket in the OCI Console to prevent overwriting of existing files in Object Storage.

You can create an application with a script file that exists in Object Storage by setting `overwrite_script=True` in `create_app`. Similarly, you can set `overwrite_archive=True` to create an application with an archive file that exists in Object Storage. By default, the `overwrite_script` and `overwrite_archive` options are set to `false`.

```
app = data_flow.create_app(app_config, overwrite_script=True, overwrite_archive=True)
```

You can explore a few attributes of the `DataFlowApp` object.

First, you can look at the configuration of the application.

```
app.config
```

Next, you could get a URL link to the OCI Console Application Details page.

```
app.oci_link
```

### 13.7.4.1 Load an Existing Application

As an alternative to creating applications in ADS, you can load existing applications created elsewhere. These applications must be Python applications. To load an existing applications, you need the application's OCID.

```
existing_app = data_flow.load_app(app_id, target_folder)
```

You can find the `app_id` in the the OCI Console or by listing existing applications.

Optionally, you could assign a value to the parameter `target_folder`. This parameter is the directory you want to store the local artifacts of this application in. If `target_folder` is not provided, then the local artifacts of this application are stored in the `dataflow_base_folder` folder defined by the `dataflow` object instance.

### 13.7.4.2 Listing Applications

From ADS you can list applications, that are returned as a list of dictionaries, with a function to provide the data in a Pandas dataframe. The default sort order is the most recent run first.

For example, to list the most recent five applications use this code:

```
from ads.dataflow.dataflow import DataFlow
data_flow = DataFlow()
data_flow.list_apps().to_dataframe().head(5)
```

### 13.7.4.3 Create a Run

After an application is created or loaded in your notebook session, the next logical step is to execute a run of that application. The process of running (or creating) a run is similar to creating an application.

First, you configure the run using the `prepare_run()` method of the `DataFlowApp` object. You only need to provide a value for the name of your run using `run_display_name`:

```
run_config = app.prepare_run(run_display_name="<run-display-name>")
```

You could use a compartment different from your application to create a run by specifying the `compartment_id` in `prepare_run`. By default, it uses the same compartment as your application to create the run.

Optionally, you can specify the `logs_bucket` to store the logs of your run. By default, the run inherits the `logs_bucket` from the parent application, but you can overwrite that option.



Every time the application launches a run, a local folder representing this run is created. This folder stores all the information including the script, the run configuration, and any logs that are stored in the logs bucket.

Then, you can create a run using the `run_config` generated in the preparation stage. During this process, you can monitor the run while the job is running. You can also pull logs into your local directories by setting, `save_log_to_local=True`.

```
run = app.run(run_config, save_log_to_local=True)
```

The `DataFlowRun` object has some useful attributes similar to the `DataFlowApp` object.

You can check the status of the run with:

```
run.status
```

You can get the configuration file that created this run. The run configuration and the PySpark script used in this run are also saved in the corresponding run directory in your notebook environment.

```
run.config
```

You can get the run directory where the artifacts are stored in your notebook environment with:

```
run.local_dir
```

Similarly, you can get a clickable link to the OCI Console Run Details page with:

```
run.oci_link
```

#### 13.7.4.4 Fetching Logs

After a run has completed, you can examine the logs using ADS. There are two types of logs, `stdout` and `stderr`.

```
run.log_stdout.head()  # show first rows of stdout
run.log_stdout.tail()  # show last lines of stdout

# where the logs are stored on OCI Storage
run.log_stdout.oci_path

# the path to the saved logs in the notebook environment if ``save_log_to_local`` was
# set to ``True`` when you create this run
run.log_stdout.local_path
```

If `save_log_to_local` is set to `False` during `app.run(...)`, you can fetch logs by calling the `fetch_log(...).save()` method on the `DataFlowRun` object with the correct logs type.

```
run.fetch_log("stdout").save()
run.fetch_log("stderr").save()
```

**Note:** Due to a limitation of PySpark (specifically Python applications in Spark), both `stdout` and `stderr` are merged into the `stdout` stream.

#### 13.7.4.5 Edit and Synchronize PySpark Script

The integration with ADS supports the edit-run-edit cycle, so the local PySpark script can be edited, and is automatically synchronized to Object Storage each time the application is run.

obtains the PySpark script from Object Storage

so the local files in the notebook session are not visible to . The `app.run(...)` method compares the content hash of the local file with the remote copy on Object Storage. If any change is detected, the new local version is copied over to the remote. For the first run the synchronization creates the remote file and generates a fully qualified URL with namespace that's required for .

Synchronizing is the default setting in `app.run(...)`. If you don't want the application to sync with the local modified files, you need to include `sync=False` as an argument parameter in `app.run(...)`.

#### 13.7.4.6 Arguments and Parameters

Passing arguments to PySpark scripts is done with the `arguments` value in `prepare_app`. Additional to the arguments supports, is a parameter dictionary that you can use to interpolate arguments. To just pass arguments, the `script_parameter` section may be ignored. However, any key-value pair defined in `script_parameter` can be referenced in arguments using the `${key}` syntax, and the value of that key is passed as the argument value.

```
from ads.dataflow.dataflow import DataFlow

data_flow = DataFlow()
app_config = data_flow.prepare_app(
    display_name,
    script_bucket,
    pyspark_file_path,
    arguments = ['${foo}', 'bar', '-d', '--file', '${filename}'],
    script_parameters={
        'foo': 'val1 val2',
        'filename': 'file1',
    }
)
app = data_flow.create_app(app_config)

run_config = app.prepare_run(run_display_name="test-run")
run = app.run(run_config)
```

---

**Note:** The arguments in the format of `${arg}` are replaced by the value provided in script parameters when passed in, while arguments not in this format are passed into the script verbatim.

---

You can override the values of some or all script parameters in each run by passing different values to `prepare_run()`.

```
run_config = app.prepare_run(run_display_name="test-run", foo='val3')
run = app.run(run_config)
```

### 13.7.4.7 Add Third-Party Libraries

Your PySpark applications might have custom dependencies in the form of Python wheels or virtual environments, see [Adding Third-Party Libraries to Applications](#).

Pass the archive file to your applications with `archive_path` and `archive_bucket` values in `prepare_app`.

- `archive_path`: The local path to archive file.
- `archive_bucket`: The bucket used to read and write the archive file in Object Storage; if not provided, `archive_bucket` will use the bucket for PySpark bucket by default.

Use `prepare_app()` to create the configuration object necessary to create the application.

```
from ads.dataflow.dataflow import DataFlow

data_flow = DataFlow()
app_config = data_flow.prepare_app(
    display_name="<app-display-name>",
    script_bucket="<your-script-bucket>",
    pyspark_file_path="<your-script-path>",
    archive_path="<your-archive-path>",
    archive_bucket="<your-archive-bucket>"
)
```

The behavior of the archive file is very similar to the PySpark script when creating:

- An application, the local archive file is uploaded to the specified bucket Object Storage.
- A run, the latest local archive file is synchronized to the remote file in Object Storage. The `sync` parameter controls this behavior.
- Loading an existing application created with `archive_uri`, the archive file is obtained from Object Storage, and saved in the local directory.

### 13.7.4.8 Fetching PySpark Output

After the application has run and any `stdout` captured in the log file, the PySpark script likely produces some form of output. Usually a PySpark script batch processes something. For example, sampling data, aggregating data, preprocessing data. You can load the resulting output as an `ADSDataset.open()` using the `ocis://` protocol handler.

The only way to get output from PySpark back into the notebook session is to create files in Object Storage that is read into the notebook, or use the `stdout` stream.

Following is a simple example of a PySpark script producing output printed in a portable JSON-L format, though CSV works too. This method, while convenient as an example, is not a recommended for large data.

```
from pyspark.sql import SparkSession

def main():

    # create a spark session
    spark = SparkSession \
        .builder \
        .appName("Python Spark SQL basic example") \
        .getOrCreate()
```

(continues on next page)

(continued from previous page)

```

# load an example csv file from dataflow public storage into DataFrame
original_df = spark\
    .read\
    .format("csv")\
    .option("header", "true")\
    .option("multiLine", "true")\
    .load("oci://oow_2019_dataflow_lab@bigdatadatasciencelarge/usercontent/kaggle_
↳berlin_airbnb_listings_summary.csv")

# the dataframe as a sql view so we can perform SQL on it
original_df.createOrReplaceTempView("berlin")

query_result_df = spark.sql("""
    SELECT
        city,
        zipcode,
        number_of_reviews,
        CONCAT(latitude, ',', longitude) AS lat_long
    FROM
        berlin""")

# Convert the filtered Spark DataFrame into JSON format
# Note: we are writing to the spark stdout log so that we can retrieve the log later.
↳at the end of the notebook.

print('\n'\
    .join(query_result_df\
    .toJSON()\
    .collect()))

if __name__ == '__main__':
    main()

```

After you run the stdout stream (which contains CSV formatted data), it can be interpreted as a string using Pandas.

```

import io
import pandas as pd

# the PySpark script wrote to the log as jsonL, and we read the log back as a pandas.
↳dataframe
df = pd.read_json((str(run.log_stdout)), lines=True)

df.head()

```

### 13.7.5 Example Notebook: Develop Pyspark jobs locally - from local to remote workflows

This notebook provides spark operations for customers by bridging the existing local spark workflows with cloud based capabilities. Data scientists can use their familiar local environments with JupyterLab, and work with remote data and remote clusters simply by selecting a kernel. The operations demonstrated are, how to:

- Use the interactive spark environment and produce a spark script,
- Prepare and create an application,
- Prepare and create a run,
- List existing dataflow applications,
- Retrieve and display the logs,

The purpose of the dataflow module is to provide an efficient and convenient way for you to launch a Spark application, and run Spark jobs. The interactive Spark kernel provides a simple and efficient way to edit and build your Spark script, and easy access to read from an OCI filesystem.

```
import io
import matplotlib.pyplot as plt
import os
from os import path
import pandas as pd
import tempfile
import uuid

from ads.dataflow.dataflow import DataFlow

from pyspark.sql import SparkSession
```

#### Build your PySpark Script Using an Interactive Spark kernel

Set up spark session in your PySpark conda environment:

```
# create a spark session
spark = SparkSession \
    .builder \
    .appName("Python Spark SQL basic example") \
    .config("spark.driver.cores", "4") \
    .config("spark.executor.cores", "4") \
    .getOrCreate()
```

Load the Employee Attrition data file from OCI Object Storage into a Spark DataFrame:

```
emp_attrition = spark\
    .read\
    .format("csv")\
    .option("header", "true")\
    .option("inferSchema", "true")\
    .option("multiLine", "true")\
    .load("oci://hosted-ds-datasets@bigdatadatasciencelarge/synthetic/orcl_attrition.\
↪ csv") \
    .cache() # cache the dataset to increase computing speed
emp_attrition.createOrReplaceTempView("emp_attrition")
```

Next, explore the dataframe:

```
spark.sql('select * from emp_attrition limit 5').toPandas()
```

Visualize how monthly income and age relate to one another in the context of years in industry:

```
fig, ax = plt.subplots()
plot = spark.sql("""
    SELECT
        Age,
        MonthlyIncome,
        YearsInIndustry
    FROM
        emp_attrition
""").toPandas().plot.scatter(x="Age", y="MonthlyIncome", title='Age vs Monthly
Income',
                             c="YearsInIndustry", cmap="viridis", figsize=(12,
12), ax=ax)
plot.set_xlabel("Age")
plot.set_ylabel("Monthly Income")
plot
```

```
<AxesSubplot:title={'center':'Age vs Monthly Income'}, xlabel='Age', ylabel='Monthly
Income'>
```

View all of the columns in the table:

```
spark.sql("show columns from emp_attrition").show()
```

```
+-----+
|      col_name|
+-----+
|      Age|
|  Attrition|
|TravelForWork|
|  SalaryLevel|
|  JobFunction|
|  CommuteLength|
|EducationalLevel|
|  EducationField|
|      Directs|
|EmployeeNumber|
|EnvironmentSatisf..|
|      Gender|
|    HourlyRate|
|JobInvolvement|
|    JobLevel|
|    JobRole|
|JobSatisfaction|
|  MaritalStatus|
|  MonthlyIncome|
|  MonthlyRate|
+-----+
only showing top 20 rows
```

Select a few columns using Spark, and convert it into a Pandas dataframe:

```
df = spark.sql("""
    SELECT
        Age,
        MonthlyIncome,
        YearsInIndustry
    FROM
        emp_attrition """).limit(10).toPandas()
df
```

You can work with different compression formats within . For example, snappy Parquet:

```
# Writing to a snappy parquet file
df.to_parquet('emp_attrition.parquet.snappy', compression='snappy')
pd.read_parquet('emp_attrition.parquet.snappy')
```

```
# We are able to read in this snappy parquet file to a spark dataframe
read_snappy_df = SparkSession \
    .builder \
    .appName("Snappy Compression Loading Example") \
    .config("spark.io.compression.codec", "org.apache.spark.io.SnappyCompressionCodec") \
    .getOrCreate() \
    .read \
    .format("parquet") \
    .load(f"{os.getcwd()}/emp_attrition.parquet.snappy")

read_snappy_df.first()
```

```
Row(Age=42, MonthlyIncome=5993, YearsInIndustry=8)
```

Other compression formats that supports include snappy Parquet, and Gzip on both CSV and Parquet.

You might have query that you want to run in from previous explorations, review the *dataflow.ipynb* notebook example that shows you how to submit a job to .

```
dataflow_base_folder = tempfile.mkdtemp()
data_flow = DataFlow(dataflow_base_folder=dataflow_base_folder)
print("Data flow directory: {}".format(dataflow_base_folder))
```

```
Data flow directory: /tmp/tmpel8x_qbr
```

```
pyspark_file_path = path.join(dataflow_base_folder, "example-{}.py".format(str(uuid.
    ↪ uuid4())[-6:]))
script = '''
from pyspark.sql import SparkSession

def main():

    # Create a Spark session
    spark = SparkSession \\\
        .builder \\\
        .appName("Python Spark SQL basic example") \\\
```

(continues on next page)

(continued from previous page)

```

        .getOrCreate()

# Load a csv file from dataflow public storage
df = spark \\\
    .read \\\
    .format("csv") \\\
    .option("header", "true") \\\
    .option("multiLine", "true") \\\
    .load("oci://hosted-ds-datasets@bigdatadatasciencelarge/synthetic/orcl_attrition.
↪ csv")

# Create a temp view and do some SQL operations
df.createOrReplaceTempView("emp_attrition")
query_result_df = spark.sql("""
    SELECT
        Age,
        MonthlyIncome,
        YearsInIndustry
    FROM emp_attrition
""")

# Convert the filtered Spark DataFrame into JSON format
# Note: we are writing to the spark stdout log so that we can retrieve the log later.
↪ at the end of the notebook.
print('\n\n'.join(query_result_df.toJSON().collect()))

if __name__ == '__main__':
    main()
'''

with open(pyspark_file_path, 'w') as f:
    print(script.strip(), file=f)

print("Script path: {}".format(pyspark_file_path))

```

```
Script path: /tmp/example.py
```

```

script_bucket = "test"                # Update the value
logs_bucket = "dataflow-log"          # Update the value
display_name = "sample_Data_Flow_app"

app_config = data_flow.prepare_app(display_name=display_name,
                                    script_bucket=script_bucket,
                                    pyspark_file_path=pyspark_file_path,
                                    logs_bucket=logs_bucket)

app = data_flow.create_app(app_config)

run_display_name = "sample_Data_Flow_run"
run_config = app.prepare_run(run_display_name=run_display_name)

run = app.run(run_config, save_log_to_local=True)

```



```
run.status
```

```
'SUCCEEDED'
```

```
run.config
```

```
{'compartment_id': 'ocid1.compartment.<unique_ID>',
 'script_bucket': 'test',
 'pyspark_file_path': '/tmp/tmpel8x_qbr/example-0054ed.py',
 'archive_path': None,
 'archive_bucket': None,
 'run_display_name': 'sample_Data_Flow_run',
 'logs_bucket': 'dataflow-log',
 'logs_bucket_uri': 'oci://dataflow-log@ociodscdev',
 'driver_shape': 'VM.Standard2.4',
 'executor_shape': 'VM.Standard2.4',
 'num_executors': 1}
```

```
run.oci_link
```

```
Saving processed data to jdbc:oracle:thin:@database_high?TNS_ADMIN=/tmp/
```

### Read from the Database Using PySpark

PySpark can be used to load data from an Oracle Autonomous Database (ADB) into a Spark application. The next cell makes a JDBC connection to the database defined using the `adb_url` variable, and accesses the table defined with `table_name`. The credentials stored in the vault and previously read into memory are used. After this command is run, you can perform Spark operations on it.

The table is relatively small so the notebook uses PySpark in the notebook session. However, for larger jobs, we recommended that you use the [Oracle](#) service.

```
if "adb_url" in globals():
    output_dataframe = sc.read \
        .format("jdbc") \
        .option("url", adb_url) \
        .option("dbtable", table_name) \
        .option("user", user) \
        .option("password", password) \
        .load()
else:
    print("Skipping as it appears that you do not have adb_url configured.")
```

The database table is loaded into Spark so that you can perform operations to transform, model, and more. In the next cell, the notebook prints the table demonstrating that it was successfully loaded into Spark from the ADB.

```
if "adb_url" in globals():
    output_dataframe.show()
else:
    print("Skipping as it appears that you do not have output_dataframe configured.")
```


(continued from previous page)

```

→      3|      4|      80|      1|
→      6|      3|      2|      2|
→      2|      2| Johnathan Burnett|
| 33| No| often| 4608| Software Developer| 3|
→ L2| Life Sciences| 1| 8| 4| Male|
→ 79| 3| 1| Laboratory Techni...| 4| Single|
→ 3068| 11864| 0| Y| No| 13|
→ 3| 3| 80| 0|
→ 8| 2| 2| 7| 7|
→ 3| 6| Rhonda Grant|
| 60| No| infrequent| 6072| Software Developer| 4|
→ L3| Medical| 1| 10| 3| Female|
→ 81| 4| 1| Laboratory Techni...| 1| Married|
→ 2670| 9964| 4| Y| Yes| 20|
→ 4| 1| 80| 3|
→ 12| 3| 2| 1| 0|
→ 0| 0| Brandon Gill|
| 31| No| infrequent| 6228| Software Developer| 25|
→ L1| Life Sciences| 1| 11| 4| Male|
→ 67| 3| 1| Laboratory Techni...| 3| Divorced|
→ 2693| 13335| 1| Y| No| 22|
→ 4| 2| 80| 1|
→ 1| 2| 3| 1| 0|
→ 0| 0| Debbie Chan|
| 39| No| often| 990| Software Developer| 24|
→ L3| Life Sciences| 1| 12| 4| Male|
→ 44| 2| 3| Manufacturing Dir...| 3| Single|
→ 9526| 8787| 0| Y| No| 21|
→ 4| 2| 80| 0|
→ 10| 2| 3| 9| 7|
→ 1| 8| Kayla Ward|
| 37| No| infrequent| 5958| Software Developer| 28|
→ L3| Medical| 1| 13| 3| Male|
→ 94| 3| 2| Healthcare Repres...| 3| Married|
→ 5237| 16577| 6| Y| No| 13|
→ 3| 2| 80| 2|
→ 17| 3| 2| 7| 7|
→ 7| 7| Angel Vaughn|
| 36| No| infrequent| 3710| Software Developer| 17|
→ L3| Medical| 1| 14| 1| Male|
→ 84| 4| 1| Laboratory Techni...| 2| Married|
→ 2426| 16479| 0| Y| No| 13|
→ 3| 3| 80| 1|
→ 6| 5| 3| 5| 4|
→ 0| 3| Samantha Parker|
| 30| No| infrequent| 700| Software Developer| 16|
→ L2| Life Sciences| 1| 15| 4| Female|
→ 49| 2| 2| Laboratory Techni...| 3| Single|
→ 4193| 12682| 0| Y| Yes| 12|
→ 3| 4| 80| 0|
→ 10| 3| 9| 5|
→ 0| 8| Melanie McBride|

```

(continues on next page)

(continued from previous page)

32	No	infrequent	3072	Software Developer	27	
→ L1	Life Sciences	1	16		1	Male
→ 31	3	1	Research Scientist		3	Divorced
→ 2911	15170		1	Y	No	17
→ 3			4		80	1
→ 5		1	2		5	2
→ 4			3	Bradley Hall		
35	No	infrequent	6172	Software Developer	20	
→ L2	Medical	1	18		2	Male
→ 93	3	1	Laboratory Techni...		4	Divorced
→ 2661	8758		0	Y	No	11
→ 3			3		80	1
→ 3		2	3		2	2
→ 1			2	Patrick Lee		
29	Yes	infrequent	472	Software Developer	25	
→ L3	Life Sciences	1	19		3	Male
→ 50	2	1	Laboratory Techni...		3	Single
→ 2028	12947		5	Y	Yes	14
→ 3			2		80	0
→ 6		4	3		4	2
→ 0			3	Jessica Willis		
30	No	infrequent	6370	Software Developer	22	
→ L4	Life Sciences	1	20		2	Female
→ 51	4	3	Manufacturing Dir...		1	Divorced
→ 9980	10195		1	Y	No	11
→ 3			3		80	1
→ 10		1	3		10	9
→ 8			8	Chad Scott		
33	No	infrequent	1530	Software Developer	6	
→ L2	Life Sciences	1	21		1	Male
→ 80	4	1	Research Scientist		2	Divorced
→ 3298	15053		0	Y	Yes	12
→ 3			4		80	2
→ 7		5	2		6	2
→ 0			5	Gregory Bennett		
23	No	none	5150	Software Developer	17	
→ L2	Medical	1	22		4	Male
→ 96	4	1	Laboratory Techni...		4	Divorced
→ 2935	7324		1	Y	Yes	13
→ 3			2		80	2
→ 1		2	2		1	0
→ 0			0	Jesse Palmer		
54	No	infrequent	5590	Product Management	3	
→ L4	Life Sciences	1	23		1	Female
→ 78	2	4	Manager		4	Married
→ 15427	22021		2	Y	No	16
→ 3			3		80	0
→ 31		3	3		25	8
→ 3			7	Dr. Erin Good DDS		
39	No	infrequent	1700	Software Developer	3	
→ L3	Life Sciences	1	24		4	Male
→ 45	3	1	Research Scientist		4	Single

(continues on next page)

(continued from previous page)

→	3944		4306		5		Y		Yes		11		→
→		3			3			80			0		→
→	6			3		3		3			2		→
→		1			2		Kathy Patrick						→
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+													
→													→
→													→
→													→
→													→
→													→
→													→
only showing top 20 rows													

### Cleaning Up Artifacts

This example created a number of artifacts, such as unzipping the wallet file, creating a database table, and starting a Spark cluster. Next, you remove these resources.

```
if wallet_path != "<wallet_path>":
    connection.update_repository(key="pyspark_adb", value=adb_creds)
    connection.import_wallet(wallet_path=wallet_path, key="pyspark_adb")
    conn = cx_Oracle.connect(user, password, tnsname)
    cursor = conn.cursor()
    cursor.execute(f"DROP TABLE {table_name}")
    cursor.close()
    conn.close()
else:
    print("Skipping as it appears that you do not have wallet_path specified.")

if "tns_path" in globals():
    shutil.rmtree(tns_path)

sc.stop()
```

### 13.7.6 Example Notebook: Using the ADB with PySpark

This notebook demonstrates how to use PySpark to process data in Object Storage, and save the results to an ADB. It also demonstrates how to query data from an ADB using a local PySpark session.

```
import base64
import cx_Oracle
import oci
import os
import shutil
import tempfile
import zipfile

from ads.database import connection
from ads.vault.vault import Vault
from pyspark import SparkConf
from pyspark.sql import SparkSession
from urllib.parse import urlparse
```

## Introduction

It has become a common practice to store structured and semi-structured data using services such as Object Storage. This provides a scalable solution to store vast quantities of data that can be post-processed. However, using a relational database management system (RDMS) such as the Oracle ADB provides advantages like ACID compliance, rapid relational joins, support for complex business logic, and more. It is important to be able to access information stored in Object Storage, process that information, and load it into an RBMS. This notebook demonstrates how to use PySpark, a Python interface to Apache Spark, to perform these operations.

This notebook uses a publicly accessible Object Storage location to read from. However, an ADB needs to be configured with permissions to create a table, write to that table, and read from it. It also assumes that the credentials to access the database are stored in the Vault. This is the best practice as it prevents the credentials from being stored locally or in the notebook where they may be accessible to others. If you do not have credentials stored in the Vault. Once credentials to the database, are stored in the Vault, you need the OCIDs for the Vault, encryption key, and the secret.

ADBs have an additional level of security that is needed to access them and are wallet file. You can obtain the wallet file from your account administrator or download it using the steps that are outlined in the [downloading a wallet(<https://docs.oracle.com/en-us/iaas/Content/Database/Tasks/adbconnecting.htm#access>)]. The wallet file is a ZIP file. This notebook unzips the wallet and updates the configuration settings so you don't have to.

The database connection also needs the TNS name of the database. Your database administrator can give you the TNS name of the database that you have access to.

## Setup the Required Variables

The required variables to set up are:

1. `vault_id`, `key_id`, `secret_ocid`: The OCID of the secret by storing the username and password required to connect to your ADB in a secret within the OCI Vault service. Note that the secret is the credential needed to access a database. This notebook is designed so that any secret can be stored as long as it is in the form of a dictionary. To store your secret, just modify the dictionary, see the `vault.ipynb` example notebook for detailed steps to generate this OCID.
2. `tnsname`: A TNS name valid for the database.
3. `wallet_path`: The local path to your wallet ZIP file, see the `autonomous_database.ipynb` example notebook for instructions on accessing the wallet file.

```
secret_ocid = "secret_ocid"
tnsname = "tnsname"
wallet_path = "wallet_path"
vault_id = "vault_id"
key_id = "key_id"
```

## Obtain Credentials from the Vault

If the `vault_id`, `key_id`, and `secret_id` have been updated, then the notebook obtains a handle to the vault with a variable called `vault`. This uses the `get_secret()` method to return a dictionary with the user credentials. The approach assumes that the Accelerated Data Science (ADS) library was used to store the secret.

```
if vault_id != "<vault_id>" and key_id != "<key_id>" and secret_ocid != "<secret_ocid>":
    print("Getting wallet username and password")
    vault = Vault(vault_id=vault_id, key_id=key_id)
    adb_creds = vault.get_secret(secret_ocid)
    user = adb_creds["username"]
    password = adb_creds["password"]
else:
    print("Skipping as it appears that you do not have vault, key, and secret ocid_
↪specified.")
```

Getting wallet username and password

### Setup the Wallet

An ADB requires a wallet file to access the database. The `wallet_path` variable defines the location of this file. The next cell prepares the wallet file to make a connection to the database. It also creates the ADB connection string, `adb_url`.

```
def setup_wallet(wallet_path):
    """
    Prepare ADB wallet file for use in PySpark.
    """

    temporary_directory = tempfile.mkdtemp()
    zip_file_path = os.path.join(temporary_directory, "wallet.zip")

    # Extract everything locally.
    with zipfile.ZipFile(wallet_path, "r") as zip_ref:
        zip_ref.extractall(temporary_directory)

    return temporary_directory

if wallet_path != "<wallet_path>":
    print("Setting up wallet")
    tns_path = setup_wallet(wallet_path)
else:
    print("Skipping as it appears that you do not have wallet_path specified.")
```

Setting up wallet

```
if "tns_path" in globals() and tnsname != "<tnsname>":
    adb_url = f"jdbc:oracle:thin:@{tnsname}?TNS_ADMIN={tns_path}"
else:
    print("Skipping, as the tns_path or tnsname are not defined.")
```

### Reading Data from Object Storage

This notebook uses PySpark to access the Object Storage file. The next cell creates a Spark application called “Python Spark SQL Example” and returns a `SparkContext`. The `SparkContext`, normally called `sc`, is a handle to the Spark application.

The data file that is used is relatively small so the notebook uses PySpark by running a version of Spark in local mode. That means, it is running in the notebook session. For larger jobs, we recommended that you use the [Oracle](#) service, which is an Oracle managed Spark service.

```
# create a spark session
sc = SparkSession \
    .builder \
    .appName("Python Spark SQL Example") \
    .getOrCreate()
```

This notebook reads in a data file that is stored in an Oracle Object Storage file. This is defined with the `file_path` variable. The `SparkContext` with the `read.option().csv()` methods is used to read in the CSV file from Object Storage into a data frame.

```
file_path = "oci://hosted-ds-datasets@bigdatadatasciencelarge/synthetic/orcl_attrition.  
↪csv"  
input_dataframe = sc.read.option("header", "true").csv(file_path)
```

### Save the Data to the Database

This notebook creates a table in your database with the name specified with `table_name`. The name that is defined should be unique so that it does not interfere with any existing table in your database. If it does, change the value to something that is unique.

```
table_name = "ODSC_PYSPARK_ADB_DEMO"  
  
if tnsname != "<tnsname>" and "adb_url" in globals():  
    print("Saving processed data to " + adb_url)  
    properties = {  
        "oracle.net.tns_admin": tnsname,  
        "password": password,  
        "user": user,  
    }  
    input_dataframe.write.jdbc(  
        url=adb_url, table=table_name, properties=properties  
    )  
else:  
    print("Skipping as it appears that you do not have tnsname specified.")
```



## BIG DATA SERVICE

New in version 2.5.10.

The Oracle Big Data Service (BDS) is an Oracle Cloud Infrastructure (OCI) service designed for a diverse set of big data use cases and workloads. From short-lived clusters used to tackle specific tasks to long-lived clusters that manage data lakes. BDS scales to meet an organization's requirements at a low cost and with the highest levels of security. To be able to connect to the BDS from the notebook session, the cluster created must have Kerberos enabled.

### 14.1 Quick Start

#### 14.1.1 Set Up A Conda Environment

The following are the recommended steps to create a conda environment to connect to BDS:

- Open a terminal window then run the following commands:
- `odsc conda install -s pyspark30_p37_cpu_v5`: Install the PySpark conda environment.

#### 14.1.2 Connect from a Notebook

##### 14.1.2.1 Using the Vault

```
import ads
import os

from ads.bds.auth import krbcontext
from ads.secrets.big_data_service import BDSSecretKeeper
from pyhive import hive

ads.set_auth('resource_principal')
with BDSSecretKeeper.load_secret("<secret_id>") as cred:
    with krbcontext(principal=cred["principal"], keytab_path=cred['keytab_path']):
        cursor = hive.connect(host=cred["hive_host"],
                               port=cred["hive_port"],
                               auth='KERBEROS',
                               kerberos_service_name="hive").cursor()
```

### 14.1.2.2 Without Using the Vault

```
import ads
import fsspec
import os

from ads.bds.auth import refresh_ticket

ads.set_auth('resource_principal')
refresh_ticket(principal="", keytab_path="",
              kerb5_path="")
cursor = hive.connect(host="", port="",
                     auth='KERBEROS', kerberos_service_name="hive").cursor()
```

## 14.2 Conda Environment

To work with BDS in a notebook session or job, you must have a conda environment that supports the BDS module in ADS along with support for PySpark. This section demonstrates how to modify a PySpark Data Science conda environment to work with BDS. It also demonstrates how to publish this conda environment so that you can share it with team members and use it in jobs.

### 14.2.1 Create

The following are the recommended steps to create a conda environment to connect to BDS:

- Open a terminal window then run the following commands:
- `odsc conda install -s pyspark30_p37_cpu_v5`: Install the PySpark conda environment.

### 14.2.2 Publish

- Create an Object Storage bucket to store published conda environments.
- Open a terminal window then run the following commands and actions:
- `odsc conda init -b <bucket_name> -b <namespace> -a <resource_principal or api_key>`: Initialize the environment so that you can work with Published Conda Environments.
- `odsc conda publish -s pyspark30_p37_cpu_v3`: Publish the conda environment.
- In the OCI Console, open Data Science.
- Select a project.
- Select a click the notebook session's name, or the Actions menu, and click Open to open the notebook session's JupyterLab interface in another tab..
- Click Published Conda Environments in the Environment Explorer tab to list all the published conda environments that are available in your designated Object Storage bucket.
- Select the Environment Version that you specified.
- Click the copy button adjacent to the Source conda environment to copy the file source path to use when installing the conda environment in other notebook sessions or to use with jobs.

## 14.3 Connect

### 14.3.1 Notebook Session

Notebook sessions require a conda environment that has the BDS module of ADS installed.

#### 14.3.1.1 Using the Vault

The preferred method to connect to a BDS cluster is to use the `BDSecretKeeper` class. This allows you to store the BDS credentials in the vault and not the notebook. It also provides a greater level of access control to the secrets and allows for credential rotation without breaking connections from various sources.

```
import ads
import os

from ads.bds.auth import krbcontext
from ads.secrets.big_data_service import BDSecretKeeper
from pyhive import hive

ads.set_auth('resource_principal')
with BDSecretKeeper.load_secret("<secret_id>") as cred:
    with krbcontext(principal=cred["principal"], keytab_path=cred['keytab_path']):
        cursor = hive.connect(host=cred["hive_host"],
                               port=cred["hive_port"],
                               auth='KERBEROS',
                               kerberos_service_name="hive").cursor()
```

#### 14.3.1.2 Without Using the Vault

BDS requires a Kerberos ticket to authenticate to the service. The preferred method is to use the vault and `BDSecretKeeper` because it is more secure, and prevents private information from being stored in a notebook. However, if this is not possible, you can use the `refresh_ticket()` method to manually create the Kerberos ticket. This method requires the following parameters:

- `kerb5_path`: The path to the `krb5.conf` file. You can copy this file from the master node of the BDS cluster located in `/etc/krb5.conf`.
- `keytab_path`: The path to the principal's keytab file. You can download this file from the master node on the BDS cluster.
- `principal`: The unique identity to that Kerberos can assign tickets to.

```
import ads
import fsspec
import os

from ads.bds.auth import refresh_ticket

ads.set_auth('resource_principal')
refresh_ticket(principal="<your_principal>", keytab_path="<your_local_keytab_file_path>",
               kerb5_path="<your_local_kerb5_config_file_path>")
cursor = hive.connect(host="<hive_host>", port="<hive_port>",
                      auth='KERBEROS', kerberos_service_name="hive").cursor()
```

### 14.3.2 Jobs

A job requires a conda environment that has the BDS module of ADS installed. It also requires secrets and configuration information that can be used to obtain a Kerberos ticket for authentication. You must copy the `keytab` and `krb5.conf` files to the jobs instance and can be copied as part of the job. We recommend that you save them into the vault then use `BDSecretKeeper` to access them. This is secure because the vault provides access control and allows for key rotation without breaking existing jobs. You can use the notebook to load configuration parameters like `hdfs_host`, `hdfs_port`, `hive_host`, `hive_port`, and so on. The `keytab` and `krb5.conf` files are securely loaded from the vault then saved in the jobs instance. The `krbcontext()` method is then used to create the Kerberos ticket. Once the ticket is created, you can query BDS.

## 14.4 File Management

This section demonstrates various methods to work with files on BDS' HDFS, see the individual framework's documentation for details.

A Kerberos ticket is needed to *connect to the BDS cluster*. This authentication ticket can be obtained with the `refresh_ticket()` method or with the use of the Vault and a `BDSecretKeeper` object. This section will demonstrate the use of the `BDSecretKeeper` object as this is more secure and is the preferred method.

### 14.4.1 FSSpec

The `fsspec` or `Filesystem Spec` is an interface that allows access to local, remote, and embedded file systems. You use it to access data stored in the BDS' HDFS. This connection is made with the `WebHDFS` protocol.

The `fsspec` library must be able to access BDS so a Kerberos ticket must be generated. The secure and recommended method to do this is to use `BDSecretKeeper` that stores the BDS credentials in the vault not the notebook session.

This section outlines some common file operations, see the `fsspec` [API Reference](#) for complete details on the features that are demonstrated and additional functionality.

*Pandas* and *PyArrow* can also use `fsspec` to perform file operations.

#### 14.4.1.1 Connect

Credentials and configuration information is stored in the vault. This information is used to obtain a Kerberos ticket and define the `hdfs_config` dictionary. This configuration dictionary is passed to the `fsspec.filesystem()` method to make a connection to the BDS' underlying HDFS storage.

```
import ads
import fsspec

from ads.secrets.big_data_service import BDSecretKeeper
from ads.bds.auth import has_kerberos_ticket, krbcontext

ads.set_auth("resource_principal")
with BDSecretKeeper.load_secret("<secret_id>") as cred:
    with krbcontext(principal = cred["principal"], keytab_path = cred['keytab_path']):
        hdfs_config = {
            "protocol": "webhdfs",
            "host": cred["hdfs_host"],
            "port": cred["hdfs_port"],
```

(continues on next page)

(continued from previous page)

```

        "kerberos": "True"
    }

fs = fsspec.filesystem(**hdfs_config)

```

#### 14.4.1.2 Delete

Delete files from HDFS using the `.rm()` method. It accepts a path of the files to delete.

```
fs.rm("/data/biketrips/2020??-tripdata.csv", recursive=True)
```

#### 14.4.1.3 Download

Download files from HDFS to a local storage device using the `.get()` method. It takes the HDFS path of the files to download, and the local path to store the files.

```
fs.get("/data/biketrips/20190[123456]-tripdata.csv", local_path="./first_half/",
      overwrite=True)
```

#### 14.4.1.4 List

The `.ls()` method lists files. It returns the matching file names as a list.

```
fs.ls("/data/biketrips/2019??-tripdata.csv")
```

```

['201901-tripdata.csv',
 '201902-tripdata.csv',
 '201903-tripdata.csv',
 '201904-tripdata.csv',
 '201905-tripdata.csv',
 '201906-tripdata.csv',
 '201907-tripdata.csv',
 '201908-tripdata.csv',
 '201909-tripdata.csv',
 '201910-tripdata.csv',
 '201911-tripdata.csv',
 '201912-tripdata.csv']

```

#### 14.4.1.5 Upload

The `.put()` method is used to upload files from local storage to HDFS. The first parameter is the local path of the files to upload. The second parameter is the HDFS path where the files are to be stored. `.upload()` is an alias of `.put()`. .. code-block:: python3

```

fs.put(
    lpath="./first_half/20200[456]-tripdata.csv", rpath="/data/biketrips/second_quarter/"
)

```

## 14.4.2 Ibis

**Ibis** is an open-source library by [Cloudera](#) that provides a Python framework to access data and perform analytical computations from different sources. Ibis allows access to the data using HDFS. You use the `ibis.impala.hdfs_connect()` method to make a connection to HDFS, and it returns a handler. This handler has methods such as `.ls()` to list, `.get()` to download, `.put()` to upload, and `.rm()` to delete files. These operations support globbing. Ibis' HDFS connector supports a variety of [additional operations](#).

### 14.4.2.1 Connect

After obtaining a Kerberos ticket, the `hdfs_connect()` method allows access to the HDFS. It is a thin wrapper around a `fspec` file system. Depending on your system configuration, you may need to define the `ibis.options.impala.temp_db` and `ibis.options.impala.temp_hdfs_path` options.

```
import ibis

with BDSSecretKeeper.load_secret("<secret_id>") as cred:
    with krbcontext(principal=cred["principal"], keytab_path=cred['keytab_path']):
        hdfs = ibis.impala.hdfs_connect(host=cred['hdfs_host'], port=cred['hdfs_port'],
                                         use_https=False, verify=False,
                                         auth_mechanism='GSSAPI', protocol='webhdfs')
```

### 14.4.2.2 Delete

Delete files from HDFS using the `.rm()` method. It accepts a path of the files to delete.

```
hdfs.rm("/data/biketrips/2020??-tripdata.csv", recursive=True)
```

### 14.4.2.3 Download

Download files from HDFS to a local storage device using the `.get()` method. It takes the HDFS path of the files to download, and the local path to store the files.

```
hdfs.get("/data/biketrips/20190[123456]-tripdata.csv", local_path="./first_half/",
         overwrite=True)
```

### 14.4.2.4 List

The `.ls()` method lists files. It returns the matching file names as a list.

```
hdfs.ls("/data/biketrips/2019??-tripdata.csv")
```

```
['201901-tripdata.csv',
 '201902-tripdata.csv',
 '201903-tripdata.csv',
 '201904-tripdata.csv',
 '201905-tripdata.csv',
 '201906-tripdata.csv',
 '201907-tripdata.csv',
```

(continues on next page)

(continued from previous page)

```
'201908-tripdata.csv',
'201909-tripdata.csv',
'201910-tripdata.csv',
'201911-tripdata.csv',
'201912-tripdata.csv']
```

#### 14.4.2.5 Upload

Use the `.put()` method to upload files from local storage to HDFS. The first parameter is the HDFS path where the files are to be stored. The second parameter is the local path of the files to upload.

```
hdfs.put(rpath="/data/biketrips/second_quarter/",
        lpath="./first_half/20200[456]-tripdata.csv",
        overwrite=True, recursive=True)
```

### 14.4.3 Pandas

Pandas allows access to BDS' HDFS system through :ref: *FSSpec*. This section demonstrates some common operations.

#### 14.4.3.1 Connect

```
import ads
import fsspec

from ads.secrets.big_data_service import BDSSecretKeeper
from ads.bds.auth import has_kerberos_ticket, krbcontext

ads.set_auth("resource_principal")
with BDSSecretKeeper.load_secret("<secret_id>") as cred:
    with krbcontext(principal = cred["principal"], keytab_path = cred['keytab_path']):
        hdfs_config = {
            "protocol": "webhdfs",
            "host": cred["hdfs_host"],
            "port": cred["hdfs_port"],
            "kerberos": "True"
        }

fs = fsspec.filesystem(**hdfs_config)
```

### 14.4.3.2 File Handle

You can use the `fsspec.open()` method to open a data file. It returns a file handle. That file handle, `f`, can be passed to any Pandas' methods that support file handles. In this example, a file on a BDS' HDFS cluster is read into a Pandas dataframe.

```
with fs.open("/data/biketrips/201901-tripdata.csv", "r") as f:
    df = pd.read_csv(f)
```

### 14.4.3.3 URL

Pandas supports `fsspec` so you can preform file operations by specifying a protocol string. The WebHDFS protocol is used to access files on BDS' HDFS system. The protocol string has this format:

```
webhdfs://host:port/path/to/data
```

The host and port parameters can be passed in the protocol string as follows:

```
df = pd.read_csv(f"webhdfs://{hdfs_config['host']}:{hdfs_config['port']}/data/biketrips/
↳ 201901-tripdata.csv",
                 storage_options={'kerberos': 'True'})
```

You can also pass the host and port parameters in the dictionary used by the `storage_options` parameter. The sample code for `hdfs_config` defines the host and port with the keys `host` and `port` respectively.

```
hdfs_config = {
    "protocol": "webhdfs",
    "host": cred["hdfs_host"],
    "port": cred["hdfs_port"],
    "kerberos": "True"
}
```

In this case, Pandas uses the following syntax to read a file on BDS' HDFS cluster:

```
df = pd.read_csv(f"webhdfs:///data/biketrips/201901-tripdata.csv",
                 storage_options=hdfs_config)
```

## 14.4.4 PyArrow

[PyArrow](#) is a Python interface to [Apache Arrow](#). Apache Arrow is an in-memory columnar analytical tool that is designed to process data at scale. PyArrow supports the `fspec.filesystem()` through the use of the `filesystem` parameter in many of its data operation methods.



#### 14.4.4.1 Connect

Make a connection to BDS' HDFS using fsspec:

```
import ads
import fsspec

from ads.secrets.big_data_service import BDSSecretKeeper
from ads.bds.auth import has_kerberos_ticket, krbcontext

ads.set_auth("resource_principal")
with BDSSecretKeeper.load_secret("<secret_id>") as cred:
    with krbcontext(principal = cred["principal"], keytab_path = cred['keytab_path']):
        hdfs_config = {
            "protocol": "webhdfs",
            "host": cred["hdfs_host"],
            "port": cred["hdfs_port"],
            "kerberos": "True"
        }

fs = fsspec.filesystem(**hdfs_config)
```

#### 14.4.4.2 Filesystem

The following sample code shows several different PyArrow methods for working with BDS' HDFS using the filesystem parameter:

```
import pyarrow as pa
import pyarrow.parquet as pq
import pyarrow.dataset as ds

ds = ds.dataset("/path/on/BDS/HDFS/data.csv", format="csv", filesystem=fs)
pq.write_table(ds.to_table(), '/path/on/BDS/HDFS/data.parquet', filesystem=fs)

import pandas as pd
import numpy as np

idx = pd.date_range('2022-01-01 12:00:00.000', '2022-03-01 12:00:00.000', freq='T')

df = pd.DataFrame({
    'numeric_col': np.random.rand(len(idx)),
    'string_col': pd._testing.rands_array(8, len(idx))},
    index = idx
)
df["dt"] = df.index
df["dt"] = df["dt"].dt.date

table = pa.Table.from_pandas(df)
pq.write_to_dataset(table, root_path="/path/on/BDS/HDFS", partition_cols=["dt"],
                    flavor="spark", filesystem=fs)
```

## 14.5 SQL Data Management

This section demonstrates how to perform standard SQL-based data management operations in BDS using various frameworks, see the individual framework's documentation for details.

A Kerberos ticket is needed to *connect to the BDS cluster*. You can obtain this authentication ticket with the `refresh_ticket()` method, or with the use of the vault and a `BDSecretKeeper` object. This section demonstrates the use of the `BDSecretKeeper` object because this is more secure and is the recommended method.

### 14.5.1 Ibis

`Ibis` is an open-source library by [Cloudera](#) that provides a Python framework to access data and perform analytical computations from different sources. The `Ibis` project is designed to provide an abstraction over different dialects of SQL. It enables the data scientist to interact with many different data systems. Some of these systems are Dask, MySQL, Pandas, PostgreSQL, PySpark, and most importantly for use with BDS, Hadoop clusters.

#### 14.5.1.1 Connect

Obtaining a Kerberos ticket, depending on your system configuration, you may need to define the `ibis.options.impala.temp_db` and `ibis.options.impala.temp_hdfs_path` options. The `ibis.impala.connect()` method makes a connection to the [Impala execution backend](#). The `.sql()` allows you to run SQL commands on the data.

```
import ibis

with BDSecretKeeper.load_secret("<secret_id>") as cred:
    with krbcontext(principal=cred["principal"], keytab_path=cred['keytab_path']):
        ibis.options.impala.temp_db = '<temp_db>'
        ibis.options.impala.temp_hdfs_path = '<temp_hdfs_path>'
        hdfs = ibis.impala.hdfs_connect(host=cred['hdfs_host'], port=cred['hdfs_port'],
                                         use_https=False, verify=False,
                                         auth_mechanism='GSSAPI', protocol='webhdfs')
        client = ibis.impala.connect(host=cred['hive_host'], port=cred['hive_port'],
                                     hdfs_client=hdfs, auth_mechanism="GSSAPI",
                                     use_ssl=False, kerberos_service_name="hive")
```

#### 14.5.1.2 Query

To query the data using `ibis` use an SQL DML command like `SELECT`. Pass the string to the `.sql()` method, and then call `.execute()` on the returned object. The output is a Pandas dataframe.

```
df = client.sql("SELECT * FROM bikes.trips LIMIT 100").execute(limit=None)
```

### 14.5.1.3 Close a Connection

It is important to close sessions when you don't need them anymore. This frees up resources in the system. Use the `.close()` method close sessions.

```
client.close()
```

## 14.5.2 Impala

[Impala](#) is a Python client for [HiveServer2](#) implementations (i.e. Impala, Hive). Both Impala and PyHive clients are HiveServer2 compliant so the connection syntax is very similar. The difference is that the Impala client uses the Impala query engine and PyHive uses Hive. In practical terms, Hive is best suited for long-running batch queries and Impala is better suited for real-time interactive querying, see [more about the differences between Hive and Impala](#).

The Impala `dbapi` module is a [Python DB-API](#) interface.

### 14.5.2.1 Connect

After obtaining a Kerberos ticket, use the `connect()` method to make the connection. It returns a connection, and the `.cursor()` method returns a cursor object. The cursor has the method `.execute()` that allows you to run Impala SQL commands on the data.

```
from impala.dbapi import connect

with BDSSecretKeeper.load_secret("<secret_id>") as cred:
    with krbcontext(principal=cred["principal"], keytab_path=cred['keytab_path']):
        cursor = connect(host=cred["hive_host"], port=cred["hive_port"],
                          auth_mechanism="GSSAPI", kerberos_service_name="hive").cursor()
```

### 14.5.2.2 Create a Table

To create an Impala table and insert data, use the `.execute()` method on the cursor object, and pass in Impala SQL commands to perform these operations.

```
cursor.execute("CREATE TABLE default.location (city STRING, province STRING)")
cursor.execute("INSERT INTO default.location VALUES ('Halifax', 'Nova Scotia')")
```

### 14.5.2.3 Query

To query an Impala table, use an Impala SQL DML command like `SELECT`. Pass this string to the `.execute()` method on the cursor object to create a record set in the cursor. You can obtain a Pandas dataframe with the `as_pandas()` function.

```
from impala.util import as_pandas

cursor.execute("SELECT * FROM default.location")
df = as_pandas(cursor)
```

#### 14.5.2.4 Drop a Table

To drop an Impala table, use an Impala SQL DDL command like `DROP TABLE`. Pass this string to the `.execute()` method on the cursor object.

```
cursor.execute("DROP TABLE IF EXISTS default.location")
```

#### 14.5.2.5 Close a Connection

It is important to close sessions when you don't need them anymore. This frees up resources in the system. Use the `.close()` method on the cursor object to close a connection.

```
cursor.close()
```

### 14.5.3 PyHive

PyHive is a set of interfaces to Presto and Hive. It is based on the [SQLAlchemy](#) and [Python DB-API](#) interfaces for Presto and Hive.

#### 14.5.3.1 Connect

After obtaining a Kerberos ticket, call the `hive.connect()` method to make the connection. It returns a connection, and the `.cursor()` method returns a cursor object. The cursor has the `.execute()` method that allows you to run Hive SQL commands on the data.

```
import ads
import os

from ads.bds.auth import krbcontext
from ads.secrets.big_data_service import BDSSecretKeeper
from pyhive import hive

ads.set_auth('resource_principal')
with BDSSecretKeeper.load_secret("<secret_id>") as cred:
    with krbcontext(principal=cred["principal"], keytab_path=cred['keytab_path']):
        cursor = hive.connect(host=cred["hive_host"],
                               port=cred["hive_port"],
                               auth='KERBEROS',
                               kerberos_service_name="hive").cursor()
```

#### 14.5.3.2 Create a Table

To create a Hive table and insert data, use the `.execute()` method on the cursor object and pass in Hive SQL commands to perform these operations.

```
cursor.execute("CREATE TABLE default.location (city STRING, province STRING)")
cursor.execute("INSERT INTO default.location VALUES ('Halifax', 'Nova Scotia')")
```

### 14.5.3.3 Query

To query a Hive table, use a Hive SQL DML command like `SELECT`. Pass this string to the `.execute()` method on the cursor object. This creates a record set in the cursor. You can access the actual records with methods like `.fetchall()`, `.fetchmany()`, and `.fetchone()`.

In the following example, the `.fetchall()` method is used in a `pd.DataFrame()` call to return all the records in Pandas dataframe: .

```
import pandas as pd

cursor.execute("SELECT * FROM default.location")
df = pd.DataFrame(cursor.fetchall(), columns=[col[0] for col in cursor.description])
```

### 14.5.3.4 Drop a Table

To drop a Hive table, use a Hive SQL DDL command like `DROP TABLE`. Pass this string to the `.execute()` method on the cursor object.

```
cursor.execute("DROP TABLE IF EXISTS default.location")
```

### 14.5.3.5 Close a Connection

It is important to close sessions when you don't need them anymore. This frees up resources in the system. Use the `.close()` method on the cursor object to close a connection.

```
cursor.close()
```



## DATA SCIENCE JOBS

Oracle Cloud Infrastructure (OCI) [Data Science Jobs \(Jobs\)](#) enables you to define and run repeatable machine learning tasks on a fully managed infrastructure. You can create a compute resource on demand and run applications that perform tasks such as data preparation, model training, hyperparameter tuning, and batch inference.

Running workloads with Data Science Jobs involves two types resources: **Job** and **Job Run**.

A **Job** is a template that describes the training task. It contains configurations about the *infrastructure*, such as [Compute Shape](#), [Block Storage](#), [Logging](#), and information about the *runtime*, such as the source code of your workload, environment variables, and CLI arguments.

A **Job Run** is an instantiation of a job. In each job run, you can override some of the job configurations, such as environment variables and CLI arguments. You can use the same job as a template and launch multiple simultaneous job runs to parallelize a large task. You can also sequence jobs and keep the state by writing state information to [Object Storage](#).

For example, you may want to experiment with how different model classes perform on the same training data by using the [ADSTuner](#) to perform hyperparameter tuning on each model class. You could do this in parallel by having a different job run for each class of models. For a given job run, you could pass an environment variable that identifies the model class that you want to use. Each model can write its results to the Logging service or Object Storage. Then you can run a final sequential job that uses the best model class, and trains the final model on the entire dataset.

The following sections provides details on running workloads with OCI Data Science Jobs using ADS Jobs APIs. You can use similar APIs to [Run a OCI DataFlow Application](#).

### 15.1 Quick Start

---

#### Prerequisite

Before creating a job, ensure that you have policies configured for Data Science resources.

See [IAM Policies](#) and [About Data Science Policies](#).

---

#### In this Page

- [Define a Job](#)
- [YAML](#)
- [Run a Job and Monitor outputs](#)
- [Load Existing Job or Job Run](#)

- *List Existing Jobs or Job Runs*
- *Delete a Job or Job Run*
- *Variable Substitution*

### 15.1.1 Define a Job

In ADS, a job is defined by *Infrastructure and Runtime*. The Data Science Job infrastructure is configured through a *DataScienceJob* instance. The runtime can be an instance of:

- *PythonRuntime* for Python code stored locally, OCI object storage, or other remote location supported by *fsspec*. See *Run a Python Workload*.
- *GitPythonRuntime* for Python code from a Git repository. See *Run Code from Git Repo*.
- *NotebookRuntime* for a single Jupyter notebook stored locally, OCI object storage, or other remote location supported by *fsspec*. See *Run a Notebook*.
- *ScriptRuntime* for bash or shell scripts stored locally, OCI object storage, or other remote location supported by *fsspec*. See *Run a Script*.
- *ContainerRuntime* for container images.

Here is an example to define and run a Python *Job*.

Note that a job can be defined either using Python APIs or YAML. See the next section for how to load and save the job with YAML.

Listing 1: Python

```
from ads.jobs import Job, DataScienceJob, PythonRuntime

job = (
    Job(name="My Job")
    .with_infrastructure(
        DataScienceJob()
        # Configure logging for getting the job run outputs.
        .with_log_group_id("<log_group_ocid>")
        # Log resource will be auto-generated if log ID is not specified.
        .with_log_id("<log_ocid>")
        # If you are in an OCI data science notebook session,
        # the following configurations are not required.
        # Configurations from the notebook session will be used as defaults.
        .with_compartment_id("<compartment_ocid>")
        .with_project_id("<project_ocid>")
        .with_subnet_id("<subnet_ocid>")
        .with_shape_name("VM.Standard.E3.Flex")
        # Shape config details are applicable only for the flexible shapes.
        .with_shape_config_details(memory_in_gbs=16, ocpus=1)
        # Minimum/Default block storage size is 50 (GB).
        .with_block_storage_size(50)
    )
    .with_runtime(
        PythonRuntime()
        # Specify the service conda environment by slug name.
```

(continues on next page)



(continued from previous page)

```

        .with_service_conda("pytorch110_p38_cpu_v1")
        # Source code of the job, can be local or remote.
        .with_source("path/to/script.py")
        # Environment variable
        .with_environment_variable(NAME="Welcome to OCI Data Science.")
        # Command line argument
        .with_argument(greeting="Good morning")
    )
)

```

Listing 2: YAML

```

kind: job
spec:
  name: "My Job"
  infrastructure:
    kind: infrastructure
    type: dataScienceJob
    spec:
      blockSizeSize: 50
      compartmentId: <compartment_ocid>
      jobInfrastructureType: STANDALONE
      logGroupId: <log_group_ocid>
      logId: <log_ocid>
      projectId: <project_ocid>
      shapeConfigDetails:
        memoryInGBs: 16
        ocpus: 1
        shapeName: VM.Standard.E3.Flex
        subnetId: <subnet_ocid>
  runtime:
    kind: runtime
    type: python
    spec:
      args:
        - --greeting
        - Good morning
      conda:
        slug: pytorch110_p38_cpu_v1
        type: service
      env:
        - name: NAME
          value: Welcome to OCI Data Science.
      scriptPathURI: path/to/script.py

```

The *PythonRuntime* is designed for *Running a Python Workload*. The source code is specified by *with\_source()* (path/to/script.py). It can be a script, a Jupyter notebook, a folder or a zip file. The source code location can be a local or remote, including HTTP URL and OCI Object Storage. An [example Python script](#) is available on [Data Science AI Sample GitHub Repository](#).

For more details, see *Infrastructure and Runtime* configurations. You can also *Run a Notebook*, *Run a Script* and *Run Code from Git Repo*.

### 15.1.2 YAML

A job can be defined using YAML, as shown in the “YAML” tab in the example above. Here are some examples to load/save the YAML job configurations:

```
# Load a job from a YAML file
job = Job.from_yaml(uri="oci://bucket_name@namespace/path/to/job.yaml")

# Save a job to a YAML file
job.to_yaml(uri="oci://bucket_name@namespace/path/to/job.yaml")

# Save a job to YAML in a string
yaml_string = job.to_yaml()

# Load a job from a YAML string
job = Job.from_yaml("""
kind: job
spec:
  infrastructure:
    kind: infrastructure
    ...
""")
```

The `uri` can be a local file path or a remote location supported by `fsspec`, including OCI object storage.

With the YAML file, you can create and run the job with ADS CLI:

```
ads opctl run -f your_job.yaml
```

For more details on `ads opctl`, see *Working with the CLI*.

The job infrastructure, runtime and job run also support YAML serialization/deserialization.

### 15.1.3 Run a Job and Monitor outputs

Once the job is defined or loaded from YAML, you can call the `create()` method to create the job on OCI. To start a job run, you can call the `run()` method, which returns a `DataScienceJobRun` instance. Once the job or job run is created, the job OCID can be accessed through `job.id` or `run.id`.

```
# Create the job on OCI Data Science
job.create()
# Start a job run
run = job.run()
# Stream the job run outputs
run.watch()
```

The `watch()` method is useful to monitor the progress of the job run. It will stream the logs to terminal and return once the job is finished. Logging configurations are required for this method to show logs. Here is an example of the logs:

```
Job OCID: <job_ocid>
Job Run OCID: <job_run_ocid>
2023-02-27 15:58:01 - Job Run ACCEPTED
2023-02-27 15:58:11 - Job Run ACCEPTED, Infrastructure provisioning.
```

(continues on next page)

(continued from previous page)

```

2023-02-27 15:59:06 - Job Run ACCEPTED, Infrastructure provisioned.
2023-02-27 15:59:29 - Job Run ACCEPTED, Job run bootstrap starting.
2023-02-27 16:01:08 - Job Run ACCEPTED, Job run bootstrap complete. Artifact execution_
↳starting.
2023-02-27 16:01:18 - Job Run IN_PROGRESS, Job run artifact execution in progress.
2023-02-27 16:01:11 - Good morning, your environment variable has value of (Welcome to_
↳OCI Data Science.)
2023-02-27 16:01:11 - Job Run 02-27-2023-16:01:11
2023-02-27 16:01:11 - Job Done.
2023-02-27 16:01:22 - Job Run SUCCEEDED, Job run artifact execution succeeded._
↳Infrastructure de-provisioning.

```

### 15.1.4 Load Existing Job or Job Run

You can load an existing job or job run using the OCID from OCI:

```

from ads.jobs import Job, DataScienceJobRun

# Load a job
job = Job.from_datascience_job("<job_ocid>")

# Load a job run
job_run = DataScienceJobRun.from_ocid("<job_run_ocid>")

```

### 15.1.5 List Existing Jobs or Job Runs

To get a list of existing jobs in a specific compartment:

```

from ads.jobs import Job

# Get a list of jobs in a specific compartment.
jobs = Job.datascience_job("<compartment_ocid>")

```

With a Job object, you can get a list of job runs:

```

# Gets a list of job runs for a specific job.
runs = job.run_list()

```

### 15.1.6 Delete a Job or Job Run

You can delete a job or job run by calling the delete() method.

```

# Delete a job and the corresponding job runs.
job.delete()
# Delete a job run
run.delete()

```

You can also cancel a job run:

```
run.cancel()
```

### 15.1.7 Variable Substitution

When defining a job or starting a job run, you can use environment variable substitution for the names and `output_uri` argument of the `with_output()` method.

For example, the following job specifies the name based on the environment variable `DATASET_NAME`, and `output_uri` based on the environment variables `JOB_RUN_OCID`:

Listing 3: Python

```
from ads.jobs import Job, DataScienceJob, PythonRuntime

job = (
    Job(name="Training on ${DATASET_NAME}")
    .with_infrastructure(
        DataScienceJob()
        .with_log_group_id("<log_group_ocid>")
        .with_log_id("<log_ocid>")
        .with_compartment_id("<compartment_ocid>")
        .with_project_id("<project_ocid>")
        .with_shape_name("VM.Standard.E3.Flex")
        .with_shape_config_details(memory_in_gbs=16, ocpus=1)
    )
    .with_runtime(
        PythonRuntime()
        .with_service_conda("pytorch110_p38_gpu_v1")
        .with_environment_variable(DATASET_NAME="MyData")
        .with_source("local/path/to/training_script.py")
        .with_output("output", "oci://bucket_name@namespace/prefix/${JOB_RUN_OCID}")
    )
)
```

Listing 4: YAML

```
kind: job
spec:
  name: Training on ${DATASET_NAME}
  infrastructure:
    kind: infrastructure
    type: dataScienceJob
    spec:
      compartmentId: <compartment_ocid>
      logGroupId: <log_group_ocid>
      logId: <log_ocid>
      projectId: <project_ocid>
      shapeConfigDetails:
        memoryInGBs: 16
        ocpus: 1
      shapeName: VM.Standard.E3.Flex
  runtime:
```

(continues on next page)

(continued from previous page)

```

kind: runtime
type: python
spec:
  conda:
    slug: pytorch110_p38_cpu_v1
    type: service
  env:
    - name: DATASET_NAME
      value: MyData
  outputDir: output
  outputUri: oci://bucket_name@namespace/prefix/${JOB_RUN_OCID}
  scriptPathURI: local/path/to/training_script.py

```

Note that JOB\_RUN\_OCID is an environment variable provided by the service after the job run is created. It is available for the output\_uri but cannot be used in the job name.

See also:

- [Saving Outputs](#)
- [Service Provided Environment Variables](#)

## 15.2 IAM Policies

Oracle Cloud Infrastructure Identity and Access Management (IAM) lets you specify policies to control the access to your cloud resources. This section describe the policies you might need for running Data Science Jobs.

**Warning:** The policies presented in this page are intended to show the resource\_type used by the job and job runs. You should further restrict the access to the resources base on your needs.

### Policy subject

In the following example, group <your\_data\_science\_users> is the subject of the policy when using OCI API keys for authentication. For resource principal authentication, the subject should be a dynamic-group, for example, dynamic-group <your\_resources>

Here is an example defining a dynamic group for all job runs in a compartment:

```

all { resource.type='datasciencejobrun', resource.compartment.id='<job_run_compartment_
  ↳ocid>' }

```

The following policies are for creating and managing Data Science Jobs and Job Runs:

```

Allow group <your_data_science_users> to manage data-science-jobs in compartment <your_
  ↳compartment_name>
Allow group <your_data_science_users> to manage data-science-job-runs in compartment
  ↳<your_compartment_name>
Allow group <your_data_science_users> to use virtual-network-family in compartment <your_
  ↳compartment_name>
Allow group <your_data_science_users> to manage log-groups in compartment <your_

```

(continues on next page)

(continued from previous page)

```
↪ compartment_name>
Allow group <your_data_science_users> to use logging-family in compartment <your_
↪ compartment_name>
Allow group <your_data_science_users> to use read metrics in compartment <your_
↪ compartment_name>
```

The following policies are for job runs to access other OCI resources:

```
Allow dynamic-group <your_resources> to read repos in compartment <your_compartment_name>
Allow dynamic-group <your_resources> to use data-science-family in compartment <your_
↪ compartment_name>
Allow dynamic-group <your_resources> to use virtual-network-family in compartment <your_
↪ compartment_name>
Allow dynamic-group <your_resources> to use log-groups in compartment <your_compartment_
↪ name>
Allow dynamic-group <your_resources> to use logging-family in compartment <your_
↪ compartment_name>
Allow dynamic-group <your_resources> to manage objects in compartment <your_compartment_
↪ name> where all {target.bucket.name=<your_bucket_name>}
Allow dynamic-group <your_resources> to use buckets in compartment <your_compartment_
↪ name> where all {target.bucket.name=<your_bucket_name>}
```

The following policy is needed for running a container job:

```
Allow dynamic-group <your_resources> to read repos in compartment <your_compartment_name>
```

See also:

- [Learn Best Practices for Setting Up Your Tenancy](#)
- [IAM with Identity Domains](#)
- [IAM without Identity Domains](#)
- [Dynamic Group](#)
- [Data Science Policies](#)
- [Object Storage](#)
- [Container Registry](#)

## 15.3 Infrastructure and Runtime

This page describes the configurations of **Infrastructure** and **Runtime** defining a Data Science Job.

### In this Page

- [Example](#)
- [Infrastructure](#)
  - [Using Configurations from Notebook](#)
  - [Compute Shapes](#)

- Networking
- Logging
- Runtime
  - Environment Variables
  - Command Line Arguments
  - Conda Environment
  - Override Configurations

### 15.3.1 Example

The following example configures the infrastructure and runtime to run a Python script.

Listing 5: Python

```
from ads.jobs import Job, DataScienceJob, PythonRuntime

job = (
    Job(name="My Job")
    .with_infrastructure(
        DataScienceJob()
        # Configure logging for getting the job run outputs.
        .with_log_group_id("<log_group_ocid>")
        # Log resource will be auto-generated if log ID is not specified.
        .with_log_id("<log_ocid>")
        # If you are in an OCI data science notebook session,
        # the following configurations are not required.
        # Configurations from the notebook session will be used as defaults.
        .with_compartment_id("<compartment_ocid>")
        .with_project_id("<project_ocid>")
        .with_subnet_id("<subnet_ocid>")
        .with_shape_name("VM.Standard.E3.Flex")
        # Shape config details are applicable only for the flexible shapes.
        .with_shape_config_details(memory_in_gbs=16, ocpus=1)
        # Minimum/Default block storage size is 50 (GB).
        .with_block_storage_size(50)
    )
    .with_runtime(
        PythonRuntime()
        # Specify the service conda environment by slug name.
        .with_service_conda("pytorch110_p38_cpu_v1")
        # Source code of the job, can be local or remote.
        .with_source("path/to/script.py")
        # Environment variable
        .with_environment_variable(NAME="Welcome to OCI Data Science.")
        # Command line argument
        .with_argument(greeting="Good morning")
    )
)
```

Listing 6: YAML

```

kind: job
spec:
  name: "My Job"
  infrastructure:
    kind: infrastructure
    type: dataScienceJob
    spec:
      blockSizeSize: 50
      compartmentId: <compartment_ocid>
      jobInfrastructureType: STANDALONE
      logGroupId: <log_group_ocid>
      logId: <log_ocid>
      projectId: <project_ocid>
      shapeConfigDetails:
        memoryInGBs: 16
        ocpus: 1
        shapeName: VM.Standard.E3.Flex
        subnetId: <subnet_ocid>
  runtime:
    kind: runtime
    type: python
    spec:
      args:
        - --greeting
        - Good morning
      conda:
        slug: pytorch110_p38_cpu_v1
        type: service
      env:
        - name: NAME
          value: Welcome to OCI Data Science.
      scriptPathURI: path/to/script.py

```

### 15.3.2 Infrastructure

The Data Science Job infrastructure is defined by a *DataScienceJob* instance. For example:

Listing 7: Python

```

from ads.jobs import Job, DataScienceJob, GitPythonRuntime

infrastructure = (
    DataScienceJob()
    # Configure logging for getting the job run outputs.
    .with_log_group_id("<log_group_ocid>")
    # Log resource will be auto-generated if log ID is not specified.
    .with_log_id("<log_ocid>")
    # If you are in an OCI data science notebook session,
    # the following configurations are not required.

```

(continues on next page)



(continued from previous page)

```

# Configurations from the notebook session will be used as defaults.
.with_compartment_id("<compartment_ocid>")
.with_project_id("<project_ocid>")
.with_subnet_id("<subnet_ocid>")
.with_shape_name("VM.Standard.E3.Flex")
# Shape config details are applicable only for the flexible shapes.
.with_shape_config_details(memory_in_gbs=16, ocpus=1)
# Minimum/Default block storage size is 50 (GB).
.with_block_storage_size(50)
)

```

Listing 8: YAML

```

kind: infrastructure
type: dataScienceJob
spec:
  blockSize: 50
  compartmentId: <compartment_ocid>
  logGroupId: <log_group_ocid>
  logId: <log_ocid>
  projectId: <project_ocid>
  shapeConfigDetails:
    memoryInGBs: 16
    ocpus: 1
  shapeName: VM.Standard.E3.Flex
  subnetId: <subnet_ocid>

```

When creating a *DataScienceJob* instance, the following configurations are required:

- Compartment ID
- Project ID
- Compute Shape

The following configurations are optional:

- Block Storage Size, defaults to 50 (GB)
- Log Group ID
- Log ID

For more details about the mandatory and optional parameters, see *DataScienceJob*.

### 15.3.2.1 Using Configurations from Notebook

If you are creating a job from an OCI Data Science *Notebook Session*, the same infrastructure configurations from the notebook session will be used as defaults, including:

- Compartment ID
- Project ID
- Subnet ID
- Compute Shape

- Block Storage Size

You can initialize the `DataScienceJob` with the logging configurations and override the other options as needed. For example:

Listing 9: Python

```
from ads.jobs import DataScienceJob

infrastructure = (
    DataScienceJob()
    .with_log_group_id("<log_group_ocid>")
    .with_log_id("<log_ocid>")
    # Use a GPU shape for the job,
    # regardless of the shape used by the notebook session
    .with_shape_name("VM.GPU3.1")
    # compartment ID, project ID, subnet ID and block storage will be
    # the same as the ones set in the notebook session
)
```

Listing 10: YAML

```
kind: infrastructure
type: dataScienceJob
spec:
  logGroupId: <log_group_ocid>
  logId: <log_ocid>
  shapeName: VM.GPU3.1
```

### 15.3.2.2 Compute Shapes

The `DataScienceJob` class provides two static methods to obtain the support compute shapes:

- You can get a list of currently supported compute shapes by calling `instance_shapes()`.
- can get a list of shapes that are available for fast launch by calling `fast_launch_shapes()`. Specifying a fast launch shape will allow your job to start as fast as possible.

### 15.3.2.3 Networking

Data Science Job offers two types of networking: default networking (managed egress) and custom networking. Default networking allows job runs to access public internet through a NAT gateway and OCI service through a service gateway, both are configured automatically. Custom networking requires you to specify a subnet ID. You can control the network access through the subnet and security lists.

If you specified a subnet ID, your job will be configured to have custom networking. Otherwise, default networking will be used. Note that when you are in a Data Science Notebook Session, the same networking configuration is be used by default. You can specify the networking manually by calling `with_job_infrastructure_type()`.

### 15.3.2.4 Logging

Logging is not required to create the job. However, it is highly recommended to enable logging for debugging and monitoring.

In the preceding example, both the log OCID and corresponding log group OCID are specified with the *DataScienceJob* instance. If your administrator configured the permission for you to search for logging resources, you can skip specifying the log group OCID because ADS can automatically retrieve it.

If you specify only the log group OCID and no log OCID, a new Log resource is automatically created within the log group to store the logs, see also [ADS Logging](#).

With logging configured, you can call *watch()* method to stream the logs.

### 15.3.3 Runtime

The *runtime* of a job defines the source code of your workload, environment variables, CLI arguments and other configurations for the environment to run the workload.

Depending on the source code, ADS provides different types of *runtime* for defining a data science job, including:

- *PythonRuntime* for Python code stored locally, OCI object storage, or other remote location supported by *fsspec*. See *Run a Python Workload*.
- *GitPythonRuntime* for Python code from a Git repository. See *Run Code from Git Repo*.
- *NotebookRuntime* for a single Jupyter notebook stored locally, OCI object storage, or other remote location supported by *fsspec*. See *Run a Notebook*.
- *ScriptRuntime* for bash or shell scripts stored locally, OCI object storage, or other remote location supported by *fsspec*. See *Run a Script*.
- *ContainerRuntime* for container images.

#### 15.3.3.1 Environment Variables

You can set environment variables for a runtime by calling *with\_environment\_variable()*. Environment variables enclosed by `${...}` will be substituted. For example:

Listing 11: Python

```
from ads.jobs import PythonRuntime

runtime = (
    PythonRuntime()
    .with_environment_variable(
        HOST="10.0.0.1",
        PORT="443",
        URL="http://${HOST}:${PORT}/path/",
        ESCAPED_URL="http://${HOST}:${PORT}/path/",
        MISSING_VAR="This is ${UNDEFINED}",
        VAR_WITH_DOLLAR="$10",
        DOUBLE_DOLLAR="$$10"
    )
)
```

Listing 12: YAML

```
kind: runtime
type: python
spec:
  env:
    - name: HOST
      value: 10.0.0.1
    - name: PORT
      value: '443'
    - name: URL
      value: http://${HOST}:${PORT}/path/
    - name: ESCAPED_URL
      value: http://${HOST}:${PORT}/path/
    - name: MISSING_VAR
      value: This is ${UNDEFINED}
    - name: VAR_WITH_DOLLAR
      value: $10
    - name: DOUBLE_DOLLAR
      value: $$10
```

```
for k, v in runtime.environment_variables.items():
    print(f"{k}: {v}")
```

will show the following environment variables for the runtime:

```
HOST: 10.0.0.1
PORT: 443
URL: http://10.0.0.1:443/path/
ESCAPED_URL: http://${HOST}:${PORT}/path/
MISSING_VAR: This is ${UNDEFINED}
VAR_WITH_DOLLAR: $10
DOUBLE_DOLLAR: $10
```

Note that:

- You can use \$\$ to escape the substitution.
- Undefined variable enclosed by \${...} will be ignored.
- Double dollar signs \$\$ will be substituted by a single one \$.

See also: [Service Provided Environment Variables](#)

### 15.3.3.2 Command Line Arguments

The command line arguments for running your script or function can be configured by calling `with_argument()`. For example:

Listing 13: Python

```
from ads.jobs import PythonRuntime

runtime = (
```

(continues on next page)

(continued from previous page)

```

PythonRuntime()
  .with_source("oci://bucket_name@namespace/path/to/script.py")
  .with_argument(
    "arg1", "arg2",
    key1="val1",
    key2="val2"
  )
)

```

Listing 14: YAML

```

kind: runtime
type: python
spec:
  scriptPathURI: oci://bucket_name@namespace/path/to/script.py
  args:
    - arg1
    - arg2
    - --key1
    - val1
    - --key2
    - val2

```

will configured the job to call your script by:

```
python script.py arg1 arg2 --key1 val1 --key2 val2
```

You can call `with_argument()` multiple times to set the arguments to your desired order. You can check `runtime.args` to see the added arguments.

Here are a few more examples:

Listing 15: Python

```

runtime = PythonRuntime()
runtime.with_argument(key1="val1", key2="val2")
runtime.with_argument("pos1")

```

Listing 16: YAML

```

kind: runtime
type: python
spec:
  args:
    - --key1
    - val1
    - --key2
    - val2
    - pos1

```

```

print(runtime.args)
# ['--key1', 'val1', '--key2', 'val2', 'pos1']

```

Listing 17: Python

```
runtime = PythonRuntime()
runtime.with_argument("pos1")
runtime.with_argument(key1="val1", key2="val2.1 val2.2")
runtime.with_argument("pos2")
```

Listing 18: YAML

```
kind: runtime
type: python
spec:
  args:
    - pos1
    - --key1
    - val1
    - --key2
    - val2.1 val2.2
    - pos2
```

```
print(runtime.args)
# ['pos1', '--key1', 'val1', '--key2', 'val2.1 val2.2', 'pos2']
```

Listing 19: Python

```
runtime = PythonRuntime()
runtime.with_argument("pos1")
runtime.with_argument(key1=None, key2="val2")
runtime.with_argument("pos2")
```

Listing 20: YAML

```
kind: runtime
type: python
spec:
  args:
    - pos1
    - --key1
    - --key2
    - val2
    - pos2
```

```
print(runtime.args)
# ["pos1", "--key1", "--key2", "val2", "pos2"]
```

### 15.3.3.3 Conda Environment

You can configure a [Conda Environment](#) for running your workload. You can use the slug name to specify a conda environment provided by the data science service. For example, to use the TensorFlow conda environment:

Listing 21: Python

```
from ads.jobs import PythonRuntime

runtime = (
    PythonRuntime()
    .with_source("oci://bucket_name@namespace/path/to/script.py")
    # Use slug name for conda environment provided by data science service
    .with_service_conda("tensorflow28_p38_cpu_v1")
)
```

Listing 22: YAML

```
kind: runtime
type: python
spec:
  conda:
    type: service
    slug: tensorflow28_p38_cpu_v1
    scriptPathURI: oci://bucket_name@namespace/path/to/script.py
```

You can also use a custom conda environment published to OCI Object Storage by passing the uri to `with_custom_conda()`, for example:

Listing 23: Python

```
from ads.jobs import PythonRuntime

runtime = (
    PythonRuntime()
    .with_source("oci://bucket_name@namespace/path/to/script.py")
    .with_custom_conda("oci://bucket@namespace/conda_pack/pack_name")
)
```

Listing 24: YAML

```
kind: runtime
type: python
spec:
  conda:
    type: published
    uri: oci://bucket@namespace/conda_pack/pack_name
    scriptPathURI: oci://bucket_name@namespace/path/to/script.py
```

By default, ADS will try to determine the region based on the authenticated API key or resource principal. If your custom conda environment is stored in a different region, you can specify the region when calling `with_custom_conda()`.

For more details on custom conda environment, see [Publishing a Conda Environment to an Object Storage Bucket in Your Tenancy](#).

#### 15.3.3.4 Override Configurations

When you call `ads.jobs.Job.run()`, a new job run will be started with the configuration defined in the `job`. You may want to override the configuration with custom variables. For example, you can customize job run display name, override command line argument, specify additional environment variables, and add free form tags:

```
job_run = job.run(
    name="<my_job_run_name>",
    args="new_arg --new_key new_val",
    env_var={"new_env": "new_val"},
    freeform_tags={"new_tag": "new_tag_val"}
)
```

## 15.4 Run a Python Workload

The *PythonRuntime* is designed for running a Python workload. You can configure the environment variables, command line arguments, and conda environment as described in *Infrastructure and Runtime*. This section shows the additional enhancements provided by *PythonRuntime*.

### In this Page

- [Example](#)
- [Source Code](#)
- [Working Directory](#)
  - [File Source Code](#)
  - [Folder Source Code](#)
  - [Archive Source Code](#)
- [Python Paths](#)
- [Outputs](#)

### 15.4.1 Example

Here is an example to define and run a job using *PythonRuntime*:

Listing 25: Python

```
from ads.jobs import Job, DataScienceJob, PythonRuntime

job = (
    Job(name="My Job")
    .with_infrastructure(
        DataScienceJob()
        # Configure logging for getting the job run outputs.
        .with_log_group_id("<log_group_ocid>")
        # Log resource will be auto-generated if log ID is not specified.
        .with_log_id("<log_ocid>")
    )
)
```

(continues on next page)



(continued from previous page)

```

# If you are in an OCI data science notebook session,
# the following configurations are not required.
# Configurations from the notebook session will be used as defaults.
.with_compartment_id("<compartment_ocid>")
.with_project_id("<project_ocid>")
.with_subnet_id("<subnet_ocid>")
.with_shape_name("VM.Standard.E3.Flex")
# Shape config details are applicable only for the flexible shapes.
.with_shape_config_details(memory_in_gbs=16, ocpus=1)
# Minimum/Default block storage size is 50 (GB).
.with_block_storage_size(50)
)
.with_runtime(
  PythonRuntime()
  # Specify the service conda environment by slug name.
  .with_service_conda("pytorch110_p38_cpu_v1")
  # The job artifact can be a single Python script, a directory or a zip file.
  .with_source("local/path/to/code_dir")
  # Environment variable
  .with_environment_variable(NAME="Welcome to OCI Data Science.")
  # Command line argument, arg1 --key arg2
  .with_argument("arg1", key="arg2")
  # Set the working directory
  # When using a directory as source, the default working dir is the parent of
↪code_dir.
  # Working dir should be a relative path beginning from the source directory.
↪(code_dir)
  .with_working_dir("code_dir")
  # The entrypoint is applicable only to directory or zip file as source
  # The entrypoint should be a path relative to the working dir.
  # Here my_script.py is a file in the code_dir/my_package directory
  .with_entrypoint("my_package/my_script.py")
  # Add an additional Python path, relative to the working dir (code_dir/other_
↪packages).
  .with_python_path("other_packages")
  # Copy files in "code_dir/output" to object storage after job finishes.
  .with_output("output", "oci://bucket_name@namespace/path/to/dir")
)
)

```

Listing 26: YAML

```

kind: job
spec:
  name: "My Job"
  infrastructure:
    kind: infrastructure
    type: dataScienceJob
    spec:
      blockSizeSize: 50
      compartmentId: <compartment_ocid>
      jobInfrastructureType: STANDALONE

```

(continues on next page)

(continued from previous page)

```

logGroupId: <log_group_ocid>
logId: <log_ocid>
projectId: <project_ocid>
shapeConfigDetails:
  memoryInGBs: 16
  ocpus: 1
  shapeName: VM.Standard.E3.Flex
  subnetId: <subnet_ocid>
runtime:
  kind: runtime
  type: python
  spec:
    args:
      - arg1
      - --key
      - arg2
    conda:
      slug: pytorch110_p38_cpu_v1
      type: service
    entrypoint: my_package/my_script.py
    env:
      - name: NAME
        value: Welcome to OCI Data Science.
    outputDir: output
    outputUri: oci://bucket_name@namespace/path/to/dir
    pythonPath:
      - other_packages
    scriptPathURI: local/path/to/code_dir
    workingDir: code_dir
    workingDir: code_dir

```

```

# Create the job on OCI Data Science
job.create()
# Start a job run
run = job.run()
# Stream the job run outputs
run.watch()

```

```

# Create the job on OCI Data Science
job.create()
# Start a job run
run = job.run()
# Stream the job run outputs
run.watch()

```

The *PythonRuntime* uses an driver script from ADS for the job run. It performs additional operations before and after invoking your code. You can examine the driver script by downloading the job artifact from the OCI Console.

## 15.4.2 Source Code

In the `with_source()` method, you can specify the location of your source code. The location can be a local path or a remote URI supported by `fsspec`. For example, you can specify files on OCI object storage using URI like `oci://bucket@namespace/path/to/prefix`. ADS will use the authentication method configured by `ads.set_auth()` to fetch the files and upload them as job artifact.

The source code can be a single file, a compressed file/archive (zip/tar), or a folder. When the source code is a compressed file/archive (zip/tar) or a folder, you need to also specify the entrypoint using `with_entrypoint()`. The path of the entrypoint should be a path relative to the working directory.

The entrypoint can be a Python script or a Jupyter Notebook.

## 15.4.3 Working Directory

The working directory of your workload can be configured by `with_working_dir()`. By default, `PythonRuntime` will create a code directory as the working directory in the job run to store your source code (job artifact), for example `/home/datascience/decompressed_artifact/code`.

When the entrypoint is a Jupyter notebook, the working directory for the code running in the notebook will be the directory containing the notebook.

When the entrypoint is not a notebook, the working directory depends on the source code.

### 15.4.3.1 File Source Code

If your source code is a single file, for example, `my_script.py`, the file structure in the job run will look like:

```
code <---This is the working directory
└─ my_script.py
```

You can refer your as `./my_script.py`

### 15.4.3.2 Folder Source Code

If your source code is a folder, for example `my_source_code`, ADS will compress the folder as job artifact. In the job run, it will be decompressed under the working directory. The file structure in the job run will look like:

```
code <---This is the working directory
└─ my_source_code
   └─ my_module.py
   └─ my_entrypoint.py
```

In this case, the working directory is the parent of your source code folder. You will need to specify the entrypoint as `my_source_code/my_entrypoint.py`.

```
runtime = (
    PythonRuntime()
    .with_source("path/to/my_source_code")
    .with_entrypoint("my_source_code/my_entrypoint.py")
)
```

Alternatively, you can specify the working directory as `my_source_code` and the entrypoint as `my_entrypoint.py`:

```
runtime = (  
    PythonRuntime()  
    .with_source("path/to/my_source_code")  
    .with_working_dir("my_source_code")  
    .with_entrypoint("my_entrypoint.py")  
)
```

#### 15.4.3.3 Archive Source Code

If your source code is a zip/tar file, the files in the archive will be decompressed under the working directory. The file structure in the job run depends on whether your archive has a top level directory. For example, you can inspect the structure of your zip file by running the `unzip -l` command:

```
unzip -l my_source_code.zip
```

This will give you outputs similar to the following:

```
Archive:  path/to/my_source_code.zip  
  Length      Date    Time    Name  
-----  
         0  02-22-2023  16:38    my_source_code/  
    1803  02-22-2023  16:38    my_source_code/my_module.py  
     91  02-22-2023  16:38    my_source_code/my_entrypoint.py  
-----  
    1894  
                3 files
```

In this case, a top level directory `my_source_code/` is presented in the archive. The file structure in the job run will look like:

```
code <---This is the working directory  
└─ my_source_code  
   └─ my_module.py  
   └─ my_entrypoint.py
```

which is the same as the case when you specified a local folder as source code. You can configure the entrypoint and working directory similar to the examples above.

If a top level directory is not presented, outputs for the archive will look like the following:

```
Archive:  path/to/my_source_code.zip  
  Length      Date    Time    Name  
-----  
    1803  02-22-2023  16:38    my_module.py  
     91  02-22-2023  16:38    my_entrypoint.py  
-----  
    1894  
                2 files
```

In this case, the file structure in the job run will look like:

```
code <---This is the working directory  
└─ my_module.py  
└─ my_entrypoint.py
```

And, you can specify the entrypoint with the filename directly:

```
runtime = (
    PythonRuntime()
    .with_source("path/to/my_source_code.zip")
    .with_entrypoint("my_entrypoint.py")
)
```

### 15.4.4 Python Paths

The working directory is added to the Python paths automatically. You can call `with_python_path()` to add additional python paths as needed. The paths should be relative paths from the working directory.

### 15.4.5 Outputs

The `with_output()` method allows you to specify the output path `output_path` in the job run and a remote URI (`output_uri`). Files in the `output_path` are copied to the remote output URI after the job run finishes successfully. Note that the `output_path` should be a path relative to the working directory.

OCI object storage location can be specified in the format of `oci://bucket_name@namespace/path/to/dir`. Please make sure you configure the IAM policy to allow the job run dynamic group to use object storage.

## 15.5 Run a Notebook

The `NotebookRuntime` allows you to run a single Jupyter notebook as a job.

### In this Page

- [\*TensorFlow Example\*](#)
- [\*Working Directory\*](#)
- [\*Download the Outputs\*](#)
- [\*Exclude Cells\*](#)
- [\*Notebook with Dependencies\*](#)

### 15.5.1 TensorFlow Example

The following example shows you how to run an the [TensorFlow 2 quick start for beginner](#) notebook from the internet and save the results to OCI Object Storage. The notebook path points to the raw file link from GitHub. To run the example, ensure that you have internet access to retrieve the notebook:

Listing 27: Python

```
from ads.jobs import Job, DataScienceJob, NotebookRuntime

job = (
    Job(name="My Job")
    .with_infrastructure(
```

(continues on next page)

(continued from previous page)

```

DataScienceJob()
# Configure logging for getting the job run outputs.
.with_log_group_id("<log_group_ocid>")
# Log resource will be auto-generated if log ID is not specified.
.with_log_id("<log_ocid>")
# If you are in an OCI data science notebook session,
# the following configurations are not required.
# Configurations from the notebook session will be used as defaults.
.with_compartment_id("<compartment_ocid>")
.with_project_id("<project_ocid>")
.with_subnet_id("<subnet_ocid>")
.with_shape_name("VM.Standard.E3.Flex")
# Shape config details are applicable only for the flexible shapes.
.with_shape_config_details(memory_in_gbs=16, ocpus=1)
# Minimum/Default block storage size is 50 (GB).
.with_block_storage_size(50)
)
.with_runtime(
  NotebookRuntime()
  .with_notebook(
    path="https://raw.githubusercontent.com/tensorflow/docs/master/site/en/
↪tutorials/customization/basics.ipynb",
    encoding='utf-8'
  )
  .with_service_conda("tensorflow28_p38_cpu_v1")
  .with_environment_variable(GREETINGS="Welcome to OCI Data Science")
  .with_exclude_tag(["ignore", "remove"])
  .with_output("oci://bucket_name@namespace/path/to/dir")
)
)

```

Listing 28: YAML

```

kind: job
spec:
  name: "My Job"
  infrastructure:
    kind: infrastructure
    type: dataScienceJob
    spec:
      blockSize: 50
      compartmentId: <compartment_ocid>
      jobInfrastructureType: STANDALONE
      logGroupId: <log_group_ocid>
      logId: <log_ocid>
      projectId: <project_ocid>
      shapeConfigDetails:
        memoryInGBs: 16
        ocpus: 1
      shapeName: VM.Standard.E3.Flex
      subnetId: <subnet_ocid>
  runtime:

```

(continues on next page)

(continued from previous page)

```

kind: runtime
type: notebook
spec:
  conda:
    slug: tensorflow28_p38_cpu_v1
    type: service
  env:
    - name: GREETINGS
      value: Welcome to OCI Data Science
  excludeTags:
    - ignore
    - remove
  notebookEncoding: utf-8
  notebookPathURI: https://raw.githubusercontent.com/tensorflow/docs/master/site/en/
↳ tutorials/customization/basics.ipynb
  outputUri: oci://bucket_name@namespace/path/to/dir

```

```

# Create the job on OCI Data Science
job.create()
# Start a job run
run = job.run()
# Stream the job run outputs
run.watch()
# Download the notebook back to local
run.download("/path/to/local/dir")

```

## 15.5.2 Working Directory

An empty directory in the job run will be created as the working directory for running the notebook. All relative paths used in the notebook will be base on the working directory.

## 15.5.3 Download the Outputs

If you specify the output location using `with_output()`. All files in the working directory, including the notebook with outputs, will be saved to output location (`oci://bucket_name@namespace/path/to/dir`) after the job finishes running. You can download the output by calling the `download()` method.

## 15.5.4 Exclude Cells

The `NotebookRuntime` also allows you to specify tags to exclude cells from being processed in a job run using `with_exclude_tag()` method. For example, you could do exploratory data analysis and visualization in a notebook, and you may want to exclude the visualization when running the notebook in a job.

To tag cells in a notebook, see [Adding tags using notebook interfaces](#).

The `with_exclude_tag()` take a list of tags as argument Cells with any matching tags are excluded from the job run. In the above example, cells with `ignore` or `remove` are excluded.

### 15.5.5 Notebook with Dependencies

If your notebook needs extra dependencies like custom module or data files, you can use *PythonRuntime* or *GitPythonRuntime* and set your notebook as the entrypoint.

See also:

- *Run a Python Workload*
- *Run Code from Git Repo*

Here is an example of running the *minGPT* demo notebook.

Listing 29: Python

```
from ads.jobs import Job, DataScienceJob, GitPythonRuntime

job = (
    Job(name="My Job")
    .with_infrastructure(
        DataScienceJob()
        # Configure logging for getting the job run outputs.
        .with_log_group_id("<log_group_ocid>")
        # Log resource will be auto-generated if log ID is not specified.
        .with_log_id("<log_ocid>")
        # If you are in an OCI data science notebook session,
        # the following configurations are not required.
        # Configurations from the notebook session will be used as defaults.
        .with_compartment_id("<compartment_ocid>")
        .with_project_id("<project_ocid>")
        .with_subnet_id("<subnet_ocid>")
        .with_shape_name("VM.Standard.E3.Flex")
        # Shape config details are applicable only for the flexible shapes.
        .with_shape_config_details(memory_in_gbs=16, ocpus=1)
        # Minimum/Default block storage size is 50 (GB).
        .with_block_storage_size(50)
    )
    .with_runtime(
        GitPythonRuntime()
        # Use service conda pack
        .with_service_conda("pytorch110_p38_gpu_v1")
        # Specify training source code from GitHub
        .with_source(url="https://github.com/karpathy/minGPT.git")
        # Entrypoint is a relative path from the root of the Git repository
        .with_entrypoint("demo.ipynb")
    )
)
```

Listing 30: YAML

```
kind: job
spec:
  name: "My Job"
  infrastructure:
    kind: infrastructure
```

(continues on next page)



(continued from previous page)

```

type: dataScienceJob
spec:
  blockSize: 50
  compartmentId: <compartment_ocid>
  jobInfrastructureType: STANDALONE
  logGroupId: <log_group_ocid>
  logId: <log_ocid>
  projectId: <project_ocid>
  shapeConfigDetails:
    memoryInGBs: 16
    ocpus: 1
    shapeName: VM.Standard.E3.Flex
    subnetId: <subnet_ocid>
runtime:
  kind: runtime
  type: gitPython
  spec:
    conda:
      slug: pytorch19_p37_gpu_v1
      type: service
    entrypoint: demo.ipynb
    url: https://github.com/karpathy/minGPT.git

```

```

# Create the job on OCI Data Science
job.create()
# Start a job run
run = job.run()
# Stream the job run outputs
run.watch()

```

## 15.6 Run a Script

This section shows how to create a job to run a script.

The *ScriptRuntime* is designed for you to define job artifacts and configurations supported by OCI Data Science Jobs natively. It can be used with any script types that is supported by the OCI Data Science Jobs, including shell scripts and python scripts.

The source code can be a single script, files in a folder or a zip/tar file.

See also: [Preparing Job Artifacts](#).

Here is an example:

Listing 31: Python

```

from ads.jobs import Job, DataScienceJob, ScriptRuntime

job = (
    Job(name="My Job")
    .with_infrastructure(
        DataScienceJob()

```

(continues on next page)

(continued from previous page)

```

# Configure logging for getting the job run outputs.
.with_log_group_id("<log_group_ocid>")
# Log resource will be auto-generated if log ID is not specified.
.with_log_id("<log_ocid>")
# If you are in an OCI data science notebook session,
# the following configurations are not required.
# Configurations from the notebook session will be used as defaults.
.with_compartment_id("<compartment_ocid>")
.with_project_id("<project_ocid>")
.with_subnet_id("<subnet_ocid>")
.with_shape_name("VM.Standard.E3.Flex")
# Shape config details are applicable only for the flexible shapes.
.with_shape_config_details(memory_in_gbs=16, ocpus=1)
# Minimum/Default block storage size is 50 (GB).
.with_block_storage_size(50)
)
.with_runtime(
  ScriptRuntime()
  # Specify the service conda environment by slug name.
  .with_service_conda("pytorch110_p38_cpu_v1")
  # The job artifact can be a single Python script, a directory or a zip file.
  .with_source("local/path/to/code_dir")
  # Environment variable
  .with_environment_variable(NAME="Welcome to OCI Data Science.")
  # Command line argument
  .with_argument("100 linux \"hi there\"")
  # The entrypoint is applicable only to directory or zip file as source
  # The entrypoint should be a path relative to the working dir.
  # Here my_script.sh is a file in the code_dir/my_package directory
  .with_entrypoint("my_package/my_script.sh")
)
)

```

Listing 32: YAML

```

kind: job
spec:
  name: "My Job"
  infrastructure:
    kind: infrastructure
    type: dataScienceJob
    spec:
      blockSize: 50
      compartmentId: <compartment_ocid>
      jobInfrastructureType: STANDALONE
      logGroupId: <log_group_ocid>
      logId: <log_ocid>
      projectId: <project_ocid>
      shapeConfigDetails:
        memoryInGBs: 16
        ocpus: 1
      shapeName: VM.Standard.E3.Flex

```

(continues on next page)

(continued from previous page)

```

    subnetId: <subnet_ocid>
runtime:
  kind: runtime
  type: script
  spec:
    args:
      - 100 linux "hi there"
    conda:
      slug: pytorch110_p38_cpu_v1
      type: service
    entrypoint: my_package/my_script.sh
    env:
      - name: NAME
        value: Welcome to OCI Data Science.
    scriptPathURI: local/path/to/code_dir

```

```

# Create the job on OCI Data Science
job.create()
# Start a job run
run = job.run()
# Stream the job run outputs
run.watch()

```

An example script is available on [Data Science AI Sample GitHub Repository](#).

### 15.6.1 Working Directory

The working directory is the parent directory where the job artifacts are decompressed, for example `/home/datascience/decompressed_artifact/`. When the source code is a compressed file/archive (zip/tar) or a folder, you need to also specify the entrypoint using `with_entrypoint()`. The path of the entrypoint should be a path relative to the working directory. Note that this directory cannot be changed when using `ScriptRuntime`. See [Python Runtime Working Directory](#) for more details.

## 15.7 Run a Container

The `ContainerRuntime` class allows you to run a container image using OCI data science jobs.

---

### OCI Container Registry

To use the `ContainerRuntime`, you need to first push the image to [OCI container registry](#).

Note that you cannot build a docker image inside an OCI Data Science Notebook Session.

For more details, see:

- [Creating a Repository](#)
  - [Pushing Images Using the Docker CLI](#).
- 

Here is an example to create and run a container job:

Listing 33: Python

```

from ads.jobs import Job, DataScienceJob, ContainerRuntime

job = (
    Job(name="My Job")
    .with_infrastructure(
        DataScienceJob()
        # Configure logging for getting the job run outputs.
        .with_log_group_id("<log_group_ocid>")
        # Log resource will be auto-generated if log ID is not specified.
        .with_log_id("<log_ocid>")
        # If you are in an OCI data science notebook session,
        # the following configurations are not required.
        # Configurations from the notebook session will be used as defaults.
        .with_compartment_id("<compartment_ocid>")
        .with_project_id("<project_ocid>")
        .with_subnet_id("<subnet_ocid>")
        .with_shape_name("VM.Standard.E3.Flex")
        # Shape config details are applicable only for the flexible shapes.
        .with_shape_config_details(memory_in_gbs=16, ocpus=1)
        # Minimum/Default block storage size is 50 (GB).
        .with_block_storage_size(50)
    )
    .with_runtime(
        ContainerRuntime()
        .with_image("<region>.ocir.io/<your_tenancy>/<your_image>")
        .with_environment_variable(GREETINGS="Welcome to OCI Data Science")
        .with_entrypoint(["/bin/sh", "-c"])
        .with_cmd("sleep 5 && echo $GREETINGS")
    )
)

```

Listing 34: YAML

```

kind: job
spec:
  name: "My Job"
  infrastructure:
    kind: infrastructure
    type: dataScienceJob
    spec:
      blockSizeSize: 50
      compartmentId: <compartment_ocid>
      jobInfrastructureType: STANDALONE
      logGroupId: <log_group_ocid>
      logId: <log_ocid>
      projectId: <project_ocid>
      shapeConfigDetails:
        memoryInGBs: 16
        ocpus: 1
      shapeName: VM.Standard.E3.Flex

```

(continues on next page)

(continued from previous page)

```

    subnetId: <subnet_ocid>
runtime:
  kind: runtime
  type: container
  spec:
    cmd: sleep 5 && echo $GREETINGS
    entrypoint:
      - /bin/sh
      - -c
    env:
      - name: GREETINGS
        value: Welcome to OCI Data Science
    image: <region>.ocir.io/<your_tenancy>/<your_image>

```

```

# Create the job on OCI Data Science
job.create()
# Start a job run
run = job.run()
# Stream the job run outputs
run.watch()

```

To configure `ContainerRuntime`, you must specify the container image. Similar to other runtime, you can add environment variables. You can optionally specify the *entrypoint* and *cmd* for running the container.

See also:

- [Understand how CMD and ENTRYPOINT interact](#)
- [Bring Your Own Container](#)

## 15.8 Run Code from Git Repo

The *GitPythonRuntime* allows you to run source code from a Git repository as a job.

### In this Page

- [PyTorch Example](#)
- [Git Repository](#)
- [Entrypoint](#)
- [Working Directory](#)
- [Python Paths](#)
- [Outputs](#)
- [Metadata](#)

## 15.8.1 PyTorch Example

The following example shows how to run a PyTorch Neural Network Example to train third order polynomial predicting  $y=\sin(x)$ .

Listing 35: Python

```
from ads.jobs import Job, DataScienceJob, GitPythonRuntime

job = (
    Job(name="My Job")
    .with_infrastructure(
        DataScienceJob()
        # Configure logging for getting the job run outputs.
        .with_log_group_id("<log_group_ocid>")
        # Log resource will be auto-generated if log ID is not specified.
        .with_log_id("<log_ocid>")
        # If you are in an OCI data science notebook session,
        # the following configurations are not required.
        # Configurations from the notebook session will be used as defaults.
        .with_compartment_id("<compartment_ocid>")
        .with_project_id("<project_ocid>")
        .with_subnet_id("<subnet_ocid>")
        .with_shape_name("VM.Standard.E3.Flex")
        # Shape config details are applicable only for the flexible shapes.
        .with_shape_config_details(memory_in_gbs=16, ocpus=1)
        # Minimum/Default block storage size is 50 (GB).
        .with_block_storage_size(50)
    )
    .with_runtime(
        GitPythonRuntime()
        .with_environment_variable(GREETINGS="Welcome to OCI Data Science")
        # Specify the service conda environment by slug name.
        .with_service_conda("pytorch19_p37_gpu_v1")
        # Specify the git repository
        # Optionally, you can specify the branch or commit
        .with_source("https://github.com/pytorch/tutorials.git")
        # Entrypoint is a relative path from the root of the git repo.
        .with_entrypoint("beginner_source/examples_nn/polynomial_nn.py")
        # Copy files in "beginner_source/examples_nn" to object storage after job
        ↪ finishes.
        .with_output(
            output_dir="beginner_source/examples_nn",
            output_uri="oci://bucket_name@namespace/path/to/dir"
        )
    )
)
```

Listing 36: YAML

```
kind: job
spec:
  name: "My Job"
```

(continues on next page)

(continued from previous page)

```

infrastructure:
  kind: infrastructure
  type: dataScienceJob
  spec:
    blockStorageSize: 50
    compartmentId: <compartment_ocid>
    jobInfrastructureType: STANDALONE
    logGroupId: <log_group_ocid>
    logId: <log_ocid>
    projectId: <project_ocid>
    shapeConfigDetails:
      memoryInGBs: 16
      ocpus: 1
    shapeName: VM.Standard.E3.Flex
    subnetId: <subnet_ocid>
runtime:
  kind: runtime
  type: gitPython
  spec:
    conda:
      slug: pytorch19_p37_gpu_v1
      type: service
    entrypoint: beginner_source/examples_nn/polynomial_nn.py
    env:
      - name: GREETINGS
        value: Welcome to OCI Data Science
    outputDir: beginner_source/examples_nn
    outputUri: oci://bucket_name@namespace/path/to/dir
    url: https://github.com/pytorch/tutorials.git

```

```

# Create the job on OCI Data Science
job.create()
# Start a job run
run = job.run()
# Stream the job run outputs
run.watch()

```

## 15.8.2 Git Repository

To configure the `GitPythonRuntime`, you must specify the source code url and the entrypoint. The default branch from the Git repository is used unless you specify a different branch or commit in the `with_source()` method.

For a public repository, we recommend the “http://” or “https://” URL. Authentication may be required for the SSH URL even if the repository is public.

To use a private repository, you must first save an SSH key to **OCI Vault** as a secret, and provide the `secret_ocid` when calling `with_source()`. For more information about creating and using secrets, see [Managing Secret with Vault](#). For repository on GitHub, you could setup the [GitHub Deploy Key](#) as secret.

---

### Git Version for Private Repository

Git version of 2.3+ is required to use a private repository.

---

### 15.8.3 Entrypoint

The entrypoint specifies how the source code is invoked. The `with_entrypoint()` supports the following arguments:

- **path:** Required. The relative path of the script/module from the root of the Git repository.
- **func:** Optional. The function in the script specified by `path` to call. If you don't specify it, then the script specified by `path` is run as a Python script in a subprocess.

The arguments for the entrypoint can be specified through `with_argument()`. For running a script, the arguments are passed in as command line arguments. See *Runtime Command Line Arguments* for more details. For running a function, the arguments are passed into the function call.

The following example shows how you can define a runtime using Python function from a git repository as an entrypoint. Here `my_function` is a function in the `my_source/my_module.py` module.

Listing 37: Python

```
runtime = (  
    GitPythonRuntime()  
    .with_environment_variable(GREETINGS="Welcome to OCI Data Science")  
    # Specify the service conda environment by slug name.  
    .with_service_conda("pytorch19_p37_gpu_v1")  
    # Specify the git repository  
    .with_source("https://example.com/your_repository.git")  
    # Entrypoint is a relative path from the root of the git repo.  
    .with_entrypoint("my_source/my_module.py", func="my_function")  
    .with_argument("arg1", "arg2", key1="val1", key2="val2")  
)
```

Listing 38: YAML

```
kind: runtime  
type: gitPython  
spec:  
  args:  
    - arg1  
    - arg2  
    - --key1  
    - val1  
    - --key2  
    - val2  
  conda:  
    slug: pytorch19_p37_gpu_v1  
    type: service  
  entryFunction: my_function  
  entrypoint: my_source/my_module.py  
  env:  
    - name: GREETINGS  
      value: Welcome to OCI Data Science  
  url: https://example.com/your_repository.git
```



The function will be called as `my_function("arg1", "arg2", key1="val1", key2="val2")`.

The arguments can be strings, list of strings or dict containing only strings.

`GitPythonRuntime` also support Jupyter notebook as entrypoint. Arguments are not used when the entrypoint is a notebook.

## 15.8.4 Working Directory

By default, the working directory is the root of the git repository. This can be configured by `with_working_dir()` using a relative path from the root of the Git repository.

Note that the entrypoint should always specified as a relative path from the root of the Git repository, regardless of the working directory. The python paths and output directory should be specified relative to the working directory.

## 15.8.5 Python Paths

The working directory is the root of the git repository. The working directory is added to the Python paths automatically. You can call `with_python_path()` to add additional python paths as needed. The paths should be relative paths from the working directory.

## 15.8.6 Outputs

The `with_output()` method allows you to specify the output path `output_dir` in the job run and a remote URI (`output_uri`). Files in the `output_dir` are copied to the remote output URI after the job run finishes successfully. Note that the `output_dir` should be a path relative to the working directory.

OCI object storage location can be specified in the format of `oci://bucket_name@namespace/path/to/dir`. Please make sure you configure the IAM policy to allow the job run dynamic group to use object storage.

## 15.8.7 Metadata

The `GitPythonRuntime` updates metadata as free-form tags of the job run after the job run finishes. The following tags are added automatically:

- `commit`: The Git commit ID.
- `method`: The entry function or method.
- `module`: The entry script or module.
- `outputs`: The prefix of the output files in Object Storage.
- `repo`: The URL of the Git repository.

The new values overwrite any existing tags. If you want to skip the metadata update, set `skip_metadata_update` to `True` when initializing the runtime:

```
runtime = GitPythonRuntime(skip_metadata_update=True)
```

## 15.9 Working with the CLI

### 15.9.1 Prerequisite

*Install ADS CLI*

### 15.9.2 Running a Pre Defined Job

```
ads opctl run -j <job ocid>
```

### 15.9.3 Delete Job or Job Run

```
ads opctl delete <job-id or run-id>
```

### 15.9.4 Cancel Job Run

```
ads opctl cancel <run-id>
```

### 15.9.5 Cancel Distributed Training Job

Stop a running cluster using cancel subcommand.

#### Option 1: Using Job OCID and Work Dir

```
ads opctl cancel -j <job ocid> --work-dir <Object storage working directory specified,  
↪when the cluster was created>
```

#### Option 2: Using cluster info file

Cluster info file is a yaml file with output generated from `ads opctl run -f`

```
ads opctl cancel -j <job ocid> --work-dir <Object storage working directory specified,  
↪when the cluster was created>
```

This command requires an api key or resource principal setup. The logs are streamed from the logging service. If your job is not attached to logging service, this option will show only the lifecycle state.

## 15.10 Monitoring With CLI

### 15.10.1 watch

You can tail the logs generated by OCI Data Science Job Runs or OCI DataFlow Application Runs using the watch subcommand.

```
ads opctl watch <job run ocid or dataflow application run ocid>
```

This command requires an api key or resource principal setup. The logs are streamed from the logging service. If your job is not attached to logging service, this option will show only the lifecycle state.



## DATA SCIENCE PIPELINES

New in version 2.8.0.

### 16.1 Overview

Oracle Cloud Infrastructure (OCI) Data Science Machine Learning (ML) Pipelines lets you define and run an end-to-end machine learning orchestration covering all the steps of machine learning lifecycle that can be executed in a repeatable, continuous ML pipeline.

The machine learning lifecycle is composed of several steps: data acquisition and extraction, data preparation, featurization, model training including algorithm selection and hyper-parameter tuning, model evaluation, deployment, and finally monitoring the deployed model and possible retraining.

#### 16.1.1 Pipeline Step

A pipeline step is a task in a pipeline. A pipeline step can be either a Data Science Job step or a Custom Script step.

#### 16.1.2 Pipeline

A pipeline is a workflow of tasks, called steps. Steps can run in sequence or in parallel resulting in a Directed Acyclic Graph (DAG) of the steps.

In a machine learning context, ML Pipelines provide a workflow of data import, data transformation, model training, and model evaluation.

#### 16.1.3 Pipeline Run


Pipeline Run is the execution instance of a pipeline. Each pipeline run includes its step runs.

## 16.2 Quick Start

### 16.2.1 ADS Python SDK

The following sections provide sample code to define, create, and run a pipeline, including a visualization to track the pipeline run status.

The following example shows creating and running a pipeline with multiple steps. The steps `step_1` and `step_2` run in parallel and `step_3` runs after `step_1` and `step_2` are complete.

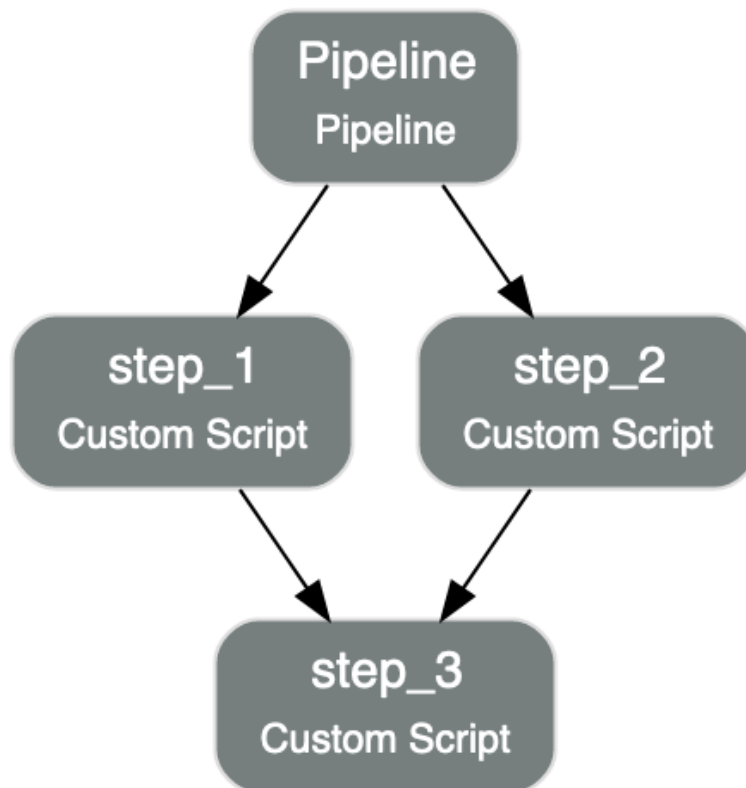

Listing 1: YAML

```

from ads.pipeline import Pipeline
import os

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

yaml_string = """
kind: pipeline
spec:
  compartmentId: {compartment_id}
  displayName: An example pipeline
  
```

(continues on next page)

(continued from previous page)

```

projectId: {project_id}
dag:
- (step_1, step_2) >> step_3
stepDetails:
- kind: customScript
  spec:
    description: A step running a python script
    infrastructure:
      kind: infrastructure
      spec:
        blockSizeSize: 200
        shapeConfigDetails:
          memoryInGBs: 32
          ocpus: 4
          shapeName: VM.Standard3.Flex
    name: step_1
    runtime:
      kind: runtime
      spec:
        conda:
          slug: generalml_p37_cpu_v1
          type: service
          scriptPathURI: script.py
          type: script
- kind: customScript
  spec:
    description: A step running a notebook
    infrastructure:
      kind: infrastructure
      spec:
        blockSizeSize: 200
        shapeConfigDetails:
          memoryInGBs: 32
          ocpus: 4
          shapeName: VM.Standard3.Flex
    name: step_2
    runtime:
      kind: runtime
      spec:
        conda:
          slug: tensorflow26_p37_cpu_v2
          type: service
          notebookEncoding: utf-8
          notebookPathURI: https://raw.githubusercontent.com/tensorflow/docs/master/site/
en/tutorials/customization/basics.ipynb
          type: notebook
- kind: customScript
  spec:
    description: A step running a python script
    infrastructure:
      kind: infrastructure
      spec:

```

(continues on next page)

(continued from previous page)

```

        blockStorageSize: 200
        shapeConfigDetails:
            memoryInGBs: 32
            ocpus: 4
            shapeName: VM.Standard3.Flex
    name: step_3
    runtime:
        kind: runtime
        spec:
            conda:
                slug: generalml_p37_cpu_v1
                type: service
            scriptPathURI: script.py
        type: script
type: pipeline
""".format(compartment_id=compartment_id, project_id=project_id)

pipeline = Pipeline.from_yaml(yaml_string)

pipeline.create()      # create the pipeline
pipeline.show()        # visualize the pipeline

pipeline_run = pipeline.run()    # run the pipeline

pipeline_run.show()    # watch the pipeline run status

```

Listing 2: Python

```

from ads.pipeline import Pipeline, PipelineStep, CustomScriptStep, ScriptRuntime, NotebookRuntime
import os

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

infrastructure = (
    CustomScriptStep()
    .with_block_storage_size(200)
    .with_shape_name("VM.Standard3.Flex")
    .with_shape_config_details(ocpus=4, memory_in_gbs=32)
)

script_runtime = (
    ScriptRuntime()
    .with_source("script.py")
    .with_service_conda("generalml_p37_cpu_v1")
)

notebook_runtime = (
    NotebookRuntime()
    .with_notebook(
        path="https://raw.githubusercontent.com/tensorflow/docs/master/site/en/tutorials/

```

(continues on next page)



(continued from previous page)

```

↪customization/basics.ipynb",
    encoding='utf-8'
)
.with_service_conda("tensorflow26_p37_cpu_v2")
)

pipeline_step_1 = (
    PipelineStep("step_1")
    .with_description("A step running a python script")
    .with_infrastructure(infrastructure)
    .with_runtime(script_runtime)
)

pipeline_step_2 = (
    PipelineStep("step_2")
    .with_description("A step running a notebook")
    .with_infrastructure(infrastructure)
    .with_runtime(notebook_runtime)
)

pipeline_step_3 = (
    PipelineStep("step_3")
    .with_description("A step running a python script")
    .with_infrastructure(infrastructure)
    .with_runtime(script_runtime)
)

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

pipeline = (
    Pipeline("An example pipeline")
    .with_compartment_id(compartment_id)
    .with_project_id(project_id)
    .with_step_details([pipeline_step_1, pipeline_step_2, pipeline_step_3])
    .with_dag(["(step_1, step_2) >> step_3"])
)

pipeline.create()      # create the pipeline
pipeline.show()        # visualize the pipeline

pipeline_run = pipeline.run()    # run the pipeline

pipeline_run.show()    # watch the pipeline run status

```

## 16.2.2 ADS CLI

### Prerequisites

1. *Install ADS CLI*
2. *Configure Defaults*

### 16.2.2.1 Create / Run

To build a brand new Data Science Pipeline and run it, provide the path to the pipeline YAML file with the `--file` option

```
ads opctl run --file <path_to_pipeline_yaml>
```

Alternatively, to run an existing pipeline, provide the pipeline OCID with the `--ocid` option

```
ads opctl run --ocid <pipeline_ocid>
```

### 16.2.2.2 Monitor

To monitor a pipeline run, provide the pipeline run OCID and provide the log type with the `-l` option

Below is an example to stream the custom log

```
ads opctl watch <pipeline_run_ocid> -l custom_log
```

---

#### Tip

The allowed values for `-l` option are `custom_log`, `service_log`, or `None`.

---

### 16.2.2.3 Cancel

To cancel a pipeline run, provide the pipeline run OCID

```
ads opctl cancel <pipeline_run_ocid>
```

Data Science Pipeline Runs can only be canceled when they are in the *ACCEPTED* or *IN\_PROGRESS* state.

### 16.2.2.4 Delete

To delete a pipeline run, provide the pipeline run OCID

```
ads opctl delete <pipeline_run_ocid>
```

Data Science Pipeline Runs can only be deleted when they are in the *SUCCEEDED*, *FAILED*, or *CANCELED* state.

To delete a pipeline, provide the pipeline OCID

```
ads opctl delete <pipeline_ocid>
```

Data Science Pipelines can only be deleted when their associated pipeline runs are all deleted.

## 16.2.3 ADS Magic Commands

---

### Tip

Get more information about the pipeline extension by running `%pipeline -h`

---

### 16.2.3.1 Installation

Install the pipeline extension by running the following command

```
%load_ext ads.pipeline.extension
```

### 16.2.3.2 Create / Run

To build a brand new Data Science Pipeline and run it, provide the path to the pipeline YAML file with the `--file` option

```
%pipeline run --file <path_to_pipeline_yaml>
```

Alternatively, to run an existing pipeline, provide the pipeline OCID with the `--ocid` option

```
%pipeline run --ocid <pipeline_ocid>
```

### 16.2.3.3 Visualize

To visualize a pipeline in a graph, use the pipeline OCID

```
%pipeline show <pipeline_ocid>
```

### 16.2.3.4 Watch status

To watch the status of pipeline run, use the pipeline run OCID

---

### Tip

Get more information about watching pipeline status by running `%pipeline status -h`

---

Below is an example of watching the status of pipeline run in `graph` mode until it finishes

```
%pipeline status <pipeline_run_ocid> -w
```

Below is an example of watching the status of pipeline run in `text` mode

```
%pipeline status <pipeline_run_ocid> -x
```

### 16.2.3.5 Monitor logs

To monitor a pipeline run, use the pipeline run OCID.

---

**Tip**

Get more information about monitoring pipeline logs by running `%pipeline log -h`

---

Below is an example of streaming the `custom_log`

```
%pipeline log <pipeline_run_ocid> -l custom_log
```

Below is an example of viewing the last 10 consolidated logs with `tail`

```
%pipeline log <pipeline_run_ocid> -t -n 10
```

### 16.2.3.6 Cancel

To cancel a pipeline run, use the pipeline run OCID

```
%pipeline cancel <pipeline_run_ocid>
```

Data Science Pipeline Runs can only be canceled when they are in the *ACCEPTED* or *IN\_PROGRESS* state.

### 16.2.3.7 Delete

---

**Tip**

Get more information about deleting pipelines and pipeline runs by running `%pipeline delete -h`

---

To delete a pipeline run, use the pipeline run OCID

```
%pipeline delete <pipeline_run_ocid>
```

Data Science Pipeline Runs can only be deleted when they are in the *SUCCEEDED*, *FAILED*, or *CANCELED* state.

To delete a pipeline, use the pipeline OCID

```
%pipeline delete <pipeline_ocid>
```

Data Science Pipelines can only be deleted when their associated pipeline runs are all deleted.

## 16.3 Pipeline

A pipeline is a workflow of tasks, called steps. Steps can run in sequence or in parallel, creating a Directed Acyclic Graph (DAG) of the steps.

### 16.3.1 Define

In an ADS pipeline module, you can either use the Python API or YAML to define a pipeline. In addition to the configuration of the pipeline, you provide the details of *Pipeline Step* and the DAG of the pipeline steps (which defines the dependencies between the steps).

#### 16.3.1.1 DAG

DAG is used to define the dependencies between the steps.

- `>>` denotes the tasks running in sequence, `A >> B` means that A is followed by B.
- `()` denotes the tasks running in parallel.
- If DAG not provided, all the steps will run in parallel.

In the example below, `step_name_1` and `step_name_2` will run in parallel, and `step_name_3` will start after both `step_name_1` and `step_name_2` are complete.

```
(step_name_1, step_name_2) >> step_name_3
```

#### 16.3.1.2 Logs

Both the log OCID and corresponding log group OCID can be specified in the Pipeline instance. If you specify only the log group OCID and no log OCID, a new Log resource is automatically created within the log group to store the logs, see [ADS Logging](#).

There are two types of logs for pipeline runs, service log and custom log. When defining a pipeline:

- to enable custom log, specify `log_id` and `log_group_id`.
- to enable service log, specify `log_group_id` and set `enable_service_log` to `True`.
- to enable both types of logs, specify `log_id` and `log_group_id`, and set `enable_service_log` to `True`.

With the specified DAG and pre-created pipeline steps, you can define a pipeline and give it a name. A Pipeline instance will be created.

Listing 3: YAML

```
from ads.pipeline import Pipeline

yaml_string = """
kind: pipeline
spec:
  compartmentId: ocid1.compartment.<unique_id>
  dag:
    - pipeline_step_name_1 >> pipeline_step_name_2
  description: <pipeline_description>
  displayName: <pipeline_display_name>
```

(continues on next page)

(continued from previous page)

```

logGroupId: ocid1.loggroup.oc1..<unique_id>
logId: ocid1.log..<unique_id>
enableServiceLog: True
maximumRuntimeInMinutes: 20
projectId: ocid1.datascienceproject..<unique_id>
stepDetails:
- kind: dataScienceJob
  spec:
    description: <pipeline_step_description>
    jobId: ocid1.datasciencejob..<unique_id>
    name: pipeline_step_name_1
- kind: customScript
  spec:
    description: <pipeline_step_description>
    infrastructure:
      kind: infrastructure
      spec:
        blockSizeSize: 200
        shapeConfigDetails:
          memoryInGBs: 32
          ocpus: 4
          shapeName: VM.Standard3.Flex
    name: pipeline_step_name_2
    runtime:
      kind: runtime
      spec:
        conda:
          slug: <slug>
          type: service
          scriptPathURI: oci://<bucket_name>@<namespace>/<prefix>/<script.py>
        type: script
type: pipeline
"""

pipeline = Pipeline.from_yaml(yaml_string)

```

Listing 4: Python

```

from ads.pipeline import PipelineStep, Pipeline

pipeline_step_one = (
    PipelineStep("<pipeline_step_name_1>")
    .with_description("<pipeline_step_description>")
    .with_job_id("<job_id>")
)

infrastructure = (
    CustomScriptStep()
    .with_block_storage_size(200)
    .with_shape_name("VM.Standard3.Flex")
    .with_shape_config_details(ocpus=4, memory_in_gbs=32)
)

```

(continues on next page)

(continued from previous page)

```

runtime = (
    ScriptRuntime()
    .with_source("oci://<bucket_name>@<namespace>/<prefix>/<script.py>")
    .with_service_conda("<slug>")
)

pipeline_step_two = (
    PipelineStep("<pipeline_step_name_2>")
    .with_description("<step_description>")
    .with_infrastructure(infrastructure)
    .with_runtime(runtime)
)

pipeline = (
    Pipeline("<pipeline_name>")
    .with_compartment_id("<compartment_id>")
    .with_project_id("<project_id>")
    .with_log_group_id("<log_group_id>")
    .with_log_id("<log_id>")
    .with_enable_service_log(True)           # to stream service log in pipeline runs
    .with_step_details([pipeline_step_one, pipeline_step_two])
    .with_dag(["pipeline_step_name_1 >> pipeline_step_name_2"])
)

```

### 16.3.2 Create

You can call the `create()` method of the Pipeline instance to create a pipeline.

```

# Create a pipeline
pipeline.create()

```

### 16.3.3 Run

You can call the `run()` method of the Pipeline instance to launch a new Pipeline Run. It returns a PipelineRun instance.

The `run()` method gives you the option to override the configurations in a pipeline run. It takes the following optional parameters:

- `display_name`: str, optional. Defaults to None. The display name of the run.
- `project_id`: str, optional. Defaults to None. The project id to override the one defined previously.
- `compartment_id`: str, optional. Defaults to None. The compartment id to override the one defined previously.
- `configuration_override_details`: dict, optional. Defaults to None. The configuration details dictionary to override the one defined previously. The `configuration_override_details` contains the following keys:

type: str, only DEFAULT is allowed; environment\_variables: dict, the environment variables; command\_line\_arguments: str, the command line arguments; maximum\_runtime\_in\_minutes: int, the maximum runtime allowed in minutes. - log\_configuration\_override\_details: dict, optional. Defaults to None. The log configuration details dictionary to override the one defined previously. - step\_override\_details: list[PipelineStepOverrideDetails], optional. Defaults to None. The step details list to override the one defined previously. - free\_form\_tags: dict(str, str), optional. Defaults to None. The free from tags dictionary to override the one defined previously. - defined\_tags: dict(str, dict(str, object)), optional. Defaults to None. The defined tags dictionary to override the one defined previously. - system\_tags: dict(str, dict(str, object)), optional. Defaults to None. The system tags dictionary to override the one defined previously.

```
# Run a pipeline, a pipeline run will be created and started
pipeline_run = pipeline.run()
```

### 16.3.4 Load

Use the `from_ocid()` method from the Pipeline class to load an existing pipeline with its OCID provided. It returns a Pipeline instance.

```
from ads.pipeline import Pipeline

pipeline = Pipeline.from_ocid("ocidl.datasciencepipeline..<unique_id>")
```

### 16.3.5 Visualize

Use the `show()` method on the Pipeline instance to visualize the pipeline in a graph.

The `show()` method takes the following optional parameter:

- **rankdir:** (str, optional). Defaults to TB. The allowed values are TB or LR. This parameter is applicable only for graph mode and it renders the direction of the graph as either top to bottom (TB) or left to right (LR).

```
pipeline.show()
```

Below is an example of the output.

### 16.3.6 Delete


Use the `delete()` method on the Pipeline instance to delete a pipeline. It takes the following optional parameters:

- **delete\_related\_pipeline\_runs:** (bool, optional). Specify whether to delete related PipelineRuns or not. Defaults to True.
- **delete\_related\_job\_runs:** (bool, optional). Specify whether to delete related JobRuns or not. Defaults to True.
- **max\_wait\_seconds:** (int, optional). The maximum time to wait, in seconds. Defaults to 1800.

A pipeline can only be deleted when its associated pipeline runs are all deleted, or alternatively, set the parameter `delete_related_pipeline_runs` to delete all associated runs in the same operation. Delete fails if a PipelineRun is in progress.

```
pipeline.delete()
```



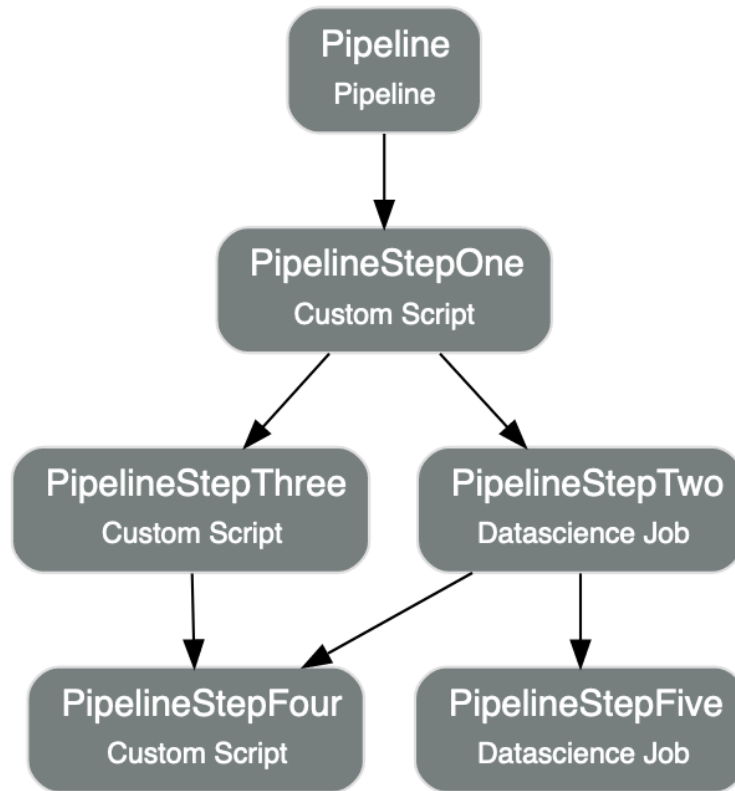

## 16.4 Pipeline Step

Pipeline step is a task in a pipeline. A pipeline step can be one of two types:

- Data Science Job: the OCID of an existing Data Science Job must be provided.
- Custom Script: the artifact of the Python script and the execution configuration must be specified.

This section shows how you can use the ADS Pipeline APIs to create pipeline steps.

### 16.4.1 Data Science Job Step

Create a Data Science Job step with the OCID of an existing Job.

Listing 5: YAML

```

kind: pipeline
spec:
  ...
  stepDetails:
    ...
  - kind: dataScienceJob
    spec:
      description: <pipeline_step_description>
      jobId: ocid1.datasciencejob..<unique_id>
      name: <pipeline_step_name>

```

(continues on next page)

(continued from previous page)

```
...
type: pipeline
```

Listing 6: Python

```
from ads.pipeline import PipelineStep

pipeline_step = (
    PipelineStep("<pipeline_step_name>")
    .with_description("<pipeline_step_description>")
    .with_job_id("<job_id>")
)
```

## 16.4.2 Custom Script Step

To create a Custom Script step, infrastructure and runtime must be specified.

The Custom Script step infrastructure is defined by a CustomScriptStep instance. When constructing a Custom Script step infrastructure, you specify the Compute shape, Block Storage size in the CustomScriptStep instance. For example:

Listing 7: YAML

```
kind: pipeline
spec:
  ...
  stepDetails:
  - kind: customScript
    spec:
      infrastructure:
        kind: infrastructure
        spec:
          blockSizeSize: 200
          shapeConfigDetails:
            memoryInGBs: 32
            ocpus: 4
            shapeName: VM.Standard3.Flex
          name: Python_Script_Step
      ...
type: pipeline
```

Listing 8: Python

```
from ads.pipeline import CustomScriptStep

infrastructure = (
    CustomScriptStep()
    .with_block_storage_size(200)
    .with_shape_name("VM.Standard3.Flex")
    .with_shape_config_details(ocpus=4, memory_in_gbs=32)
)
```

A Custom Script step can have different types of runtime depending on the source code you run:

- [PythonRuntime](#) for Python code stored locally, OCI object storage, or other remote location supported by [fsspec](#). See [Run a Python Workload](#).
- [GitPythonRuntime](#) for Python code from a Git repository. See [Run Code from Git Repo](#).
- [NotebookRuntime](#) for a single Jupyter notebook stored locally, OCI object storage, or other remote location supported by [fsspec](#). See [Run a Notebook](#).
- [ScriptRuntime](#) for bash or shell scripts stored locally, OCI object storage, or other remote location supported by [fsspec](#). See [Run a Script](#).

All of these runtime options allow you to configure a [Data Science Conda Environment](#) for running your code.

To define a Custom Script step with `GitPythonRuntime` you can use:

Listing 9: YAML

```
kind: runtime
spec:
  conda:
    slug: pytorch19_p37_gpu_v1
    type: service
  entrypoint: beginner_source/examples_nn/polynomial_nn.py
  env:
    - name: GREETINGS
      value: Welcome to OCI Data Science
  outputDir: ~/Code/tutorials/beginner_source/examples_nn
  outputUri: oci://<bucket_name>@<namespace>/<prefix>
  url: https://github.com/pytorch/tutorials.git
  type: gitPython
```

Listing 10: Python

```
from ads.pipeline import GitPythonRuntime

runtime = (
    GitPythonRuntime()
    .with_environment_variable(GREETINGS="Welcome to OCI Data Science")
    .with_service_conda("pytorch19_p37_gpu_v1")
    .with_source("https://github.com/pytorch/tutorials.git")
    .with_entrypoint("beginner_source/examples_nn/polynomial_nn.py")
    .with_output(
        output_dir="~/Code/tutorials/beginner_source/examples_nn",
        output_uri="oci://<bucket_name>@<namespace>/<prefix>"
    )
)
```

To define a Custom Script step with `NotebookRuntime` you can use:

Listing 11: YAML

```
kind: runtime
spec:
  conda:
    slug: tensorflow26_p37_cpu_v2
```

(continues on next page)

(continued from previous page)

```

    type: service
env:
  - name: GREETINGS
    value: Welcome to OCI Data Science
  notebookEncoding: utf-8
  notebookPathURI: https://raw.githubusercontent.com/tensorflow/docs/master/site/en/
  ↪ tutorials/customization/basics.ipynb
  outputURI: oci://bucket_name@namespace/path/to/dir
type: notebook

```

Listing 12: Python

```

from ads.pipeline import NotebookRuntime

runtime = (
    NotebookRuntime()
    .with_notebook(
        path="https://raw.githubusercontent.com/tensorflow/docs/master/site/en/
  ↪ tutorials/customization/basics.ipynb",
        encoding='utf-8'
    )
    .with_service_conda("tensorflow26_p37_cpu_v2")
    .with_environment_variable(GREETINGS="Welcome to OCI Data Science")
    .with_output("oci://bucket_name@namespace/path/to/dir")
)

```

To define a Custom Script step with PythonRuntime you can use:

Listing 13: YAML

```

kind: runtime
spec:
  conda:
    slug: pytorch110_p38_cpu_v1
    type: service
  entrypoint: zip_or_dir/my_package/entry.py
  outputDir: output
  outputUri: oci://bucket_name@namespace/path/to/dir
  pythonPath:
  - my_python_packages
  scriptPathURI: local/path/to/zip_or_dir
  workingDir: zip_or_dir
type: python

```

Listing 14: Python

```

from ads.pipeline import PythonRuntime

runtime = (
    PythonRuntime()
    .with_service_conda("pytorch110_p38_cpu_v1")
    # The job artifact directory is named "zip_or_dir"

```

(continues on next page)

(continued from previous page)

```

.with_source("local/path/to/zip_or_dir", entrypoint="zip_or_dir/my_package/entry.py")
# Change the working directory to be inside the job artifact directory
# Working directory a relative path from the parent of the job artifact directory
# Working directory is also added to Python paths
.with_working_dir("zip_or_dir")
# Add an additional Python path
# The "my_python_packages" folder is under "zip_or_dir" (working directory)
.with_python_path("my_python_packages")
# Files in "output" directory will be copied to OCI object storage once the job
→ finishes
# Here we assume "output" is a folder under "zip_or_dir" (working directory)
.with_output("output", "oci://bucket_name@namespace/path/to/dir")
)

```

To define a Custom Script step with ScriptRuntime you can use:

Listing 15: YAML

```

kind: runtime
spec:
  conda:
    slug: tensorflow26_p37_cpu_v2
    type: service
  scriptPathURI: oci://<bucket_name>@<namespace>/<prefix>/<script.py>
  type: script

```

Listing 16: Python

```

from ads.pipeline import ScriptRuntime

runtime = (
    ScriptRuntime()
    .with_source("oci://<bucket_name>@<namespace>/<prefix>/<script.py>")
    .with_service_conda("tensorflow26_p37_cpu_v2")
)

```

With Infrastructure and runtime provided, create a pipeline step of the Custom Script type.

Listing 17: YAML

```

kind: pipeline
spec:
  ...
  stepDetails:
    ...
  - kind: customScript
    spec:
      description: <pipeline_step_description>
      infrastructure:
        kind: infrastructure
        spec:
          blockStorageSize: 200
          shapeConfigDetails:

```

(continues on next page)

(continued from previous page)

```

        memoryInGBs: 32
        ocpus: 4
        shapeName: VM.Standard3.Flex
    name: <pipeline_step_name>
    runtime:
        kind: runtime
        spec:
            conda:
                slug: <slug>
                type: service
            scriptPathURI: oci://<bucket_name>@<namespace>/<prefix>/<script.py>
            type: script
    ...
type: pipeline

```

Listing 18: Python

```

from ads.pipeline import PipelineStep

pipeline_step = (
    PipelineStep("<pipeline_step_name>")
    .with_description("<pipeline_step_description>")
    .with_infrastructure(infrastructure)
    .with_runtime(runtime)
)

```

## 16.5 Pipeline Run

Pipeline Run is the execution instance of a pipeline. Each pipeline run includes its step runs. A pipeline run can be configured to override some of the pipeline's defaults before starting the execution.

With a `PipelineRun` instance, you can watch the status of the run and stream logs for the pipeline run and the step runs.

### 16.5.1 Watch status

Use the `show()` method of the `PipelineRun` instance to watch the status of pipeline run.

The `show()` method takes the following optional parameter:

- `mode`: (str, optional). Defaults to `graph`. The allowed values are `text` or `graph`. This parameter renders the current status of pipeline run as either `text` or `graph`.
- `wait`: (bool, optional). Defaults to `False` and it only renders the current status of each step run in graph. If set to `True`, it renders the current status of each step run until the entire pipeline is complete.
- `rankdir`: (str, optional). Defaults to `TB`. The allowed values are `TB` or `LR`. This parameter is applicable only for graph mode and it renders the direction of the graph as either top to bottom (`TB`) or left to right (`LR`).

To watch the live update of each step run status in text until the entire pipeline is complete

```
pipeline_run.show(mode="text", wait=True)
```

Step	Status
-----	-----
PipelineStepOne:	Succeeded
PipelineStepTwo:	Succeeded
PipelineStepThree:	Succeeded
PipelineStepFour:	In Progress
PipelineStepFive:	Accepted

To watch the live update of each step run status in graph mode

```
pipeline_run.show(wait=True)
```

Below is an example of the output.

## 16.5.2 Monitor Logs

Use the `watch()` method on the `PipelineRun` instance to stream the service, custom, or consolidated log of the pipeline run. The `watch()` method takes the following optional parameters:

- **steps:** (list, optional). Defaults to `None` and streams the log of the pipeline run. If a list of the step names is provided, the method streams the log of the specified pipeline step runs.
- **log\_type:** (str, optional). Defaults to `None`. The allowed values are `custom_log`, `service_log`, or `None`. If `None` is provided, the method streams both service and custom logs.
- **interval:** (float, optional). Defaults value is 3. Time interval in seconds between each request to update the logs.

Stream the consolidated log of the pipeline run.

```
pipeline_run.watch()
```

```
[S] - service log, [C] - custom log
[S] - 2022-10-31 08:54:47 - Step PipelineStepOne is starting.
[S] - 2022-10-31 08:55:36 - Step PipelineStepOne is ACCEPTED, lifecycle details:
↳Infrastructure provisioning.
[S] - 2022-10-31 08:56:39 - Step PipelineStepOne is ACCEPTED, lifecycle details: Step
↳run bootstrap starting.
[C] - 2022-10-31 08:57:18 - This is a custom log for PipelineStepOne.
[S] - 2022-10-31 08:57:39 - Step PipelineStepOne is IN_PROGRESS, lifecycle details: Step
↳run artifact execution in progress.
[S] - 2022-10-31 08:58:39 - Step PipelineStepOne is SUCCEEDED.
[S] - 2022-10-31 08:59:54 - Step PipelineStepThree is starting.
[S] - 2022-10-31 09:00:15 - Step PipelineStepTwo is starting.
[S] - 2022-10-31 09:00:44 - Step PipelineStepThree is ACCEPTED, lifecycle details:
↳Infrastructure provisioning.
[S] - 2022-10-31 09:00:53 - Step PipelineStepTwo is ACCEPTED, lifecycle details:
↳Infrastructure provisioning.
[S] - 2022-10-31 09:02:46 - Step PipelineStepThree is ACCEPTED, lifecycle details: Step
↳run bootstrap starting.
[S] - 2022-10-31 09:02:54 - Step PipelineStepTwo is ACCEPTED, lifecycle details: Step
↳run bootstrap starting.
```

(continues on next page)

(continued from previous page)

```
[C] - 2022-10-31 09:03:13 - This is a custom log for PipelineStepThree.  
[C] - 2022-10-31 09:03:13 - This is a custom log for PipelineStepTwo.  
...
```

Stream the service log of the pipeline run.

```
pipeline_run.watch(log_type="service_log")
```

```
[S] - service log  
[S] - 2022-10-31 08:54:47 - Step PipelineStepOne is starting.  
[S] - 2022-10-31 08:55:36 - Step PipelineStepOne is ACCEPTED, lifecycle details: ↳  
↳Infrastructure provisioning.  
[S] - 2022-10-31 08:56:39 - Step PipelineStepOne is ACCEPTED, lifecycle details: Step ↳  
↳run bootstrap starting.  
[S] - 2022-10-31 08:57:39 - Step PipelineStepOne is IN_PROGRESS, lifecycle details: Step ↳  
↳run artifact execution in progress.  
[S] - 2022-10-31 08:58:39 - Step PipelineStepOne is SUCCEEDED.  
[S] - 2022-10-31 08:59:54 - Step PipelineStepThree is starting.  
[S] - 2022-10-31 09:00:15 - Step PipelineStepTwo is starting.  
...
```

Stream the custom log of the specified steps.

```
pipeline_run.watch(steps=['<step_name1>', '<step_name2>'], log_type="custom_log")
```

### 16.5.3 Load

Use the `from_ocid()` method from the `PipelineRun` class to load an existing pipeline run with its OCID provided. The method returns a `PipelineRun` instance.

```
from ads.pipeline import PipelineRun  
  
pipeline_run = PipelineRun.from_ocid("ocid1.datasciencepipelinerun.<unique_id>")
```

### 16.5.4 Cancel

Use the `cancel()` method on the `PipelineRun` instance to cancel a pipeline run.

Pipeline Runs can only be canceled when they are in the `ACCEPTED` or `IN_PROGRESS` state.

```
pipeline_run.cancel()
```



### 16.5.5 Delete

Use the `delete()` method on the `PipelineRun` instance to delete a pipeline run. It takes the following optional parameter:

- `delete_related_job_runs`: (bool, optional). Specify whether to delete related `JobRuns` or not. Defaults to `True`.
- `max_wait_seconds`: (int, optional). The maximum time to wait in seconds. Defaults to `1800`.

Pipeline runs can only be deleted when they are already in a `SUCCEEDED`, `FAILED`, or `CANCELED` state.

```
pipeline_run.delete()
```

## 16.6 Examples

### 16.6.1 Create a pipeline

Listing 19: YAML

```
from ads.pipeline import Pipeline
import os

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ['PROJECT_OCID']

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

yaml_string = """
kind: pipeline
spec:
  compartmentId: {compartment_id}
  displayName: A single step pipeline
  projectId: {project_id}
  stepDetails:
  - kind: customScript
    spec:
      description: A step running a python script
      infrastructure:
        kind: infrastructure
        spec:
          blockStorageSize: 200
          shapeConfigDetails:
            memoryInGBs: 32
            ocpus: 4
            shapeName: VM.Standard3.Flex
          name: Python_Script_Step
        runtime:
          kind: runtime
          spec:
            conda:
```

(continues on next page)

(continued from previous page)

```

        slug: generalml_p37_cpu_v1
        type: service
        scriptPathURI: script.py
    type: script
type: pipeline
""".format(compartment_id=compartment_id, project_id=project_id)

pipeline = Pipeline.from_yaml(yaml_string)

pipeline.create()

```

Listing 20: Python

```

from ads.pipeline import Pipeline, PipelineStep, CustomScriptStep, ScriptRuntime
import os

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

infrastructure = (
    CustomScriptStep()
    .with_block_storage_size(200)
    .with_shape_name("VM.Standard3.Flex")
    .with_shape_config_details(ocpus=4, memory_in_gbs=32)
)

runtime = (
    ScriptRuntime()
    .with_source("script.py")
    .with_service_conda("generalml_p37_cpu_v1")
)

pipeline_step = (
    PipelineStep("Python_Script_Step")
    .with_description("A step running a python script")
    .with_infrastructure(infrastructure)
    .with_runtime(runtime)
)

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

pipeline = (
    Pipeline("A single step pipeline")
    .with_compartment_id(compartment_id)
    .with_project_id(project_id)
    .with_step_details([pipeline_step])
)

pipeline.create()

```

## 16.6.2 Run a job as a step

Listing 21: YAML

```

from ads.jobs import Job, DataScienceJob, ScriptRuntime
from ads.pipeline import Pipeline
import os

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ['PROJECT_OCID']

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

infrastructure = (
    DataScienceJob()
    .with_block_storage_size(200)
    .with_shape_name("VM.Standard3.Flex")
    .with_shape_config_details(ocpus=4, memory_in_gbs=32)
)

runtime = (
    ScriptRuntime()
    .with_source("script.py")
    .with_service_conda("generalml_p37_cpu_v1")
)

job = (
    Job()
    .with_infrastructure(infrastructure)
    .with_runtime(runtime)
)
job.create() # create a job

yaml_string = """
kind: pipeline
spec:
  compartmentId: {compartment_id}
  displayName: A single step pipeline
  projectId: {project_id}
  stepDetails:
    - kind: dataScienceJob
      spec:
        description: A step running a job
        jobId: {job_id}
        name: Job_Step
type: pipeline
""".format(compartment_id=compartment_id, project_id=project_id, job_id=job.id)

pipeline = Pipeline.from_yaml(yaml_string)

pipeline.create()

```

(continues on next page)

(continued from previous page)

```
pipeline_run = pipeline.run()
```

Listing 22: Python

```
from ads.jobs import Job, DataScienceJob, ScriptRuntime
from ads.pipeline import Pipeline, PipelineStep
import os

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

infrastructure = (
    DataScienceJob()
    .with_block_storage_size(200)
    .with_shape_name("VM.Standard3.Flex")
    .with_shape_config_details(ocpus=4, memory_in_gbs=32)
)

runtime = (
    ScriptRuntime()
    .with_source("script.py")
    .with_service_conda("generalml_p37_cpu_v1")
)

job = (
    Job()
    .with_infrastructure(infrastructure)
    .with_runtime(runtime)
)
job.create() # create a job

pipeline_step = (
    PipelineStep("Job_Step")
    .with_description("A step running a job")
    .with_job_id(job.id)
)

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

pipeline = (
    Pipeline("A single step pipeline")
    .with_compartment_id(compartment_id)
    .with_project_id(project_id)
    .with_step_details([pipeline_step])
)

pipeline.create()

pipeline_run = pipeline.run()
```

### 16.6.3 Run a python script as a step

Listing 23: YAML

```

from ads.pipeline import Pipeline
import os

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

yaml_string = """
kind: pipeline
spec:
  compartmentId: {compartment_id}
  displayName: A single step pipeline
  projectId: {project_id}
  stepDetails:
  - kind: customScript
    spec:
      description: A step running a python script
      infrastructure:
        kind: infrastructure
        spec:
          blockSizeSize: 200
          shapeConfigDetails:
            memoryInGBs: 32
            ocpus: 4
            shapeName: VM.Standard3.Flex
      name: Python_Script_Step
      runtime:
        kind: runtime
        spec:
          conda:
            slug: generalml_p37_cpu_v1
            type: service
            scriptPathURI: script.py
          type: script
type: pipeline
""".format(compartment_id=compartment_id, project_id=project_id)

pipeline = Pipeline.from_yaml(yaml_string)

pipeline.create()

pipeline_run = pipeline.run()

```

Listing 24: Python

```

from ads.pipeline import Pipeline, PipelineStep, CustomScriptStep, ScriptRuntime
import os

```

(continues on next page)

(continued from previous page)

```

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

infrastructure = (
    CustomScriptStep()
    .with_block_storage_size(200)
    .with_shape_name("VM.Standard3.Flex")
    .with_shape_config_details(ocpus=4, memory_in_gbs=32)
)

runtime = (
    ScriptRuntime()
    .with_source("script.py")
    .with_service_conda("generalml_p37_cpu_v1")
)

pipeline_step = (
    PipelineStep("Python_Script_Step")
    .with_description("A step running a python script")
    .with_infrastructure(infrastructure)
    .with_runtime(runtime)
)

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

pipeline = (
    Pipeline("A single step pipeline")
    .with_compartment_id(compartment_id)
    .with_project_id(project_id)
    .with_step_details([pipeline_step])
)

pipeline.create()

pipeline_run = pipeline.run()

```

## 16.6.4 Run a notebook as a step

Listing 25: YAML

```

from ads.pipeline import Pipeline
import os

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

yaml_string = """
kind: pipeline

```

(continues on next page)

(continued from previous page)

```

spec:
  compartmentId: {compartment_id}
  displayName: A single step pipeline
  projectId: {project_id}
  stepDetails:
  - kind: customScript
    spec:
      description: A step running a notebook
      infrastructure:
        kind: infrastructure
        spec:
          blockStorageSize: 200
          shapeConfigDetails:
            memoryInGBs: 32
            ocpus: 4
            shapeName: VM.Standard3.Flex
      name: Notebook_Step
      runtime:
        kind: runtime
        spec:
          conda:
            slug: tensorflow26_p37_cpu_v2
            type: service
          env:
            - name: GREETINGS
              value: Welcome to OCI Data Science
            notebookEncoding: utf-8
            notebookPathURI: https://raw.githubusercontent.com/tensorflow/docs/master/site/
            ↪en/tutorials/customization/basics.ipynb
            outputURI: oci://<bucket_name>@<namespace>/<prefix>
            type: notebook
      type: pipeline
    """ .format(compartment_id=compartment_id, project_id=project_id)

pipeline = Pipeline.from_yaml(yaml_string)

pipeline.create()

pipeline_run = pipeline.run()

```

Listing 26: Python

```

from ads.pipeline import Pipeline, PipelineStep, CustomScriptStep, NotebookRuntime
import os

infrastructure = (
    CustomScriptStep()
    .with_block_storage_size(200)
    .with_shape_name("VM.Standard3.Flex")
    .with_shape_config_details(ocpus=4, memory_in_gbs=32)
)

```

(continues on next page)

(continued from previous page)

```

runtime = (
    NotebookRuntime()
    .with_notebook(
        path="https://raw.githubusercontent.com/tensorflow/docs/master/site/en/tutorials/
↳ customization/basics.ipynb",
        encoding='utf-8'
    )
    .with_service_conda("tensorflow26_p37_cpu_v2")
    .with_environment_variable(GREETINGS="Welcome to OCI Data Science")
    .with_output("oci://<bucket_name>@<namespace>/<prefix>")
)

pipeline_step = (
    PipelineStep("Notebook_Step")
    .with_description("A step running a notebook")
    .with_infrastructure(infrastructure)
    .with_runtime(runtime)
)

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

pipeline = (
    Pipeline("A single step pipeline")
    .with_compartment_id(compartment_id)
    .with_project_id(project_id)
    .with_step_details([pipeline_step])
)

pipeline.create()

pipeline_run = pipeline.run()

```

### 16.6.5 Run two steps with the same infrastructure

Listing 27: YAML

```

from ads.pipeline import Pipeline
import os

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

yaml_string = """
kind: pipeline
spec:
  compartmentId: {compartment_id}

```

(continues on next page)



(continued from previous page)

```

displayName: A single step pipeline
projectId: {project_id}
stepDetails:
- kind: customScript
  spec:
    description: A step running a python script
    infrastructure:
      kind: infrastructure
      spec:
        blockStorageSize: 200
        shapeConfigDetails:
          memoryInGBs: 32
          ocpus: 4
          shapeName: VM.Standard3.Flex
    name: Python_Script_Step
  runtime:
    kind: runtime
    spec:
      conda:
        slug: generalml_p37_cpu_v1
        type: service
        scriptPathURI: script.py
      type: script
- kind: customScript
  spec:
    description: A step running a notebook
    infrastructure:
      kind: infrastructure
      spec:
        blockStorageSize: 200
        shapeConfigDetails:
          memoryInGBs: 32
          ocpus: 4
          shapeName: VM.Standard3.Flex
    name: Notebook_Step
  runtime:
    kind: runtime
    spec:
      conda:
        slug: tensorflow26_p37_cpu_v2
        type: service
      env:
        - name: GREETINGS
          value: Welcome to OCI Data Science
        notebookEncoding: utf-8
        notebookPathURI: https://raw.githubusercontent.com/tensorflow/docs/master/site/
        ↪en/tutorials/customization/basics.ipynb
        outputURI: oci://<bucket_name>@<namespace>/<prefix>
      type: notebook
  type: pipeline
""" .format(compartment_id=compartment_id, project_id=project_id)

```

(continues on next page)

(continued from previous page)

```

pipeline = Pipeline.from_yaml(yaml_string)

pipeline.create()

pipeline_run = pipeline.run()

```

Listing 28: Python

```

from ads.pipeline import Pipeline, PipelineStep, CustomScriptStep, ScriptRuntime,
↳ NotebookRuntime
import os

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

infrastructure = (
    CustomScriptStep()
    .with_block_storage_size(200)
    .with_shape_name("VM.Standard3.Flex")
    .with_shape_config_details(ocpus=4, memory_in_gbs=32)
)

step_one_runtime = (
    ScriptRuntime()
    .with_source("script.py")
    .with_service_conda("generalml_p37_cpu_v1")
)

pipeline_step_one = (
    PipelineStep("Python_Script_Step")
    .with_description("A step running a python script")
    .with_infrastructure(infrastructure)
    .with_runtime(step_one_runtime)
)

step_two_runtime = (
    NotebookRuntime()
    .with_notebook(
        path="https://raw.githubusercontent.com/tensorflow/docs/master/site/en/tutorials/
↳ customization/basics.ipynb",
        encoding='utf-8'
    )
    .with_service_conda("tensorflow26_p37_cpu_v2")
    .with_environment_variable(GREETINGS="Welcome to OCI Data Science")
    .with_output("oci://<bucket_name>@<namespace>/<prefix>")
)

pipeline_step_two = (
    PipelineStep("Notebook_Step")
    .with_description("A step running a notebook")
    .with_infrastructure(infrastructure)
    .with_runtime(step_two_runtime)
)

```

(continues on next page)

(continued from previous page)

```

)

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

pipeline = (
    Pipeline("A single step pipeline")
    .with_compartment_id(compartment_id)
    .with_project_id(project_id)
    .with_step_details([pipeline_step_one, pipeline_step_two])
)

pipeline.create()

pipeline_run = pipeline.run()

```

## 16.6.6 Run two steps in parallel

In the example below, when DAG is not specified, the steps in the pipeline run in parallel.

Listing 29: YAML

```

from ads.pipeline import Pipeline
import os

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

yaml_string = """
kind: pipeline
spec:
  compartmentId: {compartment_id}
  displayName: A single step pipeline
  projectId: {project_id}
  stepDetails:
  - kind: customScript
    spec:
      description: A step running a python script
      infrastructure:
        kind: infrastructure
        spec:
          blockSizeSize: 200
          shapeConfigDetails:
            memoryInGBs: 32
            ocpus: 4
          shapeName: VM.Standard3.Flex
      name: Python_Script_Step
      runtime:

```

(continues on next page)

(continued from previous page)

```

    kind: runtime
    spec:
      conda:
        slug: generalml_p37_cpu_v1
        type: service
        scriptPathURI: script.py
      type: script
- kind: customScript
  spec:
    description: A step running a notebook
    infrastructure:
      kind: infrastructure
      spec:
        blockSizeSize: 200
        shapeConfigDetails:
          memoryInGBs: 32
          ocpus: 4
          shapeName: VM.Standard3.Flex
    name: Notebook_Step
    runtime:
      kind: runtime
      spec:
        conda:
          slug: tensorflow26_p37_cpu_v2
          type: service
        env:
          - name: GREETINGS
            value: Welcome to OCI Data Science
          notebookEncoding: utf-8
          notebookPathURI: https://raw.githubusercontent.com/tensorflow/docs/master/site/
↪en/tutorials/customization/basics.ipynb
          outputURI: oci://<bucket_name>@<namespace>/<prefix>
        type: notebook
    type: pipeline
  """.format(compartment_id=compartment_id, project_id=project_id)

pipeline = Pipeline.from_yaml(yaml_string)

pipeline.create()

pipeline_run = pipeline.run()

```

Listing 30: Python

```

from ads.pipeline import Pipeline, PipelineStep, CustomScriptStep, ScriptRuntime, ↪
↪NotebookRuntime
import os

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

infrastructure = (

```

(continues on next page)

(continued from previous page)

```

CustomScriptStep()
.with_block_storage_size(200)
.with_shape_name("VM.Standard3.Flex")
.with_shape_config_details(ocpus=4, memory_in_gbs=32)
)

step_one_runtime = (
    ScriptRuntime()
    .with_source("script.py")
    .with_service_conda("generalml_p37_cpu_v1")
)

pipeline_step_one = (
    PipelineStep("Python_Script_Step")
    .with_description("A step running a python script")
    .with_infrastructure(infrastructure)
    .with_runtime(step_one_runtime)
)

step_two_runtime = (
    NotebookRuntime()
    .with_notebook(
        path="https://raw.githubusercontent.com/tensorflow/docs/master/site/en/tutorials/
↪customization/basics.ipynb",
        encoding='utf-8'
    )
    .with_service_conda("tensorflow26_p37_cpu_v2")
    .with_environment_variable(GREETINGS="Welcome to OCI Data Science")
    .with_output("oci://<bucket_name>@<namespace>/<prefix>")
)

pipeline_step_two = (
    PipelineStep("Notebook_Step")
    .with_description("A step running a notebook")
    .with_infrastructure(infrastructure)
    .with_runtime(step_two_runtime)
)

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

pipeline = (
    Pipeline("A single step pipeline")
    .with_compartment_id(compartment_id)
    .with_project_id(project_id)
    .with_step_details([pipeline_step_one, pipeline_step_two])
)

pipeline.create()

pipeline_run = pipeline.run()

```

## 16.6.7 Run two steps sequentially

Listing 31: YAML

```

from ads.pipeline import Pipeline
import os

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

yaml_string = """
kind: pipeline
spec:
  compartmentId: {compartment_id}
  displayName: A single step pipeline
  projectId: {project_id}
  dag:
    - Python_Script_Step >> Notebook_Step
  stepDetails:
    - kind: customScript
      spec:
        description: A step running a python script
        infrastructure:
          kind: infrastructure
          spec:
            blockSizeSize: 200
            shapeConfigDetails:
              memoryInGBs: 32
              ocpus: 4
              shapeName: VM.Standard3.Flex
        name: Python_Script_Step
        runtime:
          kind: runtime
          spec:
            conda:
              slug: generalml_p37_cpu_v1
              type: service
            scriptPathURI: script.py
          type: script
    - kind: customScript
      spec:
        description: A step running a notebook
        infrastructure:
          kind: infrastructure
          spec:
            blockSizeSize: 200
            shapeConfigDetails:
              memoryInGBs: 32
              ocpus: 4
              shapeName: VM.Standard3.Flex

```

(continues on next page)

(continued from previous page)

```

name: Notebook_Step
runtime:
  kind: runtime
  spec:
    conda:
      slug: tensorflow26_p37_cpu_v2
      type: service
    env:
      - name: GREETINGS
        value: Welcome to OCI Data Science
      notebookEncoding: utf-8
      notebookPathURI: https://raw.githubusercontent.com/tensorflow/docs/master/site/
↳ en/tutorials/customization/basics.ipynb
      outputURI: oci://<bucket_name>@<namespace>/<prefix>
    type: notebook
type: pipeline
""".format(compartment_id=compartment_id, project_id=project_id)

pipeline = Pipeline.from_yaml(yaml_string)

pipeline.create()

pipeline_run = pipeline.run()

```

Listing 32: Python

```

from ads.pipeline import Pipeline, PipelineStep, CustomScriptStep, ScriptRuntime,
↳ NotebookRuntime
import os

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

infrastructure = (
    CustomScriptStep()
    .with_block_storage_size(200)
    .with_shape_name("VM.Standard3.Flex")
    .with_shape_config_details(ocpus=4, memory_in_gbs=32)
)

step_one_runtime = (
    ScriptRuntime()
    .with_source("script.py")
    .with_service_conda("generalml_p37_cpu_v1")
)

pipeline_step_one = (
    PipelineStep("Python_Script_Step")
    .with_description("A step running a python script")
    .with_infrastructure(infrastructure)
    .with_runtime(step_one_runtime)
)

```

(continues on next page)

(continued from previous page)

```

step_two_runtime = (
    NotebookRuntime()
    .with_notebook(
        path="https://raw.githubusercontent.com/tensorflow/docs/master/site/en/tutorials/
↳ customization/basics.ipynb",
        encoding='utf-8'
    )
    .with_service_conda("tensorflow26_p37_cpu_v2")
    .with_environment_variable(GREETINGS="Welcome to OCI Data Science")
    .with_output("oci://<bucket_name>@<namespace>/<prefix>")
)

pipeline_step_two = (
    PipelineStep("Notebook_Step")
    .with_description("A step running a notebook")
    .with_infrastructure(infrastructure)
    .with_runtime(step_two_runtime)
)

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

pipeline = (
    Pipeline("A single step pipeline")
    .with_compartment_id(compartment_id)
    .with_project_id(project_id)
    .with_step_details([pipeline_step_one, pipeline_step_two])
    .with_dag(["Python_Script_Step >> Notebook_Step"])
)

pipeline.create()

pipeline_run = pipeline.run()

```

### 16.6.8 Run multiple steps with dependencies specified in DAG

In this example, step\_1 and step\_2 run in parallel and step\_3 runs after step\_1 and step\_2 are complete.

Listing 33: YAML

```

from ads.pipeline import Pipeline
import os

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

yaml_string = """

```

(continues on next page)



(continued from previous page)

```

kind: pipeline
spec:
  compartmentId: {compartment_id}
  displayName: An example pipeline
  projectId: {project_id}
  dag:
    - (step_1, step_2) >> step_3
  stepDetails:
    - kind: customScript
      spec:
        description: A step running a python script
        infrastructure:
          kind: infrastructure
          spec:
            blockStorageSize: 200
            shapeConfigDetails:
              memoryInGBs: 32
              ocpus: 4
              shapeName: VM.Standard3.Flex
        name: step_1
        runtime:
          kind: runtime
          spec:
            conda:
              slug: generalml_p37_cpu_v1
              type: service
            scriptPathURI: script.py
            type: script
    - kind: customScript
      spec:
        description: A step running a notebook
        infrastructure:
          kind: infrastructure
          spec:
            blockStorageSize: 200
            shapeConfigDetails:
              memoryInGBs: 32
              ocpus: 4
              shapeName: VM.Standard3.Flex
        name: step_2
        runtime:
          kind: runtime
          spec:
            conda:
              slug: tensorflow26_p37_cpu_v2
              type: service
            notebookEncoding: utf-8
            notebookPathURI: https://raw.githubusercontent.com/tensorflow/docs/master/site/en/tutorials/customization/basics.ipynb
            type: notebook
    - kind: customScript
      spec:

```

(continues on next page)

(continued from previous page)

```

description: A step running a python script
infrastructure:
  kind: infrastructure
  spec:
    blockStorageSize: 200
    shapeConfigDetails:
      memoryInGBs: 32
      ocpus: 4
      shapeName: VM.Standard3.Flex
name: step_3
runtime:
  kind: runtime
  spec:
    conda:
      slug: generalml_p37_cpu_v1
      type: service
      scriptPathURI: script.py
    type: script
type: pipeline
""".format(compartment_id=compartment_id, project_id=project_id)

pipeline = Pipeline.from_yaml(yaml_string)

pipeline.create()      # create the pipeline
pipeline.show()        # visualize the pipeline

pipeline_run = pipeline.run()  # run the pipeline

pipeline_run.show(wait=True)  # watch the pipeline run status

```

Listing 34: Python

```

from ads.pipeline import Pipeline, PipelineStep, CustomScriptStep, ScriptRuntime, \
↳ NotebookRuntime
import os

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

infrastructure = (
    CustomScriptStep()
    .with_block_storage_size(200)
    .with_shape_name("VM.Standard3.Flex")
    .with_shape_config_details(ocpus=4, memory_in_gbs=32)
)

script_runtime = (
    ScriptRuntime()
    .with_source("script.py")
    .with_service_conda("generalml_p37_cpu_v1")
)

```

(continues on next page)

(continued from previous page)

```

notebook_runtime = (
    NotebookRuntime()
    .with_notebook(
        path="https://raw.githubusercontent.com/tensorflow/docs/master/site/en/tutorials/
↳ customization/basics.ipynb",
        encoding='utf-8'
    )
    .with_service_conda("tensorflow26_p37_cpu_v2")
)

pipeline_step_1 = (
    PipelineStep("step_1")
    .with_description("A step running a python script")
    .with_infrastructure(infrastructure)
    .with_runtime(script_runtime)
)

pipeline_step_2 = (
    PipelineStep("step_2")
    .with_description("A step running a notebook")
    .with_infrastructure(infrastructure)
    .with_runtime(notebook_runtime)
)

pipeline_step_3 = (
    PipelineStep("step_3")
    .with_description("A step running a python script")
    .with_infrastructure(infrastructure)
    .with_runtime(script_runtime)
)

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ['PROJECT_OCID']

pipeline = (
    Pipeline("An example pipeline")
    .with_compartment_id(compartment_id)
    .with_project_id(project_id)
    .with_step_details([pipeline_step_1, pipeline_step_2, pipeline_step_3])
    .with_dag(["(step_1, step_2) >> step_3"])
)

pipeline.create()      # create the pipeline
pipeline.show()        # visualize the pipeline

pipeline_run = pipeline.run()  # run the pipeline

pipeline_run.show(wait=True)  # watch the pipeline run status

```

## 16.6.9 Set environment variables in a step

Listing 35: YAML

```
from ads.pipeline import Pipeline
import os

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

yaml_string = """
kind: pipeline
spec:
  compartmentId: {compartment_id}
  displayName: A single step pipeline
  projectId: {project_id}
  stepDetails:
    - kind: customScript
      spec:
        description: A step running a notebook
        infrastructure:
          kind: infrastructure
          spec:
            blockStorageSize: 200
            shapeConfigDetails:
              memoryInGBs: 32
              ocpus: 4
              shapeName: VM.Standard3.Flex
        name: Notebook_Step
      runtime:
        kind: runtime
        spec:
          conda:
            slug: tensorflow26_p37_cpu_v2
            type: service
          env:
            - name: GREETINGS
              value: Welcome to OCI Data Science
            notebookEncoding: utf-8
            notebookPathURI: https://raw.githubusercontent.com/tensorflow/docs/master/site/
            ↪en/tutorials/customization/basics.ipynb
            outputURI: oci://<bucket_name>@<namespace>/<prefix>
          type: notebook
        type: pipeline
  """
  .format(compartment_id=compartment_id, project_id=project_id)

pipeline = Pipeline.from_yaml(yaml_string)

pipeline.create()

pipeline_run = pipeline.run()
```

Listing 36: Python

```

from ads.pipeline import Pipeline, PipelineStep, CustomScriptStep, NotebookRuntime
import os

infrastructure = (
    CustomScriptStep()
    .with_block_storage_size(200)
    .with_shape_name("VM.Standard3.Flex")
    .with_shape_config_details(ocpus=4, memory_in_gbs=32)
)

runtime = (
    NotebookRuntime()
    .with_notebook(
        path="https://raw.githubusercontent.com/tensorflow/docs/master/site/en/tutorials/
↳ customization/basics.ipynb",
        encoding='utf-8'
    )
    .with_service_conda("tensorflow26_p37_cpu_v2")
    .with_environment_variable(GREETINGS="Welcome to OCI Data Science")
    .with_output("oci://<bucket_name>@<namespace>/<prefix>")
)

pipeline_step = (
    PipelineStep("Notebook_Step")
    .with_description("A step running a notebook")
    .with_infrastructure(infrastructure)
    .with_runtime(runtime)
)

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

pipeline = (
    Pipeline("A single step pipeline")
    .with_compartment_id(compartment_id)
    .with_project_id(project_id)
    .with_step_details([pipeline_step])
)

pipeline.create()

pipeline_run = pipeline.run()

```

## 16.6.10 Watch status update on a pipeline run

Listing 37: YAML

```

from ads.pipeline import Pipeline
import os

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

yaml_string = """
kind: pipeline
spec:
  compartmentId: {compartment_id}
  displayName: A single step pipeline
  projectId: {project_id}
  stepDetails:
    - kind: customScript
      spec:
        description: A step running a python script
        infrastructure:
          kind: infrastructure
          spec:
            blockStorageSize: 200
            shapeConfigDetails:
              memoryInGBs: 32
              ocpus: 4
              shapeName: VM.Standard3.Flex
        name: Python_Script_Step
        runtime:
          kind: runtime
          spec:
            conda:
              slug: generalml_p37_cpu_v1
              type: service
            scriptPathURI: script.py
            type: script
        type: pipeline
    """.format(compartment_id=compartment_id, project_id=project_id)

pipeline = Pipeline.from_yaml(yaml_string)

pipeline.create()
pipeline_run = pipeline.run()

# pipeline_run.show(mode="text") # watch pipeline run status in text
pipeline_run.show(wait=True)   # watch pipeline run status in graph

```

Listing 38: Python

```

from ads.pipeline import Pipeline, PipelineStep, CustomScriptStep, ScriptRuntime
import os

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

infrastructure = (
    CustomScriptStep()
    .with_block_storage_size(200)
    .with_shape_name("VM.Standard3.Flex")
    .with_shape_config_details(ocpus=4, memory_in_gbs=32)
)

runtime = (
    ScriptRuntime()
    .with_source("script.py")
    .with_service_conda("generalml_p37_cpu_v1")
)

pipeline_step = (
    PipelineStep("Python_Script_Step")
    .with_description("A step running a python script")
    .with_infrastructure(infrastructure)
    .with_runtime(runtime)
)

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

pipeline = (
    Pipeline("A single step pipeline")
    .with_compartment_id(compartment_id)
    .with_project_id(project_id)
    .with_step_details([pipeline_step])
)

pipeline.create()
pipeline_run = pipeline.run()

# pipeline_run.show(mode="text") # watch pipeline run status in text
pipeline_run.show(wait=True)    # watch pipeline run status in graph

```

## 16.6.11 Monitor logs of a pipeline run

Listing 39: YAML

```

from ads.pipeline import Pipeline
import os

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

yaml_string = """
kind: pipeline
spec:
  compartmentId: {compartment_id}
  displayName: A single step pipeline
  projectId: {project_id}
  stepDetails:
  - kind: customScript
    spec:
      description: A step running a python script
      infrastructure:
        kind: infrastructure
        spec:
          blockStorageSize: 200
          shapeConfigDetails:
            memoryInGBs: 32
            ocpus: 4
            shapeName: VM.Standard3.Flex
      name: Python_Script_Step
      runtime:
        kind: runtime
        spec:
          conda:
            slug: generalml_p37_cpu_v1
            type: service
            scriptPathURI: script.py
            type: script
type: pipeline
""".format(compartment_id=compartment_id, project_id=project_id)

pipeline = Pipeline.from_yaml(yaml_string)

pipeline.create()
pipeline_run = pipeline.run()

# pipeline_run.watch() # stream the consolidated log of the pipeline run
pipeline_run.watch(log_type="service_log") # stream service log of the pipeline run
pipeline_run.watch("Python_Script_Step", log_type="custom_log") # stream custom log of
↳ the step run

```



Listing 40: Python

```

from ads.pipeline import Pipeline, PipelineStep, CustomScriptStep, ScriptRuntime
import os

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

infrastructure = (
    CustomScriptStep()
    .with_block_storage_size(200)
    .with_shape_name("VM.Standard3.Flex")
    .with_shape_config_details(ocpus=4, memory_in_gbs=32)
)

runtime = (
    ScriptRuntime()
    .with_source("script.py")
    .with_service_conda("generalml_p37_cpu_v1")
)

pipeline_step = (
    PipelineStep("Python_Script_Step")
    .with_description("A step running a python script")
    .with_infrastructure(infrastructure)
    .with_runtime(runtime)
)

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ['PROJECT_OCID']

pipeline = (
    Pipeline("A single step pipeline")
    .with_compartment_id(compartment_id)
    .with_project_id(project_id)
    .with_step_details([pipeline_step])
)

pipeline.create()
pipeline_run = pipeline.run()

# pipeline_run.watch() # stream the consolidated log of the pipeline run
pipeline_run.watch(log_type="service_log") # stream service log of the pipeline run
pipeline_run.watch("Python_Script_Step", log_type="custom_log") # stream custom log of
↳ the step run

```

## 16.6.12 Override configurations when creating a pipeline run

Listing 41: YAML

```

from ads.pipeline import Pipeline
import os

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ["PROJECT_OCID"]

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

yaml_string = """
kind: pipeline
spec:
  commandLineArguments: argument --key value
  environmentVariables:
    env: value
  compartmentId: {compartment_id}
  displayName: A single step pipeline
  projectId: {project_id}
  stepDetails:
  - kind: customScript
    spec:
      description: A step running a python script
      infrastructure:
        kind: infrastructure
        spec:
          blockSizeSize: 200
          shapeConfigDetails:
            memoryInGBs: 32
            ocpus: 4
            shapeName: VM.Standard3.Flex
      name: Python_Script_Step
      runtime:
        kind: runtime
        spec:
          conda:
            slug: generalml_p37_cpu_v1
            type: service
            scriptPathURI: script.py
          type: script
type: pipeline
""".format(compartment_id=compartment_id, project_id=project_id)

pipeline = Pipeline.from_yaml(yaml_string)

pipeline.create()

# Override configurations when creating a pipeline run
display_override_name = "RunOverrideName"
configuration_override_details = {

```

(continues on next page)

(continued from previous page)

```

    "maximum_runtime_in_minutes": 30,
    "type": "DEFAULT",
    "environment_variables": {"a": "b"},
    "command_line_arguments": "ARGUMENT --KEY VALUE",
}

step_override_details = [
{
    "step_name": "Python_Script_Step",
    "step_configuration_details": {
        "maximum_runtime_in_minutes": 200,
        "environment_variables": {"1": "2"},
        "command_line_arguments": "argument --key value",
    },
}
]

pipeline_run = pipeline.run(
    display_name=display_override_name,
    configuration_override_details=configuration_override_details,
    step_override_details=step_override_details,
)

```

Listing 42: Python

```

from ads.pipeline import Pipeline, PipelineStep, CustomScriptStep, ScriptRuntime
import os

with open("script.py", "w") as f:
    f.write("print('Hello World!')")

infrastructure = (
    CustomScriptStep()
    .with_block_storage_size(200)
    .with_shape_name("VM.Standard3.Flex")
    .with_shape_config_details(ocpus=4, memory_in_gbs=32)
)

runtime = (
    ScriptRuntime()
    .with_source("script.py")
    .with_service_conda("generalml_p37_cpu_v1")
)

pipeline_step = (
    PipelineStep("Python_Script_Step")
    .with_description("A step running a python script")
    .with_infrastructure(infrastructure)
    .with_runtime(runtime)
)

compartment_id = os.environ['NB_SESSION_COMPARTMENT_OCID']
project_id = os.environ['PROJECT_OCID']

```

(continues on next page)

(continued from previous page)

```
pipeline = (  
    Pipeline("A single step pipeline")  
    .with_compartment_id(compartment_id)  
    .with_project_id(project_id)  
    .with_step_details([pipeline_step])  
    .with_argument("argument", key="value")  
    .with_environment_variable(env="value")  
)  
  
pipeline.create()  
  
# Override configurations when creating a pipeline run  
display_override_name = "RunOverrideName"  
configuration_override_details = {  
    "maximum_runtime_in_minutes": 30,  
    "type": "DEFAULT",  
    "environment_variables": {"a": "b"},  
    "command_line_arguments": "ARGUMENT --KEY VALUE",  
}  
  
step_override_details = [  
    {  
        "step_name": "Python_Script_Step",  
        "step_configuration_details": {  
            "maximum_runtime_in_minutes": 200,  
            "environment_variables": {"1": "2"},  
            "command_line_arguments": "argument --key value",  
        },  
    },  
]  
  
pipeline_run = pipeline.run(  
    display_name=display_override_name,  
    configuration_override_details=configuration_override_details,  
    step_override_details=step_override_details,  
)
```

## STORE CREDENTIALS

Services such as OCI Database and Streaming require users to provide credentials. These credentials must be safely accessed at runtime. [OCI Vault](#) provides a mechanism for safe storage and access of secrets. `SecretKeeper` uses Vault as a backend to store and retrieve the credentials. The data structure of the credentials varies from service to service. There is a `SecretKeeper` specific to each data structure.

These classes are provided:

- `ADBSecretKeeper`: Stores credentials for the Oracle Autonomous Database, with or without the wallet file.
- `AuthTokenSecretKeeper`: Stores an Auth Token or Access Token string. This could be an Auth Token to use to connect to Streaming, Github, or other systems that used Auth Tokens or Access Token strings.
- `BDSecretKeeper`: Stores credentials for Oracle Big Data Service with or without Keytab and kerb5 configuration files.
- `MySQLDBSecretKeeper`: Stores credentials for the MySQL database. This class will work with many databases that authenticate with a username and password only.
- `OracleDBSecretKeeper`: Stores credentials for the Oracle Database.

### 17.1 Quick Start

#### 17.1.1 Auth Tokens

##### 17.1.1.1 Save Credentials

```
import ads
from ads.secrets.auth_token import AuthTokenSecretKeeper

ads.set_auth('resource_principal') # If using resource principal authentication

ocid_vault = "ocid1.vault..<unique_ID>"
ocid_master_key = "ocid1.key..<unique_ID>"
ocid_mycompartment = "ocid1.compartment..<unique_ID>"

authtoken2 = AuthTokenSecretKeeper(
    vault_id=ocid_vault,
    key_id=ocid_master_key,
    compartment_id=ocid_mycompartment,
    auth_token="<your_auth_token>"
).save()
```

(continues on next page)

(continued from previous page)

```

        "my_xyz_auth_token2",
        "This is my key for git repo xyz",
        freeform_tags={"gitrepo":"xyz"}
    )
print(authtoken2.secret_id)

```

```
'ocid1.vaultsecret..<unique_ID>'
```

### 17.1.1.2 Load Credentials

```

import ads
from ads.secrets.auth_token import AuthTokenSecretKeeper

ads.set_auth('resource_principal') # If using resource principal authentication

with AuthTokenSecretKeeper.load_secret(source="ocid1.vaultsecret..<unique_ID>",
                                       ) as authtoken:
    import os
    print(f"Credentials inside `authtoken` object: {authtoken}")

```

```
Credentials inside `authtoken` object: {'auth_token': '<your_auth_token>'}
```

## 17.1.2 Autonomous Database

### 17.1.2.1 Save Credentials

```

import ads
ads.set_auth('resource_principal') # If using resource principal authentication
from ads.secrets.adb import ADBSecretKeeper

connection_parameters={
    "user_name":"admin",
    "password":"<your_password>",
    "service_name":"service_high",
    "wallet_location":"/home/datascience/Wallet_-----.zip"
}

ocid_vault = "ocid1.vault..<unique_ID>"
ocid_master_key = "ocid1.key..<unique_ID>"
ocid_mycompartment = "ocid1.compartment..<unique_ID>"

adw_keeper = ADBSecretKeeper(vault_id=ocid_vault,
                             key_id=ocid_master_key,
                             compartment_id=ocid_mycompartment,
                             **connection_parameters)

# Store the credentials without storing the wallet file
adw_keeper.save("adw_employee_att2",
               "My DB credentials",
               freeform_tags={"schema":"emp"},

```

(continues on next page)

(continued from previous page)

```

        save_wallet=True
    )
print(adw_keeper.secret_id)

```

```
'ocid1.vaultsecret..<unique_ID>'
```

### 17.1.2.2 Load Credentials

```

import ads
ads.set_auth('resource_principal') # If using resource principal authentication
from ads.secrets.adb import ADBSecretKeeper

with ADBSecretKeeper.load_secret("ocid1.vaultsecret..<unique_ID>") as adw_creds2:
    import pandas as pd
    df2 = pd.DataFrame(ads.read_sql("select JOBFUNCTION, ATTRITION from ATTRITION_DATA",
    ↪connection_parameters=adw_creds2))
    print(df2.head(2))

```

	JOBFUNCTION	ATTRITION
0	Product Management	No
1	Software Developer	No

### 17.1.3 Big Data Service

#### 17.1.3.1 Save Credentials

```

import ads
import fsspec
import os

from ads.secrets.big_data_service import BDSSecretKeeper
from ads.bds.auth import has_kerberos_ticket, refresh_ticket, krbcontext

ads.set_auth('resource_principal')

principal = "<your_principal>"
hdfs_host = "<your_hdfs_host>"
hive_host = "<your_hive_host>"
hdfs_port = <your_hdfs_port>
hive_port = <your_hive_port>
vault_id = "ocid1.vault..<unique_ID>"
key_id = "ocid1.key..<unique_ID>"

secret = BDSSecretKeeper(
    vault_id=vault_id,
    key_id=key_id,
    principal=principal,
    hdfs_host=hdfs_host,

```

(continues on next page)

(continued from previous page)

```

        hive_host=hive_host,
        hdfs_port=hdfs_port,
        hive_port=hive_port,
        keytab_path=keytab_path,
        kerb5_path=kerb5_path
    )

saved_secret = secret.save(name="your_bds_config_secret_name",
                           description="your bds credentials",
                           freeform_tags={"schema":"emp"},
                           defined_tags={},
                           save_files=True)

```

### 17.1.3.2 Load Credentials

```

from ads.secrets.big_data_service import BDSSecretKeeper
from pyhive import hive

with BDSSecretKeeper.load_secret(saved_secret.secret_id, keytab_dir="~/path/to/save/
↳keytab_file/") as cred:
    with krbcontext(principal=cred["principal"], keytab_path=cred['keytab_path']):
        hive_cursor = hive.connect(host=cred["hive_host"],
                                    port=cred["hive_port"],
                                    auth='KERBEROS',
                                    kerberos_service_name="hive").cursor()

```

## 17.1.4 MySQL

### 17.1.4.1 Save Credentials

```

import ads
from ads.secrets.mysqlldb import MySQLDBSecretKeeper

vault_id = "ocid1.vault.<unique_ID>"
key_id = "ocid1.key.<unique_ID>"

ads.set_auth("resource_principal") # If using resource principal for authentication
connection_parameters={
    "user_name": "<your user name>",
    "password": "<your password>",
    "host": "<db host>",
    "port": "<db port>",
    "database": "<database>",
}

mysqlldb_keeper = MySQLDBSecretKeeper(vault_id=vault_id,
                                       key_id=key_id,
                                       **connection_parameters)

```

(continues on next page)



(continued from previous page)

```

mysqldb_keeper.save("mysqldb_employee", "My DB credentials", freeform_tags={"schema":"emp
↪"})
print(mysqldb_keeper.secret_id) # Prints the secret_id of the stored credentials

'ocid1.vaultsecret..<unique_ID>'

```

#### 17.1.4.2 Load Credentials

```

import ads
from ads.secrets.mysqldb import MySQLDBSecretKeeper
ads.set_auth('resource_principal') # If using resource principal authentication

with MySQLDBSecretKeeper.load_secret(source=secret_id) as mysqldb_creds:
    import pandas as pd
    df2 = pd.DataFrame(ads.read_sql("select JOBFUNCTION, ATTRITION from ATTRITION_DATA",
↪connection_parameters=mysqldb_creds)
    print(df2.head(2))

```

	JOBFUNCTION	ATTRITION
0	Product Management	No
1	Software Developer	No

### 17.1.5 Oracle Database

#### 17.1.5.1 Save Credentials

```

import ads
from ads.secrets.oracledb import OracleDBSecretKeeper

vault_id = "ocid1.vault..<unique_ID>"
key_id = "ocid1.key..<unique_ID>"

ads.set_auth("resource_principal") # If using resource principal for authentication
connection_parameters={
    "user_name": "<your user name>",
    "password": "<your password>",
    "service_name": "service_name",
    "host": "<db host>",
    "port": "<db port>",
}

oracledb_keeper = OracleDBSecretKeeper(vault_id=vault_id,
                                       key_id=key_id,
                                       **connection_parameters)

oracledb_keeper.save("oracledb_employee", "My DB credentials", freeform_tags={"schema":
↪"emp"})
print(oracledb_keeper.secret_id) # Prints the secret_id of the stored credentials

```

```
'ocid1.vaultsecret..<unique_ID>'
```

### 17.1.5.2 Load Credentials

```
import ads
ads.set_auth('resource_principal') # If using resource principal authentication
from ads.secrets.oracledb import OracleDBSecretKeeper

with OracleDBSecretKeeper.load_secret(source=secret_id) as oracledb_creds:
    import pandas as pd
    df2 = pd.DataFrame(ads.read_sql("select JOBFUNCTION, ATTRITION from ATTRITION_DATA",
    ↪connection_parameters=oracledb_creds))
    print(df2.head(2))
```

	JOBFUNCTION	ATTRITION
0	Product Management	No
1	Software Developer	No

## 17.2 Auth Token

The `AuthTokenSecretKeeper` helps you to save the Auth Token or Access Token string to the OCI Vault service.

See [API Documentation](#) for more details

### 17.2.1 Save Credentials

#### 17.2.1.1 AuthTokenSecretKeeper

The `AuthTokenSecretKeeper` constructor takes the following parameters:

- `auth_token` (str): Provide the Auth Token or Access Token string to be stored
- `vault_id` (str): ocid of the vault
- `key_id` (str): ocid of the master key used for encrypting the secret
- `compartment_id` (str, optional): Default is None. ocid of the compartment where the vault is located. This will be defaulted to the compartment of the Notebook session, if used within a OCI Data Science notebook session.

##### 17.2.1.1.1 Save

The `AuthTokenSecretKeeper.save` API serializes and stores the credentials to Vault. It takes following parameters -

- `name` (str): Name of the secret when saved in the vault.
- `description` (str): Description of the secret when saved in the vault.
- `freeform_tags` (dict, optional): Freeform tags to use when saving the secret in the OCI Console.
- `defined_tags` (dict, optional.): Save the tags under predefined tags in the OCI Console.

The secret has following information:

- auth\_token

### 17.2.1.2 Examples

#### 17.2.1.2.1 Save Auth Token

```
import ads
from ads.secrets.auth_token import AuthTokenSecretKeeper

ads.set_auth('resource_principal') # If using resource principal authentication

ocid_vault = "ocid1.vault...<unique_ID>"
ocid_master_key = "ocid1.key...<unique_ID>"
ocid_mycompartment = "ocid1.compartment...<unique_ID>"

authtoken2 = AuthTokenSecretKeeper(
    vault_id=ocid_vault,
    key_id=ocid_master_key,
    compartment_id=ocid_mycompartment,
    auth_token="<your_auth_token>"
).save(
    "my_xyz_auth_token2",
    "This is my key for git repo xyz",
    freeform_tags={"gitrepo":"xyz"}
)
print(authtoken2.secret_id)
```

You can save the vault details in a file for later reference or using it within your code using `export_vault_details` API. The API currently let us export the information as a yaml file or a json file.

```
authtoken2.export_vault_details("my_db_vault_info.json", format="json")
```

#### 17.2.1.2.2 Save as a yaml File

```
authtoken2.export_vault_details("my_db_vault_info.yaml", format="yaml")
```

## 17.2.2 Load Credentials

### 17.2.2.1 Load

The `AuthTokenSecretKeeper.load_secret` API deserializes and loads the credentials from Vault. You could use this API in one of the following ways:

#### 17.2.2.1.1 Using a with Statement

```
with AuthTokenSecretKeeper.load_secret('ocidl.vaultsecret..<unique_ID>') as authtoken:
    print(authtoken['user_name'])
```

This approach is preferred as the secrets are only available within the code block and it reduces the risk that the variable will be leaked.

#### 17.2.2.1.2 Without using a with Statement

```
authtoken = AuthTokenSecretKeeper.load_secret('ocidl.vaultsecret..<unique_ID>')
authtokendict = authtoken.to_dict()
print(authtokendict['user_name'])
```

The `.load_secret()` takes the following parameters:

- `auth`: Provide overriding authorization information if the authorization information is different from the `ads.set_auth` setting.
- `export_env`: Default is `False`. If set to `True`, the credentials are exported as environment variable when used with
- `export_prefix`: The default name for environment variable is `user_name`, `password`, `service_name`, and `wallet_location`. You can add a prefix to avoid name collision
- `format`: Optional. If source is a file, then this value must be `json` or `yaml` depending on the file format.
- `source`: Either the file that was exported from `export_vault_details` or the OCID of the secret
- the `with` operator.

### 17.2.2.2 Examples

#### 17.2.2.2.1 Using a with Statement

```
import ads
from ads.secrets.auth_token import AuthTokenSecretKeeper

ads.set_auth('resource_principal') # If using resource principal authentication

with AuthTokenSecretKeeper.load_secret(source="ocidl.vaultsecret..<unique_ID>",
                                       ) as authtoken:
    import os
    print(f"Credentials inside `authtoken` object: {authtoken}")
```

Credentials inside `authtoken` object: {'auth\_token': '<your\_auth\_token>'}

### 17.2.2.2.2 Export to Environment Variables Using a with Statement

To expose credentials through environment variable, set `export_env=True`. The following keys are exported -

Secret attribute	Environment Variable Name
auth_token	auth_token

```
import ads
from ads.secrets.auth_token import AuthTokenSecretKeeper
import os

ads.set_auth('resource_principal') # If using resource principal authentication

with AuthTokenSecretKeeper.load_secret(
    source="ocid1.vaultsecret.<unique_ID>",
    export_env=True
):
    print(os.environ.get("auth_token")) # Prints the auth token

print(os.environ.get("auth_token")) # Prints nothing. The credentials are cleared from
↳ the dictionary outside the ``with`` block
```

You can avoid name collisions by setting the prefix string using `export_prefix` along with `export_env=True`. For example, if you set the prefix to `kafka`, the exported keys are:

Secret attribute	Environment Variable Name
auth_token	kafka.auth_token

```
import ads
from ads.secrets.auth_token import AuthTokenSecretKeeper
import os

ads.set_auth('resource_principal') # If using resource principal authentication

with AuthTokenSecretKeeper.load_secret(
    source="ocid1.vaultsecret.<unique_ID>",
    export_env=True,
    export_prefix="kafka"
):
    print(os.environ.get("kafka.auth_token")) # Prints the auth token

print(os.environ.get("kafka.auth_token")) # Prints nothing. The credentials are cleared
↳ from the dictionary outside the ``with`` block
```

## 17.3 Autonomous Database

To connect to Autonomous Database you need the following:

- user name
- password
- service name
- [wallet file](#)

The `ADBSecretKeeper` class saves the ADB credentials to the OCI Vault service.

See [API Documentation](#) for more details

### 17.3.1 Save Credentials

#### 17.3.1.1 ADBSecretKeeper

The `ADBSecretKeeper` constructor has the following parameters:

- `compartment_id` (str): OCID of the compartment where the vault is located. This defaults to the compartment of the notebook session when used in a Data Science notebook session.
- `key_id` (str): OCID of the master key used for encrypting the secret.
- `password` (str): The password of the database.
- `service_name` (str): Set the service name of the database.
- `user_name` (str): The user name to be stored.
- `vault_id` (str): OCID of the vault.
- `wallet_location` (str): Path to the wallet ZIP file.

##### 17.3.1.1.1 Save

The `ADBSecretKeeper.save` API serializes and stores the credentials to Vault using the following parameters:

- `defined_tags` (dict, optional): Default None. Save the tags under predefined tags in the OCI Console.
- `description` (str): Description of the secret when saved in Vault.
- `freeform_tags` (dict, optional): Default None. Free form tags to use for saving the secret in the OCI Console.
- `name` (str): Name of the secret when saved in Vault.
- `save_wallet` (bool, optional): Default False. If set to True, then the wallet file is serialized.

When stored without the wallet information, the secret content has following information:

- `password`
- `service_name`
- `user_name`

To store wallet file content, set `save_wallet` to True. The wallet content is stored by extracting all the files from the wallet ZIP file, and then each file is stored in the vault as a secret. The list of OCIDs corresponding to each file along with username, password, and service name is stored in a separate secret. The secret corresponding to each file content has following information:

- filename
- content of the file

A **meta secret** is created to save the username, password, service name, and the secret ids of the files within the wallet file. It has following attributes:

- user\_name
- password
- wallet\_file\_name
- wallet\_secret\_ids

The wallet file is reconstructed when `ADBSecretKeeper.load_secret` is called using the OCID of the **meta secret**.

### 17.3.1.2 Examples

#### 17.3.1.2.1 Without the Wallet File

```
import ads
ads.set_auth('resource_principal') # If using resource principal authentication
from ads.secrets.adb import ADBSecretKeeper

connection_parameters={
    "user_name":"admin",
    "password":"<your_password>",
    "service_name":"service_high",
    "wallet_location":"/home/datascience/Wallet_-----.zip"
}

ocid_vault = "ocid1.vault.<unique_ID>"
ocid_master_key = "ocid1.key.<unique_ID>"
ocid_mycompartment = "ocid1.compartment.<unique_ID>"

adw_keeper = ADBSecretKeeper(vault_id=ocid_vault,
                             key_id=ocid_master_key,
                             compartment_id=ocid_mycompartment,
                             **connection_parameters)

# Store the credentials without storing the wallet file
adw_keeper.save("adw_employee_att2", "My DB credentials", freeform_tags={"schema":"emp"})
print(adw_keeper.secret_id)
```

```
'ocid1.vaultsecret.<unique_ID>'
```

#### 17.3.1.2.2 With the Wallet File

```
import ads
ads.set_auth('resource_principal') # If using resource principal authentication
from ads.secrets.adb import ADBSecretKeeper

connection_parameters={
    "user_name":"admin",
    "password":"<your_password>",
    "service_name":"service_high",
    "wallet_location":"/home/datascience/Wallet_-----.zip"
}

ocid_vault = "ocid1.vault..<unique_ID>"
ocid_master_key = "ocid1.key..<unique_ID>"
ocid_mycompartment = "ocid1.compartment..<unique_ID>"

adw_keeper = ADBSecretKeeper(vault_id=ocid_vault,
                             key_id=ocid_master_key,
                             compartment_id=ocid_mycompartment,
                             **connection_parameters)

# Set `save_wallet`=True to save wallet file

adw_keeper.save("adw_employee_att2",
               "My DB credentials",
               freeform_tags={"schema":"emp"},
               save_wallet=True
)

print(adw_keeper.secret_id)
```

'ocid1.vaultsecret..<unique\_ID>'

You can save the vault details in a file for later reference or using it within your code using `export_vault_details` API calls. The API currently enables you to export the information as a YAML file or a JSON file.

```
adw_keeper.export_vault_details("my_db_vault_info.json", format="json")
```

To save as a YAML file:

```
adw_keeper.export_vault_details("my_db_vault_info.yaml", format="yaml")
```

### 17.3.2 Load Credentials

#### 17.3.2.1 Load

The `ADBSecretKeeper.load_secret` API deserializes and loads the credentials from Vault. You could use this API in one of the following ways:



### 17.3.2.1.1 Using a with Statement

```
with ADBSecretKeeper.load_secret('ocid1.vaultsecret.<unique_ID>') as adwsecret:
    print(adwsecret['user_name'])
```

This approach is preferred as the secrets are only available within the code block and it reduces the risk that the variable will be leaked.

### 17.3.2.1.2 Without using a with Statement

```
adwsecretobj = ADBSecretKeeper.load_secret('ocid1.vaultsecret.<unique_ID>')
adwsecret = adwsecretobj.to_dict()
print(adwsecret['user_name'])
```

The `.load_secret()` method has the following parameters:

- **auth:** Provide overriding authorization information if the authorization information is different from the `ads.set_auth` setting.
- **export\_env:** Default is `False`. If set to `True`, the credentials are exported as environment variable when used with the `with` operator.
- **export\_prefix:** The default name for environment variable is `user_name`, `password`, `service_name`, and `wallet_location`. You can add a prefix to avoid name collision
- **format:** Optional. If `source` is a file, then this value must be `json` or `yaml` depending on the file format.
- **source:** Either the file that was exported from `export_vault_details` or the OCID of the secret
- **wallet\_dir:** Optional. Directory path where the wallet zip file will be saved after the contents are retrieved from Vault. If wallet content is not available in the provided secret OCID, this attribute is ignored.
- **wallet\_location:** Optional. Path to the local wallet zip file. If vault secret does not have wallet file content, set this variable so that it will be available in the exported credential. If provided, this path takes precedence over the wallet file information in the secret.

If the wallet file was saved in the vault, then the ZIP file of the same name is created by the `.load_secret()` method. By default the ZIP file is created in the working directory. To update the location, you can set the directory path with `wallet_dir`.

## 17.3.2.2 Examples

### 17.3.2.2.1 Using a with Statement

```
import ads
ads.set_auth('resource_principal') # If using resource principal authentication
from ads.secrets.adb import ADBSecretKeeper

with ADBSecretKeeper.load_secret(
    "ocid1.vaultsecret.<unique_ID>"
) as adw_creds2:
    print(adw_creds2["user_name"]) # Prints the user name
```

(continues on next page)

(continued from previous page)

```
print (adw_creds2["user_name"]) # Prints nothing. The credentials are cleared from the
↪dictionary outside the ``with`` block
```

### 17.3.2.2.2 Export to Environment Variables Using a with Statement

To expose credentials as an environment variable, set `export_env=True`. The following keys are exported:

Secret attribute	Environment Variable Name
user_name	user_name
password	password
service_name	service_name
wallet_location	wallet_location

```
import os
import ads

ads.set_auth('resource_principal') # If using resource principal authentication
from ads.secrets.adb import ADBSecretKeeper

with ADBSecretKeeper.load_secret(
    "ocid1.vaultsecret..<unique_ID>",
    export_env=True
):
    print(os.environ.get("user_name")) # Prints the user name

print(os.environ.get("user_name")) # Prints nothing. The credentials are cleared from
↪the dictionary outside the ``with`` block
```

You can avoid name collisions by setting a prefix string using `export_prefix` along with `export_env=True`. For example, if you set the prefix to `myprocess`, then the exported keys are:

Secret attribute	Environment Variable Name
user_name	myprocess.user_name
password	myprocess.password
service_name	myprocess.service_name
wallet_location	myprocess.wallet_location

```
import os
import ads

ads.set_auth('resource_principal') # If using resource principal authentication
from ads.secrets.adb import ADBSecretKeeper

with ADBSecretKeeper.load_secret(
    "ocid1.vaultsecret..<unique_ID>",
    export_env=True,
    export_prefix="myprocess"
):
    print(os.environ.get("myprocess.user_name")) # Prints the user name
```

(continues on next page)

(continued from previous page)

```
print(os.environ.get("myprocess.user_name")) # Prints nothing. The credentials are
↳cleared from the dictionary outside the ``with`` block
```

### 17.3.2.2.3 Wallet File Location

You can set wallet file location when wallet file is not part of the stored vault secret. To specify a local wallet ZIP file, set the path to the ZIP file with `wallet_location`:

```
import ads
ads.set_auth('resource_principal') # If using resource principal authentication
from ads.secrets.adb import ADBSecretKeeper

with ADBSecretKeeper.load_secret(
    "ocid1.vaultsecret.<unique_ID>",
    wallet_location="path/to/my/local/wallet.zip"
) as adw_creds2:
    print (adw_creds2["wallet_location"]) # Prints `path/to/my/local/wallet.zip`

print (adw_creds2["wallet_location"]) # Prints nothing. The credentials are cleared from
↳the dictionary outside the ``with`` block
```

## 17.4 Big Data Service

New in version 2.5.10..

To connect to Oracle Big Data Service (BDS) you need the following:

- `hdfs host`: HDFS hostname which will be used to connect to the HDFS file system.
- `hdfs port`: HDFS port which will be used to connect to the HDFS file system.
- `hive host`: Hive hostname which will be used to connect to the Hive Server.
- `hive port`: Hive port which will be used to connect to the Hive Server.
- `kerb5 config file`: `krb5.conf` file which can be copied from `/etc/krb5.conf` from the master node of the BDS cluster. It will be used to generate the kerberos ticket.
- `keytab file`: The principal's keytab file which can be downloaded from the master node of the BDS cluster. It will be used to generate the kerberos ticket.
- `principal`: The unique identity to which Kerberos can assign tickets. It will be used to generate the kerberos ticket.

The `BDSSecretKeeper` class saves the BDS credentials to the OCI Vault service.

See [API Documentation](#) for more details

## 17.4.1 Save Credentials

### 17.4.1.1 BDSSecretKeeper

You can also save the connection parameters as well as the files needed to configure the kerberos authentication into vault. This will allow you to use repetitively in different notebook sessions, machines, and Jobs.

The `BDSSecretKeeper` constructor requires the following parameters:

- `compartment_id` (str): OCID of the compartment where the vault is located. This defaults to the compartment of the notebook session when used in a Data Science notebook session.
- `hdfs_host` (str): The HDFS hostname from the bds cluster.
- `hdfs_port` (str): The HDFS port from the bds cluster.
- `hive_host` (str): The Hive hostname from the bds cluster.
- `hive_port` (str): The Hive port from the bds cluster.
- `kerb5_path` (str): The `krb5.conf` file path.
- `key_id`: str (OCID of the master key used for encrypting the secret).
- `keytab_path` (str): The path to the keytab file.
- `principal` (str): The unique identity to which Kerberos can assign tickets.
- `vault_id`: (str): The OCID of the vault.

#### 17.4.1.1.1 Save

The `BDSSecretKeeper.save` API serializes and stores the credentials to Vault using the following parameters:

- `defined_tags` (dict, optional): Default None. Save the tags under predefined tags in the OCI Console.
- `description` (str) – Description of the secret when saved in Vault.
- `freeform_tags` (dict, optional): Default None. Free form tags to use for saving the secret in the OCI Console.
- `name` (str): Name of the secret when saved in Vault.
- `save_files` (bool, optional): Default True. If set to True, then the keytab and kerb5 config files are serialized and saved.

### 17.4.1.2 Examples

#### 17.4.1.2.1 With the Keytab and kerb5 Config Files

```
import ads
import fsspec
import os

from ads.secrets.big_data_service import BDSSecretKeeper
from ads.bds.auth import has_kerberos_ticket, refresh_ticket, krbcontext

ads.set_auth('resource_principal')

principal = "<your_principal>"
```

(continues on next page)

(continued from previous page)

```

hdfs_host = "<your_hdfs_host>"
hive_host = "<your_hive_host>"
hdfs_port = <your_hdfs_port>
hive_port = <your_hive_port>
vault_id = "ocid1.vault..<unique_ID>"
key_id = "ocid1.key..<unique_ID>"

secret = BDSSecretKeeper(
    vault_id=vault_id,
    key_id=key_id,
    principal=principal,
    hdfs_host=hdfs_host,
    hive_host=hive_host,
    hdfs_port=hdfs_port,
    hive_port=hive_port,
    keytab_path=keytab_path,
    kerb5_path=kerb5_path
)

saved_secret = secret.save(name="your_bds_config_secret_name",
                           description="your bds credentials",
                           freeform_tags={"schema":"emp"},
                           defined_tags={},
                           save_files=True)

```

#### 17.4.1.2.2 Without the Keytab and kerb5 Config Files

```

import ads
import fsspec
import os

from ads.secrets.big_data_service import BDSSecretKeeper
from ads.bds.auth import has_kerberos_ticket, refresh_ticket, krbcontext

ads.set_auth('resource_principal')

principal = "<your_principal>"
hdfs_host = "<your_hdfs_host>"
hive_host = "<your_hive_host>"
hdfs_port = <your_hdfs_port>
hive_port = <your_hive_port>
vault_id = "ocid1.vault..<unique_ID>"
key_id = "ocid1.key..<unique_ID>"

bds_keeper = BDSSecretKeeper(
    vault_id=vault_id,
    key_id=key_id,
    principal=principal,
    hdfs_host=hdfs_host,
    hive_host=hive_host,

```

(continues on next page)

(continued from previous page)

```

        hdfs_port=hdfs_port,
        hive_port=hive_port,
        keytab_path=keytab_path,
        kerb5_path=kerb5_path
    )

saved_secret = bds_keeper.save(name="your_bds_config_secret_name",
                               description="your bds credentials",
                               freeform_tags={"schema":"emp"},
                               defined_tags={},
                               save_files=False)

print(saved_secret.secret_id)

'ocid1.vaultsecret..<unique_ID>'

```

## 17.4.2 Load Credentials

### 17.4.2.1 Load

The `BDSecretKeeper.load_secret` API deserializes and loads the credentials from Vault. You could use this API in one of the following ways:

#### 17.4.2.1.1 Using a `with` Statement

```

with BDSecretKeeper.load_secret('ocid1.vaultsecret..<unique_ID>') as bdssecret:
    print(bdssecret['hdfs_host'])

```

This approach is preferred as the secrets are only available within the code block and it reduces the risk that the variable will be leaked.

#### 17.4.2.1.2 Without Using a `with` Statement

```

bdssecretobj = BDSecretKeeper.load_secret('ocid1.vaultsecret..<unique_ID>')
bdssecret = bdssecretobj.to_dict()
print(bdssecret['hdfs_host'])

```

The `.load_secret()` method takes following parameters:

- `auth`: Provide overriding authorization information if the authorization information is different from the `ads.set_auth` setting.
- `export_env`: Default is `False`. If set to `True`, the credentials are exported as environment variable when used with the `with` operator.
- `export_prefix`: The default name for environment variable is `user_name`, `password`, `service_name`, and `wallet_location`. You can add a prefix to avoid name collision
- `format`: Optional. If `source` is a file, then this value must be `json` or `yaml` depending on the file format.
- `keytab_dir`: Optional. Directory path where the keytab ZIP file is saved after the contents are retrieved from the vault. If the keytab content is not available in the specified secret OCID, then this attribute is ignored.

- **source:** Either the file that was exported from `export_vault_details` or the OCID of the secret

If the `keytab` and `kerb5` configuration files were saved in the vault, then a `keytab` and `kerb5` configuration file of the same name is created by `.load_secret()`. By default, the `keytab` file is created in the `keytab_path` specified in the secret. To update the location, set the directory path with `key_dir`. However, the `kerb5` configuration file is always saved in the `~/bds_config/krb5.conf` path.

Note that `keytab` and `kerb5` configuration files are saved only when the content is saved into the vault.

After you load and save the configuration parameters files, you can call the `krbcontext` context manager to create a Kerberos ticket.

## 17.4.2.2 Examples

### 17.4.2.2.1 Using a With Statement

To specify a local `keytab` file, set the path to the ZIP file with `wallet_location`:

```
from pyhive import hive

with BDSSecretKeeper.load_secret(saved_secret.secret_id, keytab_dir="~/path/to/save/
↳keytab_file/") as cred:
    with krbcontext(principal=cred["principal"], keytab_path=cred['keytab_path']):
        hive_cursor = hive.connect(host=cred["hive_host"],
                                   port=cred["hive_port"],
                                   auth='KERBEROS',
                                   kerberos_service_name="hive").cursor()
```

Now you can query the data from Hive:

```
hive_cursor.execute("""
    select *
    from your_db.your_table
    limit 10
""")

import pandas as pd
pd.DataFrame(hive_cursor.fetchall(), columns=[col[0] for col in hive_cursor.description])
```

### 17.4.2.2.2 Without Using a With Statement

#### Load From Secret OCID

```
bdssecretobj = BDSSecretKeeper.load_secret(saved_secret.secret_id)
bdssecret = bdssecretobj.to_dict()
print(bdssecret)
```

## Load From a JSON File

```
bdssecretobj = BDSSecretKeeper.load_secret(source="./my_bds_vault_info.json", format=
↪ "json")
bdssecretobj.to_dict()
```

## Load From a YAML File

```
bdssecretobj = BDSSecretKeeper.load_secret(source="./my_bds_vault_info.yaml", format=
↪ "yaml")
bdssecretobj.to_dict()
```

# 17.5 MySQL

To connect to a MySQL Database, you need the following:

- hostname
- password
- port, the default is 3306
- user name

The `MySQLDBSecretKeeper` class saves the MySQL database credentials to the OCI Vault service.

See [API Documentation](#) for more details

## 17.5.1 Save Credentials

### 17.5.1.1 MySQLDBSecretKeeper

The `MySQLDBSecretKeeper` constructor has the following parameters:

- `compartment_id` (str): OCID of the compartment where the vault is located. Defaults to the compartment of the notebook session when used in a Data Science notebook session.
- `database` (str, optional): The database name if available.
- `host` (str): The hostname of the database.
- `key_id` (str): OCID of the master key used for encrypting the secret.
- `password` (str): The password of the database.
- `port` (str, optional). Default 3306: Port number of the database service.
- `user_name` (str): The user name to be stored.
- `vault_id` (str): OCID of the vault.



#### 17.5.1.1.1 Save

The `MySQLDBSecretKeeper.save` API serializes and stores the credentials to the vault using the following parameters:

- `defined_tags` (dict, optional): Save the tags under predefined tags in the OCI Console.
- `description` (str): Description of the secret when saved in the vault.
- `freeform_tags` (dict, optional): Freeform tags to be used for saving the secret in the OCI Console.
- `name` (str): Name of the secret when saved in the vault.

The secret has the following information:

- `database`
- `host`
- `password`
- `port`
- `user_name`

#### 17.5.1.2 Examples

##### 17.5.1.2.1 Save Credentials

```
import ads
from ads.secrets.mysqlldb import MySQLDBSecretKeeper

vault_id = "ocid1.vault..<unique_ID>"
key_id = "ocid1.key..<unique_ID>"

ads.set_auth("resource_principal") # If using resource principal for authentication
connection_parameters={
    "user_name": "<your user name>",
    "password": "<your password>",
    "database": "database",
    "host": "<db host>",
    "port": "<db port>",
}

mysqlldb_keeper = MySQLDBSecretKeeper(vault_id=vault_id,
                                       key_id=key_id,
                                       **connection_parameters)

mysqlldb_keeper.save("mysqlldb_employee", "My DB credentials", freeform_tags={"schema": "emp
→"})
print(mysqlldb_keeper.secret_id) # Prints the secret_id of the stored credentials

'ocid1.vaultsecret..<unique_ID>'
```

You can save the vault details in a file for later reference, or use it in your code using `export_vault_details` API calls. The API currently enables you to export the information as a YAML file or a JSON file.

```
mysqldb_keeper.export_vault_details("my_db_vault_info.json", format="json")
```

#### 17.5.1.2.2 Save as a YAML File

```
mysqldb_keeper.export_vault_details("my_db_vault_info.yaml", format="yaml")
```

## 17.5.2 Load Credentials

### 17.5.2.1 Load

The `MySQLDBSecretKeeper.load_secret()` API deserializes and loads the credentials from the vault. You could use this API in one of the following ways:

#### 17.5.2.1.1 Using a with Statement

```
with MySQLDBSecretKeeper.load_secret('ocid1.vaultsecret.<unique_ID>') as mysqldb_secret:
    print(mysqldb_secret['user_name'])
```

#### 17.5.2.1.2 Without Using a with Statement

```
mysqldb_secretobj = MySQLDBSecretKeeper.load_secret('ocid1.vaultsecret.<unique_ID>')
mysqldb_secret = mysqldb_secretobj.to_dict()
print(mysqldb_secret['user_name'])
```

The `.load_secret()` method has the following parameters:

- `auth`: Provide overriding auth information if the auth information is different from the `ads.set_auth` setting.
- `export_env`: The default is `False`. If set to `True`, the credentials are exported as environment variable when used with the `with` operator.
- `export_prefix`: The default name for environment variable is `user_name`, `password`, `database`, and `wallet_location`. You can add a prefix to avoid name collision.
- `format`: (Optional) If `source` is a file, then this value must be `json` or `yaml` depending on the file format.
- `source`: Either the file that was exported from `export_vault_details`, or the OCID of the secret.

### 17.5.2.2 Examples

#### 17.5.2.2.1 Using a with Statement

```
import ads
ads.set_auth('resource_principal') # If using resource principal authentication
from ads.secrets.mysqldb import MySQLDBSecretKeeper

with MySQLDBSecretKeeper.load_secret(
```

(continues on next page)

(continued from previous page)

```

        "ocid1.vaultsecret..<unique_ID>"
    ) as mysqlcred2:
    print (mysqlcred2["user_name"]) # Prints the user name

print (mysqlcred2["user_name"]) # Prints nothing. The credentials are cleared from
↳ the dictionary outside the ``with`` block

```

#### 17.5.2.2.2 Export the Environment Variables Using a with Statement

To expose credentials as an environment variable, set `export_env=True`. The following keys are exported:

Secret attribute	Environment Variable Name
user_name	user_name
password	password
host	host
port	port
database	database

```

import os
import ads

ads.set_auth('resource_principal') # If using resource principal authentication
from ads.secrets.mysqlcred import MySQLDBSecretKeeper

with MySQLDBSecretKeeper.load_secret(
    "ocid1.vaultsecret..<unique_ID>",
    export_env=True
):
    print(os.environ.get("user_name")) # Prints the user name

print(os.environ.get("user_name")) # Prints nothing. The credentials are cleared from
↳ the dictionary outside the ``with`` block

```

You can avoid name collisions by setting a prefix string using `export_prefix` along with `export_env=True`. For example, if you set prefix as `myprocess`, then the exported keys are:

Secret attribute	Environment Variable Name
user_name	myprocess.user_name
password	myprocess.password
host	myprocess.host
port	myprocess.port
database	myprocess.database

```

import os
import ads

ads.set_auth('resource_principal') # If using resource principal authentication
from ads.secrets.mysqlcred import MySQLDBSecretKeeper

```

(continues on next page)

(continued from previous page)

```
with MySQLDBSecretKeeper.load_secret(  
    "ocidl.vaultsecret.<unique_ID>",  
    export_env=True,  
    export_prefix="myprocess"  
):  
    print(os.environ.get("myprocess.user_name")) # Prints the user name  
  
print(os.environ.get("myprocess.user_name")) # Prints nothing. The credentials are_  
↪cleared from the dictionary outside the ``with`` block
```

## 17.6 Oracle Database

To connect to an Oracle Database you need the following:

- hostname
- password
- port. Default is 1521
- service name or sid
- user name

The `OracleDBSecretKeeper` class saves the Oracle Database credentials to the OCI Vault service.

See [API Documentation](#) for more details

### 17.6.1 Save Credentials

#### 17.6.1.1 OracleDBSecretKeeper

The `OracleDBSecretKeeper` constructor has the following parameters:

- `compartment_id` (str): OCID of the compartment where the vault is located. This defaults to the compartment of the notebook session when used in a Data Science notebook session.
- `dsn` (str, optional): The DSN string if available.
- `host` (str): The hostname of the database.
- `key_id` (str): OCID of the master key used for encrypting the secret.
- `password` (str): The password of the database.
- `port` (str, optional). Default 1521. Port number of the database service.
- `service_name` (str, optional): The service name of the database.
- `sid` (str, optional): The SID of the database if the service name is not available.
- `user_name` (str): The user name to be stored.
- `vault_id` (str): OCID of the vault.

### 17.6.1.2 Save

The `OracleDBSecretKeeper.save()` API serializes and stores the credentials to Vault using the following parameters:

- `defined_tags` (dict, optional): Save the tags under predefined tags in the OCI Console.
- `description` (str): Description of the secret when saved in the vault.
- `freeform_tags` (dict, optional): Freeform tags to use when saving the secret in the OCI Console.
- `name` (str): Name of the secret when saved in the vault.

The secret has the following information:

- `dsn`
- `host`
- `password`
- `port`
- `service_name`
- `sid`
- `user_name`

### 17.6.1.3 Examples

#### 17.6.1.3.1 Save Credentials

```
import ads
from ads.secrets.oracledb import OracleDBSecretKeeper

vault_id = "ocid1.vault.<unique_ID>"
key_id = "ocid1.key.<unique_ID>"

ads.set_auth("resource_principal") # If using resource principal for authentication
connection_parameters={
    "user_name": "<your user name>",
    "password": "<your password>",
    "service_name": "service_name",
    "host": "<db host>",
    "port": "<db port>",
}

oracledb_keeper = OracleDBSecretKeeper(vault_id=vault_id,
                                       key_id=key_id,
                                       **connection_parameters)

oracledb_keeper.save("oracledb_employee", "My DB credentials", freeform_tags={"schema":
↪ "emp"})
print(oracledb_keeper.secret_id) # Prints the secret_id of the stored credentials

'ocid1.vaultsecret.<unique_ID>'
```

You can save the vault details in a file for later reference or using it within your code using `export_vault_details` API calls. The API currently enables you to export the information as a YAML file or a JSON file.

```
oracledb_keeper.export_vault_details("my_db_vault_info.json", format="json")
```

#### 17.6.1.3.2 Save as a YAML File

```
oracledb_keeper.export_vault_details("my_db_vault_info.yaml", format="yaml")
```

### 17.6.2 Load Credentials

#### 17.6.2.1 Load

The `OracleDBSecretKeeper.load_secret()` API deserializes and loads the credentials from the vault. You could use this API in one of the following ways:

##### 17.6.2.1.1 Using a `with` Statement

```
with OracleDBSecretKeeper.load_secret('ocidl.vaultsecret..<unique_ID>') as oracledb_
↪secret:
    print(oracledb_secret['user_name'])
```

##### 17.6.2.1.2 Without using a `with` Statement

```
oracledb_secretobj = OracleDBSecretKeeper.load_secret('ocidl.vaultsecret..<unique_ID>')
oracledb_secret = oracledb_secretobj.to_dict()
print(oracledb_secret['user_name'])
```

The `.load_secret()` method has the following parameters:

- **auth:** Provide overriding authorization information if the authorization information is different from the `ads.set_auth` setting.
- **export\_env:** Default is `False`. If set to `True`, the credentials are exported as environment variable when used with the `with` operator.
- **export\_prefix:** The default name for environment variable is `user_name`, `password`, `service_name`, and `wallet_location`. You can add a prefix to avoid name collision.
- **format:** Optional. If source is a file, then this value must be `json` or `yaml` depending on the file format.
- **source:** Either the file that was exported from `export_vault_details` or the OCID of the secret

## 17.6.2.2 Examples

### 17.6.2.2.1 Using a with Statement

```
import ads
ads.set_auth('resource_principal') # If using resource principal authentication
from ads.secrets.oracledb import OracleDBSecretKeeper

with OracleDBSecretKeeper.load_secret(
    "ocid1.vaultsecret.<unique_ID>"
) as oracledb_creds2:
    print (oracledb_creds2["user_name"]) # Prints the user name

print (oracledb_creds2["user_name"]) # Prints nothing. The credentials are cleared from
↳ the dictionary outside the ``with`` block
```

#### 17.6.2.2.2 Export the Environment Variable Using a with Statement

To expose credentials as an environment variable, set `export_env=True`. The following keys are exported:

Secret attribute	Environment Variable Name
user_name	user_name
password	password
host	host
port	port
service user_name	service_name
sid	sid
dsn	dsn

```
import os
import ads

ads.set_auth('resource_principal') # If using resource principal authentication
from ads.secrets.oracledb import OracleDBSecretKeeper

with OracleDBSecretKeeper.load_secret(
    "ocid1.vaultsecret.<unique_ID>",
    export_env=True
):
    print(os.environ.get("user_name")) # Prints the user name

print(os.environ.get("user_name")) # Prints nothing. The credentials are cleared from
↳ the dictionary outside the ``with`` block
```

You can avoid name collisions by setting a prefix string using `export_prefix` along with `export_env=True`. For example, if you set prefix as `myprocess`, then the exported keys are:

Secret attribute	Environment Variable Name
user_name	myprocess.user_name
password	myprocess.password
host	myprocess.host
port	myprocess.port
service user_name	myprocess.service_name
sid	myprocess.sid
dsn	myprocess.dsn

```
import os
import ads

ads.set_auth('resource_principal') # If using resource principal authentication
from ads.secrets.oracledb import OracleDBSecretKeeper

with OracleDBSecretKeeper.load_secret(
    "ocid1.vaultsecret..<unique_ID>",
    export_env=True,
    export_prefix="myprocess"
):
    print(os.environ.get("myprocess.user_name")) # Prints the user name

print(os.environ.get("myprocess.user_name")) # Prints nothing. The credentials are
↪cleared from the dictionary outside the ``with`` block
```



## CLASS DOCUMENTATION

### 18.1 ads package

#### 18.1.1 Subpackages

##### 18.1.1.1 ads.bds package

###### 18.1.1.1.1 Submodules

###### 18.1.1.1.2 ads.bds.auth module

**exception** `ads.bds.auth.KRB5KinitError`

Bases: `Exception`

KRB5KinitError class when kinit -kt command failed to generate cached ticket with the keytab file and the krb5 config file.

`ads.bds.auth.has_kerberos_ticket()`

Whether kerberos cache ticket exists.

`ads.bds.auth.init_ccache_with_keytab(principal: str, keytab_file: str) → None`

Initialize credential cache using keytab file.

#### Parameters

- **principal** (*str*) – The unique identity to which Kerberos can assign tickets.
- **keytab\_path** (*str*) – Path to your keytab file.

#### Returns

Nothing.

#### Return type

None

`ads.bds.auth.krbcontext(principal: str, keytab_path: str, krb5_path: str = '~/.bds_config/krb5.conf') → None`

A context manager for Kerberos-related actions. It provides a Kerberos context that you can put code inside. It will initialize credential cache automatically with keytab if no cached ticket exists. Otherwise, does nothing.

#### Parameters

- **principal** (*str*) – The unique identity to which Kerberos can assign tickets.
- **keytab\_path** (*str*) – Path to your keytab file.
- **krb5\_path** (*((str, optional).)*) – Path to your krb5 config file.

**Returns**

Nothing.

**Return type**

None

**Examples**

```
>>> from ads.bds.auth import krbcontext
>>> from pyhive import hive
>>> with krbcontext(principal = "your_principal", keytab_path = "your_keytab_path"):
>>>     hive_cursor = hive.connect(host="your_hive_host",
...                               port="your_hive_port",
...                               auth='KERBEROS',
...                               kerberos_service_name="hive").cursor()
```

`ads.bds.auth.refresh_ticket(principal: str, keytab_path: str, kerb5_path: str = '~/.bds_config/krb5.conf') → None`

generate new cached ticket based on the principal and keytab file path.

**Parameters**

- **principal** (*str*) – The unique identity to which Kerberos can assign tickets.
- **keytab\_path** (*str*) – Path to your keytab file.
- **kerb5\_path** ((*str*, *optional*)) – Path to your krb5 config file.

**Returns**

Nothing.

**Return type**

None

**Examples**

```
>>> from ads.bds.auth import refresh_ticket
>>> from pyhive import hive
>>> refresh_ticket(principal = "your_principal", keytab_path = "your_keytab_path")
>>> hive_cursor = hive.connect(host="your_hive_host",
...                             port="your_hive_port",
...                             auth='KERBEROS',
...                             kerberos_service_name="hive").cursor()
```

#### 18.1.1.1.3 ads.bds.big\_data\_service module

`class ads.bds.big_data_service.ADSHiveConnection(host: str, port: str = '10000', auth_mechanism: str = 'GSSAPI', driver: str = 'impyla', **kwargs)`

Bases: object

Initiate the connection.

**Parameters**

- **host** (*str*) – Hive host name.

- **port** (*str*) – Hive port. Default to 10000.
- **auth\_mechanism** (*str*) – Default to “GSSAPI”. Using “PLAIN” for unsecure cluster.
- **driver** (*str*) – Default to “impyla”. Client used to communicate with Hive. Only support impyla by far.
- **kwargs** – Other connection parameters accepted by the client.

**insert**(*table\_name: str, df: DataFrame, if\_exists: str, batch\_size: int = 1000, \*\*kwargs*)

insert a table from a pandas dataframe.

#### Parameters

- (**str**) (*if\_exists*) – Table Name. Table name contains database name as well. By default it will use ‘default’ database. You can specify the database name by *table\_name=<db\_name>.<tb\_name>*.
- (**pd.DataFrame**) (*df*) – Data to be injected to the database.
- (**str**) – Whether to replace, append or fail if the table already exists.
- **batch\_size** (*int, default 1000*) – Inserting in batches improves insertion performance. Choose this value based on available memory and network bandwidth.
- (**dict**) (*kwargs*) – Other parameters used by pandas.DataFrame.to\_sql.

**query**(*sql: str, bind\_variables: Optional[Dict] = None, chunksize: Optional[int] = None*) →

Union[DataFrame, Iterator[DataFrame]]

Query data which support select statement.

#### Parameters

- (**str**) (*sql*) – sql query.
- (**Optional[Dict]**) (*bind\_variables*) – Parameters to be bound to variables in the SQL query, if any. Impyla supports all DB API *paramstyle* `s, including `qmark, numeric, named, format, pyformat`.
- (**Optional[int]**) (*chunksize*) – chunksize of each of the dataframe in the iterator.

#### Returns

A pandas DataFrame or a pandas DataFrame iterator.

#### Return type

Union[pd.DataFrame, Iterator[pd.DataFrame]]

**class** ads.bds.big\_data\_service.**HiveConnection**(*\*\*params*)

Bases: ABC

Base class Interface.

set up hive connection.

**abstract** **get\_cursor**()

Returns the cursor from the connection.

#### Returns

cursor using a specific client.

#### Return type

HiveServer2Cursor

**abstract get\_engine()**

Returns engine from the connection.

**Return type**

Engine object for the connection.

**class** ads.bds.big\_data\_service.HiveConnectionFactory

Bases: object

**clientprovider** = {'impyla': <class 'ads.bds.big\_data\_service.ImpylaHiveConnection'>}

**classmethod** get(driver='impyla')

**class** ads.bds.big\_data\_service.ImpylaHiveConnection(\*\*params)

Bases: [HiveConnection](#)

ImpalaHiveConnection class which uses impyla client.

set up the impala connection.

**get\_cursor()** → impala.hiveserver2.HiveServer2Cursor

Returns the cursor from the connection.

**Returns**

cursor using impyla client.

**Return type**

impala.hiveserver2.HiveServer2Cursor

**get\_engine**(schema='default')

return the sqlalchemy engine from the connection.

**Parameters**

**schema** (*str*) – Default to “default”. The default schema used for query.

**Returns**

engine using a specific client.

**Return type**

sqlalchemy.engine

#### 18.1.1.1.4 Module contents

#### 18.1.1.2 ads.catalog package

##### 18.1.1.2.1 Submodules

##### 18.1.1.2.2 ads.catalog.model module

**class** ads.catalog.model.Model(model: Model, model\_etag: str, provenance\_metadata: ModelProvenance, provenance\_etag: str, ds\_client: DataScienceClient, identity\_client: IdentityClient)

Bases: object

Class that represents the ADS implementation of model catalog item. Converts the metadata and schema from OCI implementation to ADS implementation.

**to\_dataframe()**

Converts model to dataframe format.

**show\_in\_notebook()**

Shows model in the notebook in dataframe or YAML representation.

**activate()**

Activates model.

**deactivate()**

Deactivates model.

**commit()**

Commits the changes made to the model.

**rollback()**

Rollbacks the changes made to the model.

**load\_model()**

Loads the model from the model catalog based on model ID.

Initializes the Model.

**Parameters**

- **model** (*OCIModel*) – The OCI model object.
- **model\_etag** (*str*) – The model ETag.
- **provenance\_metadata** (*ModelProvenance*) – The model provenance metadata.
- **provenance\_etag** (*str*) – The model provenance metadata ETag.
- **ds\_client** (*DataScienceClient*) – The Oracle DataScience client.
- **identity\_client** (*IdentityClient*) – The Oracle Identity Service Client.

**activate()** → None

Activates model.

**Returns**

Nothing.

**Return type**

None

**commit**(*force: bool = True*) → None

Commits model changes.

**Parameters**

**force** (*bool*) – If True, any remote changes on this model would be lost.

**Returns**

Nothing.

**Return type**

None

**deactivate()** → None

Deactivates model.

**Returns**

Nothing.

**Return type**

None

**classmethod** `load_model(ds_client: DataScienceClient, identity_client: IdentityClient, model_id: str) → Model`

Loads the model from the model catalog based on model ID.

**Parameters**

- **ds\_client** (*DataScienceClient*) – The Oracle DataScience client.
- **identity\_client** (*IdentityClient*) – The Oracle Identity Service Client.
- **model\_id** (*str*) – The model ID.

**Returns**

The ADS model catalog item.

**Return type***Model***Raises**

- **ServiceError** – If error occurs while getting model from server.:
- **KeyError** – If model not found.:
- **ValueError** – If error occurs while getting model provenance metadata from server.:

**rollback()** → None

Rollbacks the changes made to the model.

**Returns**

Nothing.

**Return type**

None

**show\_in\_notebook(display\_format: str = 'dataframe')** → None

Shows model in dataframe or yaml format. Supported formats: *dataframe* and *yaml*. Defaults to *dataframe* format.

**Returns**

Nothing.

**Return type**

None

**to\_dataframe()** → DataFrame

Converts the model to dataframe format.

**Returns**

Pandas dataframe.

**Return type***panadas.DataFrame*

**exception** `ads.catalog.model.ModelArtifactSizeError(max_artifact_size: str)`

Bases: *Exception*

**class** `ads.catalog.model.ModelCatalog(compartment_id: Optional[str] = None, ds_client_auth: Optional[dict] = None, identity_client_auth: Optional[dict] = None, timeout: Optional[int] = None, ds_client: Optional[DataScienceClient] = None, identity_client: Optional[IdentityClient] = None)`

Bases: `object`

Allows to list, load, update, download, upload and delete models from model catalog.

**get\_model**(*self*, *model\_id*)

Loads the model from the model catalog based on *model\_id*.

**list\_models**(*self*, *project\_id*=None, *include\_deleted*=False, *datetime\_format*=utils.date\_format, *\*\*kwargs*)

Lists all models in a given compartment, or in the current project if *project\_id* is specified.

**list\_model\_deployment**(*self*, *model\_id*, *config*=None, *tenant\_id*=None, *limit*=500, *page*=None, *\*\*kwargs*)

Gets the list of model deployments by model Id across the compartments.

**update\_model**(*self*, *model\_id*, *update\_model\_details*=None, *\*\*kwargs*)

Updates a model with given *model\_id*, using the provided update data.

**delete\_model**(*self*, *model*, *\*\*kwargs*)

Deletes the model based on *model\_id*.

**download\_model**(*self*, *model\_id*, *target\_dir*, *force\_overwrite*=False, *install\_libs*=False, *conflict\_strategy*=ConflictStrategy.IGNORE)

Downloads the model from *model\_dir* to *target\_dir* based on *model\_id*.

**upload\_model**(*self*, *model\_artifact*, *provenance\_metadata*=None, *project\_id*=None, *display\_name*=None, *description*=None)

Uploads the model artifact to cloud storage.

Initializes model catalog instance.

#### Parameters

- **compartment\_id** ((*str*, optional). Defaults to None.) – Model compartment OCID. If None, the *config.NB\_SESSION\_COMPARTMENT\_OCID* would be used.
- **ds\_client\_auth** ((*dict*, optional). Defaults to None.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *DataServiceClient* object.
- **identity\_client\_auth** ((*dict*, optional). Defaults to None.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.
- **timeout** ((*int*, optional). Defaults to 10 seconds.) – The connection timeout in seconds for the client.
- **ds\_client** (*DataServiceClient*) – The Oracle DataScience client.
- **identity\_client** (*IdentityClient*) – The Oracle Identity Service Client.

#### Raises

- **ValueError** – If compartment ID not specified.
- **TypeError** – If timeout not an integer.

**delete\_model**(*model*: Union[str, ads.catalog.Model], *\*\*kwargs*) → bool

Deletes the model from Model Catalog.

**Parameters**

- **model** (Union[str, "ads.catalog.Model"]) – The OCID of the model to delete as a string, or a *ads.catalog.Model* instance.
- **kwargs** –
  - delete\_associated\_model\_deployment**: (bool, optional). Defaults to *False*. Whether associated model deployments need to be deleted or not.

**Returns**

*True* if the model was successfully deleted.

**Return type**

bool

**Raises**

*ModelWithActiveDeploymentError* – If model has active model deployments and inout attribute *delete\_associated\_model\_deployment* set to *False*.

**download\_model**(*model\_id*: str, *target\_dir*: str, *force\_overwrite*: bool = False, *install\_libs*: bool = False, *conflict\_strategy*=*'IGNORE'*, *bucket\_uri*: Optional[str] = None, *remove\_existing\_artifact*: Optional[bool] = True)

Downloads the model from model\_dir to target\_dir based on model\_id.

**Parameters**

- **model\_id** (str) – The OCID of the model to download.
- **target\_dir** (str) – The target location of model after download.
- **force\_overwrite** (bool) – Overwrite target\_dir if exists.
- **install\_libs** (bool, default: False) – Install the libraries specified in ds-requirements.txt which are missing in the current environment.
- **conflict\_strategy** (ConflictStrategy, default: IGNORE) – Determines how to handle version conflicts between the current environment and requirements of model artifact. Valid values: "IGNORE", "UPDATE" or ConflictStrategy. IGNORE: Use the installed version in case of conflict UPDATE: Force update dependency to the version required by model artifact in case of conflict
- **bucket\_uri** ((str, optional). Defaults to None.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.

**Returns**

A ModelArtifact instance.

**Return type**

*ModelArtifact*

**get\_model**(*model\_id*)

Loads the model from the model catalog based on model\_id.



**Parameters**

**model\_id** (*str*, *required*) – The model ID.

**Returns**

The `ads.catalog.Model` with the matching ID.

**Return type**

`ads.catalog.Model`

**list\_model\_deployment** (*model\_id: str*, *config: Optional[dict] = None*, *tenant\_id: Optional[str] = None*, *limit: int = 500*, *page: Optional[str] = None*, *\*\*kwargs*)

Gets the list of model deployments by model Id across the compartments.

**Parameters**

- **model\_id** (*str*) – The model ID.
- **config** (*dict (optional)*) – Configuration keys and values as per SDK and Tool Configuration. The `from_file()` method can be used to load configuration from a file. Alternatively, a dict can be passed. You can `validate_config` the dict using `validate_config()`. Defaults to None.
- **tenant\_id** (*str (optional)*) – The tenancy ID, which can be used to specify a different tenancy (for cross-tenancy authorization) when searching for resources in a different tenancy. Defaults to None.
- **limit** (*int (optional)*) – The maximum number of items to return. The value must be between 1 and 1000. Defaults to 500.
- **page** (*str (optional)*) – The page at which to start retrieving results.

**Return type**

The list of model deployments.

**list\_models** (*project\_id: Optional[str] = None*, *include\_deleted: bool = False*, *datetime\_format: str = '%Y-%m-%d %H:%M:%S'*, *\*\*kwargs*)

Lists all models in a given compartment, or in the current project if `project_id` is specified.

**Parameters**

- **project\_id** (*str*) – The `project_id` of model.
- **include\_deleted** (*bool, optional, default=False*) – Whether to include deleted models in the returned list.
- **datetime\_format** (*str, optional, default: '%Y-%m-%d %H:%M:%S'*) – Change format for date time fields.

**Returns**

A list of models.

**Return type**

*ModelSummaryList*

**update\_model** (*model\_id*, *update\_model\_details=None*, *\*\*kwargs*) → *Model*

Updates a model with given `model_id`, using the provided update data.

**Parameters**

- **model\_id** (*str*) – The model ID.
- **update\_model\_details** (*UpdateModelDetails*) – Contains the update model details data to apply. Mandatory unless `kwargs` are supplied.

- **kwargs** (*dict*, *optional*) – Update model details can be supplied instead as kwargs.

**Returns**

The `ads.catalog.Model` with the matching ID.

**Return type**

*Model*

**upload\_model** (*model\_artifact*: [ModelArtifact](#), *provenance\_metadata*: *Optional*[*ModelProvenance*] = *None*, *project\_id*: *Optional*[*str*] = *None*, *display\_name*: *Optional*[*str*] = *None*, *description*: *Optional*[*str*] = *None*, *freeform\_tags*: *Optional*[*Dict*[*str*, *Dict*[*str*, *object*]]] = *None*, *defined\_tags*: *Optional*[*Dict*[*str*, *Dict*[*str*, *object*]]] = *None*, *bucket\_uri*: *Optional*[*str*] = *None*, *remove\_existing\_artifact*: *Optional*[*bool*] = *True*, *overwrite\_existing\_artifact*: *Optional*[*bool*] = *True*, *model\_version\_set*: *Optional*[*Union*[*str*, [ModelVersionSet](#)]] = *None*, *version\_label*: *Optional*[*str*] = *None*)

Uploads the model artifact to cloud storage.

**Parameters**

- **model\_artifact** (*Union*[[ModelArtifact](#), [GenericModel](#)]) – The model artifacts or generic model instance.
- **provenance\_metadata** ((*ModelProvenance*, *optional*). Defaults to *None*.) – Model provenance gives data scientists information about the origin of their model. This information allows data scientists to reproduce the development environment in which the model was trained.
- **project\_id** ((*str*, *optional*). Defaults to *None*.) – The `project_id` of model.
- **display\_name** ((*str*, *optional*). Defaults to *None*.) – The name of model. If a `display_name` is not provided, a randomly generated easy to remember name with times-tamp will be generated, like ‘strange-spider-2022-08-17-23:55.02’.
- **description** ((*str*, *optional*). Defaults to *None*.) – The description of model.
- **freeform\_tags** ((*Dict*[*str*, *str*], *optional*). Defaults to *None*.) – Freeform tags for the model, by default *None*
- **defined\_tags** ((*Dict*[*str*, *dict*[*str*, *object*]], *optional*). Defaults to *None*.) – Defined tags for the model, by default *None*.
- **bucket\_uri** ((*str*, *optional*). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for uploading large artifacts which size greater than 2GB. Example: `oci://<bucket_name>@<namespace>/prefix/`.
- **remove\_existing\_artifact** ((*bool*, *optional*). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **overwrite\_existing\_artifact** ((*bool*, *optional*). Defaults to *True*.) – Overwrite target bucket artifact if exists.
- **model\_version\_set** ((*Union*[*str*, [ModelVersionSet](#)], *optional*). Defaults to *None*.) – The Model version set OCID, or name, or *ModelVersionSet* instance.
- **version\_label** ((*str*, *optional*). Defaults to *None*.) – The model version label.

**Returns**

The `ads.catalog.Model` with the matching ID.

**Return type**

`ads.catalog.Model`

```
class ads.catalog.model.ModelSummaryList(model_catalog, model_list, response=None,  
                                         datetime_format='%Y-%m-%d %H:%M:%S')
```

Bases: [SummaryList](#)

Model Summary List which represents a list of Model Object.

```
sort_by(self, columns, reverse=False)
```

Performs a multi-key sort on a particular set of columns and returns the sorted ModelSummaryList. Results are listed in a descending order by default.

```
filter(self, selection, instance=None)
```

Filters the model list according to a lambda filter function, or list comprehension.

```
filter(selection, instance=None)
```

Filters the model list according to a lambda filter function, or list comprehension.

#### Parameters

- **selection** (*lambda function filtering model instances, or a list-comprehension*) – function of list filtering projects
- **instance** (*list, optional*) – list to filter, optional, defaults to self

#### Returns

**ModelSummaryList**

#### Return type

A filtered ModelSummaryList

```
sort_by(columns, reverse=False)
```

Performs a multi-key sort on a particular set of columns and returns the sorted ModelSummaryList. Results are listed in a descending order by default.

#### Parameters

- **columns** (*List of string*) – A list of columns which are provided to sort on
- **reverse** (*Boolean (defaults to false)*) – If you'd like to reverse the results (for example, to get ascending instead of descending results)

#### Returns

**ModelSummaryList**

#### Return type

A sorted ModelSummaryList

```
exception ads.catalog.model.ModelWithActiveDeploymentError
```

Bases: [Exception](#)

### 18.1.1.2.3 ads.catalog.notebook module

```
class ads.catalog.notebook.NotebookCatalog(compartment_id=None)
```

Bases: [object](#)

```
create_notebook_session(display_name=None, project_id=None, shape=None,  
                        block_storage_size_in_gbs=None, subnet_id=None, **kwargs)
```

Create a new notebook session with the supplied details.

#### Parameters

- **display\_name** (*str*, *required*) – The value to assign to the display\_name property of this CreateNotebookSessionDetails.
- **project\_id** (*str*, *required*) – The value to assign to the project\_id property of this CreateNotebookSessionDetails.
- **shape** (*str*, *required*) – The value to assign to the shape property of this NotebookSessionConfigurationDetails. Allowed values for this property are: “VM.Standard.E2.2”, “VM.Standard.E2.4”, “VM.Standard.E2.8”, “VM.Standard2.1”, “VM.Standard2.2”, “VM.Standard2.4”, “VM.Standard2.8”, “VM.Standard2.16”, “VM.Standard2.24”.
- **block\_storage\_size\_in\_gbs** (*int*, *required*) – Size of the block storage drive. Limited to values between 50 (GB) and 1024 (1024GB = 1TB)
- **subnet\_id** (*str*, *required*) – The OCID of the subnet resource where the notebook is to be created.
- **kwargs** (*dict*, *optional*) – Additional kwargs passed to *DataScienceClient.create\_notebook\_session()*

**Returns**

**oci.data\_science.models.NotebookSession**

**Return type**

A new notebook record.

**Raises**

**KeyError** – If the resource was not found or do not have authorization to access that resource.:

**delete\_notebook\_session**(*notebook*, *\*\*kwargs*)

Deletes the notebook based on notebook\_id.

**Parameters**

**notebook** (*str ID or oci.data\_science.models.NotebookSession*, *required*) – The OCID of the notebook to delete as a string, or a Notebook Session instance

**Returns**

**Bool**

**Return type**

True if delete was successful, false otherwise

**get\_notebook\_session**(*notebook\_id*)

Get the notebook based on notebook\_id

**Parameters**

**notebook\_id** (*str*, *required*) – The OCID of the notebook to get.

**Returns**

**oci.data\_science.models.NotebookSession**

**Return type**

The oci.data\_science.models.NotebookSession with the matching ID.

**Raises**

**KeyError** – If the resource was not found or do not have authorization to access that resource.:

**list\_notebook\_session**(*include\_deleted=False*, *datetime\_format='%Y-%m-%d %H:%M:%S'*, *\*\*kwargs*)

List all notebooks in a given compartment

**Parameters**

- **include\_deleted** (*bool, optional, default=False*) – Whether to include deleted notebooks in the returned list
- **datetime\_format** (*str, optional, default: '%Y-%m-%d %H:%M:%S'*) – Change format for date time fields

**Returns****NotebookSummaryList****Return type**

A List of notebooks.

**Raises****KeyError** – If the resource was not found or do not have authorization to access that resource.:**update\_notebook\_session**(*notebook\_id, update\_notebook\_details=None, \*\*kwargs*)

Updates a notebook with given notebook\_id, using the provided update data

**Parameters**

- **notebook\_id** (*str*) – notebook\_id OCID to update
- **update\_notebook\_details** (*oci.data\_science.models.UpdateNotebookSessionDetails*) – contains the new notebook details data to apply
- **kwargs** (*dict, optional*) – Update notebook session details can be supplied instead as kwargs

**Returns****oci.data\_science.models.NotebookSession****Return type**

The updated Notebook record

**Raises****KeyError** – If the resource was not found or do not have authorization to access that resource.:

```
class ads.catalog.notebook.NotebookSummaryList(notebook_list, response=None,  
                                              datetime_format='%Y-%m-%d %H:%M:%S')
```

Bases: *SummaryList***filter**(*selection, instance=None*)

Filter the notebook list according to a lambda filter function, or list comprehension.

**Parameters**

- **selection** (*lambda function filtering notebook instances, or a list-comprehension*) – function of list filtering notebooks
- **instance** (*list, optional*) – list to filter, optional, defaults to self

**Raises****ValueError** – If selection passed is not correct. For example: selection=oci.data\_science.models.NotebookSession.:**sort\_by**(*columns, reverse=False*)

Performs a multi-key sort on a particular set of columns and returns the sorted NotebookSummaryList  
Results are listed in a descending order by default.

**Parameters**

- **columns** (*List of string*) – A list of columns which are provided to sort on

- **reverse** (*Boolean (defaults to false)*) – If you'd like to reverse the results (for example, to get ascending instead of descending results)

**Returns**

**NotebookSummaryList**

**Return type**

A sorted NotebookSummaryList

#### 18.1.1.2.4 ads.catalog.project module

**class** ads.catalog.project.**ProjectCatalog**(*compartment\_id=None, ds\_client\_auth=None, identity\_client\_auth=None*)

Bases: Mapping

**create\_project**(*create\_project\_details=None, \*\*kwargs*)

Create a new project with the supplied details. create\_project\_details contains parameters needed to create a new project, according to oci.data\_science.models.CreateProjectDetails.

**Parameters**

- **display\_name** (*str*) – The value to assign to the display\_name property of this CreateProjectDetails.
- **description** (*str*) – The value to assign to the description property of this CreateProjectDetails.
- **compartment\_id** (*str*) – The value to assign to the compartment\_id property of this CreateProjectDetails.
- **freeform\_tags** (*dict(str, str)*) – The value to assign to the freeform\_tags property of this CreateProjectDetails.
- **defined\_tags** (*dict(str, dict(str, object))*) – The value to assign to the defined\_tags property of this CreateProjectDetails.
- **kwargs** – New project details can be supplied instead as kwargs

**Returns**

**oci.data\_science.models.Project**

**Return type**

A new Project record.

**delete\_project**(*project, \*\*kwargs*)

Deletes the project based on project\_id.

**Parameters**

**project** (*str ID or oci.data\_science.models.Project, required*) – The OCID of the project to delete as a string, or a Project instance

**Returns**

**Bool**

**Return type**

True if delete was successful

**get\_project**(*project\_id*)

Get the Project based on project\_id

**Parameters**

**project\_id** (*str*, *required*) – The OCID of the project to get.

**Return type**

The `oci.data_science.models.Project` with the matching ID.

**Raises**

**KeyError** – If the resource was not found or do not have authorization to access that resource.:

**list\_projects**(*include\_deleted=False*, *datetime\_format='%Y-%m-%d %H:%M:%S'*, *\*\*kwargs*)

List all projects in a given compartment, or in the current notebook session's compartment

**Parameters**

- **include\_deleted** (*bool*, *optional*, *default=False*) – Whether to include deleted projects in the returned list
- **datetime\_format** (*str*, *optional*, *default: '%Y-%m-%d %H:%M:%S'*) – Change format for date time fields

**Returns**

**ProjectSummaryList**

**Return type**

List of Projects.

**Raises**

**KeyError** – If the resource was not found or do not have authorization to access that resource.:

**update\_project**(*project\_id*, *update\_project\_details=None*, *\*\*kwargs*)

Updates a project with given `project_id`, using the provided update data `update_project_details` contains the update project details data to apply, according to `oci.data_science.models.UpdateProjectDetails`

**Parameters**

- **project\_id** (*str*) – project\_id OCID to update
- **display\_name** (*str*) – The value to assign to the `display_name` property of this `UpdateProjectDetails`.
- **description** (*str*) – The value to assign to the `description` property of this `UpdateProjectDetails`.
- **freeform\_tags** (*dict(str, str)*) – The value to assign to the `freeform_tags` property of this `UpdateProjectDetails`.
- **defined\_tags** (*dict(str, dict(str, object))*) – The value to assign to the `defined_tags` property of this `UpdateProjectDetails`.
- **kwargs** (*dict*, *optional*) – Update project details can be supplied instead as kwargs

**Returns**

**oci.data\_science.models.Project**

**Return type**

The updated Project record

```
class ads.catalog.project.ProjectSummaryList(project_list, response=None,
                                             datetime_format='%Y-%m-%d %H:%M:%S')
```

Bases: `SummaryList`

A class used to represent Project Summary List.

...

**df**

Summary information for a project.

**Type**

data frame

**datetime\_format**

Format used to describe time.

**Type**

str

**response**

A response object with data of type list of ProjectSummaryList.

**Type**

oci.response.Response

**short\_id\_index**

Mapping of short id and its value.

**Type**

(dict of str: str)

**sort\_by(self, columns, reverse=False):**

Sort ProjectSummaryList by columns.

**filter(self, selection, instance=None):**

Filter the project list according to a lambda filter function, or list comprehension.

**filter(selection, instance=None)**

Filter the project list according to a lambda filter function, or list comprehension.

**Parameters**

- **selection** (*lambda function filtering Project instances, or a list-comprehension*) – function of list filtering projects
- **instance** (*list, optional*) – list to filter, optional, defaults to self

**Returns**

ProjectSummaryList

**Return type**

A filtered ProjectSummaryList

**Raises**

**ValueError** – If selection passed is not correct.:

**sort\_by(columns, reverse=False)**

Sort ProjectSummaryList by columns.

Performs a multi-key sort on a particular set of columns and returns the sorted ProjectSummaryList Results are listed in a descending order by default.

**Parameters**

- **columns** (*List of string*) – A list of columns which are provided to sort on
- **reverse** (*Boolean (defaults to false)*) – If you'd like to reverse the results (for example, to get ascending instead of descending results)



**Returns****ProjectSummaryList****Return type**

A sorted ProjectSummaryList

**18.1.1.2.5 ads.catalog.summary module****class** ads.catalog.summary.**SummaryList**(entity\_list, datetime\_format='%Y-%m-%d %H:%M:%S')

Bases: list

**abstract filter**(selection, instance=None)

Abstract method for filtering, implemented by the derived class

**show\_in\_notebook**(datetime\_format=None)

Displays the model catalog summary in a Jupyter Notebook cell

**Parameters****date\_format** (like utils.date\_format. Defaults to none.) –**Return type**

None

**abstract sort\_by**(columns, reverse=False)

Abstract method for sorting, implemented by the derived class

**to\_dataframe**(datetime\_format=None)

Returns the model catalog summary as a pandas dataframe

**Parameters****datetime\_format** (date\_format) – A datetime format, like utils.date\_format. Defaults to none.**Returns****Dataframe****Return type**

The pandas DataFrame representation of the model catalog summary

**18.1.1.2.6 Module contents****18.1.1.3 ads.common package****18.1.1.3.1 Subpackages****ads.common.artifact package****Module contents****ads.common.decorator package****Submodules**

### ads.common.decorator.argument\_to\_case module

The module that provides the decorator helping to convert function arguments to specific case (lower/upper).

#### Examples

```
>>> @argument_to_case("lower", ["name"])
... def test_function(name: str, last_name: str)
...     print(name)
...
>>> test_function("myname", "mylastname")
... MYNAME
```

**class** ads.common.decorator.argument\_to\_case.**ArgumentCase**(*value*)

Bases: Enum

An enumeration.

**LOWER** = 'lower'

**UPPER** = 'upper'

ads.common.decorator.argument\_to\_case.**argument\_to\_case**(*case*: [ArgumentCase](#), *arguments*: *List[str]*)

The decorator helping to convert function arguments to specific case.

#### Parameters

- **case** ([ArgumentCase](#)) – The case to convert specific arguments.
- **arguments** (*List[str]*) – The list of arguments to convert to specific case.

#### Examples

```
>>> @argument_to_case("lower", ["name"])
... def test_function(name: str, last_name: str)
...     print(name)
...
>>> test_function("myname", "mylastname")
... MYNAME
```

### ads.common.decorator.deprecate module

**exception** ads.common.decorator.deprecate.**NotSupportedError**

Bases: Exception

**class** ads.common.decorator.deprecate.**TARGET\_TYPE**(*value*)

Bases: Enum

An enumeration.

**ATTRIBUTE** = 'Attribute'

**CLASS** = 'Class'

**METHOD = 'Method'**

`ads.common.decorator.deprecate.deprecated`(*deprecated\_in*: *Optional[str] = None*, *removed\_in*: *Optional[str] = None*, *details*: *Optional[str] = None*, *target\_type*: *Optional[str] = None*, *raise\_error*: *bool = False*)

This is a decorator which can be used to mark functions as deprecated. It will result in a warning being emitted when the function is used.

#### Parameters

- **deprecated\_in** (*str*) – Version of ADS where this function deprecated.
- **removed\_in** (*str*) – Future version where this function will be removed.
- **details** (*str*) – More information to be shown.

### `ads.common.decorator.runtime_dependency` module

The module that provides the decorator helping to add runtime dependencies in functions.

#### Examples

```
>>> @runtime_dependency(module="pandas", short_name="pd")
... def test_function()
...     print(pd)
```

```
>>> @runtime_dependency(module="pandas", object="DataFrame", short_name="df")
... def test_function()
...     print(df)
```

```
>>> @runtime_dependency(module="pandas", short_name="pd")
... @runtime_dependency(module="pandas", object="DataFrame", short_name="df")
... def test_function()
...     print(df)
...     print(pd)
```

```
>>> @runtime_dependency(module="pandas", object="DataFrame", short_name="df", install_
↳ from="ads[optional]")
... def test_function()
...     pass
```

```
>>> @runtime_dependency(module="pandas", object="DataFrame", short_name="df", err_msg=
↳ "Custom error message.")
... def test_function()
...     pass
```

```
class ads.common.decorator.runtime_dependency.OptionalDependency
```

Bases: `object`

**BDS** = `'oracle-ads[bds]'`

**BOOSTED** = `'oracle-ads[boosted]'`

```
DATA = 'oracle-ads[data]'
GEO = 'oracle-ads[geo]'
HUGGINGFACE = 'oracle-ads[huggingface]'
LABS = 'oracle-ads[labs]'
MYSQL = 'oracle-ads[mysql]'
NOTEBOOK = 'oracle-ads[notebook]'
ONNX = 'oracle-ads[onnx]'
OPCTL = 'oracle-ads[opctl]'
OPTUNA = 'oracle-ads[optuna]'
PYTORCH = 'oracle-ads[torch]'
SPARK = 'oracle-ads[spark]'
TENSORFLOW = 'oracle-ads[tensorflow]'
TEXT = 'oracle-ads[text]'
VIZ = 'oracle-ads[viz]'
```

```
ads.common.decorator.runtime_dependency.runtime_dependency(module: str, short_name: str = "",  
                                                         object: Optional[str] = None,  
                                                         install_from: Optional[str] = None,  
                                                         err_msg: str = "",  
                                                         is_for_notebook_only=False)
```

The decorator which is helping to add runtime dependencies to functions.

#### Parameters

- **module** (*str*) – The module name to be imported.
- **short\_name** (*((str, optional). Defaults to empty string.)*) – The short name for the imported module.
- **object** (*((str, optional). Defaults to None.)*) – The name of the object to be imported. Can be a function or a class, or any variable provided by module.
- **install\_from** (*((str, optional). Defaults to None.)*) – The parameter helping to answer from where the required dependency can be installed.
- **err\_msg** (*((str, optional). Defaults to empty string.)*) – The custom error message.
- **is\_for\_notebook\_only** (*((bool, optional). Defaults to False.)*) – If the value of this flag is set to True, the dependency will be added only in case when the current environment is a jupyter notebook.

#### Raises

- **ModuleNotFoundError** – In case if requested module not found.
- **ImportError** – In case if object cannot be imported from the module.

## Examples

```
>>> @runtime_dependency(module="pandas", short_name="pd")
... def test_function()
...     print(pd)
```

```
>>> @runtime_dependency(module="pandas", object="DataFrame", short_name="df")
... def test_function()
...     print(df)
```

```
>>> @runtime_dependency(module="pandas", short_name="pd")
... @runtime_dependency(module="pandas", object="DataFrame", short_name="df")
... def test_function()
...     print(df)
...     print(pd)
```

```
>>> @runtime_dependency(module="pandas", object="DataFrame", short_name="df",
↳install_from="ads[optional]")
... def test_function()
...     pass
```

```
>>> @runtime_dependency(module="pandas", object="DataFrame", short_name="df", err_
↳msg="Custom error message.")
... def test_function()
...     pass
```

## ads.common.decorator.utils module

### class ads.common.decorator.utils.class\_or\_instance\_method

Bases: classmethod

Converts a function to be a class method or an instance depending on how it is called at runtime.

To declare a class method, use this idiom:

```
class C:
    @classmethod def f(obj, *args, **kwargs):
```

...

It can be called either on the class (e.g. C.f()) or on an instance (e.g. C().f()). If it is called on the class C.f(), the first argument (obj) will be the class (aka. cls). If it is called on the instance C().f(), the first argument (obj) will be the instance (aka. self).

## Module contents

### ads.common.function package

#### Submodules

#### ads.common.function.fn\_util module

`ads.common.function.fn_util.generate_fn_artifacts(path: str, fn_name: Optional[str] = None, fn_attributes=None, artifact_type_generic=False, **kwargs)`

Generates artifacts for fn (<https://fnproject.io>) at the provided path -

- func.py
- func.yaml
- requirements.txt if not there. If exists appends fdk to the file.
- score.py

#### Parameters

- **path** (*str*) – Target folder where the artifacts are placed.
- **fn\_attributes** (*dict*) – dictionary specifying all the function attributes as described in <https://github.com/fnproject/docs/blob/master/fn/develop/func-file.md>
- **artifact\_type\_generic** (*bool*) – default is False. This attribute decides which template to pick for score.py. If True, it is assumed that the code to load is provided by the user.

`ads.common.function.fn_util.get_function_config()` → dict

Returns dictionary loaded from func\_conf.yaml

`ads.common.function.fn_util.prepare_fn_attributes(func_name: str, schema_version=20180708, version=None, python_runtime=None, entry_point=None, memory=None)` → dict

Workaround for collections.namedtuples. The defaults are not supported.

`ads.common.function.fn_util.write_score(path, **kwargs)`

## Module contents

### 18.1.1.3.2 Submodules

#### 18.1.1.3.3 ads.common.analyzer module

#### 18.1.1.3.4 ads.common.auth module

**class** `ads.common.auth.APIKey`(*args: Optional[Dict] = None*)

Bases: `AuthSignerGenerator`

Creates api keys auth instance. This signer is intended to be used when signing requests for a given user - it requires that user's ID, their private key and certificate fingerprint. It prepares extra arguments necessary for creating clients for variety of OCI services.

Signer created based on args provided. If not provided current values of according arguments will be used from current global state from `AuthState` class.

#### Parameters

**args** (*dict*) – args that are required to create api key config and signer. Contains keys: `oci_config`, `oci_config_location`, `oci_key_profile`, `client_kwargs`.

- `oci_config` is a configuration dict that can be used to create clients
- `oci_config_location` - path to config file
- `oci_key_profile` - the profile to load from config file
- `client_kwargs` - optional parameters for OCI client creation in next steps

**create\_signer()** → Dict

Creates api keys configuration and signer with extra arguments necessary for creating clients. Signer constructed from the `oci_config` provided. If not '`oci_config`', configuration will be constructed from '`oci_config_location`' and '`oci_key_profile`' in place.

#### Returns

##### dict

Contains keys - `config`, `signer` and `client_kwargs`.

- `config` contains the configuration information
- `signer` contains the signer object created. It is instantiated from `signer_callable`, or

signer provided in args used, or instantiated in place - `client_kwargs` contains the *client\_kwargs* that was passed in as input parameter

#### Examples

```
>>> signer_args = dict(
>>>     client_kwargs=client_kwargs
>>> )
>>> signer_generator = AuthFactory().signerGenerator(AuthType.API_KEY)
>>> signer_generator(signer_args).create_signer()
```

**class** `ads.common.auth.AuthContext`(*\*\*kwargs*)

Bases: `object`

`AuthContext` used in 'with' statement for properly managing global authentication type, signer, config and global configuration parameters.

## Examples

```
>>> from ads import set_auth
>>> from ads.jobs import DataFlowRun
>>> with AuthContext(auth='resource_principal'):
>>>     df_run = DataFlowRun.from_ocid(run_id)
```

```
>>> from ads.model.framework.sklearn_model import SklearnModel
>>> model = SklearnModel.from_model_artifact(uri="model_artifact_path", artifact_
↳dir="model_artifact_path")
>>> set_auth(auth='api_key', oci_config_location=~/.oci/config")
>>> with AuthContext(auth='api_key', oci_config_location=~/.another_config_location/
↳config"):
>>>     # upload model to Object Storage using config from another_config_location/
↳config
>>>     model.upload_artifact(uri="oci://bucket@namespace/prefix/")
>>> # upload model to Object Storage using config from ~/.oci/config, which was set_
↳before 'with AuthContext():'
>>> model.upload_artifact(uri="oci://bucket@namespace/prefix/")
```

Initialize class AuthContext and saves global state of authentication type, signer, config and global configuration parameters.

### Parameters

**\*\*kwargs** (optional, list of parameters passed to `ads.set_auth()` method, which can be:)

**auth:** Optional[str], default 'api\_key'

'api\_key', 'resource\_principal' or 'instance\_principal'. Enable/disable resource principal identity, instance principal or keypair identity

**oci\_config\_location:** Optional[str], default `oci.config.DEFAULT_LOCATION`, which is '~/.oci/config'  
config file location

**profile:** Optional[str], default is `DEFAULT_PROFILE`, which is 'DEFAULT'  
profile name for api keys config file

**config:** Optional[Dict], default {}  
created config dictionary

**signer:** Optional[Any], default None  
created signer, can be resource principals signer, instance principal signer or other

**signer\_callable:** Optional[Callable], default None  
a callable object that returns signer

**signer\_kwargs:** Optional[Dict], default None  
parameters accepted by the signer

**client\_kwargs:** Optional[Dict], default None  
Additional keyword arguments for initializing the OCI client. Example: `client_kwargs = {"timeout": 60}`

**class** `ads.common.auth.AuthFactory`

Bases: object

AuthFactory class which contains list of registered signers and allwows to register new signers. Check documentation for more signers: <https://docs.oracle.com/en-us/iaas/tools/python/latest/api/signing.html>.



**Current signers:**

- `APIKey`
- `ResourcePrincipal`
- `InstancePrincipal`

```
classes = {'api_key': <class 'ads.common.auth.APIKey'>, 'instance_principal': <class
'ads.common.auth.InstancePrincipal'>, 'resource_principal': <class
'ads.common.auth.ResourcePrincipal'>}
```

**classmethod** `register(signer_type: str, signer: Any) → None`

Registers a new signer.

**Parameters**

- **signer\_type** (*str*) – Singer type to be registers
- **signer** ([RecordParser](#)) – A new Singer class to be registered.

**Returns**

Nothing.

**Return type**

None

**signerGenerator**(*iam\_type: Optional[str] = 'api\_key'*)

Generates signer classes based of *iam\_type*, which specify one of auth methods: ‘api\_key’, ‘resource\_principal’ or ‘instance\_principal’.

**Parameters**

**iam\_type** (*str, default 'api\_key'*) – type of auth provided in IAM\_TYPE environment variable or set in parameters in `ads.set_auth()` method.

**Returns**

returns one of classes, which implements creation of signer of specified type

**Return type**

[APIKey](#) or [ResourcePrincipal](#) or [InstancePrincipal](#)

**Raises**

**ValueError** – If *iam\_type* is not supported.

**class** `ads.common.auth.AuthSignerGenerator`

Bases: `object`

Abstract class for auth configuration and signer creation.

**create\_signer()**

**class** `ads.common.auth.AuthState(*args, **kwargs)`

Bases: `object`

Class stores state of variables specified for auth method, configuration, configuration file location, profile name, signer or signer\_callable, which set by use at any given time and can be provided by this class in any ADS module.

**oci\_cli\_auth:** `str = None`

**oci\_client\_kwargs:** `Dict = None`

**oci\_config:** `str = None`

```
oci_config_path: str = None
oci_iam_type: str = None
oci_key_profile: str = None
oci_signer: Any = None
oci_signer_callable: Callable = None
oci_signer_kwargs: Dict = None
```

```
class ads.common.auth.AuthType
    Bases: str
    API_KEY = 'api_key'
    INSTANCE_PRINCIPAL = 'instance_principal'
    RESOURCE_PRINCIPAL = 'resource_principal'
```

```
class ads.common.auth.InstancePrincipal(args: Optional[Dict] = None)
    Bases: AuthSignerGenerator
```

Creates Instance Principal signer - a SecurityTokenSigner which uses a security token for an instance principal. It prepares extra arguments necessary for creating clients for variety of OCI services.

Signer created based on args provided. If not provided current values of according arguments will be used from current global state from AuthState class.

**Parameters**

**args** (*dict*) – args that are required to create Instance Principal signer. Contains keys: `signer_kwargs`, `client_kwargs`.

- `signer_kwargs` - optional parameters required to instantiate instance principal signer
- `client_kwargs` - optional parameters for OCI client creation in next steps

**create\_signer()** → Dict

Creates Instance Principal signer with extra arguments necessary for creating clients. Signer instantiated from the *signer\_callable* or if the *signer* provided is will be return by this method. If *signer\_callable* or *signer* not provided new signer will be created in place.

**Returns**

**dict**

Contains keys - `config`, `signer` and `client_kwargs`.

- `config` contains the configuration information
- `signer` contains the signer object created. It is instantiated from *signer\_callable*, or *signer* provided in args used, or instantiated in place - `client_kwargs` contains the *client\_kwargs* that was passed in as input parameter

## Examples

```
>>> signer_args = dict(signer_kwargs={"log_requests": True})
>>> signer_generator = AuthFactory().signerGenerator(AuthType.INSTANCE_
↳ PRINCIPAL)
>>> signer_generator(signer_args).create_signer()
```

**class** `ads.common.auth.OCIAuthContext(profile: str = None)`

Bases: `object`

OCIAuthContext used in 'with' statement for properly managing global authentication type and global configuration profile parameters.

## Examples

```
>>> from ads.jobs import DataFlowRun
>>> with OCIAuthContext(profile='TEST'):
>>>     df_run = DataFlowRun.from_ocid(run_id)
```

Initialize class OCIAuthContext and saves global state of authentication type and configuration profile.

### Parameters

**profile** (*str*, default is *None*) – profile name for api keys config file

**class** `ads.common.auth.ResourcePrincipal(args: Optional[Dict] = None)`

Bases: `AuthSignerGenerator`

Creates Resource Principal signer - a security token for a resource principal. It prepares extra arguments necessary for creating clients for variety of OCI services.

Signer created based on args provided. If not provided current values of according arguments will be used from current global state from AuthState class.

### Parameters

**args** (*dict*) – args that are required to create Resource Principal signer. Contains keys: `client_kwargs`.

- `client_kwargs` - optional parameters for OCI client creation in next steps

**create\_signer()** → `Dict`

Creates Resource Principal signer with extra arguments necessary for creating clients.

## Resturns

### dict

Contains keys - `config`, `signer` and `client_kwargs`.

- `config` contains the configuration information
- `signer` contains the signer object created. It is instantiated from `signer_callable`, or

signer provided in args used, or instantiated in place - `client_kwargs` contains the *client\_kwargs* that was passed in as input parameter

## Examples

```
>>> signer_args = dict(
>>>     signer=oci.auth.signers.get_resource_principals_signer()
>>> )
>>> signer_generator = AuthFactory().signerGenerator(AuthType.RESOURCE_
↳PRINCIPAL)
>>> signer_generator(signer_args).create_signer()
```

**class** `ads.common.auth.SingletonMeta`

Bases: `type`

`ads.common.auth.api_keys(oci_config: str = '/home/docs/.oci/config', profile: str = 'DEFAULT', client_kwargs: Optional[Dict] = None) → Dict`

Prepares authentication and extra arguments necessary for creating clients for different OCI services using API Keys.

### Parameters

- **oci\_config** (*Optional[str]*, default is `$HOME/.oci/config`) – OCI authentication config file location.
- **profile** (*Optional[str]*, is `DEFAULT_PROFILE`, which is `'DEFAULT'`) – Profile name to select from the config file.
- **client\_kwargs** (*Optional[Dict]*, default `None`) – kwargs that are required to instantiate the Client if we need to override the defaults.

### Returns

Contains keys - config, signer and client\_kwargs.

- The config contains the config loaded from the configuration loaded from `oci_config`.
- The signer contains the signer object created from the api keys.
- client\_kwargs contains the `client_kwargs` that was passed in as input parameter.

### Return type

dict

## Examples

```
>>> from ads.common import oci_client as oc
>>> auth = ads.auth.api_keys(oci_config="/home/datascience/.oci/config", profile=
↳"TEST", client_kwargs={"timeout": 6000})
>>> oc.OCIClientFactory(**auth).object_storage # Creates Object storage client with
↳timeout set to 6000 using API Key authentication
```

`ads.common.auth.create_signer(auth_type: Optional[str] = 'api_key', oci_config_location: Optional[str] = '~/.oci/config', profile: Optional[str] = 'DEFAULT', config: Optional[Dict] = {}, signer: Optional[Any] = None, signer_callable: Optional[Callable] = None, signer_kwargs: Optional[Dict] = {}, client_kwargs: Optional[Dict] = None) → Dict`

Prepares authentication and extra arguments necessary for creating clients for different OCI services based on provided parameters. If `signer` or `signer_callable` provided, authentication with that signer will be created. If

*config* provided, *api\_key* type of authentication will be created. Accepted values for *auth\_type*: *api\_key* (default), 'instance\_principal', 'resource\_principal'.

### Parameters

- **auth\_type** (*Optional[str]*, default 'api\_key') – 'api\_key', 'resource\_principal' or 'instance\_principal'. Enable/disable resource principal identity, instance principal or keypair identity in a notebook session
- **oci\_config\_location** (*Optional[str]*, default *oci.config.DEFAULT\_LOCATION*, which is '~/.oci/config') – config file location
- **profile** (*Optional[str]*, default is *DEFAULT\_PROFILE*, which is 'DEFAULT') – profile name for api keys config file
- **config** (*Optional[Dict]*, default {}) – created config dictionary
- **signer** (*Optional[Any]*, default *None*) – created signer, can be resource principals signer, instance principal signer or other. Check documentation for more signers: <https://docs.oracle.com/en-us/iaas/tools/python/latest/api/signing.html>
- **signer\_callable** (*Optional[Callable]*, default *None*) – a callable object that returns signer
- **signer\_kwargs** (*Optional[Dict]*, default *None*) – parameters accepted by the signer. Check documentation: <https://docs.oracle.com/en-us/iaas/tools/python/latest/api/signing.html>
- **client\_kwargs** (*dict*) – kwargs that are required to instantiate the Client if we need to override the defaults

### Examples

```
>>> import ads
>>> auth = ads.auth.create_signer() # api_key type of authentication dictionary
↳ created with default config location and default profile
```

```
>>> config = oci.config.from_file("other_config_location", "OTHER_PROFILE")
>>> auth = ads.auth.create_signer(config=config) # api_key type of authentication
↳ dictionary created based on provided config
```

```
>>> singer = oci.auth.signers.get_resource_principals_signer()
>>> auth = ads.auth.create_signer(config={}, signer=singer) # resource principals
↳ authentication dictionary created
```

```
>>> auth = ads.auth.create_signer(auth_type='instance_principal') # instance
↳ principals authentication dictionary created
```

```
>>> signer_callable = oci.auth.signers.InstancePrincipalsSecurityTokenSigner
>>> signer_kwargs = dict(log_requests=True) # will log the request url and response
↳ data when retrieving
>>> auth = ads.auth.create_signer(signer_callable=signer_callable, signer_
↳ kwargs=signer_kwargs) # instance principals authentication dictionary created
↳ based on callable with kwargs parameters
```

`ads.common.auth.default_signer(client_kwargs: Optional[Dict] = None) → Dict`

Prepares authentication and extra arguments necessary for creating clients for different OCI services based on the default authentication setting for the session. Refer `ads.set_auth` API for further reference.

#### Parameters

**client\_kwargs** (*dict*) – kwargs that are required to instantiate the Client if we need to override the defaults. Example: `client_kwargs = {"timeout": 60}`

#### Returns

Contains keys - `config`, `signer` and `client_kwargs`.

- The `config` contains the config loaded from the configuration loaded from the default location if the default auth mode is API keys, otherwise it is empty dictionary.
- The `signer` contains the signer object created from default auth mode.
- `client_kwargs` contains the *client\_kwargs* that was passed in as input parameter.

#### Return type

dict

### Examples

```
>>> import ads
>>> from ads.common import oci_client as oc
```

```
>>> auth = ads.auth.default_signer()
>>> oc.OCIClientFactory(**auth).object_storage # Creates Object storage client
```

```
>>> ads.set_auth("resource_principal")
>>> auth = ads.auth.default_signer()
>>> oc.OCIClientFactory(**auth).object_storage # Creates Object storage client,
↪ using resource principal authentication
```

```
>>> signer_callable = oci.auth.signers.InstancePrincipalsSecurityTokenSigner
>>> ads.set_auth(signer_callable=signer_callable) # Set instance principal callable
>>> auth = ads.auth.default_signer() # signer_callable instantiated
>>> oc.OCIClientFactory(**auth).object_storage # Creates Object storage client,
↪ using instance principal authentication
```

`ads.common.auth.get_signer(oci_config: Optional[str] = None, oci_profile: Optional[str] = None, **client_kwargs) → Dict`

Provides config and signer based given parameters. If `oci_config` (api key config file location) and `oci_profile` specified new signer will be generated. Else signer of a type specified in `OCI_CLI_AUTH` environment variable will be used to generate signer and return. If `OCI_CLI_AUTH` not set, resource principal signer will be provided. Accepted values for `OCI_CLI_AUTH`: 'api\_key', 'instance\_principal', 'resource\_principal'.

#### Parameters

- **oci\_config** (*Optional[str]*, *default None*) – Path to the config file
- **oci\_profile** (*Optional[str]*, *default None*) – the profile to load from the config file
- **client\_kwargs** – kwargs that are required to instantiate the Client if we need to override the defaults

`ads.common.auth.resource_principal(client_kwargs: Optional[Dict] = None) → Dict`

Prepares authentication and extra arguments necessary for creating clients for different OCI services using Resource Principals.

#### Parameters

**client\_kwargs** (*Dict*, *default None*) – kwargs that are required to instantiate the Client if we need to override the defaults.

#### Returns

Contains keys - config, signer and client\_kwargs.

- The config contains an empty dictionary.
- The signer contains the signer object created from the resource principal.
- client\_kwargs contains the *client\_kwargs* that was passed in as input parameter.

#### Return type

dict

### Examples

```
>>> from ads.common import oci_client as oc
>>> auth = ads.auth.resource_principal({"timeout": 6000})
>>> oc.OCIClientFactory(**auth).object_storage # Creates Object Storage client with
↪ timeout set to 6000 seconds using resource principal authentication
```

`ads.common.auth.set_auth(auth: Optional[str] = 'api_key', oci_config_location: Optional[str] = '~/.oci/config', profile: Optional[str] = 'DEFAULT', config: Optional[Dict] = {}, signer: Optional[Any] = None, signer_callable: Optional[Callable] = None, signer_kwargs: Optional[Dict] = {}, client_kwargs: Optional[Dict] = {}) → None`

Save type of authentication, profile, config location, config (keypair identity) or signer, which will be used when actual creation of config or signer happens.

#### Parameters

- **auth** (*Optional[str]*, *default 'api\_key'*) – ‘api\_key’, ‘resource\_principal’ or ‘instance\_principal’. Enable/disable resource principal identity, instance principal or keypair identity in a notebook session
- **oci\_config\_location** (*Optional[str]*, *default oci.config.DEFAULT\_LOCATION*, which is `'~/.oci/config'`) – config file location
- **profile** (*Optional[str]*, *default is DEFAULT\_PROFILE*, which is `'DEFAULT'`) – profile name for api keys config file
- **config** (*Optional[Dict]*, *default {}*) – created config dictionary
- **signer** (*Optional[Any]*, *default None*) – created signer, can be resource principals signer, instance principal signer or other. Check documentation for more signers: <https://docs.oracle.com/en-us/iaas/tools/python/latest/api/signing.html>
- **signer\_callable** (*Optional[Callable]*, *default None*) – a callable object that returns signer
- **signer\_kwargs** (*Optional[Dict]*, *default None*) – parameters accepted by the signer. Check documentation: <https://docs.oracle.com/en-us/iaas/tools/python/latest/api/signing.html>

- **client\_kwargs** (*Optional[Dict]*, default *None*) – Additional keyword arguments for initializing the OCI client. Example: `client_kwargs = {"timeout": 60}`

## Examples

```
>>> ads.set_auth("api_key") # default signer is set to api keys
```

```
>>> ads.set_auth("api_key", profile = "TEST") # default signer is set to api keys,
↳and to use TEST profile
```

```
>>> ads.set_auth("api_key", oci_config_location = "other_config_location") # use
↳non-default oci_config_location
```

```
>>> ads.set_auth("api_key", client_kwargs={"timeout": 60}) # default signer with
↳connection and read timeouts set to 60 seconds for the client.
```

```
>>> other_config = oci.config.from_file("other_config_location", "OTHER_PROFILE") #
↳Create non-default config
>>> ads.set_auth(config=other_config) # Set api keys type of authentication based
↳on provided config
```

```
>>> ads.set_auth("resource_principal") # Set resource principal authentication
```

```
>>> ads.set_auth("instance_principal") # Set instance principal authentication
```

```
>>> singer = oci.auth.signers.get_resource_principals_signer()
>>> ads.auth.create_signer(config={}, singer=singer) # resource principals
↳authentication dictionary created
```

```
>>> singer_callable = oci.auth.signers.ResourcePrincipalsFederationSigner
>>> ads.set_auth(singer_callable=singer_callable) # Set resource principal
↳federation singer callable
```

```
>>> singer_callable = oci.auth.signers.InstancePrincipalsSecurityTokenSigner
>>> singer_kwargs = dict(log_requests=True) # will log the request url and response
↳data when retrieving
>>> # instance principals authentication dictionary created based on callable with
↳kwargs parameters:
>>> ads.set_auth(singer_callable=singer_callable, singer_kwargs=singer_kwargs)
```



### 18.1.1.3.5 ads.common.base\_properties module

**class** `ads.common.base_properties.BaseProperties`

Bases: *Serializable*

Represents base properties class.

**with\_prop**(*name: str, value: Any*) → *BaseProperties*

Sets property value.

**with\_dict**(*obj\_dict: Dict*) → *BaseProperties*

Populates properties values from dict.

**with\_env**() → *BaseProperties*

Populates properties values from environment variables.

**to\_dict**() → Dict

Serializes instance of class into a dictionary.

**with\_config**(*config: ads.config.ConfigSection*) → *BaseProperties*

Sets properties values from the config profile.

**from\_dict**(*obj\_dict: Dict[str, Any]*) → 'BaseProperties'

Creates an instance of the properties class from a dictionary.

**from\_config**(*uri: str, profile: str, auth: Optional[Dict] = None*) → "BaseProperties":

Loads properties from the config file.

**to\_config**(*uri: str, profile: str, force\_overwrite: Optional[bool] = False, auth: Optional[Dict] = None*) → None

Saves properties to the config file.

**classmethod from\_config**(*uri: str, profile: str, auth: Optional[Dict] = None*) → *BaseProperties*

Loads properties from the config file.

#### Parameters

- **uri** (*str*) – The URI of the config file. Can be local path or OCI object storage URI.
- **profile** (*str*) – The config profile name.
- **auth** (*(Dict, optional). Defaults to None.*) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

#### Returns

Instance of the BaseProperties.

#### Return type

*BaseProperties*

**classmethod from\_dict**(*obj\_dict: Dict[str, Any]*) → *BaseProperties*

Creates an instance of the properties class from a dictionary.

#### Parameters

**obj\_dict** (*Dict[str, Any]*) – List of properties and values in dictionary format.

#### Returns

Instance of the BaseProperties.

**Return type***BaseProperties*

**to\_config**(*uri: str, profile: str, force\_overwrite: Optional[bool] = False, auth: Optional[Dict] = None*) → None

Saves properties to the config file.

**Parameters**

- **uri** (*str*) – The URI of the config file. Can be local path or OCI object storage URI.
- **profile** (*str*) – The config profile name.
- **force\_overwrite** (*(bool, optional). Defaults to False.*) – Whether to overwrite existing files or not.
- **auth** (*(Dict, optional). Defaults to None.*) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

**Returns**

Nothing

**Return type**

None

**to\_dict**(*\*\*kwargs*)

Serializes instance of class into a dictionary.

**Returns**

A dictionary.

**Return type**

Dict

**with\_config**(*config: ConfigSection*) → *BaseProperties*

Sets properties values from the config profile.

**Returns**

Instance of the BaseProperties.

**Return type***BaseProperties*

**with\_dict**(*obj\_dict: Dict[str, Any]*) → *BaseProperties*

Sets properties from a dict.

**Parameters**

**obj\_dict** (*Dict[str, Any]*) – List of properties and values in dictionary format.

**Returns**

Instance of the BaseProperties.

**Return type***BaseProperties***Raises**

**TypeError** – If input object has a wrong type.

**with\_env**() → *BaseProperties*

Sets properties values from environment variables.

**Returns**

Instance of the BaseProperties.

**Return type**

*BaseProperties*

**with\_prop**(*name: str, value: Any*) → *BaseProperties*

Sets property value.

**Parameters**

- **name** (*str*) – Property name.
- **value** – Property value.

**Returns**

Instance of the BaseProperties.

**Return type**

*BaseProperties*

### 18.1.1.3.6 ads.common.card\_identifier module

credit card patterns refer to [https://en.wikipedia.org/wiki/Payment\\_card\\_number#Issuer\\_identification\\_number\\_\(IIN\)](https://en.wikipedia.org/wiki/Payment_card_number#Issuer_identification_number_(IIN))  
 Active and frequent card information American Express: 34, 37 Diners Club (US & Canada): 54,55 Discover Card: 6011, 622126 - 622925, 624000 - 626999, 628200 - 628899, 64, 65 Master Card: 2221-2720, 51–55 Visa: 4

**class** ads.common.card\_identifier.card\_identify

Bases: object

**identify\_issue\_network**(*card\_number*)

Returns the type of credit card based on its digits

**Parameters**

**card\_number** (*String*) –

**Returns**

**String**

**Return type**

A string corresponding to the kind of credit card.

### 18.1.1.3.7 ads.common.config module

**class** ads.common.config.Config(*uri: Optional[str] = '~/ads/config', auth: Optional[Dict] = None*)

Bases: object

The class representing a config.

Initializes a config instance.

**Parameters**

- **uri** ((*str*, optional). Defaults to *~/ads/config*.) – The path to the config file. Can be local or Object Storage file.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

**default()** → *ConfigSection*

Gets default config section.

**Returns**

A default config section.

**Return type**

*ConfigSection*

**keys()** → List[str]

Gets the all registered config section keys.

**Returns**

The list of the all registered config section keys.

**Return type**

List[str]

**load**(uri: *Optional[str] = None*, auth: *Optional[Dict] = None*) → *Config*

Loads config from a config file.

**Parameters**

- **uri** ((str, optional). Defaults to *~/.ads/config*.) – The path where the config file needs to be saved. Can be local or Object Storage file.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

**Returns**

A config object.

**Return type**

*Config*

**save**(uri: *Optional[str] = None*, auth: *Optional[Dict] = None*, force\_overwrite: *Optional[bool] = False*) → *Config*

Saves config to a config file.

**Parameters**

- **uri** ((str, optional). Defaults to *~/.ads/config*.) – The path to the config file. Can be local or Object Storage file.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Overwrites the config if exists.

**Returns**

Nothing

**Return type**

None

**section\_exists**(key: str) → bool

Checks if a config section exists.

**Parameters**

**key** (*str*) – A key of a config section.

**Returns**

True if a config section exists, False otherwise.

**Return type**

bool

**section\_get**(*key: str*) → *ConfigSection*

Gets the config section by key.

**Returns**

A config section object.

**Return type**

*ConfigSection*

**Raises**

**KeyError** – If a config section not exists.

**section\_remove**(*key: str*) → *Config*

Removes config section from config.

**Parameters**

**key** (*str*) – A key of a config section that needs to be removed.

**Returns**

Nothing

**Return type**

None

**section\_set**(*key: str, info: Union[dict, ConfigSection], replace: Optional[bool] = False*) → *ConfigSection*

Sets a config section to config. The new config section will be added in case if it doesn't exist. Otherwise the existing config section will be merged with the new fields.

**Parameters**

- **key** (*str*) – A key of a config section.
- **info** (*Union[dict, ConfigSection]*) – The config section information in a dictionary or ConfigSection format.
- **replace** (*(bool, optional). Defaults to False.*) – If set as True, overwrites config section with the new information.

**Returns**

A config section object.

**Return type**

*ConfigSection*

**Raises**

- **ValueError** – If section with given key is already exist and *replace* flag set to False.
- **TypeError** – If input *info* has a wrong format.

**to\_dict**() → Dict[str, Dict[str, Any]]

Converts config to a dictionary format.

**Returns**

A config in a dictionary format.

**Return type**

Dict[str, Dict[str, Any]]

**with\_dict**(*info*: Dict[str, Union[Dict[str, Any], ConfigSection]], *replace*: Optional[bool] = False) → Config

Merging dictionary to config.

**Parameters**

- **info** (Dict[str, Union[Dict[str, Any], ConfigSection]]) – A dictionary that needs to be merged to config.
- **replace** ((bool, optional). Defaults to False.) – If set as True, overwrites config section with the new information.

**Returns**

A config object.

**Return type**

Config

**class** ads.common.config.ConfigSection

Bases: object

The class representing a config section.

Initializes the config section instance.

**clear**() → None

Clears the config section values.

**Returns**

Nothing

**Return type**

None

**copy**() → ConfigSection

Makes a copy of a config section.

**Returns**

The instance of a copied ConfigSection.

**Return type**

ConfigSection

**get**(*key*: str) → str

Gets the config section value by key.

**Returns**

A specific config section value.

**Return type**

str

**keys**() → Tuple[str]

Gets the list of the keys of a config section.

**Returns**

The list of config section keys.

**Return type**

Tuple[str]

**remove**(*key: str*) → None

Removes the config section field by key.

**Parameters**

**key** (*str*) – The config section field key.

**Returns**

Nothing

**Return type**

None

**set**(*key: str, value: str, replace: Optional[bool] = False*) → None

Sets the config section value by key.

**Parameters**

- **key** (*str*) – The config section field key.
- **value** (*str*) – The config section field value.

**Returns**

Nothing

**Return type**

None

**to\_dict**() → Dict[str, Any]

Converts config section to a dictionary.

**Returns**

The config section in a dictionary format.

**Return type**

Dict[str, Any]

**with\_dict**(*info: Dict[str, Any], replace: Optional[bool] = False*) → *ConfigSection*

Populates the config section from a dictionary.

**Parameters**

- **info** (*Dict[str, Any]*) – The config section information in a dictionary format.
- **replace** (*(bool, optional). Defaults to False.*) – If set as True, overwrites config section with the new information.

**class** ads.common.config.**EventType**(*value*)

Bases: Enum

An enumeration.

**CHANGE** = 'change'

**class** ads.common.config.**Eventing**

Bases: object

The class helper to register event handlers.

**on**(*event\_name: str, callback: Callable*) → None

Registers a callback for the particular event.

**trigger**(*event: str*) → None

Triggers all the registered callbacks for the particular event.

```
class ads.common.config.ExtendedConfigParser(uri: Optional[str] = '~/.ads/config', auth: Optional[Dict]
                                             = None)
```

Bases: ConfigParser

Class helper to read/write information to the config file.

Initializes a config parser instance.

#### Parameters

- **uri** ((str, optional). Defaults to `~/.ads/config`.) – The path to the config file. Can be local or Object Storage file.
- **auth** ((Dict, optional). Defaults to `None`.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

```
read(uri: Optional[str] = None, auth: Optional[Dict] = None) → ExtendedConfigParser
```

Reads config file.

**uri: (str, optional). Defaults to `~/.ads/config`.**

The path to the config file. Can be local or Object Storage file.

**auth: (Dict, optional). Defaults to `None`.**

The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

#### Returns

Config parser object.

#### Return type

*ExtendedConfigParser*

```
save(uri: Optional[str] = None, auth: Optional[Dict] = None, force_overwrite: Optional[bool] = False) →
None
```

Saves the config to the file.

#### Parameters

- **uri** ((str, optional). Defaults to `~/.ads/config`.) – The path to the config file. Can be local or Object Storage file.
- **auth** ((Dict, optional). Defaults to `None`.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((bool, optional). Defaults to `False`.) – Overwrites the config if exists.

#### Return type

`None`

#### Raises

**FileExistsError** – In case if file exists and `force_overwrite` is false.

```
to_dict() → Dict[str, Any]
```

Converts config to a dictionary.



**Returns**

Config in a dictionary format.

**Return type**

Dict[str, Any]

**with\_dict**(*info*: Dict[str, Dict[str, Any]]) → *ExtendedConfigParser*

Populates config with values from a dictionary.

**Parameters**

**info** (Dict[str, Dict[str, Any]]) – Config in a dictionary format.

**Returns**

Config parser object.

**Return type**

*ExtendedConfigParser*

**class** ads.common.config.**Mode**

Bases: object

**READ** = 'r'

**WRITE** = 'w'

### 18.1.1.3.8 ads.common.data module

**class** ads.common.data.**ADSData**(*X=None, y=None, name="", dataset\_type=None*)

Bases: object

This class wraps the input dataframe to various models, evaluation, and explanation frameworks. It's primary purpose is to hold any metadata relevant to these tasks. This can include it's:

- **X** - the independent variables as some dataframe-like structure,
- **y** - the dependent variable or target column as some array-like structure,
- **name** - a string to name the data for user convenience,
- **dataset\_type** - the type of the X value.

As part of this initiative, ADSData knows how to turn itself into an onnxruntime compatible data structure with the method `.to_onnxrt()`, which takes an onnx session as input.

**Parameters**

- **X** (Union[pandas.DataFrame, dask.DataFrame, numpy.ndarray, scipy.sparse.csr.csr\_matrix]) – If str, URI for the dataset. The dataset could be read from local or network file system, hdfs, s3 and gcs. Should be none if X\_train, y\_train, X\_test, Y\_test are provided
- **y** (Union[str, pandas.DataFrame, dask.DataFrame, pandas.Series, dask.Series, numpy.ndarray]) – If str, name of the target in X, otherwise series of labels corresponding to X
- **name** (str, optional) – Name to identify this data
- **dataset\_type** (ADSDataSet optional) – When this value is available, would be used to evaluate the ads task type
- **kwargs** – Additional keyword arguments that would be passed to the underlying Pandas read API.

**static build**(*X=None, y=None, name="", dataset\_type=None, \*\*kwargs*)

Returns an ADSDData object built from the (source, target) or (X,y)

#### Parameters

- **X** (*Union[pandas.DataFrame, dask.DataFrame, numpy.ndarray, scipy.sparse.csr.csr\_matrix]*) – If str, URI for the dataset. The dataset could be read from local or network file system, hdfs, s3 and gcs. Should be none if X\_train, y\_train, X\_test, Y\_test are provided
- **y** (*Union[str, pandas.DataFrame, dask.DataFrame, pandas.Series, dask.Series, numpy.ndarray]*) – If str, name of the target in X, otherwise series of labels corresponding to X
- **name** (*str, optional*) – Name to identify this data
- **dataset\_type** (*ADSDataset, optional*) – When this value is available, would be used to evaluate the ads task type
- **kwargs** – Additional keyword arguments that would be passed to the underlying Pandas read API.

#### Returns

**ads\_data** – A built ADSDData object

#### Return type

*ads.common.data.ADSDData*

### Examples

```
>>> data = open_csv("my.csv")
```

```
>>> data_ads = ADSDData(data, 'target').build(data, 'target')
```

**to\_onnxrt**(*sess, idx\_range=None, model=None, impute\_values={}, \*\*kwargs*)

Returns itself formatted as an input for the onnxruntime session inputs passed in.

#### Parameters

- **sess** (*Session*) – The session object
- **idx\_range** (*Range*) – The range of inputs to convert to onnx
- **model** (*SupportedModel*) – A model that supports being serialized for the onnx runtime.
- **kwargs** (*additional keyword arguments*) –
  - **sess\_inputs** – Pass in the output from onnxruntime.InferenceSession(“model.onnx”).get\_inputs()
  - **input\_dtypes** (list) - If sess\_inputs cannot be passed in, pass in the numpy dtypes of each input
  - **input\_shapes** (list) - If sess\_inputs cannot be passed in, pass in the shape of each input
  - **input\_names** (list) - If sess\_inputs cannot be passed in, pass in the name of each input

#### Returns

**ort** – array of inputs formatted for the given session.

#### Return type

Array

#### 18.1.1.3.9 ads.common.data\_serializer module

**class** ads.common.data\_serializer.**InputDataSerializer**(*data: Union[Dict, str, List, ndarray, Series, DataFrame], data\_type=None*)

Bases: object

[An internal class] Defines the contract for input data

##### Parameters

- **data** (*Union[Dict, str, list, numpy.ndarray, pd.core.series.Series,]*) –
- **pd.core.frame.DataFrame** – Data expected by the model deployment predict API.
- **data\_type** (*Any, defaults to None.*) – Type of the data. If not provided, it will be checked against data.

**property data**

**property data\_type**

**is\_bytes()**

**send**(*endpoint: str, dry\_run: bool = False, \*\*kwargs*)

**to\_dict()**

#### 18.1.1.3.10 ads.common.error module

**exception** ads.common.error.**ChangesNotCommitted**(*path*)

Bases: Exception

#### 18.1.1.3.11 ads.common.extended\_enum module

**class** ads.common.extended\_enum.**ExtendedEnumMeta**(*name, bases, namespace, \*\*kwargs*)

Bases: ABCMeta

The helper metaclass to extend functionality of a generic Enum.

**values**(*cls*) → list:

Gets the list of class attributes.

**values**() → list

Gets the list of class attributes.

##### Returns

The list of class values.

##### Return type

list

#### 18.1.1.3.12 ads.common.ipython module

`ads.common.ipython.configure_plotting()`

`ads.common.ipython.set_ipython_traceback()`

#### 18.1.1.3.13 ads.common.model module

**class** `ads.common.model.ADSModel`(*est*, *target=None*, *transformer\_pipeline=None*, *client=None*,  
*booster=None*, *classes=None*, *name=None*)

Bases: `object`

Construct an ADSModel

##### Parameters

- **est** (*fitted estimator object*) – The estimator can be a standard sklearn estimator, a keras, lightgbm, or xgboost estimator, or any other object that implement methods from (`BaseEstimator`, `RegressorMixin`) for regression or (`BaseEstimator`, `ClassifierMixin`) for classification.
- **target** (*PandasSeries*) – The target column you are using in your dataset, this is assigned as the “y” attribute.
- **transformer\_pipeline** (*TransformerPipeline*) – A custom transformer pipeline object.
- **client** (*Str*) – Currently unused.
- **booster** (*Str*) – Currently unused.
- **classes** (*list, optional*) – List of target classes. Required for classification problem if the est does not contain *classes* attribute.
- **name** (*str, optional*) – Name of the model.

**static** `convert_dataframe_schema`(*df*, *drop=None*)

**feature\_names**(*X=None*)

**static** `from_estimator`(*est*, *transformers=None*, *classes=None*, *name=None*)

Build ADSModel from a fitted estimator

##### Parameters

- **est** (*fitted estimator object*) – The estimator can be a standard sklearn estimator or any object that implement methods from (`BaseEstimator`, `RegressorMixin`) for regression or (`BaseEstimator`, `ClassifierMixin`) for classification.
- **transformers** (*a scalar or an iterable of objects implementing transform function, optional*) – The transform function would be applied on data before calling predict and predict\_proba on estimator.
- **classes** (*list, optional*) – List of target classes. Required for classification problem if the est does not contain *classes* attribute.
- **name** (*str, optional*) – Name of the model.

##### Returns

**model**

**Return type***ads.common.model.ADSModel***Examples**

```
>>> model = MyModelClass.train()
>>> model_ads = from_estimator(model)
```

**static** `get_init_types(df, underlying_model=None)`

**is\_classifier()**

Returns True if ADS believes that the model is a classifier

**Returns****Boolean****Return type**

True if the model is a classifier, False otherwise.

**predict(X)**

Runs the models predict function on some data

**Parameters**

**X** (*ADSDData*) – A *ADSDData* object which holds the examples to be predicted on.

**Returns**Usually a list or *PandasSeries* of predictions**Return type**Union[List, *pandas.Series*], depending on the estimator

**predict\_proba(X)**

Runs the models predict probabilities function on some data

**Parameters**

**X** (*ADSDData*) – A *ADSDData* object which holds the examples to be predicted on.

**Returns**Usually a list or *PandasSeries* of predictions**Return type**Union[List, *pandas.Series*], depending on the estimator

**prepare**(*target\_dir=None, data\_sample=None, X\_sample=None, y\_sample=None, include\_data\_sample=False, force\_overwrite=False, fn\_artifact\_files\_included=False, fn\_name='model\_api', inference\_conda\_env=None, data\_science\_env=False, ignore\_deployment\_error=False, use\_case\_type=None, inference\_python\_version=None, imputed\_values={}, \*\*kwargs*)

Prepare model artifact directory to be published to model catalog

**Parameters**

- **target\_dir** (*str*, *default: model.name[:12]*) – Target directory under which the model artifact files need to be added
- **data\_sample** (*ADSDData*) – Note: This format is preferable to *X\_sample* and *y\_sample*. A sample of the test data that will be provided to `predict()` API of scoring script Used to generate `schema_input.json` and `schema_output.json` which defines the input and output formats

- **X\_sample** (*pandas.DataFrame*) – A sample of input data that will be provided to predict() API of scoring script Used to generate schema.json which defines the input formats
- **y\_sample** (*pandas.Series*) – A sample of output data that is expected to be returned by predict() API of scoring script, corresponding to X\_sample Used to generate schema\_output.json which defines the output formats
- **force\_overwrite** (*bool*, *default: False*) – If True, overwrites the target directory if exists already
- **fn\_artifact\_files\_included** (*bool*, *default: True*) – If True, generates artifacts to export a model as a function without ads dependency
- **fn\_name** (*str*, *default: 'model\_api'*) – Required parameter if fn\_artifact\_files\_included parameter is setup.
- **inference\_conda\_env** (*str*, *default: None*) – Conda environment to use within the model deployment service for inferencing
- **data\_science\_env** (*bool*, *default: False*) – If set to True, datascience environment represented by the slug in the training conda environment will be used.
- **ignore\_deployment\_error** (*bool*, *default: False*) – If set to True, the prepare will ignore all the errors that may impact model deployment
- **use\_case\_type** (*str*) – The use case type of the model. Use it through `UseCaseType` class or string provided in `UseCaseType`. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with `UseCaseType` class to see all supported types.
- **inference\_python\_version** (*str*, *default: None*.) – If provided will be added to the generated runtime yaml
- **\*\*kwargs** –
- -----
- **max\_col\_num** (*((int, optional). Defaults to utils.DATA\_SCHEMA\_MAX\_COL\_NUM.)*) – The maximum column size of the data that allows to auto generate schema.

**Returns**

**model\_artifact**

**Return type**

an instance of *ModelArtifact* that can be used to test the generated scoring script

**rename**(*name*)

Changes the name of a model

**Parameters**

**name** (*str*) – A string which is supplied for naming a model.

**score**(*X*, *y\_true*, *score\_fn=None*)

Scores a model according to a custom score function

**Parameters**

- **X** (*ADSDData*) – A *ADSDData* object which holds the examples to be predicted on.
- **y\_true** (*ADSDData*) – A *ADSDData* object which holds ground truth labels for the examples which are being predicted on.

- **score\_fn** (*Scorer* (*callable*)) – A callable object that returns a score, usually created with `sklearn.metrics.make_scorer()`.

**Returns**

Almost always a scalar score (usually a float).

**Return type**

float, depending on the estimator

**show\_in\_notebook()**

Describe the model by showing it's properties

**summary()**

A summary of the ADSModel

**transform(X)**

Process some ADSData through the selected ADSModel transformers

**Parameters**

**X** (*ADSData*) – A ADSData object which holds the examples to be transformed.

**visualize\_transforms()**

A graph of the ADSModel transformer pipeline. It is only supported in JupyterLabs Notebooks.

**18.1.1.3.14 ads.common.model\_artifact module****class ads.common.model\_artifact.ConflictStrategy**

Bases: object

**CREATE** = 'CREATE'

**IGNORE** = 'IGNORE'

**UPDATE** = 'UPDATE'

**exception ads.common.model\_artifact.InvalidDataType**

Bases: Exception

Invalid Data Type.

```
class ads.common.model_artifact.ModelArtifact(artifact_dir, conflict_strategy='IGNORE',
                                              install_libs=False, reload=True, create=False,
                                              progress=None, model_file_name='model.onnx',
                                              inference_conda_env=None, data_science_env=False,
                                              ignore_deployment_error=False,
                                              inference_python_version=None)
```

Bases: *Introspectable*

A class used to construct model artifacts.

...

**artifact\_dir**

Path to the model artifacts.

**Type**

str

**conflict\_strategy**

How to handle version conflicts between the current environment and the requirements of model artifact.

**Type**

*ConflictStrategy*, default: IGNORE

**install\_libs**

Re-install the environment in which the model artifact were trained in.

**Type**

bool

**reload**

Reload the model into the environment.

**Type**

bool

**create**

Create the *runtime.yaml* file.

**Type**

bool

**progress**

Show a progress bar.

**model\_file\_name**

Name of the model file.

**Type**

str

**inference\_conda\_env**

The inference conda environment. If provided, the value will be set in the *runtime.yaml*. This is expected to be full oci URI format - *oci://{bucket}@{namespace}/path/to/condapack*.

**Type**

str

**data\_science\_env**

Is the inference conda environment managed by the Oracle Data Science service?

**Type**

bool

**ignore\_deployment\_error**

Determine whether to turn off logging for deployment error. If set to True, the *.prepare()* method will ignore errors that impact model deployment.

**Type**

bool

**inference\_python\_version**

The version of Python to be used in inference. The value will be set in the *runtime.yaml* file

**Type**

str Optional, default None



**reload**(*self*, *model\_file\_name=None*)

Reload the files in the model artifact directory.

**verify**(*self*, *input\_data*)

Verifies a model artifact directory.

**install\_requirements**(*self*, *conflict\_strategy=ConflictStrategy.IGNORE*)

Installs missing libraries listed in the model artifact.

**populate\_metadata**(*self*, *model=None*, *use\_case\_type=None*)

Extracts and populate taxonomy metadata from the model.

**save**(

*self*, *display\_name: str = None*, *description: str = None*, *project\_id: str = None*, *compartment\_id: str = None*, *training\_script\_path: str = None*, *ignore\_pending\_changes: bool = False*, *auth: dict = None*, *training\_id: str = None*, *timeout: int = None*, *ignore\_introspection=False*,

)

Saves this model artifact in model catalog.

**populate\_schema**(

*self*, *data\_sample: ADSDData = None*, *X\_sample: Union[list, tuple, pd.DataFrame, pd.Series, np.ndarray] = None*, *y\_sample: Union[list, tuple, pd.DataFrame, pd.Series, np.ndarray] = None*,

)

Populates input and output schema.

**introspect**(*self*) → *pd.DataFrame*

Runs model introspection.

**classmethod from\_model\_catalog**(*model\_id: str*, *artifact\_dir: str*, *model\_file\_name: Optional[str] = 'model.onnx'*, *auth: Optional[Dict] = None*, *force\_overwrite: Optional[bool] = False*, *install\_libs: Optional[bool] = False*, *conflict\_strategy='IGNORE'*, *bucket\_uri: Optional[str] = None*, *remove\_existing\_artifact: Optional[bool] = True*, *\*\*kwargs*) → [\*ModelArtifact\*](#)

Download model artifacts from the model catalog to the target artifact directory.

#### Parameters

- **model\_id** (*str*) – The model OCID.
- **artifact\_dir** (*str*) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **model\_file\_name** ((*str*, *optional*). Defaults to "model.onnx".) – The name of the serialized model.
- **auth** ((*Dict*, *optional*). Defaults to *None*.) – Default authentication is set using the *ads.set\_auth()* method. Use the *ads.common.auth.api\_keys()* or *ads.common.auth.resource\_principal()* to create appropriate authentication signer and *kwargs* required to instantiate a *IdentityClient* object.
- **force\_overwrite** ((*bool*, *optional*). Defaults to *False*.) – Overwrite existing files.
- **install\_libs** (*bool*, *default: False*) – Install the libraries specified in *ds-requirements.txt*.

- **conflict\_strategy** (`ConflictStrategy`, *default: IGNORE*) – Determines how to handle version conflicts between the current environment and requirements of model artifact. Valid values: “IGNORE”, “UPDATE” or `ConflictStrategy`. IGNORE: Use the installed version in case of conflict UPDATE: Force update dependency to the version required by model artifact in case of conflict
- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **kwargs** –
  - compartment\_id**: (*str*, optional)  
Compartment OCID. If not specified, the value will be taken from the environment variables.
  - timeout**: (*int*, optional). Defaults to 10 seconds.  
The connection timeout in seconds for the client.

**Returns**

An instance of `ModelArtifact` class.

**Return type**

*ModelArtifact*

**install\_requirements**(*conflict\_strategy='IGNORE'*)

Installs missing libraries listed in the model artifacts.

**Parameters**

**conflict\_strategy** (`ConflictStrategy`, *default: IGNORE*) – Update the conflicting dependency to the version required by the model artifact. Valid values: “IGNORE” or `ConflictStrategy.IGNORE`, “UPDATE” or `ConflictStrategy.UPDATE`. IGNORE: Use the installed version in case of a conflict. UPDATE: Force update dependency to the version required by model artifact in case of conflict.

**introspect**() → `DataFrame`

Runs model introspection.

**Returns**

The introspection result in a dataframe format.

**Return type**

`pd.DataFrame`

**populate\_metadata**(*model=None*, *use\_case\_type=None*)

Extracts and populate taxonomy metadata from given model.

**Parameters**

- **model** ((*Any*, optional). Defaults to *None*.) – The model object.
- **use\_case\_type** ((*str*, optional). Default to *None*.) – The use case type of the model.
- **model** – This is an optional model object which is only used to extract taxonomy metadata. Supported models: `keras`, `lightgbm`, `pytorch`, `sklearn`, `tensorflow`, and `xgboost`. If the model is not under supported frameworks, then extracting taxonomy metadata will be skipped.

- **use\_case\_type** – The use case type of the model.

**Returns**

Nothing.

**Return type**

None

**populate\_schema**(*data\_sample: Optional[ADSDData] = None, X\_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, y\_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, max\_col\_num: int = 2000*)

Populate the input and output schema. If the schema exceeds the limit of 32kb, save as json files to the artifact directory.

**Parameters**

- **data\_sample** (*ADSDData*) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*) – A sample of input data that will be used to generate input schema.
- **y\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*) – A sample of output data that will be used to generate output schema.
- **max\_col\_num** (*((int, optional). Defaults to utils.DATA\_SCHEMA\_MAX\_COL\_NUM.)*) – The maximum column size of the data that allows to auto generate schema.

**reload**(*model\_file\_name: Optional[str] = None*)

Reloads files in model artifact directory.

**Parameters**

**model\_file\_name** (*str*) – The model file name.

**save**(*display\_name: str = None, description: str = None, project\_id: str = None, compartment\_id: str = None, training\_script\_path: str = None, ignore\_pending\_changes: bool = False, auth: dict = None, training\_id: str = None, timeout: int = None, ignore\_introspection=True, freeform\_tags=None, defined\_tags=None, bucket\_uri: Optional[str] = None, remove\_existing\_artifact: Optional[bool] = True, model\_version\_set: Optional[Union[str, ModelVersionSet]] = None, version\_label: Optional[str] = None*)

Saves the model artifact in the model catalog.

**Parameters**

- **display\_name** (*str, optional*) – Model display name.
- **description** (*str, optional*) – Description for the model.
- **project\_id** (*str, optional*) – Model's project OCID. If None, the default project OCID *config.PROJECT\_OCID* would be used.
- **compartment\_id** (*str, optional*) – Model's compartment OCID. If None, the default compartment OCID *config.NB\_SESSION\_COMPARTMENT\_OCID* would be used.
- **training\_script\_path** (*str, optional*) – The training script path is either relative to the working directory, or an absolute path.
- **ignore\_pending\_changes** (*bool, default: False*) – If True, ignore uncommitted changes and use the current git HEAD commit for provenance metadata. This argument is used only when the function is called from a script in git managed directory.

- **auth** (*dict*) – Default is *None*. Default authentication is set using the *ads.set\_auth()* method. Use the *ads.common.auth.api\_keys()* or *ads.common.auth.resource\_principal()* to create appropriate authentication signer and kwargs required to instantiate a *DataScience-Client* object.
- **training\_id** (*str*, *optional*) – The training OCID for the model.
- **timeout** (*int*, *default: 10*) – The connection timeout in seconds.
- **ignore\_introspection** (*bool*, *optional*) – Ignore the result of model introspection . If set to *True*, the *.save()* will ignore all model introspection errors.
- **freeform\_tags** (*dict(str, str)*, *optional*) – Freeform tags for the model.
- **defined\_tags** (*dict(str, dict(str, object))*, *optional*) – Defined tags for the model.
- **bucket\_uri** ((*str*, *optional*). *Defaults to None.*) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for uploading large artifacts which size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*
- **remove\_existing\_artifact** ((*bool*, *optional*). *Defaults to True.*) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **model\_version\_set** ((*Union[str, ModelVersionSet]*, *optional*). *Defaults to None.*) – The Model version set OCID, or name, or *ModelVersionSet* instance.
- **version\_label** ((*str*, *optional*). *Defaults to None.*) – The model version label.

## Examples

```
>>> from ads.common.model_artifact import ModelArtifact
>>> from ads.config import NB_SESSION_OCID
```

```
>>> # Getting auth details.
>>> # If you are using API keys
>>> auth=ads.common.auth.api_keys()
```

```
>>> # If you are using resource principal
>>> auth=ads.common.auth.resource_principal()
```

```
>>> # If you have set the auth type using ads.set_auth()
>>> auth=ads.common.auth.default_signer()
```

```
>>> # Preparing model artifacts
>>> model_artifact = prepare_generic_model(
...     "path_to_model_artifacts",
...     force_overwrite=True,
...     data_science_env=True,
...     model=gamma_reg_model,
... )
```

```

>>> # Saving model to the model catalog
>>> model_artifact.save(
...     project_id=PROJECT_ID,
...     compartment_id=COMPARTMENT,
...     display_name="RF Classifier 2",
...     description="A sample Random Forest classifier",
...     ignore_pending_changes=True,
...     auth=auth,
...     training_id=NB_SESSION_OCID,
...     timeout=6000,
...     ignore_introspection = True
... )

```

### **verify(input\_data)**

Verifies the contents of the model artifact directory.

#### **Parameters**

**input\_data** (*str, dict, BytesIO stream*) – Data to be passed into the deployed model. It can be of type json (*str*), a dict object, or a BytesIO stream. All types get converted into a UTF-8 encoded BytesIO stream and is then sent to the handler. Any data handling past there is done in func.py. By default it looks for data under the keyword “input”, and returns data under the keyword “prediction”.

#### **Returns**

- **output\_data** (*the resulting prediction, formatted in the same way as input\_data*)
- *Example* – `input_dict = {"input": train.X[:3].to_dict()}`  
`model_artifact.verify(input_dict)`  
 – returns `{"prediction": [30/4, 24.8, 30.7]}` \*

**class** ads.common.model\_artifact.**PACK\_TYPE**(*value*)

Bases: Enum

An enumeration.

**SERVICE\_PACK** = 'data\_science'

**USER\_CUSTOM\_PACK** = 'published'

**class** ads.common.model\_artifact.**VersionConflictWarning**(*version\_conflicts*)

Bases: object

ads.common.model\_artifact.**execute**(*cmd*)

ads.common.model\_artifact.**pip\_install**(*package, options='-U'*)

## 18.1.1.3.15 ads.common.model\_export\_util module

```
ads.common.model_export_util.prepare_generic_model(model_path: str, fn_artifact_files_included: bool = False, fn_name: str = 'model_api', force_overwrite: bool = False, model: Any = None, data_sample: ADSDData = None, use_case_type=None, X_sample: Union[list, tuple, Series, ndarray, DataFrame] = None, y_sample: Union[list, tuple, Series, ndarray, DataFrame] = None, **kwargs) → ModelArtifact
```

Generates template files to aid model deployment. The model could be accompanied by other artifacts all of which can be dumped at *model\_path*. Following files are generated: \* func.yaml \* func.py \* requirements.txt \* score.py

**Parameters**

- **model\_path** (*str*) – Path where the artifacts must be saved. The serialized model object and any other associated files/objects must be saved in the *model\_path* directory
- **fn\_artifact\_files\_included** (*bool*) – Default is False, if turned off, function artifacts are not generated.
- **fn\_name** (*str*) – Optional parameter to specify the function name
- **force\_overwrite** (*bool*) – Optional parameter to specify if the model\_artifact should overwrite the existing model\_path (if it exists)
- **model** (*(Any, optional). Defaults to None.*) – This is an optional model object which is only used to extract taxonomy metadata. Supported models: automl, keras, lightgbm, pytorch, sklearn, tensorflow, and xgboost. If the model is not under supported frameworks, then extracting taxonomy metadata will be skipped. The alternative way is using *artifact.populate\_metadata(model=model, usecase\_type=UseCaseType.REGRESSION)*.
- **data\_sample** (*ADSDData*) – A sample of the test data that will be provided to predict() API of scoring script Used to generate schema\_input and schema\_output
- **use\_case\_type** (*str*) – The use case type of the model
- **X\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame, dask.dataframe.core.Series, dask.dataframe.core.DataFrame]*) – A sample of input data that will be provided to predict() API of scoring script Used to generate input schema.
- **y\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame, dask.dataframe.core.Series, dask.dataframe.core.DataFrame]*) – A sample of output data that is expected to be returned by predict() API of scoring script, corresponding to X\_sample Used to generate output schema.
- **\*\*kwargs** –
- **\_\_\_\_\_** –
- **data\_science\_env** (*bool, default: False*) – If set to True, the datascience environment represented by the slug in the training conda environment will be used.
- **inference\_conda\_env** (*str, default: None*) – Conda environment to use within the model deployment service for inferencing. For example, *oci://bucketname@namespace/path/to/conda/env*
- **ignore\_deployment\_error** (*bool, default: False*) – If set to True, the prepare method will ignore all the errors that may impact model deployment.

- **underlying\_model** (*str*, *default*: 'UNKNOWN') – Underlying Model Type, could be “automl”, “sklearn”, “h2o”, “lightgbm”, “xgboost”, “torch”, “mxnet”, “tensorflow”, “keras”, “pyod” and etc.
- **model\_libs** (*dict*, *default*: {}) – Model required libraries where the key is the library names and the value is the library versions. For example, {numpy: 1.21.1}.
- **progress** (*int*, *default*: None) – max number of progress.
- **inference\_python\_version** (*str*, *default*: None.) – If provided will be added to the generated runtime yaml
- **max\_col\_num** ((*int*, *optional*). Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – The maximum column size of the data that allows to auto generate schema.

## Examples

```
>>> import cloudpickle
>>> import os
>>> from sklearn.linear_model import LogisticRegression
>>> from sklearn.datasets import make_classification
>>> import ads
>>> from ads.common.model_export_util import prepare_generic_model
>>> import yaml
>>> import oci
>>>
>>> ads.set_auth('api_key', oci_config_location=oci.config.DEFAULT_LOCATION,
↳profile='DEFAULT')
>>> model_artifact_location = os.path.expanduser('~/.myusecase/model/')
>>> inference_conda_env="oci://my-bucket@namespace/conda_environments/cpu/Data_
↳Exploration_and_Manipulation_for_CPU_Python_3.7/2.0/dataexpl_p37_cpu_v2"
>>> inference_python_version = "3.7"
>>> if not os.path.exists(model_artifact_location):
...     os.makedirs(model_artifact_location)
>>> X, y = make_classification(n_samples=100, n_features=20, n_classes=2)
>>> lrmodel = LogisticRegression().fit(X, y)
>>> with open(os.path.join(model_artifact_location, 'model.pkl'), "wb") as mfile:
...     cloudpickle.dump(lrmodel, mfile)
>>> modelartifact = prepare_generic_model(
...     model_artifact_location,
...     model = lrmodel,
...     force_overwrite=True,
...     inference_conda_env=inference_conda_env,
...     ignore_deployment_error=True,
...     inference_python_version=inference_python_version
... )
>>> modelartifact.reload() # Call reload to update the ModelArtifact object with
↳the generated score.py
>>> assert len(modelartifact.predict(X[:5])['prediction']) == 5 #Test the generated
↳score.py works. This may require customization.
>>> with open(os.path.join(model_artifact_location, "runtime.yaml")) as rf:
...     content = yaml.load(rf, Loader=yaml.FullLoader)
...     assert content['MODEL_DEPLOYMENT']['INFERENCE_CONDA_ENV']['INFERENCE_ENV_
```

(continues on next page)

(continued from previous page)

```

→PATH'] == inference_conda_env
...     assert content['MODEL_DEPLOYMENT']['INFERENCE_CONDA_ENV']['INFERENCE_PYTHON_
→VERSION'] == inference_python_version
>>> # Save Model to model artifact
>>> ocimodel = modelartifact.save(
...     project_id="oci1.....", # OCID of the project to which the model to be
→associated
...     compartment_id="oci1.....", # OCID of the compartment where the model will
→reside
...     display_name="LRModel_01",
...     description="My Logistic Regression Model",
...     ignore_pending_changes=True,
...     timeout=100,
...     ignore_introspection=True,
... )
>>> print(f"The OCID of the model is: {ocimodel.id}")

```

**Returns****model\_artifact** – A generic model artifact**Return type**

ads.model\_artifact.model\_artifact

ads.common.model\_export\_util.serialize\_model(model=None, target\_dir=None, X=None, y=None, model\_type=None, \*\*kwargs)

**Parameters**

- **model** (ads.Model) – A model to be serialized
- **target\_dir** (str, optional) – directory to output the serialized model
- **X** (Union[pandas.DataFrame, pandas.Series]) – The X data
- **y** (Union[list, pandas.DataFrame, pandas.Series]) – Tbe Y data
- **model\_type** (str, optional) – A string corresponding to the model type

**Returns****model\_kwargs** – A dictionary of model kwargs for the serialized model**Return type**

Dict

**18.1.1.3.16 ads.common.model\_introspect module**

The module that helps to minimize the number of errors of the model post-deployment process. The model provides a simple testing harness to ensure that model artifacts are thoroughly tested before being saved to the model catalog.



## Classes

### ModelIntrospect

Class to introspect model artifacts.

## Examples

```
>>> model_introspect = ModelIntrospect(artifact=model_artifact)
>>> model_introspect()
... Test key          Test name          Result          Message
... -----
... test_key_1        test_name_1        Passed          test passed
... test_key_2        test_name_2        Not passed      some error occurred
>>> model_introspect.status
... Passed
```

**class** `ads.common.model_introspect.Introspectable`

Bases: `ABC`

Base class that represents an introspectable object.

**exception** `ads.common.model_introspect.IntrospectionNotPassed`

Bases: `ValueError`

**class** `ads.common.model_introspect.ModelIntrospect(artifact: Introspectable)`

Bases: `object`

Class to introspect model artifacts.

#### Parameters

- **status** (*str*) – Returns the current status of model introspection. The possible variants: *Passed, Not passed, Not tested*.
- **failures** (*int*) – Returns the number of failures of introspection result.

**run**(*self*) → `None`

Invokes model artifacts introspection.

**to\_dataframe**(*self*) → `pd.DataFrame`

Serializes model introspection result into a `DataFrame`.

## Examples

```
>>> model_introspect = ModelIntrospect(artifact=model_artifact)
>>> result = model_introspect()
... Test key          Test name          Result          Message
... -----
... test_key_1        test_name_1        Passed          test passed
... test_key_2        test_name_2        Not passed      some error occurred
```

Initializes the Model Introspect.

#### Parameters

**artifact** (`Introspectable`) – The instance of `ModelArtifact` object.

**Raises**

- **ValueError** – If model artifact object not provided.:
- **TypeError** – If provided input parameter not a ModelArtifact instance.:

**property failures: int**

Calculates the number of failures.

**Returns**

The number of failures.

**Return type**

int

**run()** → DataFrame

Invokes introspection.

**Returns**

The introspection result in a DataFrame format.

**Return type**

pd.DataFrame

**property status: str**

Gets the current status of model introspection.

**to\_dataframe()** → DataFrame

Serializes model introspection result into a DataFrame.

**Returns**

The model introspection result in a DataFrame representation.

**Return type**

*pandas.DataFrame*

```
class ads.common.model_introspect.PrintItem(key: str = "", case: str = "", result: str = "", message: str = "")
```

Bases: object

Class represents the model introspection print item.

**case:** str = ''

**key:** str = ''

**message:** str = ''

**result:** str = ''

**to\_list()** → List[str]

Converts instance to a list representation.

**Returns**

The instance in a list representation.

**Return type**

List[str]

```
class ads.common.model_introspect.TEST_STATUS
```

Bases: str

**NOT\_PASSED** = 'Failed'

```
NOT_TESTED = 'Skipped'
```

```
PASSED = 'Passed'
```

#### 18.1.1.3.17 ads.common.model\_metadata module

The module created for the back compatability. The original *model\_metadata* was moved to the *ads.model* package.

#### 18.1.1.3.18 ads.common.model\_metadata\_mixin module

```
class ads.common.model_metadata_mixin.MetadataMixin
```

Bases: object

MetadataMixin class which populates the custom metadata, taxonomy metadata, input/output schema and provenance metadata.

```
populate_metadata(use_case_type: Optional[str] = None, data_sample: Optional[ADSDData] = None,
                  X_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None,
                  y_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None,
                  training_script_path: Optional[str] = None, training_id: Optional[str] = None,
                  ignore_pending_changes: bool = True, max_col_num: int = 2000)
```

Populates input schema and output schema. If the schema exceeds the limit of 32kb, save as json files to the artifact directory.

##### Parameters

- **use\_case\_type** ((*str*, optional). Defaults to *None*.) – The use case type of the model.
- **data\_sample** ((*ADSDData*, optional). Defaults to *None*.) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*. Defaults to *None*.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*. Defaults to *None*.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (*str*. Defaults to *None*.) – Training script path.
- **training\_id** ((*str*, optional). Defaults to *None*.) – The training model OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – Ignore the pending changes in git.
- **max\_col\_num** ((*int*, optional). Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – The maximum number of columns allowed in auto generated schema.

##### Returns

Nothing.

##### Return type

None

```
populate_schema(data_sample: Optional[ADSDData] = None, X_sample: Optional[Union[List, Tuple,  
DataFrame, Series, ndarray]] = None, y_sample: Optional[Union[List, Tuple,  
DataFrame, Series, ndarray]] = None, max_col_num: int = 2000)
```

Populate input and output schemas. If the schema exceeds the limit of 32kb, save as json files to the artifact dir.

#### Parameters

- **data\_sample** ([ADSDData](#)) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample** ([Union\[list, tuple, pd.Series, np.ndarray, pd.DataFrame\]](#)) – A sample of input data that will be used to generate the input schema.
- **y\_sample** ([Union\[list, tuple, pd.Series, np.ndarray, pd.DataFrame\]](#)) – A sample of output data that will be used to generate the output schema.
- **max\_col\_num** (([int, optional](#)). Defaults to `utils.DATA_SCHEMA_MAX_COL_NUM`.) – The maximum number of columns allowed in auto generated schema.

#### 18.1.1.3.19 [ads.common.object\\_storage\\_details](#) module

**exception** `ads.common.object_storage_details.InvalidObjectStoragePath`

Bases: `Exception`

Invalid Object Storage Path.

```
class ads.common.object_storage_details.ObjectStorageDetails(bucket: str, namespace: str = "",  
filepath: str = "", auth:  
Optional[Dict] = None)
```

Bases: `object`

Class that represents the Object Storage bucket URI details.

#### **bucket**

The Object Storage bucket name.

#### **Type**

`str`

#### **namespace**

The Object Storage namespace. Will be extracted automatically if not provided.

#### **Type**

(`str, optional`). Defaults to empty string.

#### **filepath**

The path to the object.

#### **Type**

(`str, optional`). Defaults to empty string.

#### **auth**

ADS auth dictionary for OCI authentication. This can be generated by calling `ads.common.auth.api_keys()` or `ads.common.auth.resource_principal()` If this is `None`, `ads.common.default_signer()` will be used.

#### **Type**

(`Dict, optional`). Defaults to `None`.

**auth:** Dict = None

**bucket:** str

**fetch\_metadata\_of\_object()** → Dict

Fetches the manifest metadata from the object storage of a conda pack.

**Returns**

The metadata in dictionary format.

**Return type**

Dict

**filepath:** str = ''

**classmethod from\_path**(*env\_path: str*) → *ObjectStorageDetails*

Construct an ObjectStorageDetails instance from conda pack path.

**Parameters**

**env\_path** ((*str*)) – conda pack object storage path.

**Raises**

**Exception** – OCI conda url path not properly configured.:

**Returns**

An ObjectStorageDetails instance.

**Return type**

*ObjectStorageDetails*

**static is\_valid\_uri**(*uri: str*) → bool

Validates the Object Storage URI.

**namespace:** str = ''

**property path**

Full object storage path of this file.

**to\_tuple()**

Returns the values of the fields of ObjectStorageDetails class.

#### 18.1.1.3.20 ads.common.oci\_client module

**class** ads.common.oci\_client.**OCIClientFactory**(*config={}, signer=None, client\_kwargs=None*)

Bases: object

A factory class to create OCI client objects. The constructor takes in config, signer and client\_kwargs. *client\_kwargs* is passed to the client constructor as key word arguments.

## Examples

```
from ads.common import auth as authutil from ads.common import oci_client as oc

auth = authutil.default_signer() oc.OCIClientFactory(**auth).object_storage # Creates Object storage client

auth = authutil.default_signer({"timeout": 6000}) oc.OCIClientFactory(**auth).object_storage # Creates Object
storage client with timeout set to 6000

auth = authutil.api_keys(config="/home/datascience/oci/config", profile="TEST", {"timeout": 6000})
oc.OCIClientFactory(**auth).object_storage # Creates Object storage client with timeout set to 6000 using API
Key authentication

auth = authutil.resource_principal({"timeout": 6000}) oc.OCIClientFactory(**auth).object_storage # Creates
Object storage client with timeout set to 6000 using resource principal authentication

auth = authutil.create_signer("instance_principal") oc.OCIClientFactory(**auth).object_storage # Creates Ob-
ject storage client using instance principal authentication
```

**property ai\_language**

**create\_client**(*client\_name*)

**property data\_labeling\_cp**

**property data\_labeling\_dp**

**property data\_science**

**property dataflow**

**property identity**

**property object\_storage**

**property secret**

**property vault**

### 18.1.1.3.21 ads.common.oci\_datascience module

```
class ads.common.oci_datascience.DSCNotebookSession(config: Optional[dict] = None, signer:  
                                                    Optional[Signer] = None, client_kwargs:  
                                                    Optional[dict] = None, **kwargs)
```

Bases: [\*OCIDataScienceMixin\*](#), [\*NotebookSession\*](#)

Represents a data science notebook session

To get the information of an existing notebook session: >>> notebook = DSCNotebookSession.from\_ociid(NOTEBOOK\_OCID) Get the name of the notebook session >>> notebook.display\_name  
Get the subnet ID of the notebook session >>> notebook.notebook\_session\_configuration\_details.subnet\_id

Initializes a service/resource with OCI client as a property. If config or signer is specified, it will be used to initialize the OCI client. If neither of them is specified, the client will be initialized with ads.common.auth.default\_signer. If both of them are specified, both of them will be passed into the OCI client, and the authentication will be determined by OCI Python SDK.

#### Parameters

- **config** (*dict*, *optional*) – OCI API key config dictionary, by default None.
- **signer** (*oci.signer.Signer*, *optional*) – OCI authentication signer, by default None.
- **client\_kwargs** (*dict*, *optional*) – Additional keyword arguments for initializing the OCI client.

```
class ads.common.oci_datascience.OCIDataScienceMixin(config: Optional[dict] = None, signer:
Optional[Signer] = None, client_kwargs:
Optional[dict] = None, **kwargs)
```

Bases: *OCIModelMixin*

Initializes a service/resource with OCI client as a property. If config or signer is specified, it will be used to initialize the OCI client. If neither of them is specified, the client will be initialized with `ads.common.auth.default_signer`. If both of them are specified, both of them will be passed into the OCI client, and the authentication will be determined by OCI Python SDK.

#### Parameters

- **config** (*dict*, *optional*) – OCI API key config dictionary, by default None.
- **signer** (*oci.signer.Signer*, *optional*) – OCI authentication signer, by default None.
- **client\_kwargs** (*dict*, *optional*) – Additional keyword arguments for initializing the OCI client.

**property client:** *DataScienceClient*

OCI client

**property client\_composite:** *DataScienceClientCompositeOperations*

**classmethod init\_client** (*\*\*kwargs*) → *DataScienceClient*

Initializes the OCI client specified in the “client” keyword argument Sub-class should override this method and call `cls._init_client(client=OCI_CLIENT)`

#### Parameters

**\*\*kwargs** – Additional keyword arguments for initializing the OCI client.

#### Return type

An instance of OCI client.

### 18.1.1.3.22 ads.common.oci\_logging module

```
class ads.common.oci_logging.ConsolidatedLog(*args)
```

Bases: *object*

Represents the Consolidated OCI Log resource.

Usage: Initialize consolidated log instance for `oci_log_one` and `oci_log_two`

```
>>> oci_log_one = OCILog( >>> compartment_id=<compartment_id_one>, >>> id=<id_one>, >>> log_group_id=<log_group_id_one>, >>> annotation=<annotation_one> >>> ) >>> oci_log_two = OCILog( >>> compartment_id=<compartment_id_two>, >>> id=<id_two>, >>> log_group_id=<log_group_id_two>, >>> annotation=<annotation_two> >>> ) >>> consolidated_log = ConsolidatedLog(oci_log_one, oci_log_two)
```

Stream, sort and annotate the logs from `oci_log_one` and `oci_log_two`

```
>>> consolidated_log.stream() Get the most recent 20 consolidated logs from oci_log_one and oci_log_two
>>> consolidated_log.tail(limit=20) Get the most recent 20 raw logs from oci_log_one and oci_log_two
>>> consolidated_log.search(limit=20)
```

Initializes a consolidate log model instance.

**Parameters**

**args** – A list of OCILog instance.

**head**(*source: Optional[str] = None, limit: int = 100, time\_start: Optional[datetime] = None*) → None

Returns the preceding consolidated log records.

**Parameters**

- **source** (*str, optional*) – Expression or OCID to filter the “source” field of the OCI log record. Defaults to None.
- **limit** (*int, optional.*) – Maximum number of records to be returned. If limit is set to None, all logs from time\_start to now will be returned. Defaults to 100.
- **time\_start** (*datetime.datetime, optional*) – Starting time for the log query. Defaults to None.

**search**(*source: Optional[str] = None, time\_start: Optional[datetime] = None, time\_end: Optional[datetime] = None, limit: Optional[int] = None, sort\_by: str = 'datetime', sort\_order: str = 'DESC', log\_filter: Optional[str] = None*) → List[SearchResult]

Searches raw logs.

**Parameters**

- **source** (*str, optional*) – Expression or OCID to filter the “source” field of the OCI log record. Defaults to None.
- **time\_start** (*datetime.datetime, optional*) – Starting time for the log query. Defaults to None.
- **time\_end** (*datetime.datetime, optional.*) – Ending time for the query. Defaults to None.
- **limit** (*int, optional.*) – Maximum number of records to be returned. All logs will be returned. Defaults to None.
- **sort\_by** (*str, optional.*) – The field for sorting the logs. Defaults to “datetime”
- **sort\_order** (*str, optional.*) – The sort order for the log records. Can be “ASC” or “DESC”. Defaults to “DESC”.
- **log\_filter** (*str, optional*) – Expression for filtering the logs. This will be the WHERE clause of the query. Defaults to None.

**Returns**

A list of oci.loggingsearch.models.SearchResult objects

**Return type**

list

**stream**(*source: Optional[str] = None, interval: int = 3, stop\_condition: Optional[callable] = None, time\_start: Optional[datetime] = None, log\_filter: Optional[str] = None*)

Streams consolidated logs to console/terminal until stop\_condition() returns true.

**Parameters**

- **source** (*str, optional*) – Expression or OCID to filter the “source” field of the OCI log record. Defaults to None.
- **interval** (*int, optional*) – The time interval between sending each request to pull logs from OCI logging service. Defaults to 3.
- **stop\_condition** (*callable, optional*) – A function to determine if the streaming should stop. The log streaming will stop if the function returns true. Defaults to None.



- **time\_start** (*datetime.datetime*, *optional*) – Starting time for the log query. Defaults to None.
- **log\_filter** (*str*, *optional*) – Expression for filtering the logs. This will be the WHERE clause of the query. Defaults to None.

**tail**(*source: Optional[str] = None, limit: int = 100, time\_start: Optional[datetime] = None, log\_filter: Optional[str] = None*) → None

Returns the most recent consolidated log records.

#### Parameters

- **source** (*str*, *optional*) – Expression or OCID to filter the “source” field of the OCI log record. Defaults to None.
- **limit** (*int*, *optional*.) – Maximum number of records to be returned. If limit is set to None, all logs from time\_start to now will be returned. Defaults to 100.
- **time\_start** (*datetime.datetime*, *optional*) – Starting time for the log query. Defaults to None.
- **log\_filter** (*str*, *optional*) – Expression for filtering the logs. This will be the WHERE clause of the query. Defaults to None.

**class** ads.common.oci\_logging.**OCILog**(*log\_type: str = 'CUSTOM', \*\*kwargs*)

Bases: [OCILoggingModelMixin](#), [Log](#)

Represents the OCI Log resource.

Usage: (OCI requires display\_name to be unique and it cannot contain space) >>> log = OCILog(display\_name="My\_Log", log\_group\_id=LOG\_GROUP\_ID).create() Usually it is better to create a log using the create\_log() method in OCILogGroup. >>> log.delete() # Delete the resource Get a log object from OCID >>> oci\_log = OCILog.from\_ociid("LOG\_OCID\_HERE") Stream the logs from an OCI Data Science Job run to stdout >>> oci\_log.stream(source="JOB\_RUN\_OCID\_HERE") Gets the most recent 10 logs >>> oci\_log.tail(10)

Initializes an OCI log model locally. The resource is not created in OCI until the create() or create\_async() method is called.

#### **create\_async()**

Creates a new Log with OCI logging service

#### **delete()**

Delete the log

**static format\_datetime**(*dt: datetime*) → str

Converts datetime object to RFC3339 date time format in string

#### Parameters

**dt** (*datetime.datetime*) – Datetime object to be formatted.

#### Returns

A timestamp in RFC3339 format.

#### Return type

str

**head**(*source: Optional[str] = None, limit=100, time\_start: Optional[datetime] = None*) → List[dict]

Returns the preceding log records.

#### Parameters

- **source** ((*str*, *optional*). Defaults to *None*.) – The source field to filter the log records.
- **limit** ((*int*, *optional*). Defaults to *100*.) – Maximum number of records to be returned. If limit is set to *None*, all logs from *time\_start* to now will be returned.
- **time\_start** ((*datetime.datetime*, *optional*)) – Starting time for the log query. Defaults to *None*. Logs up to 14 days from now will be returned.

**Returns**

A list of log records. Each log record is a dictionary with the following keys: *id*, *time*, *message*.

**Return type**

list

**search**(*source*: *Optional[str]* = *None*, *time\_start*: *Optional[datetime]* = *None*, *time\_end*: *Optional[datetime]* = *None*, *limit*: *Optional[int]* = *None*, *sort\_by*: *str* = 'datetime', *sort\_order*: *str* = 'DESC', *log\_filter*: *Optional[str]* = *None*) → List[SearchResult]

Search logs

**Parameters**

- **source** (*str*, *optional*) – Expression or OCID to filter the “source” field of the OCI log record. Defaults to *None*. No filtering will be performed.
- **time\_start** (*datetime.datetime*, *optional*) – Starting UTC time for the query. Defaults to *None*. Logs from the past 24 hours will be returned.
- **time\_end** (*datetime.datetime*, *optional*) – Ending UTC time for the query. Defaults to *None*. The current time will be used.
- **limit** (*int*, *optional*) – Maximum number of records to be returned. Defaults to *None*. All logs will be returned.
- **sort\_by** (*str*, *optional*) – The field for sorting the logs. Defaults to “datetime”
- **sort\_order** (*str*, *optional*) – Specify how the records should be sorted. Must be “ASC” or “DESC”. Defaults to “DESC”.
- **log\_filter** (*str*, *optional*) – Expression for filtering the logs. This will be the WHERE clause of the query. Defaults to *None*.

**Returns**

A list of SearchResult objects

**Return type**

List[oci.loggingsearch.models.SearchResult]

**property search\_client**

OCI logging search client.

**stream**(*source*: *Optional[str]* = *None*, *interval*: *int* = 3, *stop\_condition*: *Optional[callable]* = *None*, *time\_start*: *Optional[datetime]* = *None*, *log\_filter*: *Optional[str]* = *None*)

Streams logs to console/terminal until *stop\_condition*() returns true.

**Parameters**

- **source** (*str*) –
- **interval** (*int*) – The time interval between sending each request to pull logs from OCI logging service (Default value = 3)
- **stop\_condition** (*callable*) – A function to determine if the streaming should stop. (Default value = *None*) The log streaming will stop if the function returns true.

- **time\_start** (*datetime.datetime*) – Starting time for the log query. Defaults to None. Logs up to 14 days from now will be returned.
- **log\_filter** (*str, optional*) – Expression for filtering the logs. This will be the WHERE clause of the query. Defaults to None.

**Returns**

The number of logs printed.

**Return type**

int

**sync**(*\*\*kwargs*) → None

Refreshes the properties of the Log model OCI requires both Log OCID and Log group OCID to get the Log model.

This method override the sync() method from OCIMixin to improve performance.

**tail**(*source: Optional[str] = None, limit=100, time\_start: Optional[datetime] = None, log\_filter: Optional[str] = None*) → List[dict]

Returns the most recent log records.

**Parameters**

- **source** (*(str, optional). Defaults to None.*) – The source field to filter the log records.
- **limit** (*(int, optional). Defaults to 100.*) – Maximum number of records to be returned. If limit is set to None, all logs from time\_start to now will be returned.
- **time\_start** (*(datetime.datetime, optional)*) – Starting time for the log query. Defaults to None. Logs up to 14 days from now will be returned.
- **log\_filter** (*(str, optional). Defaults to None.*) – Expression for filtering the logs. This will be the WHERE clause of the query.

**Returns**

A list of log records. Each log record is a dictionary with the following keys: *id, time, message*.

**Return type**

list

**class** ads.common.oci\_logging.OCILogGroup(*config: Optional[dict] = None, signer: Optional[Signer] = None, client\_kwargs: Optional[dict] = None, \*\*kwargs*)

Bases: [OCILoggingModelMixin](#), LogGroup

Represents the OCI Log Group resource.

Using OCILogGroup to create a new log group. OCI requires display\_name to be unique and it cannot contain space. >>> log\_group = OCILogGroup(display\_name="My\_Log\_Group").create() Once created, access the OCID and other properties >>> log\_group.id # The OCID is None before the log is created. >>> None Create a log resource within the log group >>> log\_group.id # OCID will be available once the log group is created Access the property >>> log\_group.display\_name Create logs within the log group >>> log = log\_group.create\_log("My custom access log") >>> log\_group.create\_log("My custom prediction log") List the logs in a log group. The following line will return a list of OCILog objects. >>> logs = log\_group.list\_logs() Delete the resource >>> log\_group.delete()

Initializes a service/resource with OCI client as a property. If config or signer is specified, it will be used to initialize the OCI client. If neither of them is specified, the client will be initialized with ads.common.auth.default\_signer. If both of them are specified, both of them will be passed into the OCI client,

and the authentication will be determined by OCI Python SDK.

**Parameters**

- **config** (*dict*, *optional*) – OCI API key config dictionary, by default None.
- **signer** (*oci.signer.Signer*, *optional*) – OCI authentication signer, by default None.
- **client\_kwargs** (*dict*, *optional*) – Additional keyword arguments for initializing the OCI client.

**create\_async()**

Creates a new LogGroup asynchronously with OCI logging service

**create\_log**(*display\_name: str*, *\*\*kwargs*)

Create a log (OCI resource) within the log group.

**Parameters**

- **display\_name** (*str*) – The display name of the log
- **\*\*kwargs** – Keyword arguments to be passed into the OCI API for log properties.

**Returns**

An instance of OCILog

**Return type**

*OCILog*

**delete()**

Deletes the log group and the logs in the log group.

**list\_logs**(*\*\*kwargs*) → list

Lists all logs within the log group.

**Parameters**

**\*\*kwargs** – keyword arguments for filtering the results. They are passed into `oci.logging.LoggingManagementClient.list_logs()`

**Returns**

A list of OCILog

**Return type**

list

```
class ads.common.oci_logging.OCILoggingModelMixin(config: Optional[dict] = None, signer:
Optional[Signer] = None, client_kwargs:
Optional[dict] = None, **kwargs)
```

Bases: *OCIModelMixin, OCIWorkRequestMixin*

Base model for representing OCI logging resources managed through `oci.logging.LoggingManagementClient`. This class should not be initialized directly. Use a sub-class (`OCILogGroup` or `OCILog`) instead.

Initializes a service/resource with OCI client as a property. If `config` or `signer` is specified, it will be used to initialize the OCI client. If neither of them is specified, the client will be initialized with `ads.common.auth.default_signer`. If both of them are specified, both of them will be passed into the OCI client, and the authentication will be determined by OCI Python SDK.

**Parameters**

- **config** (*dict*, *optional*) – OCI API key config dictionary, by default None.
- **signer** (*oci.signer.Signer*, *optional*) – OCI authentication signer, by default None.

- **client\_kwargs** (*dict, optional*) – Additional keyword arguments for initializing the OCI client.

**property client: LoggingManagementClient**

OCI logging management client

**create()**

Creates a new resource with OCI service synchronously. This method will wait for the resource creation to be succeeded or failed.

**Each sub-class should implement the create\_async() method with the corresponding method in OCI SDK**

to create the resource.

**Raises**

- **NotImplementedError** – when user called create but the create\_async() method is not implemented.
- **oci.exceptions.RequestException** – when there is an error creating the resource with OCI request.

**create\_async()**

Creates the OCI logging resource asynchronously. Sub-class should implement this method with OCI Python SDK and return the response from the OCI PythonSDK.

**classmethod from\_name**(*display\_name: str, \*\*kwargs*) → Union[*OCILogGroup, OCILog*]

Obtain an existing OCI logging resource by using its display name. OCI log group or log resource requires display name to be unique.

**Parameters**

**display\_name** (*str*) – Display name of the logging resource (e.g. log group)

**Return type**

An instance of logging resource, e.g. OCILogGroup, or OCILog.

**classmethod init\_client**(*\*\*kwargs*) → LoggingManagementClient

Initialize OCI client

**class** ads.common.oci\_logging.SortOrder

Bases: object

ASC = 'ASC'

DESC = 'DESC'

### 18.1.1.3.23 ads.common.oci\_mixin module

Contains Mixins for integrating OCI data models

**class** ads.common.oci\_mixin.MergeStrategy(*value*)

Bases: Enum

An enumeration.

MERGE = 'merge'

**OVERRIDE = 'override'**

**class** ads.common.oci\_mixin.**OCIClientMixin**(*config=None, signer=None, client\_kwargs=None*)

Bases: object

Mixin class for representing OCI resource/service with OCI client.

Most OCI requests requires a client for making the connection. Usually the same client will be used for the requests related the same resource/service type. This Mixin adds a “client” property to simplify accessing the client. The actual client will be initialize lazily so that it is not required for a sub-class To use the client, sub-class should override the `init_client()` method pass in the “client” keyword argument. For example:

```
@class_or_instance_method def init_client(cls, **kwargs) -> oci.logging.LoggingManagementClient:
    return cls._init_client(client=oci.logging.LoggingManagementClient, **kwargs)
```

Instance methods in the sub-class can use `self.client` to access the client. The `init_client()` method is a class method used to create the client. Any class method using the client should use `init_client()` to create the client. The call to this method may come from an instance or a class. When the method is called from a class,

the default authentication configured at ADS level with `ads.set_auth()` will be used.

**When the method is called from an instance,**

the config, signer and kwargs specified when initializing the instance will be used.

**The sub-class’s `__init__` method should take config, signer and client\_kwargs as argument,**

then pass them to the `__init__` method of this class.

This allows users to override the authentication and client initialization parameters. For example, `log_group = OCILogGroup(config=config, signer=signer, client_kwargs=kwargs)`

Initializes a service/resource with OCI client as a property. If config or signer is specified, it will be used to initialize the OCI client. If neither of them is specified, the client will be initialized with `ads.common.auth.default_signer`. If both of them are specified, both of them will be passed into the OCI client,

and the authentication will be determined by OCI Python SDK.

#### Parameters

- **config** (*dict, optional*) – OCI API key config dictionary, by default None.
- **signer** (*oci.signer.Signer, optional*) – OCI authentication signer, by default None.
- **client\_kwargs** (*dict, optional*) – Additional keyword arguments for initializing the OCI client.

#### property auth: dict

The ADS authentication config used to initialize the client. This auth has the same format as those obtained by calling functions in `ads.common.auth`. The config is a dict containing the following key-value pairs: config: The config contains the config loaded from the configuration loaded from `oci_config`. signer: The signer contains the signer object created from the api keys. client\_kwargs: client\_kwargs contains the `client_kwargs` that was passed in as input parameter.

#### property client

OCI client

**config = None**

**classmethod** `create_instance(*args, **kwargs)`

Creates an instance using the same authentication as the class or an existing instance. If this method is called by a class, the default ADS authentication method will be used. If this method is called by an instance, the authentication method set in the instance will be used.

**classmethod** `init_client(**kwargs)`

Initializes the OCI client specified in the “client” keyword argument Sub-class should override this method and call `cls._init_client(client=OCI_CLIENT)`

**Parameters**

**\*\*kwargs** – Additional keyword arguments for initializing the OCI client.

**Return type**

An instance of OCI client.

**kwargs** = None

**signer** = None

```
class ads.common.oci_mixin.OCIModelMixin(config: Optional[dict] = None, signer: Optional[Signer] =
                                         None, client_kwargs: Optional[dict] = None, **kwargs)
```

Bases: *OCISerializableMixin*

Mixin class to operate OCI model. OCI resources are represented by models in the OCI Python SDK.

## Unifying OCI models for the same resource

OCI SDK uses different models to represent the same resource for different operations. For example, `CreateLogDetails` is used when creating a log resource,

while `LogSummary` is returned when listing the log resources.

**However, both `CreateLogDetails` and `LogSummary` have the same commonly used attribute like `compartment_id`, `display_name`, `log_type`, etc.**

In general, there is a class with a super set of all properties. For example, the `Log` class contains all properties of `CreateLogDetails` and `LogSummary`,

as well as other classes representing an OCI log resource.

**A subclass can be implemented with this Mixin to unify the OCI models,**  
so that all properties are available to the user.

**For example, if we define the Mixin model as `class OCILog(OCIModelMixin, oci.logging.models.Log)`,**  
users will be able to access properties like `OCILog().display_name`

Since this sub-class contains all the properties, it can be converted to any related OCI model in an operation. For example, we can create `CreateLogDetails` from `OCILog` by extracting a subset of the properties. When listing the resources, properties from `LogSummary` can be used to update

the corresponding properties of `OCILog`.

Such conversion can be done by the generic methods provided by this Mixin. Although OCI SDK accepts dictionary (JSON) data instead of objects like `CreateLogDetails` when creating or

updating the resource, the structure and keys of the dictionary is not easy for a user to remember.

It is also unnecessary for the users to construct the entire dictionary if they only want to update a single value.

This Mixin class should be the first parent as the class from OCI SDK does not call `super().__init__()` in its `__init__()` constructor.

Mixin properties may not be initialized correctly if `super().__init__()` is not called.

### Provide generic methods for CRUDL operations

Since OCI SDK uses different models in CRUDL operations, this Mixin provides the following method to convert between them.

An OCI model instance can be any OCI model of the resource containing some properties, e.g. `LogSummary`. `from_oci_model()` static method can be used to initialize a new instance from an OCI model instance. `update_from_oci_model()` can be used to update the existing properties from an OCI model instance. `to_oci_model()` can be used to extract properties from the Mixin model to OCI model.

Initializes a service/resource with OCI client as a property. If `config` or `signer` is specified, it will be used to initialize the OCI client. If neither of them is specified, the client will be initialized with `ads.common.auth.default_signer`. If both of them are specified, both of them will be passed into the OCI client, and the authentication will be determined by OCI Python SDK.

**param config**

OCI API key config dictionary, by default None.

**type config**

dict, optional

**param signer**

OCI authentication signer, by default None.

**type signer**

oci.signer.Signer, optional

**param client\_kwargs**

Additional keyword arguments for initializing the OCI client.

**type client\_kwargs**

dict, optional

```
CONS_COMPARTMENT_ID = 'compartment_id'
```

```
OCI_MODEL_PATTERN = 'oci.[^.] + \\.models[\\...]*?'
```

```
static check_compartment_id(compartment_id: Optional[str]) → str
```

**Checks if a compartment ID has value and**

return the value from `NB_SESSION_COMPARTMENT_OCID` environment variable if it is not specified.

**Parameters**

**compartment\_id** (*str*) – Compartment OCID or None

**Returns**

*str*: Compartment OCID

**Return type**

*type*



**Raises**

**ValueError** – `compartment_id` is not specified and `NB_SESSION_COMPARTMENT_OCID` environment variable is not set

**delete()**

Deletes the resource

**classmethod** **deserialize**(*data: dict, to\_cls: Optional[str] = None*)

Deserialize data

**Parameters**

- **data** (*dict*) – A dictionary containing the data to be deserialized.
- **to\_cls** (*str*) – The name of the OCI model class to be initialized using the data. The OCI model class must be from the same OCI service of the OCI client (`self.client`). Defaults to `None`, the parent OCI model class name will be used if current class is inherited from an OCI model. If parent OCI model class is not found or not from the same OCI service, the data will be returned as is.

**static** **flatten**(*data: dict*) → *dict*

Flattens a nested dictionary.

**Parameters**

**data** (*A nested dictionary*) –

**Returns**

The flattened dictionary.

**Return type**

*dict*

**classmethod** **from\_dict**(*data*)

Initialize an instance from a dictionary.

**Parameters**

**data** (*dict*) – A dictionary containing the properties to initialize the class.

**classmethod** **from\_oci\_model**(*oci\_instance*)

Initialize an instance from an instance of OCI model.

**Parameters**

**oci\_instance** – An instance of an OCI model.

**classmethod** **from\_ocid**(*ocid: str*)

Initializes an object from OCID

**Parameters**

**ocid** (*str*) – The OCID of the object

**classmethod** **list\_resource**(*compartment\_id: Optional[str] = None, limit: int = 0, \*\*kwargs*) → *list*

Generic method to list OCI resources

**Parameters**

- **compartment\_id** (*str*) – Compartment ID of the OCI resources. Defaults to `None`. If `compartment_id` is not specified, the value of `NB_SESSION_COMPARTMENT_OCID` in environment variable will be used.
- **limit** (*int*) – The maximum number of items to return. Defaults to 0, All items will be returned

- **\*\*kwargs** – Additional keyword arguments to filter the resource. The kwargs are passed into OCI API.

**Returns**

A list of OCI resources

**Return type**

list

**Raises**

**NotImplementedError** – List method is not supported or implemented.

**load\_properties\_from\_env()**

Loads properties from the environment

**property name: str**

Gets the name of the object.

**property status: Optional[str]**

Status of the object.

**Returns**

Status of the object.

**Return type**

str

**sync**(merge\_strategy: [MergeStrategy](#) = *MergeStrategy.OVERRIDE*)

Refreshes the properties of the object from OCI

**to\_dict**(flatten: bool = False) → dict

Converts the properties to a dictionary

**Parameters**

**flatten** – (Default value = False)

**to\_oci\_model**(oci\_model)

Converts the object into an instance of OCI data model.

**Parameters**

- **oci\_model** (class or str) – The OCI model to be converted to. This can be a string of the model name.
- **type\_mapping** (dict) – A dictionary mapping the models. Returns: An instance of the oci\_model

**to\_yaml**() → str

Serializes the object into YAML string.

**Returns**

YAML stored in a string.

**Return type**

str

**update\_from\_oci\_model**(oci\_model\_instance, merge\_strategy: [MergeStrategy](#) = *MergeStrategy.OVERRIDE*)

Updates the properties from OCI model with the same properties.

**Parameters**

**oci\_model\_instance** – An instance of OCI model, which should have the same properties of this class.

**exception** `ads.common.oci_mixin.OCIModelNotExists`

Bases: `Exception`

**class** `ads.common.oci_mixin.OCIModelWithNameMixin`

Bases: `object`

Mixin class to operate OCI model which contains name property.

**classmethod** `from_name(name: str, compartment_id: Optional[str] = None)`

Initializes an object from name.

**Parameters**

- **name** (*str*) – The name of the object.
- **compartment\_id** (*(str, optional). Defaults to None.*) – Compartment OCID of the OCI resources. If *compartment\_id* is not specified, the value will be taken from environment variables.

**class** `ads.common.oci_mixin.OCISerializableMixin(config=None, signer=None, client_kwargs=None)`

Bases: `OCIClientMixin`

Mixin class containing OCI serialization/de-serialization methods. These methods are copied and modified from the OCI BaseClient.

Initializes a service/resource with OCI client as a property. If *config* or *signer* is specified, it will be used to initialize the OCI client. If neither of them is specified, the client will be initialized with `ads.common.auth.default_signer`. If both of them are specified, both of them will be passed into the OCI client,

and the authentication will be determined by OCI Python SDK.

**Parameters**

- **config** (*dict, optional*) – OCI API key config dictionary, by default `None`.
- **signer** (*oci.signer.Signer, optional*) – OCI authentication signer, by default `None`.
- **client\_kwargs** (*dict, optional*) – Additional keyword arguments for initializing the OCI client.

**classmethod** `deserialize(data, to_cls)`

De-serialize data from dictionary to an OCI model

**serialize()**

Serialize the model to a dictionary that is ready to be send to OCI API.

**Returns**

A dictionary that is ready to be send to OCI API.

**Return type**

`dict`

**type\_mappings** = `None`

**class** `ads.common.oci_mixin.OCIWorkRequestMixin`

Bases: `object`

Mixin class containing methods related to OCI work request

```
get_work_request_response(response: str, wait_for_state: Union[str, tuple], success_state: str,  
                           max_wait_seconds: Optional[int] = None, wait_interval_seconds:  
                           Optional[int] = None, error_msg: str = "")
```

```
wait_for_work_request(work_request_id: str, wait_for_state: Union[str, tuple], max_wait_seconds:  
                       Optional[int] = None, wait_interval_seconds: Optional[int] = None)
```

Wait for a work request to be completed.

#### Parameters

- **work\_request\_id** (*str*) – OCI work request ID
- **wait\_for\_state** (*str or tuple*) – The state to wait for. Must be a tuple for multiple states.
- **max\_wait\_seconds** (*int*) – Max wait seconds for the work request. Defaults to None (Default value from OCI SDK will be used).
- **wait\_interval\_seconds** (*int*) – Interval in seconds between each status check. Defaults to None (Default value from OCI SDK will be used).

#### Returns

OCI API Response

#### Return type

Response

### 18.1.1.3.24 `ads.common.oci_resource` module

Contains class wrapping OCI resource search service

```
class ads.common.oci_resource.OCIResource(config=None, signer=None, client_kwargs=None)
```

Bases: `OCIClientMixin`

Contains helper methods for getting information from OCIResourceSearch service.

Usage: Find the compartment ID of an OCI resource: `>>> OCIResource.get_compartment_id("YOUR_OCID")`  
Search for OCI resource matching free text (Similar to the search box in OCI console): `>>> OCIResource.search("YOUR_FREE_TEXT")` Search for OCI resource matching structured text: `>>> OCIResource.search("STRUCTURED_TEXT", type="Structured")`

Initializes a service/resource with OCI client as a property. If config or signer is specified, it will be used to initialize the OCI client. If neither of them is specified, the client will be initialized with `ads.common.auth.default_signer`. If both of them are specified, both of them will be passed into the OCI client, and the authentication will be determined by OCI Python SDK.

#### Parameters

- **config** (*dict, optional*) – OCI API key config dictionary, by default None.
- **signer** (*oci.signer.Signer, optional*) – OCI authentication signer, by default None.
- **client\_kwargs** (*dict, optional*) – Additional keyword arguments for initializing the OCI client.

```
classmethod get_compartment_id(ocid) → str
```

Gets the compartment OCID of an OCI resource, given the resource's OCID.

**Parameters****ocid** (*str*) – OCID of a resource**Returns**

Compartment OCID of the resource

**Return type**

str

**classmethod** **init\_client**(*\*\*kwargs*) → ResourceSearchClient

Initializes the OCI client specified in the “client” keyword argument Sub-class should override this method and call `cls._init_client(client=OCI_CLIENT)`

**Parameters****\*\*kwargs** – Additional keyword arguments for initializing the OCI client.**Return type**

An instance of OCI client.

**classmethod** **search**(*query: str, type: str = 'FreeText', config: Optional[dict] = None, tenant\_id: Optional[str] = None, limit: int = 500, page: Optional[str] = None, \*\*kwargs*) → list

Search OCI resource by free text.

**Parameters**

- **query** (*str*) – The content to search for.
- **type** (*str (optional)*) – The type of SearchDetails, whether “FreeText” or “Structured”. Defaults to “FreeText”.
- **config** (*dict (optional)*) – Configuration keys and values as per SDK and Tool Configuration. The `from_file()` method can be used to load configuration from a file. Alternatively, a dict can be passed. You can validate\_config the dict using `validate_config()`. Defaults to None.
- **tenant\_id** (*str (optional)*) – The tenancy ID, which can be used to specify a different tenancy (for cross-tenancy authorization) when searching for resources in a different tenancy. Defaults to None.
- **limit** (*int (optional)*) – The maximum number of items to return. The value must be between 1 and 1000. Defaults to 500.
- **page** (*str (optional)*) – The page at which to start retrieving results.

**Returns**

A list of search results

**Return type**

list

**exception** `ads.common.oci_resource.ResourceNotFoundError`

Bases: Exception

Exception when an OCI resource is not found or user does not have permission to access it. This could mean the resource does not exist, or there is not enough permission to find/access the resource.

**class** `ads.common.oci_resource.SEARCH_TYPE`

Bases: str

**FREETEXT** = 'FreeText'**STRUCTURED** = 'Structured'

### 18.1.1.3.25 ads.common.serializer module

**class** ads.common.serializer.DataClassSerializable

Bases: *Serializable*

Wrapper class that inherit from Serializable class.

**to\_dict**(*self*) → dict

Serializes the object into a dictionary.

**from\_dict**(*cls*, *obj\_dict*) → *cls*

Returns an instance of the class instantiated from the dictionary provided.

**classmethod from\_dict**(*obj\_dict*: dict, *side\_effect*: Optional[SideEffect] = 'lower') → *DataClassSerializable*

Returns an instance of the class instantiated by the dictionary provided.

**Parameters**

- **obj\_dict** ((*dict*)) – Dictionary representation of the object
- **side\_effect** (Optional[SideEffect]) – side effect to take on the dictionary. The side effect can be either convert the dictionary keys to “lower” (SideEffect.CONVERT\_KEYS\_TO\_LOWER.value) or “upper”(SideEffect.CONVERT\_KEYS\_TO\_UPPER.value) cases.

**Returns**

A DataClassSerializable instance.

**Return type**

*DataClassSerializable*

**to\_dict**(\*\**kwargs*) → Dict

Serializes instance of class into a dictionary

**kwargs**

**side\_effect**: Optional[SideEffect]

side effect to take on the dictionary. The side effect can be either convert the dictionary keys to “lower” (SideEffect.CONVERT\_KEYS\_TO\_LOWER.value) or “upper”(SideEffect.CONVERT\_KEYS\_TO\_UPPER.value) cases.

**returns**

A dictionary.

**rtype**

Dict

**class** ads.common.serializer.Serializable

Bases: ABC

Base class that represents a serializable item.

**to\_dict**(*self*) → dict

Serializes the object into a dictionary.

**from\_dict**(cls, obj\_dict) → cls

Returns an instance of the class instantiated from the dictionary provided.

**\_write\_to\_file**(s, uri, *\*\*kwargs*)

Write string s into location specified by uri

**\_read\_from\_file**(uri, *\*\*kwargs*)

Returns contents from location specified by URI

**to\_json**(self, uri=None, *\*\*kwargs*)

Returns object serialized as a JSON string

**from\_json**(cls, json\_string=None, uri=None, *\*\*kwargs*)

Creates an object from JSON string provided or from URI location containing JSON string

**to\_yaml**(self, uri=None, *\*\*kwargs*)

Returns object serialized as a YAML string

**from\_yaml**(cls, yaml\_string=None, uri=None, *\*\*kwargs*)

Creates an object from YAML string provided or from URI location containing YAML string

**from\_string**(cls, obj\_string=None: str, uri=None, *\*\*kwargs*)

Creates an object from string provided or from URI location containing string

**abstract classmethod from\_dict**(obj\_dict: dict) → *Serializable*

Returns an instance of the class instantiated by the dictionary provided.

#### Parameters

**obj\_dict** ((dict)) – Dictionary representation of the object.

#### Returns

A Serializable instance.

#### Return type

*Serializable*

**classmethod from\_json**(json\_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, decoder: callable = <class 'json.decoder.JSONDecoder'>, *\*\*kwargs*)

Creates an object from JSON string provided or from URI location containing JSON string

#### Parameters

- **json\_string** ((string, optional)) – JSON string. Defaults to None.
- **uri** ((string, optional)) – URI location of file containing JSON string. Defaults to None.
- **decoder** ((callable, optional)) – Custom decoder. Defaults to simple JSON decoder.
- **kwargs** –
- -----
- **storage** (keyword arguments to be passed into *fsspec.open()*. For OCI object) – For other storage connections consider e.g. host, port, username, password, etc.
- **config="path/to/.oci/config". (this should be)** – For other storage connections consider e.g. host, port, username, password, etc.

**Raises**

**ValueError** – Raised if neither string nor uri is provided

**Returns**

Returns instance of the class

**Return type**

cls

**classmethod from\_string**(*obj\_string*: ~typing.Optional[str] = None, *uri*: ~typing.Optional[str] = None, *loader*: callable = <class 'yaml.cyaml.CSafeLoader'>, \*\*kwargs) → *Serializable*

Creates an object from string provided or from URI location containing string

**Parameters**

- **obj\_string** ((*str*, *optional*)) – String representing the object
- **uri** ((*str*, *optional*)) – URI location of file containing string. Defaults to None.
- **loader** ((*callable*, *optional*)) – Custom YAML loader. Defaults to CLoader/SafeLoader.
- **kwargs** ((*dict*)) – keyword arguments to be passed into fsspec.open(). For OCI object storage, this should be config="path/to/.oci/config". For other storage connections consider e.g. host, port, username, password, etc.

**Returns**

A Serializable instance

**Return type**

*Serializable*

**classmethod from\_yaml**(*yaml\_string*: ~typing.Optional[str] = None, *uri*: ~typing.Optional[str] = None, *loader*: callable = <class 'yaml.cyaml.CSafeLoader'>, \*\*kwargs)

Creates an object from YAML string provided or from URI location containing YAML string

**Parameters**

- (**string** (*uri*)) –
- **optional** (Custom YAML loader. Defaults to CLoader/SafeLoader.) –
- (**string** –
- **optional**) –
- (**callable** (*loader*)) –
- **optional**) –
- (**dict**) (*kwargs*) – For other storage connections consider e.g. host, port, username, password, etc.

**Raises**

**ValueError** – Raised if neither string nor uri is provided

**Returns**

Returns instance of the class

**Return type**

cls



**abstract to\_dict**(*\*\*kwargs*) → dict

Serializes instance of class into a dictionary.

**Returns**

A dictionary.

**Return type**

Dict

**to\_json**(*uri*: ~typing.Optional[str] = None, *encoder*: callable = <class 'json.encoder.JSONEncoder'>, *\*\*kwargs*) → str

Returns object serialized as a JSON string

**Parameters**

- **uri** ((string, optional)) – URI location to save the JSON string. Defaults to None.
- **encoder** ((callable, optional)) – Encoder for custom data structures. Defaults to JSONEncoder.
- **kwargs** –
- -----
- **storage** (keyword arguments to be passed into *fsspec.open()*. For OCI object) – For other storage connections consider e.g. host, port, username, password, etc.
- **config="path/to/.oci/config". (this should be)** – For other storage connections consider e.g. host, port, username, password, etc.
- **Returns** – string: Serialized version of object

**to\_yaml**(*uri*: ~typing.Optional[str] = None, *dumper*: callable = <class 'yaml.cyaml.CSafeDumper'>, *\*\*kwargs*) → str

Returns object serialized as a YAML string

**Parameters**

- **uri** ((string, optional)) – URI location to save the YAML string. Defaults to None.
- **dumper** ((callable, optional)) – Custom YAML Dumper. Defaults to CDumper/SafeDumper.
- **kwargs** –
- -----
- **side\_effect** (Optional[SideEffect]) – side effect to take on the dictionary. The side effect can be either convert the dictionary keys to “lower” (SideEffect.CONVERT\_KEYS\_TO\_LOWER.value) or “upper” (SideEffect.CONVERT\_KEYS\_TO\_UPPER.value) cases.
- **storage** (keyword arguments to be passed into *fsspec.open()*. For OCI object) – For other storage connections consider e.g. host, port, username, password, etc.
- **config="path/to/.oci/config". (this should be)** – For other storage connections consider e.g. host, port, username, password, etc.
- **Returns** –

**Union[str, None]**

Serialized version of object. None in case when *uri* provided.

**class** `ads.common.serializer.SideEffect`(*value*)

Bases: Enum

An enumeration.

`CONVERT_KEYS_TO_LOWER` = 'lower'

`CONVERT_KEYS_TO_UPPER` = 'upper'

#### 18.1.1.3.26 `ads.common.utils` module

**exception** `ads.common.utils.FileOverwriteError`

Bases: Exception

**class** `ads.common.utils.JsonConverter`(\**, skipkeys=False, ensure\_ascii=True, check\_circular=True, allow\_nan=True, sort\_keys=False, indent=None, separators=None, default=None*)

Bases: JSONEncoder

Constructor for JSONEncoder, with sensible defaults.

If `skipkeys` is false, then it is a `TypeError` to attempt encoding of keys that are not str, int, float or None. If `skipkeys` is True, such items are simply skipped.

If `ensure_ascii` is true, the output is guaranteed to be str objects with all incoming non-ASCII characters escaped. If `ensure_ascii` is false, the output can contain non-ASCII characters.

If `check_circular` is true, then lists, dicts, and custom encoded objects will be checked for circular references during encoding to prevent an infinite recursion (which would cause an `OverflowError`). Otherwise, no such check takes place.

If `allow_nan` is true, then NaN, Infinity, and -Infinity will be encoded as such. This behavior is not JSON specification compliant, but is consistent with most JavaScript based encoders and decoders. Otherwise, it will be a `ValueError` to encode such floats.

If `sort_keys` is true, then the output of dictionaries will be sorted by key; this is useful for regression tests to ensure that JSON serializations can be compared on a day-to-day basis.

If `indent` is a non-negative integer, then JSON array elements and object members will be pretty-printed with that indent level. An indent level of 0 will only insert newlines. None is the most compact representation.

If specified, `separators` should be an (item\_separator, key\_separator) tuple. The default is (', ', ': ') if `indent` is None and (', ', ': ') otherwise. To get the most compact JSON representation, you should specify (',', ':') to eliminate whitespace.

If specified, `default` is a function that gets called for objects that can't otherwise be serialized. It should return a JSON encodable version of the object or raise a `TypeError`.

**default** (*obj*)

Converts an object to JSON based on its type

##### Parameters

**obj** (`Object`) – An object which is being converted to Json, supported types are pandas Timestamp, series, dataframe, or categorical or numpy ndarrays.

##### Returns

**Json**

##### Return type

A json representation of the object.

`ads.common.utils.batch_convert_case(spec: dict, to_fmt: str) → Dict`

Convert the case of a dictionary of spec from camel to snake or vice versa.

**Parameters**

- **spec** (*dict*) – dictionary of spec to convert
- **to\_fmt** (*str*) – format to convert to, can be “camel” or “snake”

**Returns**

dictionary of converted spec

**Return type**

dict

`ads.common.utils.camel_to_snake(name: str) → str`

Converts the camel case string to the snake representation.

**Parameters**

**name** (*str*) – The name to convert.

**Returns**

str

**Return type**

The name converted to the snake representation.

`ads.common.utils.copy_file(uri_src: str, uri_dst: str, force_overwrite: Optional[bool] = False, auth: Optional[Dict] = None, chunk_size: Optional[int] = 8192, progressbar_description: Optional[str] = 'Copying {uri_src}` to `{uri_dst}`') → str`

Copies file from *uri\_src* to *uri\_dst*. If *uri\_dst* specifies a directory, the file will be copied into *uri\_dst* using the base filename from *uri\_src*. Returns the path to the newly created file.

**Parameters**

- **uri\_src** (*str*) – The URI of the source file, which can be local path or OCI object storage URI.
- **uri\_dst** (*str*) – The URI of the destination file, which can be local path or OCI object storage URI.
- **force\_overwrite** (*(bool, optional)*. Defaults to *False*.) – Whether to overwrite existing files or not.
- **auth** (*(Dict, optional)*. Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **chunk\_size** (*(int, optional)*. Defaults to *DEFAULT\_BUFFER\_SIZE*) – How much data can be copied in one iteration.

**Returns**

The path to the newly created file.

**Return type**

str

**Raises**

**FileExistsError** – If a destination file exists and *force\_overwrite* set to *False*.

`ads.common.utils.copy_from_uri(uri: str, to_path: str, unpack: Optional[bool] = False, force_overwrite: Optional[bool] = False, auth: Optional[Dict] = None) → None`

Copies file(s) to local path. Can be a folder, archived folder or a separate file. The source files can be located in a local folder or in OCI Object Storage.

#### Parameters

- **uri** (*str*) – The URI of the source file or directory, which can be local path or OCI object storage URI.
- **to\_path** (*str*) – The local destination path. If this is a directory, the source files will be placed under it.
- **unpack** (*(bool, optional). Defaults to False.*) – Indicate if zip or tar.gz file specified by the uri should be unpacked. This option has no effect on other files.
- **force\_overwrite** (*(bool, optional). Defaults to False.*) – Whether to overwrite existing files or not.
- **auth** (*(Dict, optional). Defaults to None.*) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

#### Returns

Nothing

#### Return type

None

#### Raises

**ValueError** – If destination path is already exist and `force_overwrite` is set to False.

`ads.common.utils.download_from_web(url: str, to_path: str) → None`

Downloads a single file from http/https/ftp.

#### Parameters

- **url** (*str*) – The URL of the source file.
- **to\_path** (*path-like object*) – Local destination path.

#### Returns

Nothing

#### Return type

None

`ads.common.utils.ellipsis_strings(raw, n=24)`

takes a sequence (<string>, list(<string>), tuple(<string>), pd.Series(<string>)) and Ellipsis'ize them at position n

`ads.common.utils.extract_lib_dependencies_from_model(model) → dict`

Extract a dictionary of library dependencies for a model

#### Parameters

**model** –

#### Returns

**Dict**

#### Return type

A dictionary of library dependencies.

`ads.common.utils.extract_region(auth: Optional[Dict] = None) → Optional[str]`

Extracts region information from the environment variables and signer.

**Parameters**

**auth** (*Dict*) – The ADS authentication config used to initialize the client. Contains keys - config, signer and client\_kwargs.

**Returns**

The region identifier. For example: *us-ashburn-1*. Returns *None* if region cannot be extracted.

**Return type**

Union[str, None]

`ads.common.utils.first_not_none(itr)`

Returns the first non-none result from an iterable, similar to `any()` but return value not true/false

`ads.common.utils.flatten(d, parent_key="")`

Flattens nested dictionaries to a single layer dictionary

**Parameters**

- **d** (*dict*) – The dictionary that needs to be flattened
- **parent\_key** (*str*) – Keys in the dictionary that are nested

**Returns**

**a\_dict** – a single layer dictionary

**Return type**

dict

`ads.common.utils.folder_size(path: str) → int`

Recursively calculating a size of the *path* folder.

**Parameters**

**path** (*str*) – Path to the folder.

**Returns**

The size fo the folder in bytes.

**Return type**

int

`ads.common.utils.generate_requirement_file(requirements: dict, file_path: str, file_name: str = 'requirements.txt')`

Generate requirements file at *file\_path*.

**Parameters**

- **requirements** (*dict*) – Key is the library name and value is the version
- **file\_path** (*str*) – Directory to save requirements.txt
- **file\_name** (*str*) – Optional parameter to specify the file name

`ads.common.utils.get_base_modules(model)`

Get the base modules from an ADS model

`ads.common.utils.get_bootstrap_styles()`

Returns HTML bootstrap style information

`ads.common.utils.get_compute_accelerator_ncores()`

`ads.common.utils.get_cpu_count()`

Returns the number of CPUs available on this machine

`ads.common.utils.get_dataframe_styles(max_width=75)`

Styles used for dataframe, example usage:

```
df.style .set_table_styles(utils.get_dataframe_styles()) .set_table_attributes('class=table') .render()
```

**Returns**

**styles** – A list of dataframe table styler styles.

**Return type**

array

`ads.common.utils.get_files(directory: str)`

List out all the file names under this directory.

**Parameters**

**directory** (*str*) – The directory to list out all the files from.

**Returns**

List of the files in the directory.

**Return type**

List

`ads.common.utils.get_oci_config()`

Returns the OCI config location, and the OCI config profile.

`ads.common.utils.get_progress_bar(max_progress: int, description: str = 'Initializing', verbose: bool = False) → TqdmProgressBar`

Returns an instance of the TqdmProgressBar class.

**Parameters**

- **max\_progress** (*int*) – The number of steps for the progressbar.
- **description** ((*str*, optional). Defaults to "Initializing".) – The first step description.
- **verbose** ((bool, optional). Defaults to *False*) – If the progress should show the debug information.

**Returns**

An instance of the TqdmProgressBar.

**Return type**

*TqdmProgressBar*

`ads.common.utils.get_random_name_for_resource()` → str

Returns randomly generated easy to remember name. It consists from 1 adjective and 1 animal word, tailed by UTC timestamp (joined with '-'). This is an ADS default resource name generated for models, jobs, jobruns, model deployments, pipelines.

**Returns**

Randomly generated easy to remember name for oci resources - models, jobs, jobruns, model deployments, pipelines. Example: polite-panther-2022-08-17-21:15.46; strange-spider-2022-08-17-23:55.02

**Return type**

str

`ads.common.utils.get_sqlalchemy_engine(connection_url, *args, **kwargs)`

The SQLAlchemy docs say to use a single engine per connection\_url, this class will take care of that.

**Parameters**

**connection\_url** (*string*) – The URL to connect to

**Returns**

**engine** – The engine from which SQLAlchemy commands can be ran on

**Return type**

SQLAlchemy engine

`ads.common.utils.get_value(obj, attr, default=None)`

Gets a copy of the value from a nested dictionary of an object with nested attributes.

**Parameters**

- **obj** – An object or a dictionary
- **attr** – Attributes as a string separated by dot(.)
- **default** – Default value to be returned if attribute is not found.

**Returns**

A copy of the attribute value. For dict or list, a deepcopy will be returned.

**Return type**

Any

`ads.common.utils.highlight_text(text)`

Returns text with html highlights. :param text: The text to be highlighted. :type text: String

**Returns**

**ht** – The text with html highlight information.

**Return type**

*String*

`ads.common.utils.horizontal_scrollable_div(html)`

Wrap html with the necessary html to make horizontal scrolling possible.

## Examples

```
display(HTML(utils.horizontal_scrollable_div(my_html)))
```

**Parameters**

**html** (*str*) – Your HTML to wrap.

**Returns**

Wrapped HTML.

**Return type**

type

`ads.common.utils.human_size(num_bytes: int, precision: Optional[int] = 2) → str`

Converts bytes size to a string representing its value in B, KB, MB and GB.

**Parameters**

- **num\_bytes** (*int*) – The size in bytes.
- **precision** (*((int, optional). Defaults to 2.)*) – The precision of converting the bytes value.

**Returns**

A string representing the size in B, KB, MB and GB.

**Return type**

str

`ads.common.utils.inject_and_copy_kwargs(kwargs, **args)`

Takes in a dictionary and returns a copy with the args injected

**Examples**

```
>>> foo(arg1, args, utils.inject_and_copy_kwargs(kwargs, arg3=12, arg4=42))
```

**Parameters**

- **kwargs** (*dict*) – The original *kwargs*.
- **\*\*args** (*type*) – A series of arguments, foo=42, bar=12 etc

**Returns**

**d** – new dictionary object that you can use in place of kwargs

**Return type**

dict

`ads.common.utils.is_data_too_wide(data: Union[list, tuple, Series, ndarray, DataFrame], max_col_num: int) → bool`

Returns true if the data has too many columns.

**Parameters**

- **data** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*) – A sample of data that will be used to generate schema.
- **max\_col\_num** (*int.*) – The maximum column size of the data that allows to auto generate schema.

`ads.common.utils.is_debug_mode()`

Returns true if ADS is in debug mode.

`ads.common.utils.is_documentation_mode()`

Returns true if ADS is in documentation mode.

`ads.common.utils.is_notebook()`

Returns true if the environment is a jupyter notebook.

`ads.common.utils.is_resource_principal_mode()`

Returns true if ADS is in resource principal mode.

`ads.common.utils.is_same_class(obj, cls)`

checks to see if object is the same class as cls

`ads.common.utils.is_test()`

Returns true if ADS is in test mode.

**class** `ads.common.utils.ml_task_types(value)`

Bases: Enum

An enumeration.



**BINARY\_CLASSIFICATION** = 2

**BINARY\_TEXT\_CLASSIFICATION** = 4

**MULTI\_CLASS\_CLASSIFICATION** = 3

**MULTI\_CLASS\_TEXT\_CLASSIFICATION** = 5

**REGRESSION** = 1

**UNSUPPORTED** = 6

`ads.common.utils.numeric_pandas_dtypes()`

Returns a list of the “numeric” pandas data types

`ads.common.utils.oci_config_file()`

Returns the OCI config file location

`ads.common.utils.oci_config_location()`

Returns oci configuration file location.

`ads.common.utils.oci_config_profile()`

Returns the OCI config profile location.

`ads.common.utils.oci_key_location()`

Returns the OCI key location

`ads.common.utils.oci_key_profile()`

Returns key profile value specified in oci configuration file.

`ads.common.utils.print_user_message(msg, display_type='tip', see_also_links=None, title='Tip')`

This method is deprecated and will be removed in future releases. Prints in html formatted block one of tip|info|warn type.

#### Parameters

- **msg** (*str or list*) – The actual message to display. `display_type` is “module”, `msg` can be a list of [module name, module package name], i.e. [“automl”, “ads[ml]”]
- **display\_type** (*str (default 'tip')*) – The type of user message.
- **see\_also\_links** (*list of tuples in the form of [('display\_name', 'url')]*) –
- **title** (*str (default 'tip')*) – The title of user message.

`ads.common.utils.random_valid_ocid(prefix='ocidl.dataflowapplication.ocl.iad')`

Generates a random valid ocid.

#### Parameters

**prefix** (*str*) – A prefix, corresponding to a region location.

#### Returns

**ocid** – a valid ocid with the given prefix.

#### Return type

*str*

`ads.common.utils.remove_file(file_path: str, auth: Optional[Dict] = None) → None`

Reoves file.

#### Parameters

- **file\_path** (*str*) – The path of the source file, which can be local path or OCI object storage URI.
- **auth** ((*Dict*, *optional*). *Defaults to None.*) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

**Returns**

Nothing.

**Return type**

None

`ads.common.utils.replace_spaces(lst)`

Replace all spaces with underscores for strings in the list.

Requires that the list contains strings for each element.

lst: list of strings

`ads.common.utils.set_oci_config(oci_config_location, oci_config_profile)`

**Parameters**

- **oci\_config\_location** – location of the config file, for example, `~/oci/config`
- **oci\_config\_profile** – The profile to load from the config file. Defaults to “DEFAULT”

`ads.common.utils.snake_to_camel(name: str, capitalized_first_token: Optional[bool] = False)` → *str*

Converts the snake case string to the camel representation.

**Parameters**

- **name** (*str*) – The name to convert.
- **capitalized\_first\_token** ((*bool*, *optional*). *Defaults to False.*) – Whether the first token needs to be capitalized or not.

**Returns**

*str*

**Return type**

The name converted to the camel representation.

`ads.common.utils.split_data(X, y, random_state=42, test_size=0.3)`

Splits data using Sklearn based on the input type of the data.

**Parameters**

- **X** (a *Pandas Dataframe*) – The data points.
- **y** (a *Pandas Dataframe*) – The labels.
- **random\_state** (*int*) – A random state for reproducibility.
- **test\_size** (*int*) – The number of elements that should be included in the test dataset.

`ads.common.utils.to_dataframe(data: Union[list, tuple, Series, ndarray, DataFrame])`

Convert to pandas DataFrame.

**Parameters**

**data** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*) – Convert data to pandas DataFrame.

**Returns**

pandas DataFrame.

**Return type**

pd.DataFrame

`ads.common.utils.truncate_series_top_n(series, n=24)`

take a series which can be interpreted as a dict, index=key, this function sorts by the values and takes the top-n values, and returns a new series

`ads.common.utils.wrap_lines(li, heading="")`

Wraps the elements of iterable into multi line string of fixed width

**18.1.1.3.27 ads.common.word\_lists module****18.1.1.3.28 Module contents****18.1.1.4 ads.data\_labeling package****18.1.1.4.1 Subpackages****ads.data\_labeling.interface package****Submodules****ads.data\_labeling.interface.loader module****class** `ads.data_labeling.interface.loader.Loader`

Bases: ABC

Data Loader Interface.

**abstract** `load(**kwargs) → Any`**ads.data\_labeling.interface.parser module****class** `ads.data_labeling.interface.parser.Parser`

Bases: ABC

Data Parser Interface.

**abstract** `parse() → Any`

## ads.data\_labeling.interface.reader module

**class** ads.data\_labeling.interface.reader.**Reader**

Bases: ABC

Data Reader Interface.

**info()** → *Serializable*

**abstract read()** → Any

## Module contents

## ads.data\_labeling.loader package

### Submodules

## ads.data\_labeling.loader.file\_loader module

**class** ads.data\_labeling.loader.file\_loader.**FileLoader**(*auth: Optional[Dict] = None*)

Bases: object

FileLoader Base Class.

### Attributes:

**auth:** (dict, optional). Defaults to None.

The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

### Examples

```
>>> from ads.data_labeling.loader.file_loader import FileLoader
>>> import oci
>>> import os
>>> from ads.common import auth as authutil
>>> path = "path/to/your_text_file.txt"
>>> file_content = FileLoader(auth=authutil.api_keys()).load(path)
```

Initiates a FileLoader instance.

#### **param auth**

The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

#### **type auth**

(dict, optional). Defaults to None.

**bulk\_load**(*paths*: List[str], *\*\*kwargs*) → Dict[str, Any]

Loads the files content from the list of paths. The ThreadPoolExecutor is used to load the files in parallel threads.

**Parameters**

**paths** (List[str]) – The list of file paths, can be local or object storage paths.

**Returns**

The map between file path and file content.

**Return type**

Dict[str, Any]

**load**(*path*: str, *\*\*kwargs*) → BytesIO

Loads the file content from the path.

**Parameters**

- **path** (str) – The file path, can be local or object storage path.
- **kwargs** – Nothing.

**Returns**

The data in BytesIO format.

**Return type**

BytesIO

**class** ads.data\_labeling.loader.file\_loader.FileLoaderFactory

Bases: object

FileLoaderFactory class to create/register FileLoaders.

**static loader**(*dataset\_type*: str, *auth*: Optional[Dict] = None) → *FileLoader*

Gets the loader based on the dataset\_type.

**Parameters**

- **dataset\_type** (str) – Dataset type. Currently supports TEXT, IMAGE and DOCUMENT.
- **auth** ((dict, optional). Defaults to None.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

**Returns**

A FileLoader instance corresponding to the dataset\_type.

**Return type**

*FileLoader*

**classmethod register**(*dataset\_type*: str, *loader*: Loader) → None

Registers a new loader for a given dataset\_type.

**Parameters**

- **dataset\_type** (str) – Dataset type. Currently supports TEXT and IMAGE.
- **loader** (Loader) – A Loader class which supports loading content of the given dataset\_type.

**Returns**

Nothing.

**Return type**

None

**class** `ads.data_labeling.loader.file_loader.ImageFileLoader`(*auth: Optional[Dict] = None*)Bases: *FileLoader*

ImageFileLoader class which loads image files.

**Examples**

```
>>> from ads.data_labeling import ImageFileLoader
>>> import oci
>>> import os
>>> from ads.common import auth as authutil
>>> path = "path/to/image.png"
>>> image = ImageFileLoader(auth=authutil.api_keys()).load(path)
```

Initiates a FileLoader instance.

**Parameters**

**auth** ((dict, optional). Defaults to None.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

**load**(*path: str, \*\*kwargs*) → ImageFile

Loads the image from the path.

**Parameters**

- **path** (*str*) – Image file path, can be local or object storage path.
- **kwargs** – Nothing.

**Returns**

Image opened by Pillow.

**Return type**

PIL.ImageFile.ImageFile

**class** `ads.data_labeling.loader.file_loader.TextFileLoader`(*auth: Optional[Dict] = None*)Bases: *FileLoader*

TextFileLoader class which loads text files.

**Examples**

```
>>> from ads.data_labeling import TextFileLoader
>>> import oci
>>> import os
>>> from ads.common import auth as authutil
>>> path = "path/to/your_text_file.txt"
>>> file_content = TextFileLoader(auth=authutil.api_keys()).load(path)
```

Initiates a FileLoader instance.

**Parameters**

**auth** ((dict, optional). Defaults to None.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

**load**(path: str, backend: Union[str, Base] = 'default', \*\*kwargs) → str

Loads the content from the path.

**Parameters**

- **path** (str) – Text file path, can be local or object storage path.
- **backend** (Union[str, backends.Base]) – Default to “default”. Valid options are “default” and “tika” or *ads.text\_dataset.backends.Base*, *ads.text\_dataset.backends.Tika*
- **kwargs** –
  - encoding**: (str, optional). Defaults to ‘utf-8’.
 Encoding for text files. Used only to extract the content of the text dataset contents.

**Returns**

Content of the text file.

**Return type**

str

**Module contents****ads.data\_labeling.mixin package****Submodules****ads.data\_labeling.mixin.data\_labeling module**

**class** ads.data\_labeling.mixin.data\_labeling.DataLabelingAccessMixin

Bases: object

Mixin class for labeled text data.

**static read\_labeled\_data**(path: Optional[str] = None, dataset\_id: Optional[str] = None, compartment\_id: Optional[str] = None, auth: Optional[Dict] = None, materialize: bool = False, encoding: str = 'utf-8', include\_unlabeled: bool = False, format: Optional[str] = None, chunksize: Optional[int] = None)

Loads the dataset generated by data labeling service from either the export file or the Data Labeling Service.

**Parameters**

- **path** ((str, optional). Defaults to None) – The export file path, can be either local or object storage path.
- **dataset\_id** ((str, optional). Defaults to None) – The dataset OCID.
- **compartment\_id** (str. Defaults to the compartment\_id from the env variable.) – The compartment OCID of the dataset.
- **auth** ((dict, optional). Defaults to None) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys*

or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate `IdentityClient` object.

- **materialize** *((bool, optional). Defaults to False)* – Whether the content of the dataset file should be loaded or it should return the file path to the content. By default the content will not be loaded.
- **encoding** *((str, optional). Defaults to 'utf-8')* – Encoding of files. Only used for “TEXT” dataset.
- **include\_unlabeled** *((bool, optional). Default to False)* – Whether to load the unlabeled records or not.
- **format** *((str, optional). Defaults to None)* – Output format of annotations. Can be None, “spacy” for dataset Entity Extraction type or “yolo” for Object Detection type.
  - When None, it outputs `List[NERItem]` or `List[BoundingBoxItem]`,
  - When “spacy”, it outputs `List[Tuple]`,
  - When “yolo”, it outputs `List[List[Tuple]]`.
- **chunksize** *((int, optional). Defaults to None)* – The amount of records that should be read in one iteration. The result will be returned in a generator format.

#### Returns

`pd.DataFrame` if `chunksize` is not specified. `Generator[pd.DataFrame]` if `chunksize` is specified.

#### Return type

`Union[Generator[pd.DataFrame, Any, Any], pd.DataFrame]`

### Examples

```
>>> import pandas as pd
>>> import ads
>>> from ads.common import auth as authutil
>>> df = pd.DataFrame.ads.read_labeled_data(path="path_to_your_metadata.jsonl",
...                                     auth=authutil.api_keys(),
...                                     materialize=False)
...                                     Path      Content      Annotations
... -----
0    path/to/the/content/file                yes
1    path/to/the/content/file                no
```

```
>>> df = pd.DataFrame.ads.read_labeled_data_from_dls(dataset_id="your_dataset_
↳ ocid",
...                                     compartment_id="your_
↳ compartment_id",
...                                     auth=authutil.api_keys(),
...                                     materialize=False)
...                                     Path      Content      Annotations
... -----
0    path/to/the/content/file                yes
1    path/to/the/content/file                no
```



**render\_bounding\_box**(*options: Optional[Dict] = None, content\_column: str = 'Content', annotations\_column: str = 'Annotations', categories: Optional[List[str]] = None, limit: int = 50, path: Optional[str] = None*) → None

Renders bounding box dataset. Displays only first 50 rows.

#### Parameters

- **options** (*dict*) – The colors options specified for rendering.
- **content\_column** (*Optional[str]*) – The column name with the content data.
- **annotations\_column** (*Optional[str]*) – The column name for the annotations list.
- **categories** (*Optional List[str]*) – The list of object categories in proper order for model training. Only used when bounding box annotations are in YOLO format. Example: ['cat','dog','horse']
- **limit** (*Optional[int]*. Defaults to 50) – The maximum amount of records to display.
- **path** (*Optional[str]*) – Path to save the image with annotations to local directory.

#### Returns

Nothing

#### Return type

None

#### Examples

```
>>> import pandas as pd
>>> import ads
>>> from ads.common import auth as authutil
>>> df = pd.DataFrame.ads.read_labeled_data(path="path_to_your_metadata.jsonl",
...                                       auth=authutil.api_keys(),
...                                       materialize=True)
>>> df.ads.render_bounding_box(content_column="Content", annotations_column=
↳ "Annotations")
```

**render\_ner**(*options: Dict = None, content\_column: str = 'Content', annotations\_column: str = 'Annotations', limit: int = 50*) → None

Renders NER dataset. Displays only first 50 rows.

#### Parameters

- **options** (*dict*) – The colors options specified for rendering.
- **content\_column** (*Optional[str]*) – The column name with the content data.
- **annotations\_column** (*Optional[str]*) – The column name for the annotations list.
- **limit** (*Optional[int]*. Defaults to 50) – The maximum amount of records to display.

#### Returns

Nothing

#### Return type

None

## Examples

```
>>> import pandas as pd
>>> import ads
>>> from ads.common import auth as authutil
>>> df = pd.DataFrame.ads.read_labeled_data(path="path_to_your_metadata.jsonl",
...                                       auth=authutil.api_keys(),
...                                       materialize=True)
>>> df.ads.render_ner(content_column="Content", annotations_column="Annotations
↪")
```

## Module contents

### ads.data\_labeling.parser package

#### Submodules

#### ads.data\_labeling.parser.dls\_record\_parser module

**exception** ads.data\_labeling.parser.dls\_record\_parser.**AnnotationNotFoundError**(*id: str*)

Bases: `Exception`

**class** ads.data\_labeling.parser.dls\_record\_parser.**DLSBoundingBoxRecordParser**(*dataset\_source\_path: str, auth: Optional[dict] = None, format: Optional[str] = None, categories: Optional[List[str]] = None*)

Bases: *DLSRecordParser*

BoundingBoxRecordParser class which parses the label of BoundingBox label data.

Initiates a DLSRecordParser instance.

#### Parameters

- **dataset\_source\_path** (*str*) – Dataset source path.
- **auth** (*((dict, optional). Defaults to None.)*) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **format** (*((str, optional). Defaults to None.)*) – Output format of annotations.
- **categories** (*((List[str], optional). Defaults to None.)*) – The list of object categories in proper order for model training. Example: ['cat','dog','horse']

#### Returns

DLSRecordParser instance.

#### Return type

*DLSRecordParser*

```
class ads.data_labeling.parser.dls_record_parser.DLSMultiLabelRecordParser(dataset_source_path:
                                                                    str, auth:
                                                                    Optional[dict] =
                                                                    None, format:
                                                                    Optional[str] =
                                                                    None, categories:
                                                                    Op-
                                                                    tional[List[str]] =
                                                                    None)
```

Bases: [DLSRecordParser](#)

MultiLabelRecordParser class which parses the label of Multiple label data.

Initiates a DLSRecordParser instance.

#### Parameters

- **dataset\_source\_path** (*str*) – Dataset source path.
- **auth** ((*dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **format** ((*str*, *optional*). Defaults to *None*.) – Output format of annotations.
- **categories** ((*List[str]*, *optional*). Defaults to *None*.) – The list of object categories in proper order for model training. Example: ['cat','dog','horse']

#### Returns

DLSRecordParser instance.

#### Return type

[DLSRecordParser](#)

```
class ads.data_labeling.parser.dls_record_parser.DLSNERRecordParser(dataset_source_path: str,
                                                                    auth: Optional[dict] =
                                                                    None, format: Optional[str]
                                                                    = None, categories:
                                                                    Optional[List[str]] =
                                                                    None)
```

Bases: [DLSRecordParser](#)

NERRecordParser class which parses the label of NER label data.

Initiates a DLSRecordParser instance.

#### Parameters

- **dataset\_source\_path** (*str*) – Dataset source path.
- **auth** ((*dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **format** ((*str*, *optional*). Defaults to *None*.) – Output format of annotations.
- **categories** ((*List[str]*, *optional*). Defaults to *None*.) – The list of object categories in proper order for model training. Example: ['cat','dog','horse']

**Returns**

DLSRecordParser instance.

**Return type**

*DLSRecordParser*

```
class ads.data_labeling.parser.dls_record_parser.DLSRecordParser(dataset_source_path: str, auth:
                                                                    Optional[dict] = None, format:
                                                                    Optional[str] = None,
                                                                    categories: Optional[List[str]]
                                                                    = None)
```

Bases: *Parser*

DLSRecordParser class which parses the labels from the record.

Initiates a DLSRecordParser instance.

**Parameters**

- **dataset\_source\_path** (*str*) – Dataset source path.
- **auth** ((*dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **format** ((*str*, *optional*). Defaults to *None*.) – Output format of annotations.
- **categories** ((*List[str]*, *optional*). Defaults to *None*.) – The list of object categories in proper order for model training. Example: ['cat','dog','horse']

**Returns**

DLSRecordParser instance.

**Return type**

*DLSRecordParser*

```
parse(oci_record_summary: OCISummary) → Record
```

Extracts the annotations. Constructs and returns a Record instance which contains the file path and the labels.

**Parameters**

**oci\_record\_summary** (*OCISummary*) – The summary information about the record.

**Returns**

Record instance which contains the file path and the annotations.

**Return type**

*Record*

```
class ads.data_labeling.parser.dls_record_parser.DLSRecordParserFactory
```

Bases: object

DLSRecordParserFactory class which contains a list of registered parsers and allows to register new DLSRecordParsers.

**Current parsers include:**

- DLSSingleLabelRecordParser
- DLSMultiLabelRecordParser
- DLSNERRecordParser

- `DLSBoundingBoxRecordParser`

**static parser**(*annotation\_type: str, dataset\_source\_path: str, format: Optional[str] = None, categories: Optional[List[str]] = None, auth: Optional[dict] = None*) → *DLSRecordParser*

Gets the parser based on the *annotation\_type*.

#### Parameters

- **annotation\_type** (*str*) – Annotation type which can be `SINGLE_LABEL`, `MULTI_LABEL`, `ENTITY_EXTRACTION` and `BOUNDING_BOX`.
- **dataset\_source\_path** (*str*) – Dataset source path.
- **format** ((*str, optional*). Defaults to *None*.) – Output format of annotations. Can be *None*, “spacy” for dataset Entity Extraction type or “yolo” for Object Detection type. When *None*, it outputs `List[NERItem]` or `List[BoundingBoxItem]`. When “spacy”, it outputs `List[Tuple]`. When “yolo”, it outputs `List[List[Tuple]]`.
- **categories** ((*List[str], optional*). Defaults to *None*.) – The list of object categories in proper order for model training. Example: [`‘cat’`,`‘dog’`,`‘horse’`]
- **auth**((*dict, optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate `IdentityClient` object.

#### Returns

*DLSRecordParser* corresponding to the annotation type.

#### Return type

*DLSRecordParser*

#### Raises

**ValueError** – If *annotation\_type* is not supported.

**classmethod register**(*annotation\_type: str, parser: DLSRecordParser*) → *None*

Registers a new parser.

#### Parameters

- **annotation\_type** (*str*) – Annotation type which can be `SINGLE_LABEL`, `MULTI_LABEL`, `ENTITY_EXTRACTION` and `BOUNDING_BOX`.
- **parser** (*DLSRecordParser*) – A new Parser class to be registered.

#### Returns

Nothing.

#### Return type

*None*

```
class ads.data_labeling.parser.dls_record_parser.DLSSingleLabelRecordParser(dataset_source_path: str, auth: Optional[dict] = None, format: Optional[str] = None, categories: Optional[List[str]] = None)
```

Bases: *DLSRecordParser*

SingleLabelRecordParser class which parses the label of Single label data.

Initiates a DLSRecordParser instance.

#### Parameters

- **dataset\_source\_path** (*str*) – Dataset source path.
- **auth** ((*dict*, *optional*). *Defaults to None.*) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **format** ((*str*, *optional*). *Defaults to None.*) – Output format of annotations.
- **categories** ((*List[str]*, *optional*). *Defaults to None.*) – The list of object categories in proper order for model training. Example: ['cat','dog','horse']

#### Returns

DLSRecordParser instance.

#### Return type

*DLSRecordParser*

**exception** *ads.data\_labeling.parser.dls\_record\_parser.ReadAnnotationError*(*id: str*)

Bases: *Exception*

### **ads.data\_labeling.parser.export\_metadata\_parser module**

**class** *ads.data\_labeling.parser.export\_metadata\_parser.MetadataParser*

Bases: *Parser*

MetadataParser class which parses the metadata from the record.

**EXPECTED\_KEYS** = ['id', 'compartmentId', 'displayName', 'labelsSet', 'annotationFormat', 'datasetSourceDetails', 'datasetFormatDetails']

**static parse**(*json\_data: Dict[Any, Any]*) → *Metadata*

Parses the metadata jsonl file.

#### Parameters

**json\_data** (*dict*) – dictionary format of the metadata jsonl file content.

#### Returns

Metadata object which contains the useful fields from the metadata jsonl file

#### Return type

*Metadata*

### **ads.data\_labeling.parser.export\_record\_parser module**

**class** *ads.data\_labeling.parser.export\_record\_parser.BoundingBoxRecordParser*(*dataset\_source\_path: str, format: Optional[str] = None, categories: Optional[List[str]] = None*)

Bases: [RecordParser](#)

BoundingBoxRecordParser class which parses the label of BoundingBox label data.

Initiates a RecordParser instance.

#### Parameters

- **dataset\_source\_path** (*str*) – Dataset source path.
- **format** ((*str*, *optional*). Defaults to *None*.) – Output format of annotations.
- **categories** ((*List[str]*, *optional*). Defaults to *None*.) – The list of object categories in proper order for model training. Example: ['cat','dog','horse']

#### Returns

RecordParser instance.

#### Return type

[RecordParser](#)

```
class ads.data_labeling.parser.export_record_parser.EntityType
```

Bases: object

Entity type class for supporting multiple types of entities.

```
GENERIC = 'GENERIC'
```

```
IMAGEOBJECTSELECTION = 'IMAGEOBJECTSELECTION'
```

```
TEXTSELECTION = 'TEXTSELECTION'
```

```
class ads.data_labeling.parser.export_record_parser.MultiLabelRecordParser(dataset_source_path:  
                                                                           str,format:  
                                                                           Optional[str] =  
                                                                           None, categories:  
                                                                           Op-  
                                                                           tional[List[str]] =  
                                                                           None)
```

Bases: [RecordParser](#)

MultiLabelRecordParser class which parses the label of Multiple label data.

Initiates a RecordParser instance.

#### Parameters

- **dataset\_source\_path** (*str*) – Dataset source path.
- **format** ((*str*, *optional*). Defaults to *None*.) – Output format of annotations.
- **categories** ((*List[str]*, *optional*). Defaults to *None*.) – The list of object categories in proper order for model training. Example: ['cat','dog','horse']

#### Returns

RecordParser instance.

#### Return type

[RecordParser](#)

```
class ads.data_labeling.parser.export_record_parser.NERRecordParser(dataset_source_path: str,
                                                                    format: Optional[str] =
                                                                    None, categories:
                                                                    Optional[List[str]] =
                                                                    None)
```

Bases: [RecordParser](#)

NERRecordParser class which parses the label of NER label data.

Initiates a RecordParser instance.

#### Parameters

- **dataset\_source\_path** (*str*) – Dataset source path.
- **format** ((*str*, *optional*). Defaults to *None*.) – Output format of annotations.
- **categories** ((*List[str]*, *optional*). Defaults to *None*.) – The list of object categories in proper order for model training. Example: ['cat','dog','horse']

#### Returns

RecordParser instance.

#### Return type

[RecordParser](#)

```
class ads.data_labeling.parser.export_record_parser.RecordParser(dataset_source_path: str,
                                                                  format: Optional[str] = None,
                                                                  categories: Optional[List[str]]
                                                                  = None)
```

Bases: [Parser](#)

RecordParser class which parses the labels from the record.

### Examples

```
>>> from ads.data_labeling.parser.export_record_parser import _
↳ SingleLabelRecordParser
>>> from ads.data_labeling.parser.export_record_parser import MultiLabelRecordParser
>>> from ads.data_labeling.parser.export_record_parser import NERRecordParser
>>> from ads.data_labeling.parser.export_record_parser import _
↳ BoundingBoxRecordParser
>>> import fsspec
>>> import json
>>> from ads.common import auth as authutil
>>> labels = []
>>> with fsspec.open("/path/to/records_file.jsonl", **authutil.api_keys()) as f:
>>>     for line in f:
>>>         bounding_box_labels = BoundingBoxRecordParser("source_data_path").
↳ parse(json.loads(line))
>>>         labels.append(bounding_box_labels)
```

Initiates a RecordParser instance.

#### Parameters

- **dataset\_source\_path** (*str*) – Dataset source path.
- **format** ((*str*, *optional*). Defaults to *None*.) – Output format of annotations.



- **categories** ((*List[str]*, *optional*). *Defaults to None.*) – The list of object categories in proper order for model training. Example: ['cat','dog','horse']

**Returns**

RecordParser instance.

**Return type**

*RecordParser*

**parse**(*record: Dict*) → *Record*

Extracts the annotations from the record content. Constructs and returns a Record instance containing the file path and the labels.

**Parameters**

**record** (*Dict*) – Content of the record from the record file.

**Returns**

Record instance which contains the file path as well as the annotations.

**Return type**

*Record*

**class** `ads.data_labeling.parser.export_record_parser.RecordParserFactory`

Bases: `object`

RecordParserFactory class which contains a list of registered parsers and allows to register new RecordParsers.

**Current parsers include:**

- SingleLabelRecordParser
- MultiLabelRecordParser
- NERRecordParser
- BoundingBoxRecordParser

**static parser**(*annotation\_type: str*, *dataset\_source\_path: str*, *format: Optional[str] = None*, *categories: Optional[List[str]] = None*) → *RecordParser*

Gets the parser based on the *annotation\_type*.

**Parameters**

- **annotation\_type** (*str*) – Annotation type which can be SINGLE\_LABEL, MULTI\_LABEL, ENTITY\_EXTRACTION and BOUNDING\_BOX.
- **dataset\_source\_path** (*str*) – Dataset source path.
- **format** ((*str*, *optional*). *Defaults to None.*) – Output format of annotations. Can be None, “spacy” for dataset Entity Extraction type or “yolo” for Object Detection type. When None, it outputs List[NERItem] or List[BoundingBoxItem]. When “spacy”, it outputs List[Tuple]. When “yolo”, it outputs List[List[Tuple]].
- **categories** ((*List[str]*, *optional*). *Defaults to None.*) – The list of object categories in proper order for model training. Example: ['cat','dog','horse']

**Returns**

RecordParser corresponding to the annotation type.

**Return type**

*RecordParser*

**Raises**

**ValueError** – If *annotation\_type* is not supported.

**classmethod** **register**(*annotation\_type: str, parser*) → None

Registers a new parser.

**Parameters**

- **annotation\_type** (*str*) – Annotation type which can be SINGLE\_LABEL, MULTI\_LABEL, ENTITY\_EXTRACTION and BOUNDING\_BOX.
- **parser** ([RecordParser](#)) – A new Parser class to be registered.

**Returns**

Nothing.

**Return type**

None

```
class ads.data_labeling.parser.export_record_parser.SingleLabelRecordParser(dataset_source_path:  
                                str, format:  
                                Optional[str] =  
                                None, categories:  
                                Op-  
                                tional[List[str]]  
                                = None)
```

Bases: [RecordParser](#)

SingleLabelRecordParser class which parses the label of Single label data.

Initiates a RecordParser instance.

**Parameters**

- **dataset\_source\_path** (*str*) – Dataset source path.
- **format** ((*str, optional*). Defaults to None.) – Output format of annotations.
- **categories** ((*List[str], optional*). Defaults to None.) – The list of object categories in proper order for model training. Example: ['cat','dog','horse']

**Returns**

RecordParser instance.

**Return type**

[RecordParser](#)

## Module contents

### [ads.data\\_labeling.reader package](#)

#### Submodules

### [ads.data\\_labeling.reader.dataset\\_reader module](#)

The module containing classes to read labeled datasets. Allows to read labeled datasets from exports or from the cloud.

## Classes

### LabeledDatasetReader

The LabeledDatasetReader class to read labeled dataset.

### ExportReader

The ExportReader class to read labeled dataset from the export.

### DLSDatasetReader

The DLSDatasetReader class to read labeled dataset from the cloud.

## Examples

```
>>> from ads.common import auth as authutil
>>> from ads.data_labeling import LabeledDatasetReader
>>> ds_reader = LabeledDatasetReader.from_export(
...     path="oci://bucket_name@namespace/dataset_metadata.jsonl",
...     auth=authutil.api_keys(),
...     materialize=True
... )
>>> ds_reader.info()
-----
annotation_type          SINGLE_LABEL
compartment_id           TEST_COMPARTMENT
dataset_id                TEST_DATASET
dataset_name              test_dataset_name
dataset_type              TEXT
labels                    ['yes', 'no']
records_path              path/to/records
source_path               path/to/dataset
```

```
>>> ds_reader.read()
-----
      Path          Content      Annotations
-----
0  path/to/the/content/file1  file content      yes
1  path/to/the/content/file2  file content      no
2  path/to/the/content/file3  file content      no
```

```
>>> next(ds_reader.read(iterator=True))
("path/to/the/content/file1", "file content", "yes")
```

```
>>> next(ds_reader.read(iterator=True, chunksize=2))
[("path/to/the/content/file1", "file content", "yes"),
 ("path/to/the/content/file2", "file content", "no")]
```

```
>>> next(ds_reader.read(chunksize=2))
-----
      Path          Content      Annotations
-----
0  path/to/the/content/file1  file content      yes
1  path/to/the/content/file2  file content      no
```

```
>>> ds_reader = LabeledDatasetReader.from_DLS(  
...     dataset_id="dataset_OCID",  
...     compartment_id="compartment_OCID",  
...     auth=authutil.api_keys(),  
...     materialize=True  
... )
```

```
class ads.data_labeling.reader.dataset_reader.DLSDatasetReader(dataset_id: str, compartment_id:  
                                                                str, auth: Dict, encoding='utf-8',  
                                                                materialize: bool = False,  
                                                                include_unlabeled: bool = False)
```

Bases: [Reader](#)

The DLSDatasetReader class to read labeled dataset from the cloud.

**info**(self) → [Metadata](#)

Gets the labeled dataset metadata.

**read**(self) → Generator[Tuple, Any, Any]

Reads the labeled dataset.

Initializes the DLS dataset reader instance.

#### Parameters

- **dataset\_id** (str) – The dataset OCID.
- **compartment\_id** (str) – The compartment OCID of the dataset.
- **auth** ((dict, optional). Defaults to None.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **encoding** ((str, optional). Defaults to 'utf-8'.) – Encoding for files. The encoding is used to extract the metadata information of the labeled dataset and also to extract the content of the text dataset records.
- **materialize** ((bool, optional). Defaults to False.) – Whether the content of dataset files should be loaded/materialized or not. By default the content will not be materialized.
- **include\_unlabeled** ((bool, optional). Defaults to False.) – Whether to load the unlabeled records or not.

#### Raises

- **ValueError** – When dataset\_id is empty or not a string.:
- **TypeError** – When dataset\_id not a string.:

**info**() → [Metadata](#)

Gets the labeled dataset metadata.

#### Returns

The labeled dataset metadata.

#### Return type

[Metadata](#)

**read**(*format: Optional[str] = None*) → Generator[Tuple, Any, Any]

Reads the labeled dataset records.

#### Parameters

**format** ((*str, optional*). Defaults to *None*.) – Output format of annotations. Can be *None*, “spacy” for dataset Entity Extraction type or “yolo” for Object Detection type. When *None*, it outputs List[NERItem] or List[BoundingBoxItem]. When “spacy”, it outputs List[Tuple]. When “yolo”, it outputs List[List[Tuple]].

#### Returns

The labeled dataset records.

#### Return type

Generator[Tuple, Any, Any]

```
class ads.data_labeling.reader.dataset_reader.ExportReader(path: str, auth: Optional[Dict] = None,
                                                           encoding='utf-8', materialize: bool =
                                                           False, include_unlabeled: bool =
                                                           False)
```

Bases: [Reader](#)

The ExportReader class to read labeled dataset from the export.

**info**(*self*) → [Metadata](#)

Gets the labeled dataset metadata.

**read**(*self*) → Generator[Tuple, Any, Any]

Reads the labeled dataset.

Initializes the labeled dataset export reader instance.

#### Parameters

- **path** (*str*) – The metadata file path, can be either local or object storage path.
- **auth** ((*dict, optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **encoding** ((*str, optional*). Defaults to *'utf-8'*.) – Encoding for files. The encoding is used to extract the metadata information of the labeled dataset and also to extract the content of the text dataset records.
- **materialize** ((*bool, optional*). Defaults to *False*.) – Whether the content of dataset files should be loaded/materialized or not. By default the content will not be materialized.
- **include\_unlabeled** ((*bool, optional*). Defaults to *False*.) – Whether to load the unlabeled records or not.

#### Raises

- **ValueError** – When path is empty or not a string.:
- **TypeError** – When path not a string.:

**info**() → [Metadata](#)

Gets the labeled dataset metadata.

#### Returns

The labeled dataset metadata.

**Return type***Metadata***read**(*format: Optional[str] = None*) → Generator[Tuple, Any, Any]

Reads the labeled dataset records.

**Parameters****format** ((*str, optional*). Defaults to *None*.) – Output format of annotations. Can be *None*, “spacy” for dataset Entity Extraction type or “yolo” for Object Detection type. When *None*, it outputs List[NERItem] or List[BoundingBoxItem]. When “spacy”, it outputs List[Tuple]. When “yolo”, it outputs List[List[Tuple]].**Returns**

The labeled dataset records.

**Return type**

Generator[Tuple, Any, Any]

**class** ads.data\_labeling.reader.dataset\_reader.LabeledDatasetReader(*reader: Reader*)

Bases: object

The labeled dataset reader class.

**info**(*self*) → *Metadata*

Gets labeled dataset metadata.

**read**(*self, iterator: bool = False*) → Union[Generator[Any, Any, Any], pd.DataFrame]

Reads labeled dataset.

**from\_export**(*cls, path: str, auth: Dict = None, encoding='utf-8', materialize: bool = False*) → 'LabeledDatasetReader'

Constructs a Labeled Dataset Reader instance.

**Examples**

```
>>> from ads.common import auth as authutil
>>> from ads.data_labeling import LabeledDatasetReader
```

```
>>> ds_reader = LabeledDatasetReader.from_export(
...     path="oci://bucket_name@namespace/dataset_metadata.jsonl",
...     auth=authutil.api_keys(),
...     materialize=True
... )
```

```
>>> ds_reader = LabeledDatasetReader.from_DLS(
...     dataset_id="dataset_OCID",
...     compartment_id="compartment_OCID",
...     auth=authutil.api_keys(),
...     materialize=True
... )
```

```
>>> ds_reader.info()
-----
annotation_type                               SINGLE_LABEL
```

(continues on next page)

(continued from previous page)

compartment_id	TEST_COMPARTMENT
dataset_id	TEST_DATASET
dataset_name	test_dataset_name
dataset_type	TEXT
labels	['yes', 'no']
records_path	path/to/records
source_path	path/to/dataset

```
>>> ds_reader.read()
```

	Path	Content	Annotations
0	path/to/the/content/file1	file content	yes
1	path/to/the/content/file2	file content	no
2	path/to/the/content/file3	file content	no

```
>>> next(ds_reader.read(iterator=True))
("path/to/the/content/file1", "file content", "yes")
```

```
>>> next(ds_reader.read(iterator=True, chunksize=2))
[("path/to/the/content/file1", "file content", "yes"),
 ("path/to/the/content/file2", "file content", "no")]
```

```
>>> next(ds_reader.read(chunksize=2))
```

	Path	Content	Annotations
0	path/to/the/content/file1	file content	yes
1	path/to/the/content/file2	file content	no

Initializes the labeled dataset reader instance.

#### Parameters

**reader** ([Reader](#)) – The Reader instance which reads and extracts the labeled dataset.

**classmethod from\_DLS**(*dataset\_id: str*, *compartment\_id: Optional[str] = None*, *auth: Optional[dict] = None*, *encoding: str = 'utf-8'*, *materialize: bool = False*, *include\_unlabeled: bool = False*) → [LabeledDatasetReader](#)

Constructs Labeled Dataset Reader instance.

#### Parameters

- **dataset\_id** (*str*) – The dataset OCID.
- **compartment\_id** (*str*. Defaults to the *compartment\_id* from the *env* variable.) – The compartment OCID of the dataset.
- **auth** ((*dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **encoding** ((*str*, *optional*). Defaults to *'utf-8'*.) – Encoding for files.
- **materialize** ((*bool*, *optional*). Defaults to *False*.) – Whether the content of the dataset file should be loaded or it should return the file path to the content. By default the content will not be loaded.

**Returns**

The LabeledDatasetReader instance.

**Return type**

*LabeledDatasetReader*

**classmethod** **from\_export**(*path: str, auth: Optional[dict] = None, encoding: str = 'utf-8', materialize: bool = False, include\_unlabeled: bool = False*) → *LabeledDatasetReader*

Constructs Labeled Dataset Reader instance.

**Parameters**

- **path** (*str*) – The metadata file path, can be either local or object storage path.
- **auth** ((*dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **encoding** ((*str*, *optional*). Defaults to *'utf-8'*.) – Encoding for files.
- **materialize** ((*bool*, *optional*). Defaults to *False*.) – Whether the content of the dataset file should be loaded or it should return the file path to the content. By default the content will not be loaded.

**Returns**

The LabeledDatasetReader instance.

**Return type**

*LabeledDatasetReader*

**info**() → *Serializable*

Gets the labeled dataset metadata.

**Returns**

The labeled dataset metadata.

**Return type**

*Metadata*

**read**(*iterator: bool = False, format: Optional[str] = None, chunksize: Optional[int] = None*) → Union[Generator[Any, Any, Any], DataFrame]

Reads the labeled dataset records.

**Parameters**

- **iterator** ((*bool*, *optional*). Defaults to *False*.) – True if the result should be represented as a Generator. False if the result should be represented as a Pandas DataFrame.
- **format** ((*str*, *optional*). Defaults to *None*.) – Output format of annotations. Can be *None*, “spacy” or “yolo”.
- **chunksize** ((*int*, *optional*). Defaults to *None*.) – The number of records that should be read in one iteration. The result will be returned in a generator format.

**Returns**

- Union[ – Generator[Tuple[str, str, Any], Any, Any], Generator[List[Tuple[str, str, Any]], Any, Any], Generator[pd.DataFrame, Any, Any], pd.DataFrame
- ] – *pd.DataFrame* if *iterator* and *chunksize* are not specified. *Generator[pd.DataFrame]* if *iterator* equal to *False* and *chunksize* is specified. *Generator[List[Tuple[str, str, Any]]]* if



*iterator* equal to *True* and *chunksize* is specified. *Generator[Tuple[str, str, Any]]* if *iterator* equal to *True* and *chunksize* is not specified.

## ads.data\_labeling.reader.dls\_record\_reader module

```
class ads.data_labeling.reader.dls_record_reader.DLSRecordReader(dataset_id: str,  
                                                                compartment_id: str, auth:  
                                                                Optional[dict] = None)
```

Bases: [Reader](#)

DLS Record Reader Class that reads records from the cloud into ADS format.

Initiates a DLSRecordReader instance.

### Parameters

- **dataset\_id** (*str*) – The dataset OCID.
- **compartment\_id** (*str*) – The compartment OCID of the dataset.
- **auth** ((*dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

**read()** → *Generator[OCIRecordSummary, Any, Any]*

Reads OCI records.

### Yields

*OCIRecordSummary* – The OCIRecordSummary instance.

```
class ads.data_labeling.reader.dls_record_reader.OCIRecordSummary(record:  
                                                                Optional[RecordSummary] =  
                                                                None, annotation: Op-  
                                                                tional[List[AnnotationSummary]]  
                                                                = None)
```

Bases: *object*

The class that representing the labeled record in ADS format.

### record

OCI RecordSummary.

### Type

RecordSummary

### annotations

List of OCI AnnotationSummary.

### Type

List[AnnotationSummary]

**annotation:** List[AnnotationSummary] = None

**record:** RecordSummary = None

```
exception ads.data_labeling.reader.dls_record_reader.ReadAnnotationsError(dataset_id: str)
```

Bases: *Exception*

**exception** `ads.data_labeling.reader.dls_record_reader.ReadRecordsError(dataset_id: str)`

Bases: `Exception`

### `ads.data_labeling.reader.export_record_reader` module

**class** `ads.data_labeling.reader.export_record_reader.ExportRecordReader(path: str, auth: Optional[Dict] = None, encoding='utf-8', includes_metadata: bool = False)`

Bases: `JsonlReader`

The `ExportRecordReader` class to read labeled dataset records from the export.

**read**(*self*) → `Generator[Dict, Any, Any]`

Reads labeled dataset records.

Initiates an `ExportRecordReader` instance.

#### Parameters

- **path** (*str*) – object storage path or local path for a file.
- **auth** ((*dict*, *optional*). Defaults to *None*.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate `IdentityClient` object.
- **encoding** ((*str*, *optional*). Defaults to *'utf-8'*.) – Encoding of files. Only used for “TEXT” dataset.
- **includes\_metadata** ((*bool*, *optional*). Defaults to *False*.) – Determines whether the export file includes metadata or not.

### Examples

```
>>> from ads.data_labeling.reader.export_record_reader import ExportRecordReader
>>> path = "your/path/to/jsonl/file.jsonl"
>>> from ads.common import auth as authutil
>>> reader = ExportRecordReader(path=path, auth=authutil.api_keys(), encoding="utf-8")
>>> next(reader.read())
```

**read**() → `Generator[Dict, Any, Any]`

Reads labeled dataset records.

#### Returns

The labeled dataset records.

#### Return type

`Generator[Dict, Any, Any]`

**ads.data\_labeling.reader.jsonl\_reader module**

**class** ads.data\_labeling.reader.jsonl\_reader.JsonlReader(*path: str, auth: Optional[Dict] = None, encoding='utf-8'*)

Bases: *Reader*

JsonlReader class which reads the file.

Initiates a JsonlReader object.

**Parameters**

- **path** (*str*) – object storage path or local path for a file.
- **auth** (*((dict, optional). Defaults to None.)*) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **encoding** (*((str, optional). Defaults to 'utf-8'.)*) – Encoding of files. Only used for “TEXT” dataset.

**Examples**

```
>>> from ads.data_labeling.reader.jsonl_reader import JsonlReader
>>> path = "your/path/to/jsonl/file.jsonl"
>>> from ads.common import auth as authutil
>>> reader = JsonlReader(path=path, auth=authutil.api_keys(), encoding="utf-8")
>>> next(reader.read())
```

**read**(*skip: Optional[int] = None*) → Generator[Dict, Any, Any]

Reads and yields the content of the file.

**Parameters**

- **skip** (*((int, optional). Defaults to None.)*) – The number of records that should be skipped.

**Returns**

The content of the file.

**Return type**

Generator[Dict, Any, Any]

**Raises**

- **ValueError** – If *skip* not empty and not a positive integer.
- **FileNotFoundError** – When file not found.

**ads.data\_labeling.reader.metadata\_reader module**

```
class ads.data_labeling.reader.metadata_reader.DLSMetadataReader(dataset_id: str,
                                                                compartment_id: str, auth:
                                                                dict)
```

Bases: [Reader](#)

DLSMetadataReader class which reads the metadata jsonl file from the cloud.

Initializes the DLS metadata reader instance.

**Parameters**

- **dataset\_id** (*str*) – The dataset OCID.
- **compartment\_id** (*str*) – The compartment OCID of the dataset.
- **auth** (*dict*) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

**Raises**

- **ValueError** – When dataset\_id is empty or not a string.:
- **TypeError** – When dataset\_id not a string.:

**read()** → [Metadata](#)

Reads the content from the metadata file.

**Returns**

The metadata of the labeled dataset.

**Return type**

[Metadata](#)

**Raises**

- [DatasetNotFoundError](#) – If dataset not found.
- [ReadDatasetError](#) – If any error occurred in attempt to read dataset.

```
exception ads.data_labeling.reader.metadata_reader.DatasetNotFoundError(id: str)
```

Bases: Exception

```
exception ads.data_labeling.reader.metadata_reader.EmptyMetadata
```

Bases: Exception

Empty Metadata.

```
class ads.data_labeling.reader.metadata_reader.ExportMetadataReader(path: str, auth:
                                                                    Optional[Dict] = None,
                                                                    encoding='utf-8')
```

Bases: [JsonlReader](#)

ExportMetadataReader class which reads the metadata jsonl file from local/object storage path.

Initiates a JsonlReader object.

**Parameters**

- **path** (*str*) – object storage path or local path for a file.

- **auth**((dict, optional). Defaults to None.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **encoding**((str, optional). Defaults to 'utf-8'.) – Encoding of files. Only used for “TEXT” dataset.

## Examples

```
>>> from ads.data_labeling.reader.jsonl_reader import JsonlReader
>>> path = "your/path/to/jsonl/file.jsonl"
>>> from ads.common import auth as authutil
>>> reader = JsonlReader(path=path, auth=authutil.api_keys(), encoding="utf-8")
>>> next(reader.read())
```

**read()** → *Metadata*

Reads the content from the metadata file.

### Returns

The metadata of the labeled dataset.

### Return type

*Metadata*

**class** `ads.data_labeling.reader.metadata_reader.MetadataReader`(*reader: Reader*)

Bases: object

MetadataReader class which reads and extracts the labeled dataset metadata.

## Examples

```
>>> from ads.data_labeling import MetadataReader
>>> import oci
>>> import os
>>> from ads.common import auth as authutil
>>> reader = MetadataReader.from_export_file("metadata_export_file_path",
...                                         auth=authutil.api_keys())
>>> reader.read()
```

Initiate a MetadataReader instance.

### Parameters

**reader** (*Reader*) – Reader instance which reads and extracts the labeled dataset metadata.

**classmethod** `from_DLS`(*dataset\_id: str, compartment\_id: Optional[str] = None, auth: Optional[dict] = None*) → *MetadataReader*

Constructs a MetadataReader instance.

### Parameters

- **dataset\_id** (*str*) – The dataset OCID.
- **compartment\_id** ((*str, optional*). Default None) – The compartment OCID of the dataset.

- **auth**((dict, optional). Defaults to None.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate `IdentityClient` object.

**Returns**

The `MetadataReader` instance whose reader is a `DLSMetadataReader` instance.

**Return type**

*MetadataReader*

**classmethod** `from_export_file`(path: str, auth: Optional[Dict] = None) → *MetadataReader*

Constructs a `MetadataReader` instance.

**Parameters**

- **path** (str) – metadata file path, can be either local or object storage path.
- **auth**((dict, optional). Defaults to None.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate `IdentityClient` object.

**Returns**

The `MetadataReader` instance whose reader is a `ExportMetadataReader` instance.

**Return type**

*MetadataReader*

**read**() → *Metadata*

Reads the content from the metadata file.

**Returns**

The metadata of the labeled dataset.

**Return type**

*Metadata*

**exception** `ads.data_labeling.reader.metadata_reader.ReadDatasetError`(id: str)

Bases: `Exception`

## **ads.data\_labeling.reader.record\_reader module**

```
class ads.data_labeling.reader.record_reader.RecordReader(reader: Reader, parser: Parser, loader:
Optional[Loader] = None,
include_unlabeled: bool = False,
encoding: str = 'utf-8', materialize: bool
= False)
```

Bases: `object`

Record Reader Class consists of parser, reader and loader. Reader reads the the content from the record file. Parser parses the label for each record. And Loader loads the content of the file path in that record.

## Examples

```
>>> import os
>>> import oci
>>> from ads.data_labeling import RecordReader
>>> from ads.common import auth as authutil
>>> file_path = "/path/to/your_record.jsonl"
>>> dataset_type = "IMAGE"
>>> annotation_type = "BOUNDING_BOX"
>>> record_reader = RecordReader.from_export_file(file_path, dataset_type,
↳ annotation_type, "image_file_path", authutil.api_keys())
>>> next(record_reader.read())
```

Initiates a RecordReader instance.

### Parameters

- **reader** (*Reader*) – Reader instance to read content from the record file.
- **parser** (*Parser*) – Parser instance to parse the labels from record file.
- **loader** (*Loader. Defaults to None.*) – Loader instance to load the content from the file path in the record.
- **materialize** (*bool, optional. Defaults to False.*) – Whether to materialize the content using loader.
- **include\_unlabeled** (*(bool, optional). Default to False.*) – Whether to load the unlabeled records or not.
- **encoding** (*str, optional*) – Encoding for text files. Used only to extract the content of the text dataset contents.

### Raises

**ValueError** – If the record reader and record parser must be specified. If the loader is not specified when materialize if True.

**classmethod from\_DLS**(*dataset\_id: str, dataset\_type: str, annotation\_type: str, dataset\_source\_path: str, compartment\_id: Optional[str] = None, auth: Optional[Dict] = None, include\_unlabeled: bool = False, encoding: str = 'utf-8', materialize: bool = False, format: Optional[str] = None, categories: Optional[List[str]] = None*) → *RecordReader*

Constructs Record Reader instance.

### Parameters

- **dataset\_id** (*str*) – The dataset OCID.
- **dataset\_type** (*str*) – Dataset type. Currently supports TEXT, IMAGE and DOCUMENT.
- **annotation\_type** (*str*) – Annotation Type. Currently TEXT supports SINGLE\_LABEL, MULTI\_LABEL, ENTITY\_EXTRACTION. IMAGE supports SINGLE\_LABEL, MULTI\_LABEL and BOUNDING\_BOX. DOCUMENT supports SINGLE\_LABEL and MULTI\_LABEL.
- **dataset\_source\_path** (*str*) – Dataset source path.
- **compartment\_id** (*(str, optional). Defaults to None.*) – The compartment OCID of the dataset.

- **auth**((*dict*, *optional*). *Defaults to None.*) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **encoding**((*str*, *optional*). *Defaults to 'utf-8'.*) – Encoding for files.
- **materialize**((*bool*, *optional*). *Defaults to False.*) – Whether the content of the dataset file should be loaded or it should return the file path to the content. By default the content will not be loaded.
- **format**((*str*, *optional*). *Defaults to None.*) – Output format of annotations. Can be None, “spacy” for dataset Entity Extraction type or “yolo” for Object Detection type. When None, it outputs List[NERItem] or List[BoundingBoxItem]. When “spacy”, it outputs List[Tuple]. When “yolo”, it outputs List[List[Tuple]].
- **categories**((*List[str]*, *optional*). *Defaults to None.*) – The list of object categories in proper order for model training. Example: ['cat','dog','horse']

**Returns**

The RecordReader instance.

**Return type**

*RecordReader*

```
classmethod from_export_file(path: str, dataset_type: str, annotation_type: str, dataset_source_path: str, auth: Optional[Dict] = None, include_unlabeled: bool = False, encoding: str = 'utf-8', materialize: bool = False, format: Optional[str] = None, categories: Optional[List[str]] = None, includes_metadata=False) → RecordReader
```

Initiates a RecordReader instance.

**Parameters**

- **path**(*str*) – Record file path.
- **dataset\_type**(*str*) – Dataset type. Currently supports TEXT, IMAGE and DOCUMENT.
- **annotation\_type**(*str*) – Annotation Type. Currently TEXT supports SINGLE\_LABEL, MULTI\_LABEL, ENTITY\_EXTRACTION. IMAGE supports SINGLE\_LABEL, MULTI\_LABEL and BOUNDING\_BOX. DOCUMENT supports SINGLE\_LABEL and MULTI\_LABEL.
- **dataset\_source\_path**(*str*) – Dataset source path.
- **auth**((*dict*, *optional*). *Default None*) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **include\_unlabeled**((*bool*, *optional*). *Default to False.*) – Whether to load the unlabeled records or not.
- **encoding**((*str*, *optional*). *Defaults to "utf-8".*) – Encoding for text files. Used only to extract the content of the text dataset contents.
- **materialize**((*bool*, *optional*). *Defaults to False.*) – Whether to materialize the content by loader.
- **format**((*str*, *optional*). *Defaults to None.*) – Output format of annotations. Can be None, “spacy” for dataset Entity Extraction type or “yolo” for Object Detection



type. When `None`, it outputs `List[NERItem]` or `List[BoundingBoxItem]`. When “spacy”, it outputs `List[Tuple]`. When “yolo”, it outputs `List[List[Tuple]]`.

- **categories** ((*List[str]*, *optional*). *Defaults to None.*) – The list of object categories in proper order for model training. Example: `['cat','dog','horse']`
- **includes\_metadata** ((*bool*, *optional*). *Defaults to False.*) – Determines whether the export file includes metadata or not.

#### Returns

A `RecordReader` instance.

#### Return type

*RecordReader*

**read()** → `Generator[Tuple[str, Union[List, str]], Any, Any]`

Reads the record.

#### Yields

*Generator[Tuple[str, Union[List, str]], Any, Any]* – File path, content and labels in a tuple.

## Module contents

### ads.data\_labeling.visualizer package

#### Submodules

### ads.data\_labeling.visualizer.image\_visualizer module

The module that helps to visualize Image Dataset.

`ads.data_labeling.visualizer.image_visualizer.render`(*items: List[LabeledImageItem]*, *options: Dict = None*)

Renders Labeled Image dataset.

## Examples

```
>>> bbox1 = BoundingBoxItem(bottom_left=(0.3, 0.4),
>>>                             top_left=(0.3, 0.09),
>>>                             top_right=(0.86, 0.09),
>>>                             bottom_right=(0.86, 0.4),
>>>                             labels=['dolphin', 'fish'])
```

```
>>> record1 = LabeledImageItem(img_obj1, [bbox1])
```

```
>>> bbox2 = BoundingBoxItem(bottom_left=(0.2, 0.4),
>>>                             top_left=(0.2, 0.2),
>>>                             top_right=(0.8, 0.2),
>>>                             bottom_right=(0.8, 0.4),
>>>                             labels=['dolphin'])
>>> bbox3 = BoundingBoxItem(bottom_left=(0.5, 1.0),
>>>                             top_left=(0.5, 0.8),
```

(continues on next page)

(continued from previous page)

```
>>> top_right=(0.8, 0.8),
>>> bottom_right=(0.8, 1.0),
>>> labels=['shark'])
```

```
>>> record2 = LabeledImageItem(img_obj2, [bbox2, bbox3])
>>> render(items = [record1, record2], options={"default_color":"blue", "colors": {
↪ "dolphin":"blue", "whale":"red"}})
```

**class** `ads.data_labeling.visualizer.image_visualizer.ImageLabeledDataFormatter`

Bases: `object`

The ImageRender class to render Image items in a notebook session.

**static render\_item**(*item*: `LabeledImageItem`, *options*: `Optional[Dict]` = `None`, *path*: `Optional[str]` = `None`) → `None`

Renders image dataset.

#### Parameters

- **item** (`LabeledImageItem`) – Item to render.
- **options** (`Optional[dict]`) – Render options.
- **path** (`str`) – Path to save the image with annotations to local directory.

#### Returns

Nothing.

#### Return type

`None`

#### Raises

- **ValueError** – If items not provided. If path is not valid.
- **TypeError** – If items provided in a wrong format.

**class** `ads.data_labeling.visualizer.image_visualizer.LabeledImageItem`(*img*: `ImageFile`, *boxes*: `List[BoundingBoxItem]`)

Bases: `object`

Data class representing Image Item.

#### **img**

the labeled image object.

#### Type

`ImageFile`

#### **boxes**

a list of `BoundingBoxItem`

#### Type

`List[BoundingBoxItem]`

**boxes**: `List[BoundingBoxItem]`

**img**: `ImageFile`

**class** `ads.data_labeling.visualizer.image_visualizer.RenderOptions`(*default\_color: str, colors: Optional[dict]*)

Bases: `object`

Data class representing render options.

**default\_color**

The specified default color.

**Type**

`str`

**colors**

The multiple specified colors.

**Type**

`Optional[dict]`

**colors:** `Optional[dict]`

**default\_color:** `str`

**classmethod** `from_dict(options: dict) → RenderOptions`

Constructs an instance of `RenderOptions` from a dictionary.

**Parameters**

**options** (*dict*) – Render options in dictionary format.

**Returns**

The instance of `RenderOptions`.

**Return type**

`RenderOptions`

**to\_dict()**

Converts `RenderOptions` instance to dictionary format.

**Returns**

The render options in dictionary format.

**Return type**

`dict`

**exception** `ads.data_labeling.visualizer.image_visualizer.WrongEntityFormat`

Bases: `ValueError`

`ads.data_labeling.visualizer.image_visualizer.render`(*items: List[LabeledImageItem], options: Optional[Dict] = None, path: Optional[str] = None*) → `None`

Render image dataset.

**Parameters**

- **items** (*List[LabeledImageItem]*) – The list of `LabeledImageItem` to render.
- **options** (*dict, optional*) – The options for rendering.
- **path** (*str*) – Path to save the images with annotations to local directory.

**Returns**

Nothing.

**Return type**

None

**Raises**

- **ValueError** – If items not provided. If path is not valid.
- **TypeError** – If items provided in a wrong format.

**Examples**

```
>>> bbox1 = BoundingBoxItem(bottom_left=(0.3, 0.4),
>>>                           top_left=(0.3, 0.09),
>>>                           top_right=(0.86, 0.09),
>>>                           bottom_right=(0.86, 0.4),
>>>                           labels=['dolphin', 'fish'])
```

```
>>> record1 = LabeledImageItem(img_obj1, [bbox1])
>>> render(items = [record1])
```

**ads.data\_labeling.visualizer.text\_visualizer module**

The module that helps to visualize NER Text Dataset.

ads.data\_labeling.visualizer.text\_visualizer.**render**(items: List[LabeledTextItem], options: Dict = None) → str

Renders NER dataset to Html format.

**Examples**

```
>>> record1 = LabeledTextItem("London is the capital of the United Kingdom", [NERItem(
↳ 'city', 0, 6), NERItem("country", 29, 14)])
>>> record2 = LabeledTextItem("Houston area contractor seeking a Sheet Metal_
↳ Superintendent.", [NERItem("city", 0, 6)])
>>> result = render(items = [record1, record2], options={"default_color": "#DDEECC",
↳ "colors": {"city": "#DDEECC", "country": "#FFAAAA"}})
>>> display(HTML(result))
```

**class** ads.data\_labeling.visualizer.text\_visualizer.LabeledTextItem(txt: str, ents: List[NERItem])

Bases: object

Data class representing NER Item.

**txt**

The labeled sentence.

**Type**

str

**ents**

The list of entities.

**Type**  
List[*NERItem*]

**ents: List[*NERItem*]**

**txt: str**

**class** ads.data\_labeling.visualizer.text\_visualizer.**RenderOptions**(*default\_color: str, colors: Optional[dict]*)

Bases: object

Data class representing render options.

**default\_color**  
The specified default color.

**Type**  
str

**colors**  
The multiple specified colors.

**Type**  
Optional[dict]

**colors: Optional[dict]**

**default\_color: str**

**classmethod from\_dict**(*options: dict*) → *RenderOptions*  
Constructs an instance of RenderOptions from a dictionary.

**Parameters**  
**options** (*dict*) – Render options in dictionary format.

**Returns**  
The instance of RenderOptions.

**Return type**  
*RenderOptions*

**to\_dict()**  
Converts RenderOptions instance to dictionary format.

**Returns**  
The render options in dictionary format.

**Return type**  
dict

**class** ads.data\_labeling.visualizer.text\_visualizer.**TextLabeledDataFormatter**

Bases: object

The TextLabeledDataFormatter class to render NER items into Html format.

**static render**(*items: List[LabeledTextItem], options: Optional[Dict] = None*) → str  
Renders NER dataset to Html format.

**Parameters**

- **items** (*List[LabeledTextItem]*) – Items to render.
- **options** (*Optional[dict]*) – Render options.

**Returns**

Html representation of rendered NER dataset.

**Return type**

str

**Raises**

- **ValueError** – If items not provided.
- **TypeError** – If items provided in a wrong format.

`ads.data_labeling.visualizer.text_visualizer.render(items: List[LabeledTextItem], options: Optional[Dict] = None) → str`

Renders NER dataset to Html format.

**Parameters**

- **items** (*List[LabeledTextItem]*) – The list of NER items to render.
- **options** (*dict, optional*) – The options for rendering.

**Returns**

Html string.

**Return type**

str

**Examples**

```
>>> record = LabeledTextItem("London is the capital of the United Kingdom",  
↪ [NERItem('city', 0, 6), NERItem("country", 29, 14)])  
>>> result = render(items = [record], options={"default_color": "#DDEECC", "colors":  
↪ {"city": "#DDEECC", "country": "#FFAAAA"}})  
>>> display(HTML(result))
```

**Module contents****18.1.1.4.2 Submodules****18.1.1.4.3 ads.data\_labeling.boundingbox module**

```
class ads.data_labeling.boundingbox.BoundingBoxItem(top_left: ~typing.Tuple[float, float], bottom_left:  
~typing.Tuple[float, float], bottom_right:  
~typing.Tuple[float, float], top_right:  
~typing.Tuple[float, float], labels:  
~typing.List[str] = <factory>)
```

Bases: object

BoundingBoxItem class representing bounding box label.

**labels**

List of labels for this bounding box.

**Type**

List[str]

**top\_left**

Top left corner of this bounding box.

**Type**

Tuple[float, float]

**bottom\_left**

Bottom left corner of this bounding box.

**Type**

Tuple[float, float]

**bottom\_right**

Bottom right corner of this bounding box.

**Type**

Tuple[float, float]

**top\_right**

Top right corner of this bounding box.

**Type**

Tuple[float, float]

**Examples**

```
>>> item = BoundingBoxItem(
...     labels = ['cat', 'dog'],
...     bottom_left=(0.2, 0.4),
...     top_left=(0.2, 0.2),
...     top_right=(0.8, 0.2),
...     bottom_right=(0.8, 0.4))
>>> item.to_yolo(categories = ['cat', 'dog', 'horse'])
```

**bottom\_left:** Tuple[float, float]

**bottom\_right:** Tuple[float, float]

**classmethod from\_yolo**(bbox: List[Tuple], categories: Optional[List[str]] = None) → *BoundingBoxItem*

Converts the YOLO formatted annotations to BoundingBoxItem.

**Parameters**

- **bboxes** (*List[Tuple]*) – The list of bounding box annotations in YOLO format. Example: [(0, 0.511560675, 0.50234826, 0.47013485, 0.57803468)]
- **categories** (*List[str]*) – The list of object categories in proper order for model training. Example: ['cat', 'dog', 'horse']

**Returns**

The BoundingBoxItem.

**Return type**

*BoundingBoxItem*

**Raises**

**TypeError** – When categories list has a wrong format.

**labels:** List[str]

**to\_yolo**(categories: List[str]) → List[Tuple[int, float, float, float, float]]

Converts BoundingBoxItem to the YOLO format.

**Parameters**

**categories** (List[str]) – The list of object categories in proper order for model training.

Example: ['cat','dog','horse']

**Returns**

The list of YOLO formatted bounding boxes.

**Return type**

List[Tuple[int, float, float, float, float]]

**Raises**

- **ValueError** – When categories list not provided. When categories list not matched with the labels.
- **TypeError** – When categories list has a wrong format.

**top\_left:** Tuple[float, float]

**top\_right:** Tuple[float, float]

**class** ads.data\_labeling.boundingbox.**BoundingBoxItems**(items: ~typing.List[~ads.data\_labeling.boundingbox.BoundingBoxItem]  
= <factory>)

Bases: object

BoundingBoxItems class which consists of a list of BoundingBoxItem.

**items**

List of BoundingBoxItem.

**Type**

List[BoundingBoxItem]

## Examples

```
>>> item = BoundingBoxItem(  
...     labels = ['cat', 'dog']  
...     bottom_left=(0.2, 0.4),  
...     top_left=(0.2, 0.2),  
...     top_right=(0.8, 0.2),  
...     bottom_right=(0.8, 0.4))  
>>> items = BoundingBoxItems(items = [item])  
>>> items.to_yolo(categories = ['cat', 'dog', 'horse'])
```

**items:** List[BoundingBoxItem]

**to\_yolo**(categories: List[str]) → List[Tuple[int, float, float, float, float]]

Converts BoundingBoxItems to the YOLO format.

**Parameters**

**categories** (List[str]) – The list of object categories in proper order for model training.

Example: ['cat','dog','horse']



**Returns**

The list of YOLO formatted bounding boxes.

**Return type**

List[Tuple[int, float, float, float, float]]

**Raises**

- **ValueError** – When categories list not provided. When categories list not matched with the labels.
- **TypeError** – When categories list has a wrong format.

**18.1.1.4.4 ads.data\_labeling.constants module**

**class** ads.data\_labeling.constants.**AnnotationType**

Bases: object

AnnotationType class which contains all the annotation types that data labeling service supports.

**BOUNDING\_BOX** = 'BOUNDING\_BOX'

**ENTITY\_EXTRACTION** = 'ENTITY\_EXTRACTION'

**MULTI\_LABEL** = 'MULTI\_LABEL'

**SINGLE\_LABEL** = 'SINGLE\_LABEL'

**class** ads.data\_labeling.constants.**DatasetType**

Bases: object

DatasetType class which contains all the dataset types that data labeling service supports.

**DOCUMENT** = 'DOCUMENT'

**IMAGE** = 'IMAGE'

**TEXT** = 'TEXT'

**class** ads.data\_labeling.constants.**Formats**

Bases: object

Common formats class which contains all the common formats that are supported to convert to.

**SPACY** = 'spacy'

**YOLO** = 'yolo'

**18.1.1.4.5 ads.data\_labeling.data\_labeling\_service module**

**class** ads.data\_labeling.data\_labeling\_service.**DataLabeling**(*compartment\_id: Optional[str] = None, dls\_cp\_client\_auth: Optional[dict] = None, dls\_dp\_client\_auth: Optional[dict] = None*)

Bases: *OCIWorkRequestMixin*

Class for data labeling service. Integrate the data labeling service APIs.

## Examples

```
>>> import ads
>>> import pandas
>>> from ads.data_labeling.data_labeling_service import DataLabeling
>>> ads.set_auth("api_key")
>>> dls = DataLabeling()
>>> dls.list_dataset()
>>> metadata_path = dls.export(dataset_id="your dataset id",
...     path="oci://<bucket_name>@<namespace>/folder")
>>> df = pd.DataFrame(ads.read_labeled_data(metadata_path))
```

Initialize a DataLabeling class.

### Parameters

- **compartment\_id** (*str, optional*) – OCID of data labeling datasets’ compartment
- **dls\_cp\_client\_auth** (*dict, optional*) – Data Labeling control plane client auth. Default is None. The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **dls\_dp\_client\_auth** (*dict, optional*) – Data Labeling data plane client auth. Default is None. The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

### Returns

Nothing.

### Return type

None

**export** (*dataset\_id: str, path: str, include\_unlabeled=False*) → *str*

Export dataset based on the dataset\_id and save the jsonl files under the path (metadata jsonl file and the records jsonl file) to the object storage path provided by the user and return the metadata jsonl path.

### Parameters

- **dataset\_id** (*str*) – The dataset id of which the snapshot will be generated.
- **path** (*str*) – The object storage path to store the generated snapshot. “oci://<bucket\_name>@<namespace>/prefix”
- **include\_unlabeled** (*bool, Optional. Defaults to False.*) – Whether to include unlabeled records or not.

### Returns

oci path of the metadata jsonl file.

### Return type

str

**list\_dataset** (*\*\*kwargs*) → *DataFrame*

List all the datasets created from the data labeling service under a given compartment.

### Parameters

**kwargs** (*dict, optional*) – Additional keyword arguments will be passed to *oci.data\_labeling\_serviceDataLabelingManagementClient.list\_datasets* method.

**Returns**

pandas dataframe which contains the dataset information.

**Return type**

pandas.DataFrame

**Raises**

**Exception** – If pagination.list\_call\_get\_all\_results() fails

**18.1.1.4.6 ads.data\_labeling.metadata module**

```
class ads.data_labeling.metadata.Metadata(source_path: str = "", records_path: str = "", labels:
    ~typing.List[str] = <factory>, dataset_name: str = "",
    compartment_id: str = "", dataset_id: str = "",
    annotation_type: str = "", dataset_type: str = "")
```

Bases: *DataClassSerializable*

The class that representing the labeled dataset metadata.

**source\_path**

Contains information on where all the source data(image/text/document) stores.

**Type**

str

**records\_path**

Contains information on where records jsonl file stores.

**Type**

str

**labels**

List of classes/labels for the dataset.

**Type**

List

**dataset\_name**

Dataset display name on the Data Labeling Service console.

**Type**

str

**compartment\_id**

Compartment id of the labeled dataset.

**Type**

str

**dataset\_id**

Dataset id.

**Type**

str

**annotation\_type**

Type of the labeling/annotation task. Currently supports SINGLE\_LABEL, MULTI\_LABEL, ENTITY\_EXTRACTION, BOUNDING\_BOX.

**Type**

str

**dataset\_type**

Type of the dataset. Currently supports Text, Image, DOCUMENT.

**Type**

str

**annotation\_type:** str = ''

**compartment\_id:** str = ''

**dataset\_id:** str = ''

**dataset\_name:** str = ''

**dataset\_type:** str = ''

**classmethod from\_dls\_dataset**(dataset: Dataset) → *Metadata*

Constructs a Metadata instance from OCI DLS dataset.

**Parameters**

**dataset** (*OCIDLSDataset*) – OCIDLSDataset object.

**Returns**

The ads labeled dataset metadata instance.

**Return type**

*Metadata*

**labels:** List[str]

**records\_path:** str = ''

**source\_path:** str = ''

**to\_dataframe**() → DataFrame

Converts the metadata to dataframe format.

**Returns**

The metadata in Pandas dataframe format.

**Return type**

pandas.DataFrame

**to\_dict**() → Dict

Converts to dictionary representation.

**Returns**

The metadata in dictionary type.

**Return type**

Dict

#### 18.1.1.4.7 ads.data\_labeling.ner module

**class** ads.data\_labeling.ner.**NERItem**(*label: str = "", offset: int = 0, length: int = 0*)

Bases: object

NERItem class which is a representation of a token span.

**label**

Entity name.

**Type**

str

**offset**

The token span's entity start index position in the text.

**Type**

int

**length**

Length of the token span.

**Type**

int

**classmethod** **from\_spacy**(*token*) → *NERItem*

**label: str = ''**

**length: int = 0**

**offset: int = 0**

**to\_spacy**() → tuple

Converts one NERItem to the spacy format.

**Returns**

NERItem in the spacy format

**Return type**

Tuple

**class** ads.data\_labeling.ner.**NERItems**(*items: ~typing.List[~ads.data\_labeling.ner.NERItem] = <factory>*)

Bases: object

NERItems class consists of a list of NERItem.

**items**

List of NERItem.

**Type**

List[*NERItem*]

**items: List[*NERItem*]**

**to\_spacy**() → List[tuple]

Converts NERItems to the spacy format.

**Returns**

List of NERItems in the Spacy format.

**Return type**

List[tuple]

**exception** `ads.data_labeling.ner.WrongEntityFormatLabelIsEmpty`Bases: `ValueError`**exception** `ads.data_labeling.ner.WrongEntityFormatLabelNotString`Bases: `ValueError`**exception** `ads.data_labeling.ner.WrongEntityFormatLengthIsNegative`Bases: `ValueError`**exception** `ads.data_labeling.ner.WrongEntityFormatLengthNotInteger`Bases: `ValueError`**exception** `ads.data_labeling.ner.WrongEntityFormatOffsetIsNegative`Bases: `ValueError`**exception** `ads.data_labeling.ner.WrongEntityFormatOffsetNotInteger`Bases: `ValueError`**18.1.1.4.8 ads.data\_labeling.record module****class** `ads.data_labeling.record.Record`(*path: str = "", content: Optional[Any] = None, annotation: Optional[Union[Tuple, str, List[BoundingBoxItem], List[NERItem]]] = None*)Bases: `object`

Class representing Record.

**path**

File path.

**Type**`str`**content**

Content of the record.

**Type**`Any`**annotation**

Annotation/label of the record.

**Type**`Union[Tuple, str, List[BoundingBoxItem], List[NERItem]]`**annotation:** `Union[Tuple, str, List[BoundingBoxItem], List[NERItem]] = None`**content:** `Any = None`**path:** `str = ''`**to\_dict()**  $\rightarrow$  Dict

Convert the Record instance to a dictionary.

**Returns**

Dictionary representation of the Record instance.

**Return type**

Dict

**to\_tuple()** → Tuple[str, Any, Union[Tuple, str, List[BoundingBoxItem], List[NERItem]]]

Convert the Record instance to a tuple.

**Returns**

Tuple representation of the Record instance.

**Return type**

Tuple

**18.1.1.4.9 Module contents****18.1.1.5 ads.database package****18.1.1.5.1 Submodules****18.1.1.5.2 ads.database.connection module**

**class** ads.database.connection.**Connector**(*secret\_id: Optional[str] = None, key: Optional[str] = None, repository\_path: Optional[str] = None, \*\*kwargs*)

Bases: object

Validate that a connection could be made for the given set of connection parameters, and construct a Connector object provided that the validation is successful.

**Parameters**

- **secret\_id** (*str, optional*) – The ocid of the secret to retrieve from Oracle Cloud Infrastructure Vault.
- **key** (*str, optional*) – The key to find the database directory.
- **repository\_path** (*str, optional*) – The local database information store, default to ~/.database unless specified otherwise.
- **kwargs** (*dict, optional*) – Name-value pairs that are to be added to the list of connection parameters. For example, database\_name="mydb", database\_type="oracle", username = "root", password = "pwd".

**Return type**

A Connector object.

**connect()**

**class** ads.database.connection.**OracleConnector**(*oracle\_connection\_config*)

Bases: object

ads.database.connection.**get\_repository**(*key: str, repository\_path: Optional[str] = None*) → dict

Get all values from local database store.

**Parameters**

- **key** (*str*) – The key to find the database directory.
- **repository\_path** (*str, optional*) – The path to local database store, default to ~/.database unless specified otherwise.

**Return type**

A dictionary of all values in the store.

```
ads.database.connection.import_wallet(wallet_path: str, key: str, repository_path: Optional[str] = None)
    → None
```

Saves wallet to local database store. Unzip the wallet zip file, update sqlnet.ora and store wallet files.

**Parameters**

- **wallet\_path** (*str*) – The local path to the downloaded wallet zip file.
- **key** (*str*) – The key to find the database directory.
- **repository\_path** (*str*, *optional*) – The local database store, default to ~/.database unless specified otherwise.

```
ads.database.connection.update_repository(value: dict, key: str, replace: bool = True, repository_path:
    Optional[str] = None) → dict
```

Saves value into local database store.

**Parameters**

- **value** (*dict*) – The values to store locally.
- **key** (*str*) – The key to find the local database directory.
- **replace** (*bool*, *default to True*) – If set to false, updates the stored value.
- **repository\_path** (*str: str*, *optional*) – The local database store, default to ~/.database unless specified otherwise.

**Return type**

A dictionary of all values in the repository for the given key.

### 18.1.1.5.3 Module contents

### 18.1.1.6 ads.dataflow package

#### 18.1.1.6.1 Submodules

#### 18.1.1.6.2 ads.dataflow.dataflow module

```
class ads.dataflow.dataflow.DataFlow(compartment_id=None,
    dataflow_base_folder='/home/datascience/dataflow', os_auth=None,
    df_auth=None)
```

Bases: object

```
create_app(app_config: dict, overwrite_script=False, overwrite_archive=False) → object
```

Create a new dataflow application with the supplied app config. app\_config contains parameters needed to create a new application, according to oci.data\_flow.models.CreateApplicationDetails.

**Parameters**

- **app\_config** (*dict*) – the config file that contains all necessary parameters used to create a dataflow app
- **overwrite\_script** (*bool*) – whether to overwrite the existing pyscript script on Object Storage



- **overwrite\_archive** (*bool*) – whether to overwrite the existing archive file on Object Storage

**Returns**

**df\_app** – New dataflow application.

**Return type**

`oci.dataflow.models.Application`

**get\_app**(*app\_id: str*)

Get the Project based on app\_id.

**Parameters**

**app\_id** (*str, required*) – The OCID of the dataflow app to get.

**Returns**

**app** – The `oci.dataflow.models.Application` with the matching ID.

**Return type**

`oci.dataflow.models.Application`

**list\_apps**(*include\_deleted: bool = False, compartment\_id: Optional[str] = None, datetime\_format: str = '%Y-%m-%d %H:%M:%S', \*\*kwargs*) → object

List all apps in a given compartment, or in the current notebook session's compartment.

**Parameters**

- **include\_deleted** (*bool, optional, default=False*) – Whether to include deleted apps in the returned list.
- **compartment\_id** (*str, optional, default: NB\_SESSION\_COMPARTMENT\_OCID*) – The compartment specified to list apps.
- **datetime\_format** (*str, optional, default: '%Y-%m-%d %H:%M:%S'*) – Change format for date time fields.

**Returns**

**dsl** – List of Dataflow applications.

**Return type**

List

**load\_app**(*app\_id: str, target\_folder: Optional[str] = None*) → object

Load an existing dataflow application based on application id. The existing dataflow application can be created either from dataflow service or the dataflow integration of ADS.

**Parameters**

- **app\_id** (*str, required*) – The OCID of the dataflow app to load.
- **target\_folder** (*str, optional*) – the folder to store the local artifacts of this application. If not specified, the target\_folder will use the `dataflow_base_folder` by default.

**Returns**

**dfa** – A dataflow application of type `ads.dataflow.dataflow.DataFlowApp`

**Return type**

`ads.dataflow.dataflow.DataFlowApp`

**prepare\_app**(*display\_name: str, script\_bucket: str, pyspark\_file\_path: str, spark\_version: str = '2.4.4', compartment\_id: Optional[str] = None, archive\_path: Optional[str] = None, archive\_bucket: Optional[str] = None, logs\_bucket: str = 'dataflow-logs', driver\_shape: str = 'VM.Standard2.4', executor\_shape: str = 'VM.Standard2.4', num\_executors: int = 1, arguments: list = [], script\_parameters: dict = {}*) → dict

Check if the parameters provided by users to create an application are valid and then prepare `app_configuration` for creating an app or saving for future reuse.

#### Parameters

- **display\_name** (*str*, *required*) – A user-friendly name. This name is not necessarily unique.
- **script\_bucket** (*str*, *required*) – bucket in object storage to upload the pyspark file
- **pyspark\_file\_path** (*str*, *required*) – path to the pyspark file
- **spark\_version** (*str*) – Allowed values are “2.4.4”, “3.0.2”.
- **compartment\_id** (*str*) – OCID of the compartment to create a dataflow app. If not provided, `compartment_id` will use the same as the notebook session.
- **archive\_path** (*str*, *optional*) – path to the archive file
- **archive\_bucket** (*str*, *optional*) – bucket in object storage to upload the archive file
- **logs\_bucket** (*str*, *default is 'dataflow-logs'*) – bucket in object storage to put run logs
- **driver\_shape** (*str*) – The value to assign to the `driver_shape` property of this `CreateApplicationDetails`. Allowed values for this property are: “VM.Standard2.1”, “VM.Standard2.2”, “VM.Standard2.4”, “VM.Standard2.8”, “VM.Standard2.16”, “VM.Standard2.24”.
- **executor\_shape** (*str*) – The value to assign to the `executor_shape` property of this `CreateApplicationDetails`. Allowed values for this property are: “VM.Standard2.1”, “VM.Standard2.2”, “VM.Standard2.4”, “VM.Standard2.8”, “VM.Standard2.16”, “VM.Standard2.24”.
- **num\_executors** (*int*) – The number of executor VMs requested.
- **arguments** (*list of str*) – The values passed into the command line string to run the application
- **script\_parameters** (*dict*) – The value of the parameters passed to the running application as command line arguments for the pyspark script.

#### Returns

**app\_configuration**

#### Return type

dictionary containing all the validated params for `CreateApplicationDetails`.

**template**(*job\_type: str = 'standard\_pyspark', script\_str: str = "", file\_dir: Optional[str] = None, file\_name: Optional[str] = None*) → *str*

Populate a prewritten pyspark or sparksql python script with user’s choice to write additional lines and save in local directory.

#### Parameters

- **job\_type** (*str*, *default is 'standard\_pyspark'*) – Currently supports two types, ‘standard\_pyspark’ or ‘sparksql’
- **script\_str** (*str*, *optional*, *default is ""*) – code provided by user to write in the python script
- **file\_dir** (*str*, *optional*) – Directory to save the python script in local directory
- **file\_name** (*str*, *optional*) – name of the python script to save to the local directory

**Returns**

**script\_path** – Path to the template generated python file in local directory

**Return type**

str

**class** ads.dataflow.dataflow.**DataFlowApp**(*app\_config, app\_response, app\_dir, oci\_link, \*\*kwargs*)

Bases: *DataFlow*

**property config: dict**

Retrieve the app\_config file used to create the data flow app

**Returns**

**app\_config** – dictionary containing all the validated params for this DataFlowApp

**Return type**

Dict

**get\_run**(*run\_id: str*)

Get the Run based on run\_id

**Parameters**

**run\_id** (*str, required*) – The OCID of the dataflow run to get.

**Returns**

**df\_run** – The oci.dataflow.models.Run with the matching ID.

**Return type**

oci.dataflow.models.Run

**list\_runs**(*include\_failed: bool = False, datetime\_format: str = '%Y-%m-%d %H:%M:%S', \*\*kwargs*) → object

List all run of a dataflow app

**Parameters**

- **include\_failed** (*bool, optional, default=False*) – Whether to include failed runs in the returned list
- **datetime\_format** (*str, optional, default: '%Y-%m-%d %H:%M:%S'*) – Change format for date time fields

**Returns**

**df\_runs** – List of Data flow runs.

**Return type**

List

**property oci\_link: object**

Retrieve the oci link of the data flow app

**Returns**

**oci\_link** – a link to the app page in an oci console.

**Return type**

str

**prepare\_run**(*run\_display\_name: str, compartment\_id: Optional[str] = None, logs\_bucket: str = "", driver\_shape: str = 'VM.Standard2.4', executor\_shape: str = 'VM.Standard2.4', num\_executors: int = 1, \*\*kwargs*) → dict

Check if the parameters provided by users to create a run are valid and then prepare run\_config for creating run details.

### Parameters

- **run\_display\_name** (*str*) – A user-friendly name. This name is not necessarily unique.
- **compartment\_id** (*str*) – OCID of the compartment to create a dataflow run. If not provided, compartment\_id will use the same as the dataflow app.
- **logs\_bucket** (*str*) – bucket in object storage to put run logs, if not provided, will use the same logs\_bucket as defined in app\_config
- **driver\_shape** (*str*) – The value to assign to the driver\_shape property of this CreateApplicationDetails. Allowed values for this property are: “VM.Standard2.1”, “VM.Standard2.2”, “VM.Standard2.4”, “VM.Standard2.8”, “VM.Standard2.16”, “VM.Standard2.24”.
- **executor\_shape** (*str*) – The value to assign to the executor\_shape property of this CreateApplicationDetails. Allowed values for this property are: “VM.Standard2.1”, “VM.Standard2.2”, “VM.Standard2.4”, “VM.Standard2.8”, “VM.Standard2.16”, “VM.Standard2.24”.
- **num\_executors** (*int*) – The number of executor VMs requested.

### Returns

**run\_config** – Dictionary containing all the validated params for CreateRunDetails.

### Return type

Dict

**run**(*run\_config: dict, save\_log\_to\_local: bool = False, copy\_script\_to\_object\_storage: bool = True, copy\_archive\_to\_object\_storage: bool = True, pyspark\_file\_path: Optional[str] = None, archive\_path: Optional[str] = None, wait: bool = True*) → object

Create a new dataflow run with the supplied run config. run\_config contains parameters needed to create a new run, according to oci.data\_flow.models.CreateRunDetails.

### Parameters

- **run\_config** (*dict, required*) – The config file that contains all necessary parameters used to create a dataflow run
- **save\_log\_to\_local** (*bool, optional*) – A boolean value that defaults to false. If set to true, it saves the log files to local dir
- **copy\_script\_to\_object\_storage** (*bool, optional*) – A boolean value that defaults to true. Local script will be copied to object storage
- **copy\_archive\_to\_object\_storage** (*bool, optional*) – A boolean value that defaults to true. Local archive file will be copied to object storage
- **pyspark\_file\_path** (*str, optional*) – The pyspark file path used for creating the dataflow app. if pyspark\_file\_path isn’t specified then reuse the path that the app was created with.
- **archive\_path** (*str, optional*) – The archive file path used for creating the dataflow app. if archive\_path isn’t specified then reuse the path that the app was created with.
- **wait** (*bool, optional*) – A boolean value that defaults to true. When True, the return will be ads.dataflow.dataflow.DataFlowRun in terminal state. When False, the return will be a ads.dataflow.dataflow.RunObserver.

### Returns

**df\_run** – Either a new Data Flow run or a run observer.

**Return type**

Variable

**class** ads.dataflow.dataflow.**DataFlowLog**(text, oci\_path, log\_local\_dir)

Bases: object

**head**(n: int = 10)

Show the first n lines of the log as the output of the notebook cell

**Parameters****n** (int, default is 10) – the number of lines from head of the log file**Return type**

None

**property local\_dir**

Get the local directory where the log file is saved.

**Returns****local\_dir** – Path to the local directory where the log file is saved.**Return type**

str

**property local\_path**

Get the path of the log file in local directory

**Returns****local\_path** – Path of the log file in local directory**Return type**

str

**property oci\_path**

Get the path of the log file in object storage

**Returns****oci\_path** – Path of the log file in object storage**Return type**

str

**save**(log\_dir=None)

save the log file to a local directory.

**Parameters**

- **log\_dir** (str,) – The path to the local directory to save log file, if not
- **set** –
- **default.** (log will be saved to the \_local\_dir by) –

**Return type**

None

**show\_all**()

Show all content of the log as the output of the notebook cell

**Return type**

None

**tail**(*n: int = 10*)

Show the last *n* lines of the log as the output of the notebook cell

**Parameters**

**n**(*int, default is 10*) – the number of lines from tail of the log file

**Return type**

None

**class** `ads.dataflow.dataflow.DataFlowRun`(*run\_config, run\_response, save\_log\_to\_local, local\_dir, \*\*kwargs*)

Bases: *DataFlow*

**LOG\_OUTPUTS** = ['stdout', 'stderr']

**property config: dict**

Retrieve the `run_config` file used to create the Data Flow run

**Returns**

**run\_config** – dictionary containing all the validated params for this `DataFlowRun`

**Return type**

Dict

**fetch\_log**(*log\_type: str*) → object

Fetch the log information of a run

**Parameters**

**log\_type**(*str, have two values, 'stdout' or 'stderr'*) –

**Returns**

**dfl** – a Data Flow log object

**Return type**

*DataFlowLog*

**property local\_dir: str**

Retrieve the local directory of the data flow run

**Returns**

**local\_dir** – the local path to the Data Flow run

**Return type**

str

**property log\_stderr: object**

Retrieve the stderr of the data flow run

**Returns**

**log\_error** – a clickable link that opens the stderr log in another tab in jupyter notebook environment

**Return type**

*ads.dataflow.dataflow.DataFlowLog*

**property log\_stdout: object**

Retrieve the stdout of the data flow run

**Returns**

**log\_out** – a clickable link that opens the stdout log in another tab in a JupyterLab notebook environment

**Return type***ads.dataflow.dataflow.DataFlowLog***property oci\_link: object**

Retrieve the oci link of the data flow run

**Returns****oci\_link** – link to the run page in an oci console**Return type**

str

**property status: str**

Retrieve the status of the data flow run

**Returns****status** – String that describes the status of the run**Return type**

str

**update\_config(param\_dict) → None**

Modify the run\_config file used to create the data flow run

**Parameters****param\_dict** (*Dict*) – Dictionary containing the key value pairs of the run\_config parameters and the updated values.**Return type**

None

**class** `ads.dataflow.dataflow.RunObserver`(*app, run\_config, save\_log\_to\_local*)

Bases: object

**property config: dict**

Retrieve the run\_config file used to create the data flow run

**Returns****run\_config** – Dictionary containing all the validated parameters for this Data Flow run**Return type**

Dict

**property local\_dir: str**

Retrieve the local directory of the data flow run

**Returns****local\_dir** – the local path to the Data Flow run**Return type**

str

**property oci\_link: object**

Retrieve the oci link of the data flow run

**Returns****oci\_link** – link to the run page in an oci console**Return type**

str

**property status: str**

Returns the lifecycle state of the Data Flow run

**update\_config**(*param\_dict*) → None

Modify the run\_config file used to create the data flow run

**Parameters**

**param\_dict** (*Dict*) – dictionary containing the key value pairs of the run\_config parameters and the updated values.

**Return type**

None

**wait()**

Wait and monitor the run creation process.

**Parameters**

**None** –

**Returns**

**df\_run** – The oci.dataflow.models.Run after monitoring is done.

**Return type**

oci.dataflow.models.Run

**class** ads.dataflow.dataflow.SPARK\_VERSION

Bases: str

**v2\_4\_4** = '2.4.4'

**v3\_0\_2** = '3.0.2'

**18.1.1.6.3 ads.dataflow.dataflowssummary module****class** ads.dataflow.dataflowssummary.SummaryList(*entity\_list, datetime\_format='%Y-%m-%d %H:%M:%S'*)

Bases: list

**abstract filter**(*selection, instance=None*)

Abstract filter method for dataflow summary.

**abstract sort\_by**(*columns, reverse=False*)

Abstract sort method for dataflow summary.

**to\_dataframe**(*datetime\_format=None*)

Abstract to\_dataframe method for dataflow summary.

**18.1.1.6.4 Module contents****18.1.1.7 ads.dataset package****18.1.1.7.1 Submodules****18.1.1.7.2 ads.dataset.classification\_dataset module**



```
class ads.dataset.classification_dataset.BinaryClassificationDataset(df, sampled_df, target,
                                                                    target_type, shape,
                                                                    positive_class=None,
                                                                    **kwargs)
```

Bases: [ClassificationDataset](#)

Dataset for binary classification

```
set_positive_class(positive_class, missing_value=False)
```

Return new dataset with values in target column mapped to True or False in accordance with the specified positive label.

#### Parameters

- **positive\_class** (same dtype as target) – The target label which should be identified as positive outcome from model.
- **missing\_value** (bool) – missing values will be converted to this

#### Returns

dataset

#### Return type

same type as the caller

#### Raises

[ValidationError](#) – if the positive\_class is not present in target

### Examples

```
>>> ds = DatasetFactory.open("iris.csv")
>>> ds_with_target = ds.set_target('class')
>>> ds_with_pos_class = ds.set_positive_class('setosa')
```

```
class ads.dataset.classification_dataset.BinaryTextClassificationDataset(df, sampled_df,
                                                                    target, target_type,
                                                                    shape, **kwargs)
```

Bases: [BinaryClassificationDataset](#)

Dataset for binary text classification

```
auto_transform()
```

Automatically chooses the most effective dataset transformation

```
select_best_features(score_func=None, k=12)
```

Automatically chooses the best features and removes the rest

```
class ads.dataset.classification_dataset.ClassificationDataset(df, sampled_df, target, target_type,
                                                                    shape, **kwargs)
```

Bases: [ADSDatasetWithTarget](#)

Dataset for classification task

```
auto_transform(fix_imbalance: bool = True, correlation_threshold: float = 0.7, frac: float = 1.0,
                correlation_methods: str = 'pearson')
```

Return transformed dataset with several optimizations applied automatically. The optimizations include:

- Dropping constant and primary key columns, which has no predictive quality,

- Imputation, to fill in missing values in noisy data:
  - For continuous variables, fill with mean if less than 40% is missing, else drop,
  - For categorical variables, fill with most frequent if less than 40% is missing, else drop,
- Dropping strongly co-correlated columns that tend to produce less generalizable models,
- Balancing dataset using up or down sampling.

#### Parameters

- **fix\_imbalance** (*bool, defaults to True.*) – Fix imbalance between classes in dataset. Used only for classification datasets.
- **correlation\_threshold** (*float, defaults to 0.7. It must be between 0 and 1, inclusive.*) – The correlation threshold where columns with correlation higher than the threshold will be considered as strongly co-correlated and recommended to be taken care of.
- **frac** (*float, defaults to 1.0. Range -> (0, 1].*) – What fraction of the data should be used in the calculation?
- **correlation\_methods** (*Union[list, str], defaults to 'pearson'.*) –
  - ‘pearson’: Use Pearson’s Correlation between continuous features,
  - ‘cramers v’: Use Cramer’s V correlations between categorical features,
  - ‘correlation ratio’: Use Correlation Ratio Correlation between categorical and continuous features,
  - ‘all’: Is equivalent to [‘pearson’, ‘cramers v’, ‘correlation ratio’].Or a list containing any combination of these methods, for example, [‘pearson’, ‘cramers v’].

#### Returns

**transformed\_dataset** – The dataset after transformation

#### Return type

*ADSDatasetWithTarget*

### Examples

```
>>> ds_clean = ds.auto_transform(correlation_threshold=0.6)
```

**convert\_to\_text\_classification**(*text\_column: str*)

Builds a new dataset with the given text column as the only feature besides target.

#### Parameters

**text\_column** (*str*) – Feature name to use for text classification task

#### Returns

**ds** – Dataset with one text feature and a classification target

#### Return type

TextClassificationDataset

## Examples

```
>>> review_ds = DatasetFactory.open("review_data.csv")
>>> ds_text_class = review_ds.convert_to_text_classification('reviews')
```

**down\_sample**(*sampler=None*)

Fixes an imbalanced dataset by down-sampling.

### Parameters

**sampler** (An instance of *SamplerMixin*) – Should implement `fit_resample(X,y)` method. If `None`, does random down sampling.

### Returns

**down\_sampled\_ds** – A down-sampled dataset.

### Return type

*ClassificationDataset*

## Examples

```
>>> ds = DatasetFactory.open("some_data.csv")
>>> ds_balanced_small = ds.down_sample()
```

**up\_sample**(*sampler='default'*)

Fixes imbalanced dataset by up-sampling

### Parameters

- **sampler** (An instance of *SamplerMixin*) – Should implement `fit_resample(X,y)` method. If `'default'`, either SMOTE or random sampler will be used
- **fill\_missing\_type** (a string) – Can either be `'mean'`, `'mode'` or `'median'`.

### Returns

**up\_sampled\_ds** – an up-sampled dataset

### Return type

*ClassificationDataset*

## Examples

```
>>> ds = DatasetFactory.open("some_data.csv")
>>> ds_balanced_large = ds.up_sample()
```

```
class ads.dataset.classification_dataset.MultiClassClassificationDataset(df, sampled_df,
                                                                    target, target_type,
                                                                    shape, **kwargs)
```

Bases: *ClassificationDataset*

Dataset for multi-class classification

```
class ads.dataset.classification_dataset.MultiClassTextClassificationDataset(df, sampled_df,
                                                                    target,
                                                                    target_type,
                                                                    shape,
                                                                    **kwargs)
```

Bases: *MultiClassClassificationDataset*

Dataset for multi-class text classification

**auto\_transform()**

Automatically chooses the most effective dataset transformation

**select\_best\_features**(*score\_func=None, k=12*)

Automatically chooses the best features and removes the rest

#### 18.1.1.7.3 **ads.dataset.correlation module**

#### 18.1.1.7.4 **ads.dataset.correlation\_plot module**

**class** `ads.dataset.correlation_plot.BokehHeatMap(ds)`

Bases: `object`

Generate a HeatMap or horizontal bar plot to compare features.

**debug()**

Return True if in debug mode, otherwise False.

**flatten\_corr\_matrix**(*corr\_matrix*)

Flatten a correlation matrix into a pandas Dataframe.

**Parameters**

**corr\_matrix** (*Pandas Dataframe*) – The correlation matrix to be flattened.

**Returns**

**corr\_flatten** – The flattened correlation matrix.

**Return type**

Pandas DataFrame

**generate\_heatmap**(*corr\_matrix, title: str, msg: str, correlation\_threshold: float*)

Generate a heatmap from a correlation matrix.

**Parameters**

- **corr\_matrix** (*Pandas Dataframe*) – The dataframe to be used for heatmap generation.
- **title** (*str*) – title of the heatmap.
- **msg** (*str*) – An additional msg to include in the plot.
- **correlation\_threshold** (*float*) – A float between 0 and 1 which is used for excluding correlations which are not intense enough from the plot.

**Returns**

**tab** – A matplotlib Panel object which includes a plotted heatmap

**Return type**

matplotlib Panel

**generate\_target\_heatmap**(*corr\_matrix, title: str, correlation\_target: str, msg: str, correlation\_threshold: float*)

Generate a heatmap from a correlation matrix and its targets.

**Parameters**

- **corr\_matrix** (*Pandas Dataframe*) – The dataframe to be used for heatmap generation.
- **title** (*str*) – title of the heatmap.
- **correlation\_target** (*str*) – The target column name for computing correlations against.
- **msg** (*str*) – An additional msg to include in the plot.
- **correlation\_threshold** (*float*) – A float between 0 and 1 which is used for excluding correlations which are not intense enough from the plot.

**Returns**

**tab** – A matplotlib Panel object which includes a plotted heatmap.

**Return type**

matplotlib Panel

**plot\_correlation\_heatmap**(*ds*, *plot\_type: str = 'heatmap'*, *correlation\_target: str = None*, *correlation\_threshold=-1*, *correlation\_methods: str = 'pearson'*, *\*\*kwargs*)

Plots a correlation heatmap.

**Parameters**

- **ds** (*Pandas Slice*) – A data slice or file
- **plot\_type** (*str Defaults to "heatmap"*) – The type of plot - “bar” is another option.
- **correlation\_target** (*str, Defaults to None*) – the target column for correlation calculations.
- **correlation\_threshold** (*float, Defaults to -1*) – the threshold for computing correlation heatmap elements.
- **correlation\_methods** (*str, Defaults to "pearson"*) – the way to compute correlations, other options are “cramers v” and “correlation ratio”

**plot\_hbar**(*matrix*, *low: float = 1*, *high=1*, *title: str = None*, *tool\_tips: list = None*, *column\_name: str = None*)

Plots a histogram bar-graph.

**Parameters**

- **matrix** (*Pandas Dataframe*) – The dataframe to be plotted.
- **low** (*float, Defaults to 1*) – The color mapping value for “low” points.
- **high** (*float, Defaults to 1*) – The color mapping value for “high” points.
- **title** (*str, Defaults to None*) – The optional title of the heat map.
- **tool\_tips** (*list of str, Defaults to None*) – An optional list of tool tips to include with the plot.
- **column\_name** (*str, Defaults to None*) – The name of the column which is being plotted.

**Returns**

**fig** – A matplotlib heatmap figure object.

**Return type**

matplotlib Figure

**plot\_heat\_map**(*matrix*, *xrange*: list, *yrange*: list, *low*: float = 1, *high*=1, *title*: str = None, *tool\_tips*: list = None)

Plots a matrix as a heatmap.

**Parameters**

- **matrix** (*Pandas Dataframe*) – The dataframe to be plotted.
- **xrange** (*List of floats*) – The range of x values to plot.
- **yrange** (*List of floats*) – The range of y values to plot.
- **low** (*float, Defaults to 1*) – The color mapping value for “low” points.
- **high** (*float, Defaults to 1*) – The color mapping value for “high” points.
- **title** (*str, Defaults to None*) – The optional title of the heat map.
- **tool\_tips** (*list of str, Defaults to None*) – An optional list of tool tips to include with the plot.

**Returns**

**fig** – A matplotlib heatmap figure object.

**Return type**

matplotlib Figure

`ads.dataset.correlation_plot.plot_correlation_heatmap(ds=None, **kwargs) → None`

Plots a correlation heatmap.

**Parameters**

**ds** (*Pandas Slice*) – A data slice or file

#### 18.1.1.7.5 ads.dataset.dask\_series module

#### 18.1.1.7.6 ads.dataset.dataframe\_transformer module

**class** `ads.dataset.dataframe_transformer.DataFrameTransformer`(*func\_name*, *target\_name*,  
*target\_sample\_val*, *args*=None,  
*kw\_args*=None)

Bases: `TransformerMixin`

A DataFrameTransformer object.

**fit**(*df*)

Takes in a DF and returns a fitted model

**transform**(*df*)

Takes in a DF and returns a transformed DF

`ads.dataset.dataframe_transformer.expand_lambda_function(lambda_func)`

Returns a lambda function after expansion.

### 18.1.1.7.7 ads.dataset.dataset module

```
class ads.dataset.dataset.ADSDataset(df, sampled_df, shape, name="", description=None,
                                     type_discovery=True, types={}, metadata=None,
                                     progress=<ads.dataset.progress.DummyProgressBar object>,
                                     transformer_pipeline=None, interactive=False, **kwargs)
```

Bases: *PandasDataset*

An ADSDataset Object.

The ADSDataset object cannot be used for classification or regression problems until a target has been set using *set\_target*. To see some rows in the data use any of the usual Pandas functions like *head()*. There are also a variety of converters, to\_dask, to\_pandas, to\_h2o, to\_xgb, to\_csv, to\_parquet, to\_json & to\_hdf .

**assign\_column**(column, arg)

Return new dataset with new column or values of the existing column mapped according to input correspondence.

Used for adding a new column or substituting each value in a column with another value, that may be derived from a function, a *pandas.Series* or a *pandas.DataFrame*.

#### Parameters

- **column** (*str*) – Name of the feature to update.
- **arg** (*function, dict, Series or DataFrame*) – Mapping correspondence.

#### Returns

**dataset** – a dataset with the specified column assigned.

#### Return type

same type as the caller

### Examples

```
>>> ds = DatasetFactory.open("data.csv")
>>> ds_same_size = ds.assign_column('target', lambda x: x>15 if x not None)
>>> ds_bigger = ds.assign_column('new_col', np.arange(ds.shape[0]))
```

**astype**(types)

Convert data type of features.

#### Parameters

**types** (*dict*) – key is the existing feature name value is the data type to which the values of the feature should be converted. Valid data types: All numpy datatypes (Example: *np.float64*, *np.int64*, ...) or one of categorical, continuous, ordinal or datetime.

#### Returns

**updated\_dataset** – an ADSDataset with new data types

#### Return type

*ADSDataset*

## Examples

```
>>> ds = DatasetFactory.open("data.csv")
>>> ds_reformatted = ds.astype({"target": "categorical"})
```

**call**(*func*, \**args*, *sample\_size*=None, \*\**kwargs*)

Runs a custom function on dataframe

*func* will receive the pandas dataframe (which represents the dataset) as an argument named 'df' by default. This can be overridden by specifying the dataframe argument name in a tuple (*func*, *dataframe\_name*).

### Parameters

- **func** (*Union[callable, tuple]*) – Custom function that takes pandas dataframe as input Alternatively a (callable, data) tuple where data is a string indicating the keyword of callable that expects the dataframe name
- **args** (*iterable, optional*) – Positional arguments passed into func
- **sample\_size** (*int, Optional*) – To use a sampled dataframe
- **kwargs** (*mapping, optional*) – A dictionary of keyword arguments passed into func

### Returns

**func** – a plotting function that contains \**args* and \*\**kwargs*

### Return type

function

## Examples

```
>>> ds = DatasetFactory.open("classification_data.csv")
>>> def f1(df):
...     return(sum(df), axis=0)
>>> sum_ds = ds.call(f1)
```

**compute**()

**corr**(*correlation\_methods*: *Union[list, str]* = 'pearson', *frac*: *float* = 1.0, *sample\_size*: *float* = 1.0, *nan\_threshold*: *float* = 0.8, *overwrite*: *Optional[bool]* = None, *force\_recompute*: *bool* = False)

Compute pairwise correlation of numeric and categorical columns, output a matrix or a list of matrices computed using the correlation methods passed in.

### Parameters

- **correlation\_methods** (*Union[list, str]*, default to 'pearson') –
  - 'pearson': Use Pearson's Correlation between continuous features,
  - 'cramers v': Use Cramer's V correlations between categorical features,
  - 'correlation ratio': Use Correlation Ratio Correlation between categorical and continuous features,
  - 'all': Is equivalent to ['pearson', 'cramers v', 'correlation ratio'].Or a list containing any combination of these methods, for example, ['pearson', 'cramers v'].
- **frac** – Is deprecated and replaced by *sample\_size*.



- **sample\_size** (*float, defaults to 1.0. Float, Range -> (0, 1]*) – What fraction of the data should be used in the calculation?
- **nan\_threshold** (*float, default to 0.8, Range -> [0, 1]*) – Only compute a correlation when the proportion of the values, in a column, is less than or equal to nan\_threshold.
- **overwrite** – Is deprecated and replaced by force\_recompute.
- **force\_recompute** (*bool, default to be False*) –
  - If False, it calculates the correlation matrix if there is no cached correlation matrix. Otherwise, it returns the cached correlation matrix.
  - If True, it calculates the correlation matrix regardless whether there is cached result or not.

**Returns**

**correlation** – The pairwise correlations as a matrix (DataFrame) or list of matrices

**Return type**

Union[list, pandas.DataFrame]

**property ddf**

**df\_read\_functions** = ['head', 'describe', '\_get\_numeric\_data']

**drop\_columns(columns)**

Return new dataset with specified columns removed.

**Parameters**

**columns** (*str or list*) – columns to drop.

**Returns**

**dataset** – a dataset with specified columns dropped.

**Return type**

same type as the caller

**Raises**

**ValidationError** – If any of the feature names is not found in the dataset.

**Examples**

```
>>> ds = DatasetFactory.open("data.csv")
>>> ds_smaller = ds.drop_columns(['col1', 'col2'])
```

**merge(data, \*\*kwargs)**

Merges this dataset with another ADSDataset or pandas dataframe.

**Parameters**

- **data** (*Union[ADSDataset, pandas.DataFrame]*) – Data to merge.
- **kwargs** (*dict, optional*) – additional keyword arguments that would be passed to underlying dataframe's merge API.

### Examples

```
>>> ds1 = DatasetFactory.open("data1.csv")
>>> ds2 = DatasetFactory.open("data2.csv")
>>> ds_12 = ds1.merge(ds2)
```

#### **rename\_columns**(*columns*)

Returns a new dataset with altered column names.

dict values must be unique (1-to-1). Labels not contained in a dict will be left as-is. Extra labels listed don't throw an error.

##### Parameters

**columns** (*dict-like or function or list of str*) – dict to rename columns selectively, or list of names to rename all columns, or a function like `str.upper`

##### Returns

**dataset** – A dataset with specified columns renamed.

##### Return type

same type as the caller

### Examples

```
>>> ds = DatasetFactory.open("data.csv")
>>> ds_renamed = ds.rename_columns({'col1': 'target'})
```

#### **sample**(*frac=None, random\_state=42*)

Returns random sample of dataset.

##### Parameters

- **frac** (*float, optional*) – Fraction of axis items to return.
- **random\_state** (int or `np.random.RandomState`) – If int we create a new `RandomState` with this as the seed Otherwise we draw from the passed `RandomState`

##### Returns

**sampled\_dataset** – An `ADSDataset` which was randomly sampled.

##### Return type

*ADSDataset*

### Examples

```
>>> ds = DatasetFactory.open("data.csv")
>>> ds_sample = ds.sample()
```

#### **set\_description**(*description*)

Sets description for the dataset.

Give your dataset a description.

##### Parameters

**description** (*str*) – Description of the dataset.

## Examples

```
>>> ds = DatasetFactory.open("data1.csv")
>>> ds_renamed = ds.set_description("dataset1 is from \"data1.csv\"")
```

### set\_name(*name*)

Sets name for the dataset.

This name will be used to filter the datasets returned by `ds.list()` API. Calling this API is optional. By default name of the dataset is set to empty.

#### Parameters

**name** (*str*) – Name of the dataset.

## Examples

```
>>> ds = DatasetFactory.open("data1.csv")
>>> ds_renamed = ds.set_name("dataset1")
```

### set\_target(*target*, *type\_discovery=True*, *target\_type=None*)

Returns a dataset tagged based on the type of target.

#### Parameters

- **target** (*str*) – name of the feature to use as target.
- **type\_discovery** (*bool*) – This is set as True by default.
- **target\_type** (*type*) – If provided, then the target will be typed with the provided value.

#### Returns

**ds** – tagged according to the type of the target column.

#### Return type

*ADSDataset*

## Examples

```
>>> ds = DatasetFactory.open("classification_data.csv")
>>> ds_with_target= ds.set_target("target_class")
```

**show\_corr**(*frac: float = 1.0*, *sample\_size: float = 1.0*, *nan\_threshold: float = 0.8*, *overwrite: Optional[bool] = None*, *force\_recompute: bool = False*, *correlation\_target: Optional[str] = None*, *plot\_type: str = 'heatmap'*, *correlation\_threshold: float = -1*, *correlation\_methods='pearson'*, *\*\*kwargs*)

Show heatmap or barplot of pairwise correlation of numeric and categorical columns, output three tabs which are heatmap or barplot of correlation matrix of numeric columns vs numeric columns using pearson correlation method, categorical columns vs categorical columns using Cramer's V method, and numeric vs categorical columns, excluding NA/null values and columns which have more than 80% of NA/null values. By default, only 'pearson' correlation is calculated and shown in the first tab. Set `correlation_methods='all'` to show all correlation charts.

#### Parameters

- **frac** (*Is superseded by sample\_size*) –

- **sample\_size** (*float, defaults to 1.0. Float, Range -> (0, 1]*) – What fraction of the data should be used in the calculation?
- **nan\_threshold** (*float, defaults to 0.8, Range -> [0, 1]*) – In the default case, it will only calculate the correlation of the columns which has less than or equal to 80% of missing values.
- **overwrite** – Is deprecated and replaced by `force_recompute`.
- **force\_recompute** (*bool, default to be False.*) –
  - If False, it calculates the correlation matrix if there is no cached correlation matrix. Otherwise, it returns the cached correlation matrix.
  - If True, it calculates the correlation matrix regardless whether there is cached result or not.
- **plot\_type** (*str, default to "heatmap"*) – It can only be “heatmap” or “bar”. Note that if “bar” is chosen, `correlation_target` also has to be set and the bar chart will only show the correlation values of the pairs which have the target in them.
- **correlation\_target** (*str, default to None*) – It can be any columns of type continuous, ordinal, categorical or zipcode. When `correlation_target` is set, only pairs that contains `correlation_target` will show.
- **correlation\_threshold** (*float, default to -1*) – It can be any number between -1 and 1.
- **correlation\_methods** (*Union[list, str], defaults to 'pearson'*) –
  - ‘pearson’: Use Pearson’s Correlation between continuous features,
  - ‘cramers v’: Use Cramer’s V correlations between categorical features,
  - ‘correlation ratio’: Use Correlation Ratio Correlation between categorical and continuous features,
  - ‘all’: Is equivalent to [‘pearson’, ‘cramers v’, ‘correlation ratio’].Or a list containing any combination of these methods, for example, [‘pearson’, ‘cramers v’].

**Return type**

None

**show\_in\_notebook**(*correlation\_threshold=-1, selected\_index=0, sample\_size=0, visualize\_features=True, correlation\_methods='pearson', \*\*kwargs*)

Provide visualization of dataset.

- Display feature distribution. The data table display will show a maximum of 8 digits,
- Plot the correlation between the dataset features (as a heatmap) only when all the features are continuous or ordinal,
- Display data head.

**Parameters**

- **correlation\_threshold** (*int, default -1*) – The correlation threshold to select, which only show features that have larger or equal correlation values than the threshold.
- **selected\_index** (*int, str, default 0*) – The displayed output is stacked into an accordion widget, use `selected_index` to force the display to open a specific element, use the (zero offset) index or any prefix string of the name (eg, ‘corr’ for correlations)

- **sample\_size** (*int*, *default 0*) – The size (in rows) to sample for visualizations
- **visualize\_features** (*bool default False*) – For the “Features” section control if feature visualizations are shown or not. If not only a summary of the numeric statistics is shown. The numeric statistics are also always shows for wide (>64 features) datasets
- **correlation\_methods** (*Union[list, str]*, *default to 'pearson'*) –
  - ‘pearson’: Use Pearson’s Correlation between continuous features,
  - ‘cramers v’: Use Cramer’s V correlations between categorical features,
  - ‘correlation ratio’: Use Correlation Ratio Correlation between categorical and continuous features,
  - ‘all’: Is equivalent to [‘pearson’, ‘cramers v’, ‘correlation ratio’].
 Or a list containing any combination of these methods, for example, [‘pearson’, ‘cramers v’].

**snapshot** (*snapshot\_dir=None, name="", storage\_options=None*)

Snapshot the dataset with modifications made so far.

Optionally caller can invoke `ds.set_name()` before saving to identify the dataset uniquely at the time of using `ds.list()`.

The snapshot can be reloaded by providing the URI returned by this API to `DatasetFactory.open()`

#### Parameters

- **snapshot\_dir** (*str, optional*) – Directory path under which dataset snapshot will be created. Defaults to `snapshots_dir` set using `DatasetFactory.set_default_storage()`.
- **name** (*str, optional, default: ""*) – Name to uniquely identify the snapshot using `DatasetFactory.list_snapshots()`. If not provided, an auto-generated name is used.
- **storage\_options** (*dict, optional*) – Parameters passed on to the backend filesystem class. Defaults to `storage_options` set using `DatasetFactory.set_default_storage()`.

#### Returns

**p\_str** – the URI to access the snapshotted dataset.

#### Return type

str

### Examples

```
>>> ds = DatasetFactory.open("data.csv")
>>> ds_uri = ds.snapshot()
```

**to\_avro** (*path, schema=None, storage\_options=None, \*\*kwargs*)

Save data to Avro files. Avro is a remote procedure call and data serialization framework developed within Apache’s Hadoop project. It uses JSON for defining data types and protocols, and serializes data in a compact binary format.

#### Parameters

- **path** (*string*) – Path to a target filename. May contain a \* to denote many filenames.
- **schema** (*dict*) – Avro schema dictionary, see below.

- **storage\_options** (*dict*, *optional*) – Parameters passed to the backend filesystem class. Defaults to storage\_options set using DatasetFactory.set\_default\_storage().
- **kwargs** (*dict*, *optional*) – See <https://fastavro.readthedocs.io/en/latest/writer.html>

## Notes

Avro schema is a complex dictionary describing the data, see <https://avro.apache.org/docs/1.8.2/gettingstartedpython.html#Defining+a+schema> and <https://fastavro.readthedocs.io/en/latest/writer.html>. Its structure is as follows:

```
{'name': 'Test',
 'namespace': 'Test',
 'doc': 'Descriptive text',
 'type': 'record',
 'fields': [
   {'name': 'a', 'type': 'int'},
 ]}
```

where the “name” field is required, but “namespace” and “doc” are optional descriptors; “type” must always be “record”. The list of fields should have an entry for every key of the input records, and the types are like the primitive, complex or logical types of the Avro spec (<https://avro.apache.org/docs/1.8.2/spec.html>).

## Examples

```
>>> ds = DatasetFactory.open("data.avro")
>>> ds.to_avro("my/path.avro")
```

**to\_csv**(*path*, *storage\_options=None*, *\*\*kwargs*)

Save the materialized dataframe to csv file.

### Parameters

- **path** (*str*) – Location to write to. If there are more than one partitions in df, should include a glob character to expand into a set of file names, or provide a *name\_function=parameter*. Supports protocol specifications such as “oci://”, “s3://”.
- **storage\_options** (*dict*, *optional*) – Parameters passed on to the backend filesystem class. Defaults to storage\_options set using DatasetFactory.set\_default\_storage().
- **kwargs** (*dict*, *optional*) –

## Examples

```
>>> ds = DatasetFactory.open("data.csv")
>>> [ds_link] = ds.to_csv("my/path.csv")
```

**to\_dask**(*filter=None*, *frac=None*, *npartitions=None*, *include\_transformer\_pipeline=False*)

Returns a copy of the data as `dask.dataframe.core.DataFrame`, and a sklearn pipeline optionally that holds the transformations run so far on the data.

The pipeline returned can be updated with the transformations done offline and passed along with the dataframe to Dataset.open API if the transformations need to be reproduced at the time of scoring.

### Parameters

- **filter** (*str, optional*) – The query string to filter the dataframe, for example `ds.to_dask(filter="age > 50 and location == 'san francisco'")` See also <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.query.html>
- **frac** (*float, optional*) – fraction of original data to return.
- **include\_transformer\_pipeline** (*bool, default: False*) – If True, (dataframe, transformer\_pipeline) is returned as a tuple.

#### Returns

- **dataframe** (*dask.dataframe.core.DataFrame*) – if `include_transformer_pipeline` is False.
- **(data, transformer\_pipeline)** (*tuple of dask.dataframe.core.DataFrame and dataset.pipeline.TransformerPipeline*) – if `include_transformer_pipeline` is True.

#### Examples

```
>>> ds = DatasetFactory.open("data.csv")
>>> ds_dask = ds.to_dask()
```

#### Notes

See also <http://docs.dask.org/en/latest/dataframe-api.html#dataframe> and <https://scikit-learn.org/stable/modules/generated/sklearn.pipeline.Pipeline.html#sklearn.pipeline.Pipeline>

**to\_dask\_dataframe**(*filter=None, frac=None, npartitions=None, include\_transformer\_pipeline=False*)

**to\_h2o**(*filter=None, frac=None, include\_transformer\_pipeline=False*)

Returns a copy of the data as `h2o.H2OFrame`, and a sklearn pipeline optionally that holds the transformations run so far on the data.

The pipeline returned can be updated with the transformations done offline and passed along with the dataframe to Dataset.open API if the transformations need to be reproduced at the time of scoring.

#### Parameters

- **filter** (*str, optional*) – The query string to filter the dataframe, for example `ds.to_h2o(filter="age > 50 and location == 'san francisco'")` See also <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.query.html>
- **frac** (*float, optional*) – fraction of original data to return.
- **include\_transformer\_pipeline** (*bool, default: False*) – If True, (dataframe, transformer\_pipeline) is returned as a tuple.

#### Returns

- **dataframe** (*h2o.H2OFrame*) – if `include_transformer_pipeline` is False.
- **(data, transformer\_pipeline)** (*tuple of h2o.H2OFrame and dataset.pipeline.TransformerPipeline*) – if `include_transformer_pipeline` is True.

## Examples

```
>>> ds = DatasetFactory.open("data.csv")
>>> ds_as_h2o = ds.to_h2o()
```

## Notes

See also <https://scikit-learn.org/stable/modules/generated/sklearn.pipeline.Pipeline.html#sklearn.pipeline.Pipeline>

**to\_h2o\_dataframe**(*filter=None, frac=None, include\_transformer\_pipeline=False*)

**to\_hdf**(*path: str, key: str, storage\_options: Optional[dict] = None, \*\*kwargs*) → str

Save data to Hierarchical Data Format (HDF) files.

### Parameters

- **path** (*string*) – Path to a target filename.
- **key** (*string*) – Datapath within the files.
- **storage\_options** (*dict, optional*) – Parameters passed to the backend filesystem class. Defaults to `storage_options` set using `DatasetFactory.set_default_storage()`.
- **kwargs** (*dict, optional*) –

### Returns

The filename of the HDF5 file created.

### Return type

str

## Examples

```
>>> ds = DatasetFactory.open("data.csv")
>>> ds.to_hdf(path="my/path.h5", key="df")
```

**to\_json**(*path, storage\_options=None, \*\*kwargs*)

Save data to JSON files.

### Parameters

- **path** (*str*) – Location to write to. If there are more than one partitions in `df`, should include a glob character to expand into a set of file names, or provide a `name_function=parameter`. Supports protocol specifications such as “`oci://`”, “`s3://`”.
- **storage\_options** (*dict, optional*) – Parameters passed on to the backend filesystem class. Defaults to `storage_options` set using `DatasetFactory.set_default_storage()`.
- **kwargs** (*dict, optional*) –



## Examples

```
>>> ds = DatasetFactory.open("data.csv")
>>> ds.to_json("my/path.json")
```

**to\_pandas**(*filter=None, frac=None, include\_transformer\_pipeline=False*)

Returns a copy of the data as `pandas.DataFrame`, and a sklearn pipeline optionally that holds the transformations run so far on the data.

The pipeline returned can be updated with the transformations done offline and passed along with the dataframe to `Dataset.open` API if the transformations need to be reproduced at the time of scoring.

### Parameters

- **filter** (*str, optional*) – The query string to filter the dataframe, for example `ds.to_pandas(filter="age > 50 and location == 'san francisco'")` See also <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.query.html>
- **frac** (*float, optional*) – fraction of original data to return.
- **include\_transformer\_pipeline** (*bool, default: False*) – If True, (dataframe, transformer\_pipeline) is returned as a tuple

### Returns

- **dataframe** (*pandas.DataFrame*) – if `include_transformer_pipeline` is False.
- (**data**, **transformer\_pipeline**) (*tuple of pandas.DataFrame and dataset.pipeline.TransformerPipeline*) – if `include_transformer_pipeline` is True.

## Examples

```
>>> ds = DatasetFactory.open("data.csv")
>>> ds_as_df = ds.to_pandas()
```

## Notes

See also <https://scikit-learn.org/stable/modules/generated/sklearn.pipeline.Pipeline.html#sklearn.pipeline.Pipeline>

**to\_pandas\_dataframe**(*filter=None, frac=None, include\_transformer\_pipeline=False*)

**to\_parquet**(*path, storage\_options=None, \*\*kwargs*)

Save data to parquet file.

### Parameters

- **path** (*str*) – Location to write to. If there are more than one partitions in df, should include a glob character to expand into a set of file names, or provide a *name\_function=parameter*. Supports protocol specifications such as “*oci://*”, “*s3://*”.
- **storage\_options** (*dict, optional*) – Parameters passed on to the backend filesystem class. Defaults to `storage_options` set using `DatasetFactory.set_default_storage()`.
- **kwargs** (*dict, optional*) –

## Examples

```
>>> ds = DatasetFactory.open("data.csv")
>>> ds.to_parquet("my/path")
```

**to\_xgb**(*filter=None, frac=None, include\_transformer\_pipeline=False*)

Returns a copy of the data as `xgboost.DMatrix`, and a sklearn pipeline optionally that holds the transformations run so far on the data.

The pipeline returned can be updated with the transformations done offline and passed along with the dataframe to `Dataset.open` API if the transformations need to be reproduced at the time of scoring.

### Parameters

- **filter** (*str, optional*) – The query string to filter the dataframe, for example `ds.to_xgb(filter="age > 50 and location == 'san francisco'")` See also <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.query.html>
- **frac** (*float, optional*) – fraction of original data to return.
- **include\_transformer\_pipeline** (*bool, default: False*) – If True, (dataframe, transformer\_pipeline) is returned as a tuple.

### Returns

- **dataframe** (*xgboost.DMatrix*) – if `include_transformer_pipeline` is False.
- (**data**, **transformer\_pipeline**) (*tuple of xgboost.DMatrix and dataset.pipeline.TransformerPipeline*) – if `include_transformer_pipeline` is True.

## Examples

```
>>> ds = DatasetFactory.open("data.csv")
>>> xgb_dmat = ds.to_xgb()
```

## Notes

See also <https://scikit-learn.org/stable/modules/generated/sklearn.pipeline.Pipeline.html#sklearn.pipeline.Pipeline>

**to\_xgb\_dmatrix**(*filter=None, frac=None, include\_transformer\_pipeline=False*)

### 18.1.1.7.8 ads.dataset.dataset\_browser module

**class** `ads.dataset.dataset_browser.DatasetBrowser`

Bases: `ABC`

**static** `GitHub(user: str, repo: str, branch: str = 'master')`

Returns a `GitHubDataset`

**static** `filesystem(folder: str)`

Returns a `LocalFilesystemDataset`.

**filter\_list**(*L, filter\_pattern*)  $\rightarrow$  `List[str]`

Filters a list of dataset names.

**static list**(*filter\_pattern*='\*') → List[str]

Return a list of dataset browser strings.

**abstract open**(\*\**kwargs*)

Return new dataset for the given name.

**Parameters**

**name** (*str*) – the name of the dataset to open.

**Returns**

**ds**

**Return type**

Dataset

### Examples

```
ds_browser = DatasetBrowser("sklearn")
```

```
ds = ds_browser.open("iris")
```

**static seaborn**()

Returns a SeabornDataset.

**static sklearn**()

Returns a SklearnDataset.

**static web**(*index\_url*: str)

Returns a WebDataset.

**class** ads.dataset.dataset\_browser.**GitHubDatasets**(*user*: str, *repo*: str, *branch*: str)

Bases: [DatasetBrowser](#)

**list**(*filter\_pattern*: str = '.\*') → List[str]

Return a list of dataset browser strings.

**open**(*name*: str, \*\**kwargs*)

Return new dataset for the given name.

**Parameters**

**name** (*str*) – the name of the dataset to open.

**Returns**

**ds**

**Return type**

Dataset

### Examples

```
ds_browser = DatasetBrowser("sklearn")
```

```
ds = ds_browser.open("iris")
```

**class** ads.dataset.dataset\_browser.**LocalFilesystemDatasets**(*folder*: str)

Bases: [DatasetBrowser](#)

**list**(*filter\_pattern: str = '.\*')* → List[str]  
Return a list of dataset browser strings.

**open**(*name: str, \*\*kwargs*)  
Return new dataset for the given name.

**Parameters**

**name** (*str*) – the name of the dataset to open.

**Returns**

**ds**

**Return type**

Dataset

### Examples

```
ds_browser = DatasetBrowser("sklearn")  
ds = ds_browser.open("iris")
```

**class** ads.dataset.dataset\_browser.**SeabornDatasets**

Bases: [\*DatasetBrowser\*](#)

**list**(*filter\_pattern: str = '.\*')* → List[str]  
Return a list of dataset browser strings.

**open**(*name: str, \*\*kwargs*)  
Return new dataset for the given name.

**Parameters**

**name** (*str*) – the name of the dataset to open.

**Returns**

**ds**

**Return type**

Dataset

### Examples

```
ds_browser = DatasetBrowser("sklearn")  
ds = ds_browser.open("iris")
```

**class** ads.dataset.dataset\_browser.**SklearnDatasets**

Bases: [\*DatasetBrowser\*](#)

**list**(*filter\_pattern: str = '.\*')* → List[str]  
Return a list of dataset browser strings.

**open**(*name: str, \*\*kwargs*)  
Return new dataset for the given name.

**Parameters**

**name** (*str*) – the name of the dataset to open.

**Returns**

**ds**

**Return type**

Dataset

**Examples**

```
ds_browser = DatasetBrowser("sklearn")
```

```
ds = ds_browser.open("iris")
```

```
sklearn_datasets = ['breast_cancer', 'diabetes', 'iris', 'wine', 'digits']
```

```
class ads.dataset.dataset_browser.WebDatasets(index_url: str)
```

Bases: [DatasetBrowser](#)

```
list(filter_pattern: str = '.*') → List[str]
```

Return a list of dataset browser strings.

```
open(name: str, **kwargs)
```

Return new dataset for the given name.

**Parameters**

**name** (*str*) – the name of the dataset to open.

**Returns**

**ds**

**Return type**

Dataset

**Examples**

```
ds_browser = DatasetBrowser("sklearn")
```

```
ds = ds_browser.open("iris")
```

**18.1.1.7.9 ads.dataset.dataset\_with\_target module**

```
class ads.dataset.dataset_with_target.ADSDataSetWithTarget(df, sampled_df, target, target_type,
                                                            shape, sample_max_rows=-1,
                                                            type_discovery=True, types={},
                                                            parent=None, name="",
                                                            metadata=None,
                                                            transformer_pipeline=None,
                                                            description=None,
                                                            progress=<ads.dataset.progress.DummyProgressBar
                                                            object>, **kwargs)
```

Bases: [ADSDataSet](#)

This class provides APIs for preparing dataset for modeling.

```
auto_transform(correlation_threshold: float = 0.7, frac: float = 1.0, sample_size=1.0,
               correlation_methods: Union[str, list] = 'pearson')
```

Return transformed dataset with several optimizations applied automatically. The optimizations include:

- Dropping constant and primary key columns, which has no predictive quality,
- Imputation, to fill in missing values in noisy data:

- For continuous variables, fill with mean if less than 40% is missing, else drop,
- For categorical variables, fill with most frequent if less than 40% is missing, else drop,
- Dropping strongly co-correlated columns that tend to produce less generalizable models.

#### Parameters

- **correlation\_threshold** (*float, defaults to 0.7. It must be between 0 and 1, inclusive*) – the correlation threshold where columns with correlation higher than the threshold will be considered as strongly co-correlated and recommended to be taken care of.
- **frac** (*Is superseded by sample\_size*) –
- **sample\_size** (*float, defaults to 1.0. Float, Range -> (0, 1]*) – What fraction of the data should be used in the calculation?
- **correlation\_methods** (*Union[list, str], defaults to 'pearson'*) –
  - 'pearson': Use Pearson's Correlation between continuous features,
  - 'cramers v': Use Cramer's V correlations between categorical features,
  - 'correlation ratio': Use Correlation Ratio Correlation between categorical and continuous features,
  - 'all': Is equivalent to ['pearson', 'cramers v', 'correlation ratio'].Or a list containing any combination of these methods, for example, ['pearson', 'cramers v'].

#### Returns

**transformed\_dataset**

#### Return type

*ADSDataSetWithTarget*

### Examples

```
>>> ds_clean = ds.auto_transform()
```

```
get_recommendations(correlation_methods: str = 'pearson', correlation_threshold: float = 0.7, frac: float = 1.0, sample_size: float = 1.0, overwrite: bool = None, force_recompute: bool = False, display_format: str = 'widget')
```

Generate recommendations for dataset optimization. This includes:

- Identifying constant and primary key columns, which has no predictive quality,
- Imputation, to fill in missing values in noisy data:
  - For continuous variables, fill with mean if less than 40% is missing, else drop,
  - For categorical variables, fill with most frequent if less than 40% is missing, else drop,
- Identifying strongly co-correlated columns that tend to produce less generalizable models,
- Automatically balancing dataset for classification problems using up or down sampling.

#### Parameters

- **correlation\_methods** (*Union[list, str], default to 'pearson'*) –

- ‘pearson’: Use Pearson’s Correlation between continuous features,
- ‘cramers v’: Use Cramer’s V correlations between categorical features,
- ‘correlation ratio’: Use Correlation Ratio Correlation between categorical and continuous features,
- ‘all’: Is equivalent to [‘pearson’, ‘cramers v’, ‘correlation ratio’].

Or a list containing any combination of these methods, for example, [‘pearson’, ‘cramers v’].

- **correlation\_threshold** (*float, defaults to 0.7. It must be between 0 and 1, inclusive*) – The correlation threshold where columns with correlation higher than the threshold will be considered as strongly co-correlated and recommended to be taken care of.
- **frac** (*Is superseded by sample\_size*) –
- **sample\_size** (*float, defaults to 1.0. Float, Range -> (0, 1]*) – What fraction of the data should be used in the calculation?
- **overwrite** – Is deprecated and replaced by `force_recompute`.
- **force\_recompute** (*bool, default to be False*) –
  - If False, it calculates the correlation matrix if there is no cached correlation matrix. Otherwise, it returns the cached correlation matrix.
  - If True, it calculates the correlation matrix regardless whether there is cached result or not.
- **display\_format** (*string, defaults to 'widget'.*) – Should be either ‘widget’ or ‘table’. If ‘widget’, a GUI style interface is popped out; if ‘table’, a table of suggestions is shown.

#### **get\_transformed\_dataset()**

Return the transformed dataset with the recommendations applied.

This method should be called after applying the recommendations using the `Recommendation#show_in_notebook()` API.

#### **rename\_columns(columns)**

Returns a dataset with columns renamed.

#### **select\_best\_features(score\_func=None, k=12)**

Return new dataset containing only the top k features.

##### **Parameters**

- **k** (*int, default 12*) – The top ‘k’ features to select.
- **score\_func** (*function*) – Scoring function to use to rank the features. This scoring function should take a 2d array X(features) and an array like y(target) and return a numeric score for each feature in the same order as X.

## Notes

See also [https://scikit-learn.org/stable/modules/generated/sklearn.feature\\_selection.f\\_regression.html](https://scikit-learn.org/stable/modules/generated/sklearn.feature_selection.f_regression.html) and [https://scikit-learn.org/stable/modules/generated/sklearn.feature\\_selection.f\\_classif.html](https://scikit-learn.org/stable/modules/generated/sklearn.feature_selection.f_classif.html)

## Examples

```
>>> ds = DatasetBrowser("sklearn").open("iris")
>>> ds_small = ds.select_best_features(k=2)
```

**suggest\_recommendations**(*correlation\_methods*: Union[str, list] = 'pearson', *print\_code*: bool = True, *correlation\_threshold*: float = 0.7, *overwrite*: Optional[bool] = None, *force\_recompute*: bool = False, *frac*: float = 1.0, *sample\_size*: float = 1.0, *\*\*kwargs*)

Returns a pandas dataframe with suggestions for dataset optimization. This includes:

- Identifying constant and primary key columns, which has no predictive quality,
- Imputation, to fill in missing values in noisy data:
  - For continuous variables, fill with mean if less than 40% is missing, else drop,
  - For categorical variables, fill with most frequent if less than 40% is missing, else drop,
- Identifying strongly co-correlated columns that tend to produce less generalizable models,
- Automatically balancing dataset for classification problems using up or down sampling.

### Parameters

- **correlation\_methods** (Union[list, str], default to 'pearson') –
  - 'pearson': Use Pearson's Correlation between continuous features,
  - 'cramers v': Use Cramer's V correlations between categorical features,
  - 'correlation ratio': Use Correlation Ratio Correlation between categorical and continuous features,
  - 'all': Is equivalent to ['pearson', 'cramers v', 'correlation ratio'].

Or a list containing any combination of these methods, for example, ['pearson', 'cramers v']

- **print\_code** (bool, Defaults to True) – Print Python code for the suggested actions.
- **correlation\_threshold** (float. Defaults to 0.7. It must be between 0 and 1, inclusive) – the correlation threshold where columns with correlation higher than the threshold will be considered as strongly co-correlated and recommended to be taken care of.
- **frac** (Is superseded by sample\_size) –
- **sample\_size** (float, defaults to 1.0. Float, Range -> (0, 1]) – What fraction of the data should be used in the calculation?
- **overwrite** – Is deprecated and replaced by force\_recompute.
- **force\_recompute** (bool, default to be False) –
  - If False, it calculates the correlation matrix if there is no cached correlation matrix. Otherwise, it returns the cached correlation matrix.



- If True, it calculates the correlation matrix regardless whether there is cached result or not.

**Returns****suggestion dataframe****Return type**

pandas.DataFrame

**Examples**

```
>>> suggestion_df = ds.suggest_recommendations(correlation_threshold=0.7)
```

**train\_test\_split**(*test\_size=0.1, random\_state=42*)

Splits dataset to train and test data.

**Parameters**

- **test\_size** (*Union[float, int], optional, default=0.1*) –
- **random\_state** (*Union[int, RandomState], optional, default=None*) –
  - If int, random\_state is the seed used by the random number generator;
  - If RandomState instance, random\_state is the random number generator;
  - If None, the random number generator is the RandomState instance used by np.random.

**Returns****train\_data, test\_data** – tuple of ADSData instances**Return type**

tuple

**Examples**

```
>>> ds = DatasetFactory.open("data.csv")
>>> train, test = ds.train_test_split()
```

**train\_validation\_test\_split**(*test\_size=0.1, validation\_size=0.1, random\_state=42*)

Splits dataset to train, validation and test data.

**Parameters**

- **test\_size** (*Union[float, int], optional, default=0.1*) –
- **validation\_size** (*Union[float, int], optional, default=0.1*) –
- **random\_state** (*Union[int, RandomState], optional, default=None*) –
  - If int, random\_state is the seed used by the random number generator;
  - If RandomState instance, random\_state is the random number generator;
  - If None, the random number generator is the RandomState instance used by np.random.

**Returns****train\_data, validation\_data, test\_data** – tuple of ADSData instances**Return type**

tuple

### Examples

```
>>> ds = DatasetFactory.open("data.csv")
>>> train, valid, test = ds.train_validation_test_split()
```

#### `type_of_target()`

Return the target type for the dataset.

##### Returns

**target\_type** – an object of `TypedFeature`

##### Return type

*TypedFeature*

### Examples

```
>>> ds = ds.set_target('target_class')
>>> assert(ds.type_of_target() == 'categorical')
```

#### `visualize_transforms()`

Render a representation of the dataset's transform DAG.

#### 18.1.1.7.10 `ads.dataset.exception` module

**exception** `ads.dataset.exception.DatasetError(*args, **kwargs)`

Bases: `BaseException`

Base class for dataset errors.

**exception** `ads.dataset.exception.ValidationError(msg)`

Bases: *DatasetError*

Handles validation errors in dataset.

#### 18.1.1.7.11 `ads.dataset.factory` module

**class** `ads.dataset.factory.CustomFormatReaders`

Bases: `object`

**DEFAULT\_SQL\_ARRAYSIZE** = 50000

**DEFAULT\_SQL\_CHUNKSIZE** = 12007

**DEFAULT\_SQL\_CTU** = False

**DEFAULT\_SQL\_MIL** = 128

**static read\_arff**(*path*, *\*\*kwargs*)

**static read\_avro**(*path*: str, *\*\*kwargs*) → `DataFrame`

**static read\_html**(*path*, *html\_table\_index*: `Optional[int]` = None, *\*\*kwargs*)

```
static read_json(path: str, **kwargs) → DataFrame
```

```
static read_libsvm(path: str, **kwargs) → DataFrame
```

```
static read_log(path, **kwargs)
```

```
classmethod read_sql(path: str, table: Optional[str] = None, **kwargs) → DataFrame
```

#### Parameters

- **path** – str This is the connection URL that gets passed to sqlalchemy’s create\_engine method
- **table** – str This is either the name of a table to select \* from or a sql query to be run
- **kwargs** –

#### Returns

pd.DataFrame

```
static read_tsv(path: str, **kwargs) → DataFrame
```

```
static read_xml(path: str, **kwargs) → DataFrame
```

Load data from xml file.

#### Parameters

- **path** (str) – Path to XML file
- **storage\_options** (dict, optional) – Storage options passed to Pandas to read the file.

#### Returns

dataframe

#### Return type

pandas.DataFrame

```
class ads.dataset.factory.DatasetFactory
```

Bases: object

```
static download(remote_path, local_path, storage=None, overwrite=False)
```

Download a remote file or directory to local storage.

#### Parameters

- **remote\_path** (str) – Supports protocols like oci, s3, also supports glob expressions
- **local\_path** (str) – Supports glob expressions
- **storage** (dict) – Parameters passed on to the backend remote filesystem class.
- **overwrite** (bool, default False) – If True, the method will overwrite any existing files in the local\_path

## Examples

```
>>> DatasetFactory.download("oci://Bucket/prefix/to/data/*.csv",
...                          "/home/datascience/data/")
```

**static** `from_dataframe(df, target: Optional[str] = None, **kwargs)`

Returns an object of `ADSDatasetWithTarget` or `ADSDataset` given a `pandas.DataFrame`

### Parameters

- **df** (`pandas.DataFrame`) –
- **target** (`str`) –
- **kwargs** (`dict`) – See `DatasetFactory.open()` for supported kwargs

### Returns

**dataset** – according to the type of target

### Return type

an object of `ADSDataset` target is not specified, otherwise an object of `ADSDatasetWithTarget` tagged

## Examples

```
>>> df = pd.DataFrame(data)
>>> ds = from_dataframe(df)
```

**classmethod** `infer_target_type(target, target_series, discover_target_type=True)`

**static** `list_snapshots(snapshot_dir=None, name="", storage_options=None, **kwargs)`

Displays the URIs for dataset snapshots under the given directory path.

### Parameters

- **snapshot\_dir** (`str`) – Return all dataset snapshots created using `ADSDataset.snapshot()` within this directory. The path can contain protocols such as `oci`, `s3`.
- **name** (`str`, *optional*) – The list of snapshots in the directory gets filtered by the name. Accepts glob expressions. default = “`ads_`”
- **storage\_options** (`dict`) – Parameters passed on to the backend filesystem class.

## Example

```
>>> DatasetFactory.list_snapshots(snapshot_dir="oci://my_bucket/snapshots_dir",
...                               name="ads_iris_")
```

Returns a list of all snapshots (recursively) saved to obj storage bucket “`my_bucket`” with prefix “`/snapshots_dir/ads_iris_*`” sorted by time created.

**static** `open(source, target=None, format='infer', reader_fn: Callable = None, name: str = None, description="", npartitions: int = None, type_discovery=True, html_table_index=None, column_names='infer', sample_max_rows=10000, positive_class=None, transformer_pipeline=None, types={}, **kwargs)`

Returns an object of ADSDataset or ADSDatasetWithTarget read from the given path

Deprecated since version 2.6.6: “Deprecated in favor of using Pandas. Pandas supports reading from object storage directly. Check [https://accelerated-data-science.readthedocs.io/en/latest/user\\_guide/loading\\_data/connect.html](https://accelerated-data-science.readthedocs.io/en/latest/user_guide/loading_data/connect.html)”,

#### Parameters

- **source** (*Union[str, pandas.DataFrame, h2o.DataFrame, pyspark.sql.dataframe.DataFrame]*) – If str, URI for the dataset. The dataset could be read from local or network file system, hdfs, s3, gcs and optionally pyspark in pyspark conda env
- **target** (*str, optional*) – Name of the target in dataset. If set an ADSDatasetWithTarget object is returned, otherwise an ADSDataset object is returned which can be used to understand the dataset through visualizations
- **format** (*str, default: infer*) – Format of the dataset. Supported formats: CSV, TSV, Parquet, libsvm, JSON, XLS/XLSX (Excel), HDF5, SQL, XML, Apache server log files (clf, log), ARFF. By default, the format would be inferred from the ending of the dataset file path.
- **reader\_fn** (*Callable, default: None*) – The user may pass in their own custom reader function. It must accept (*path, \*\*kwargs*) and return a pandas DataFrame
- **name** (*str, optional default: ""*) –
- **description** (*str, optional default: ""*) – Text describing the dataset
- **npartitions** (*int, deprecated*) – Number of partitions to split the data By default this is set to the max number of cores supported by the backend compute accelerator
- **type\_discovery** (*bool, default: True*) – If false, the data types of the dataframe are used as such. By default, the dataframe columns are associated with the best suited data types. Associating the features with the discovered datatypes would impact visualizations and model prediction.
- **html\_table\_index** (*int, optional*) – The index of the dataframe table in html content. This is used when the format of dataset is html
- **column\_names** (*'infer', list of str or None, default: 'infer'*) – Supported only for CSV and TSV. List of column names to use. By default, column names are inferred from the first line of the file. If set to None, column names would be auto-generated instead of inferring from file. If the file already contains a column header, specify header=0 to ignore the existing column names.
- **sample\_max\_rows** (*int, default: 10000, use -1 auto calculate sample size, use 0 (zero) for no sampling*) – Sample size of the dataframe to use for visualization and optimization.
- **positive\_class** (*Any, optional*) – Label in target for binary classification problems which should be identified as positive for modeling. By default, the first unique value is considered as the positive label.
- **types** (*dict, optional*) – Dictionary of <feature\_name> : <data\_type> to override the data type of features.
- **transformer\_pipeline** (*datasets.pipeline.TransformerPipeline, optional*) – A pipeline of transformations done outside the sdk and need to be applied at the time of scoring

- **storage\_options** (*dict*, *default: varies by source type*) – Parameters passed on to the backend filesystem class.
- **sep** (*str*) – Delimiting character for parsing the input file.
- **kwargs** (*additional keyword arguments that would be passed to underlying dataframe read API*) – based on the format of the dataset

#### Returns

- **dataset** (*An instance of ADSDataset*)
- (*or*)
- **dataset\_with\_target** (*An instance of ADSDatasetWithTarget*)

#### Examples

```
>>> ds = DatasetFactory.open("/path/to/data.data", format='csv', delimiter=" ",
...                             na_values="n/a", skipinitialspace=True)
```

```
>>> ds = DatasetFactory.open("/path/to/data.csv", target="col_1", prefix="col_",
...                             skiprows=1, encoding="ISO-8859-1")
```

```
>>> ds = DatasetFactory.open("oci://bucket@namespace/path/to/data.tsv",
...                             column_names=["col1", "col2", "col3"], header=0)
```

```
>>> ds = DatasetFactory.open("oci://bucket@namespace/path/to/data.csv",
...                             storage_options={"config": "~/oci/config",
...                             "profile": "USER_2"}, delimiter = ';')
```

```
>>> ds = DatasetFactory.open("/path/to/data.parquet", engine='pyarrow',
...                             types={"col1": "ordinal",
...                                     "col2": "categorical",
...                                     "col3" : "continuous",
...                                     "col4" : "float64"})
```

```
>>> ds = DatasetFactory.open(df, target="class", sample_max_rows=5000,
...                             positive_class="yes")
```

```
>>> ds = DatasetFactory.open("s3://path/to/data.json.gz", format="json",
...                             compression="gzip", orient="records")
```

**static open\_to\_pandas**(*source: str, format: Optional[str] = None, reader\_fn: Optional[Callable] = None, \*\*kwargs*) → DataFrame

**static set\_default\_storage**(*snapshots\_dir=None, storage\_options=None*)

Set default storage directory and options.

Both snapshots\_dir and storage\_options can be overridden at the API scope.

#### Parameters

- **snapshots\_dir** (*str*) – Path for the snapshots directory. Can contain protocols such as oci, s3

- **storage\_options** (*dict*, *optional*) – Parameters passed on to the backend filesystem class.

**static upload**(*local\_file\_or\_dir*, *remote\_file\_or\_dir*, *storage\_options=None*)

Upload local file or directory to remote storage

**Parameters**

- **local\_file\_or\_dir** (*str*) – Supports glob expressions
- **remote\_file\_or\_dir** (*str*) – Supports protocols like oci, s3, also supports glob expressions
- **storage\_options** (*dict*) – Parameters passed on to the backend remote filesystem class.

`ads.dataset.factory.get_format_reader(path: ElaboratedPath, **kwargs) → Callable`

`ads.dataset.factory.load_dataset(path: ElaboratedPath, reader_fn: Callable, **kwargs) → DataFrame`

#### 18.1.1.7.12 ads.dataset.feature\_engineering\_transformer module

**class** `ads.dataset.feature_engineering_transformer.FeatureEngineeringTransformer`(*feature\_metadata=None*)

Bases: `TransformerMixin`

**fit**(*X*, *y=None*)

**fit\_transform**(*X*, *y=None*, \*\**fit\_params*)

Fit to data, then transform it.

Fits transformer to *X* and *y* with optional parameters *fit\_params* and returns a transformed version of *X*.

**Parameters**

- **X** (*array-like of shape (n\_samples, n\_features)*) – Input samples.
- **y** (*array-like of shape (n\_samples,) or (n\_samples, n\_outputs), default=None*) – Target values (None for unsupervised transformations).
- **\*\*fit\_params** (*dict*) – Additional fit parameters.

**Returns**

**X\_new** – Transformed array.

**Return type**

ndarray array of shape (n\_samples, n\_features\_new)

**transform**(*df*, *progress=<ads.dataset.progress.DummyProgressBar object>*, *fit\_transform=False*)

#### 18.1.1.7.13 ads.dataset.feature\_selection module

**class** `ads.dataset.feature_selection.FeatureImportance`(*ds*, *score\_func=None*, *n=None*)

Bases: `object`

**show\_in\_notebook**(*fig\_size=(10, 10)*)

Shows selected features in the notebook with matplotlib.

#### 18.1.1.7.14 ads.dataset.forecasting\_dataset module

```
class ads.dataset.forecasting_dataset.ForecastingDataset(df, sampled_df, target, target_type, shape,
                                                         **kwargs)
```

Bases: *ADSDatasetWithTarget*

```
select_best_features(score_func=None, k=12)
```

Not yet implemented

#### 18.1.1.7.15 ads.dataset.helper module

```
class ads.dataset.helper.DatasetDefaults
```

Bases: object

```
sampling_confidence_interval = 1.0
```

```
sampling_confidence_level = 95
```

```
exception ads.dataset.helper.DatasetLoadException(exc_msg)
```

Bases: *BaseException*

```
class ads.dataset.helper.ElaboratedPath(source: Union[str, List[str]], format: Optional[str] = None,
                                         name: Optional[str] = None, **kwargs)
```

Bases: object

The Elaborated Path class unifies all of the operations and information related to a path or pathlist. Whether the user wants to An Elaborated path can accept any of the following as a valid source: \* A single path \* A glob pattern path \* A directory \* A list of paths (Note: all of these paths must be from the same filesystem AND have the same format) \* A sqlalchemy connection url

##### Parameters

- **source** –
- **format** –
- **kwargs** –

By the end of this method, this class needs to have paths, format, and name ready

**property format: str**

**property name: str**

**property num\_paths: int**

This method will return the number of paths found with the associated original glob, folder, or path. If this returns 0, :return:

**property paths: List[str]**

a list of str Each element will be a valid path

##### Type

return

```
ads.dataset.helper.calculate_sample_size(population_size, min_size_to_sample, confidence_level=95,
                                         confidence_interval=1.0)
```



**Find sample size for a population using Cochran's Sample Size Formula.**

With default values for `confidence_level` (percentage, default: 95%) and `confidence_interval` (margin of error, percentage, default: 1%)

SUPPORTED CONFIDENCE LEVELS: 50%, 68%, 90%, 95%, and 99% *ONLY* - this is because the Z-score is table based, and I'm only providing Z for common confidence levels.

```
ads.dataset.helper.concatenate(X, y)
```

```
ads.dataset.helper.convert_columns(df, feature_metadata=None, dtypes=None)
```

```
ads.dataset.helper.convert_to_html(plot)
```

```
ads.dataset.helper.deprecate_default_value(var, old_value, new_value, warning_msg, warning_type)
```

```
ads.dataset.helper.deprecate_variable(old_var, new_var, warning_msg, warning_type)
```

```
ads.dataset.helper.down_sample(df, target)
```

Fixes imbalanced dataset by down-sampling

**Parameters**

- **df** (*pandas.DataFrame*) –
- **target** (*name of the target column in df*) –

**Returns**

**downsampled\_df**

**Return type**

*pandas.DataFrame*

```
ads.dataset.helper.fix_column_names(X)
```

```
ads.dataset.helper.generate_sample(df: DataFrame, n: int, confidence_level: int = 95, confidence_interval: float = 1.0, **kwargs)
```

```
ads.dataset.helper.get_dtype(feature_type, dtype)
```

```
ads.dataset.helper.get_feature_type(name, series)
```

```
ads.dataset.helper.get_fill_val(feature_types, column, action, constant='constant')
```

```
ads.dataset.helper.is_text_data(df, target=None)
```

```
ads.dataset.helper.map_types(types)
```

```
ads.dataset.helper.parse_apache_log_datetime(x)
```

**Parses datetime with timezone formatted as:**

*[day/month/year:hour:minute:second zone]*

Source: <https://mmas.github.io/read-apache-access-log-pandas> .. rubric:: Example

```
>>> parse_datetime('13/Nov/2015:11:45:42 +0000')
datetime.datetime(2015, 11, 3, 11, 45, 4, tzinfo=<UTC>)
```

Due to problems parsing the timezone (%z) with `datetime.strptime`, the timezone will be obtained using the `pytz` library.

`ads.dataset.helper.parse_apache_log_str(x)`

Returns the string delimited by two characters.

Source: [https://mmas.github.io/read-apache-access-log-pandas .. rubric::](https://mmas.github.io/read-apache-access-log-pandas..rubric::) Example

```
>>> parse_str('[my string]') 'my string'
```

`ads.dataset.helper.rename_duplicate_cols(original_cols)`

`ads.dataset.helper.up_sample(df, target, sampler='default', feature_types=None)`

Fixes imbalanced dataset by up-sampling

#### Parameters

- **df** (*Union[pandas.DataFrame, dask.dataframe.core.DataFrame]*) –
- **target** (*name of the target column in df*) –
- **sampler** (*Should implement fit\_resample(X,y) method*) –
- **fillna** (*a dictionary contains the column name as well as the fill value,*) – only needed when the column has missing values

#### Returns

**upsampled\_df**

#### Return type

*Union[pandas.DataFrame, dask.dataframe.core.DataFrame]*

`ads.dataset.helper.visualize_transformation(transformer_pipeline, text=None)`

`ads.dataset.helper.write_parquet(path, data, engine='fastparquet', metadata_dict=None, compression=None, storage_options=None)`

Uses fast parquet to write dask dataframe and custom metadata in parquet format

#### Parameters

- **path** (*str*) – Path to write to
- **data** (*pandas.DataFrame*) –
- **engine** (*string*) – “auto” by default
- **metadata\_dict** (*Deprecated, will not pass through*) –
- **compression** (*{{'snappy', 'gzip', 'brotli', None}}, default 'snappy'*) – Name of the compression to use
- **storage\_options** (*dict, optional*) – storage arguments required to read the path

#### Returns

**str**

#### Return type

the file path the parquet was written to

#### 18.1.1.7.16 `ads.dataset.label_encoder` module

**class** `ads.dataset.label_encoder.DataFrameLabelEncoder`

Bases: `TransformerMixin`

Label encoder for `pandas.dataframe`. `dask.dataframe.core.DataFrame`

**fit**(*X*)

Fits a `DataFrameLabelEncoder`.

**transform**(*X*)

Transforms a dataset using the `DataFrameLabelEncoder`.

#### 18.1.1.7.17 `ads.dataset.pipeline` module

**class** `ads.dataset.pipeline.TransformerPipeline`(*steps*)

Bases: `Pipeline`

**add**(*transformer*)

Add transformer to data transformation pipeline

**Parameters**

**transformer** (`Union[TransformerMixin, tuple(str, TransformerMixin)]`) – if tuple, (name, transformer implementing transform)

**steps**: `List[Any]`

**visualize**()

#### 18.1.1.7.18 `ads.dataset.plot` module

**class** `ads.dataset.plot.Plotting`(*df*, *feature\_types*, *x*, *y=None*, *plot\_type='infer'*, *yscale=None*)

Bases: `object`

**select\_best\_plot**()

Returns the best plot for a given dataset

**show\_in\_notebook**(*\*\*kwargs*)

Visualizes the dataset by plotting the distribution of a feature or relationship between two features.

**Parameters**

- **figsize** (*tuple*) – defines the size of the fig
- -----

#### 18.1.1.7.19 ads.dataset.progress module

```
class ads.dataset.progress.DummyProgressBar(*args, **kwargs)
```

Bases: [ProgressBar](#)

```
update(*args, **kwargs)
```

Updates the progress bar

```
class ads.dataset.progress.ProgressBar
```

Bases: object

```
abstract update(description)
```

```
class ads.dataset.progress.TqdmProgressBar(max_progress=100, description='Running', verbose=False)
```

Bases: [ProgressBar](#)

```
update(description=None)
```

Updates the progress bar

#### 18.1.1.7.20 ads.dataset.recommendation module

```
class ads.dataset.recommendation.Recommendation(ds, recommendation_transformer)
```

Bases: object

```
recommendation_type_labels = ['Constant Columns', 'Potential Primary Key Columns',  
'Imputation', 'Multicollinear Columns', 'Identify positive label for target', 'Fix  
imbalance in dataset']
```

```
recommendation_types = ['constant_column', 'primary_key', 'imputation',  
'strong_correlation', 'positive_class', 'fix_imbalance']
```

```
show_in_notebook()
```

#### 18.1.1.7.21 ads.dataset.recommendation\_transformer module

```
class ads.dataset.recommendation_transformer.RecommendationTransformer(feature_metadata=None,  
correlation=None,  
target=None,  
is_balanced=False,  
target_type=None,  
feature_ranking=None,  
len=0,  
fix_imbalance=True,  
auto_transform=True,  
correlation_threshold=0.7)
```

Bases: TransformerMixin

```
fit(X)
```

```
fit_transform(X, y=None, **fit_params)
```

Fit to data, then transform it.

Fits transformer to *X* and *y* with optional parameters *fit\_params* and returns a transformed version of *X*.

**Parameters**

- **X** (*array-like of shape (n\_samples, n\_features)*) – Input samples.
- **y** (*array-like of shape (n\_samples,) or (n\_samples, n\_outputs), default=None*) – Target values (None for unsupervised transformations).
- **\*\*fit\_params** (*dict*) – Additional fit parameters.

**Returns**

**X\_new** – Transformed array.

**Return type**

ndarray array of shape (n\_samples, n\_features\_new)

**transform**(*X, progress=<ads.dataset.progress.DummyProgressBar object>, fit\_transform=False, update\_transformer\_log=False*)

**transformer\_log**(*action*)

local wrapper to both log and record in the actions\_performed array

**18.1.1.7.22 ads.dataset.regression\_dataset module**

**class** ads.dataset.regression\_dataset.**RegressionDataset**(*df, sampled\_df, target, target\_type, shape, \*\*kwargs*)

Bases: [ADSDatasetWithTarget](#)

**18.1.1.7.23 ads.dataset.sampled\_dataset module**

**class** ads.dataset.sampled\_dataset.**PandasDataset**(*sampled\_df, type\_discovery=True, types={}, metadata=None, progress=<ads.dataset.progress.DummyProgressBar object>*)

Bases: `object`

This class provides APIs that can work on a sampled dataset.

**plot**(*x, y=None, plot\_type='infer', yscale=None, verbose=True, sample\_size=0*)

Supports plotting feature distribution, and relationship between features.

**Parameters**

- **x** (*str*) – The name of the feature to plot
- **y** (*str, optional*) – Name of the feature to plot against x
- **plot\_type** (*str, default: infer*) – Override the inferred plot type for certain combinations of the data types of x and y. By default, the best plot type is inferred based on x and y data types. Valid values:
  - `box_plot` - discrete feature vs continuous feature. Draw a box plot to show distributions with respect to categories,
  - `scatter` - continuous feature vs continuous feature. Draw a scatter plot with possibility of several semantic groupings.
- **yscale** (*str, optional*) – One of {"linear", "log", "symlog", "logit"}. The y axis scale type to apply. Can be used when either x or y is an ordinal feature.

- **verbose** (*bool*, *default True*) – Displays Note/Tips if True

**plot\_gis\_scatter**(*lon='longitude', lat='latitude', ax=None*)

Supports plotting Choropleth maps

**Parameters**

- **df** (*pandas dataframe*) – The dataframe to plot
- **x** (*str*) – The name of the feature to plot, usually the longitude
- **y** (*str*) – The name of the feature to plot, usually the latitude

**summary**(*feature\_name=None*)

Display list of features & their datatypes. Shows the column name and the feature's meta\_data if given a specific feature name.

**Parameters**

**date\_col** (*str*) – The name of the feature

**Returns**

a dictionary that contains requested information

**Return type**

dict

**timeseries**(*date\_col*)

Supports any plotting operations where x=datetime.

**Parameters**

**date\_col** (*str*) – The name of the feature to plot

**Returns**

a plotting object that contains a date column and dataframe

**Return type**

func

#### 18.1.1.7.24 ads.dataset.target module

**class** ads.dataset.target.**TargetVariable**(*sampled\_ds, target, target\_type*)

Bases: object

This class provides target specific APIs.

**is\_balanced**(*skewness\_threshold=0.5, class\_imbalance\_threshold=0.5*)

Returns True if the target is balanced, False otherwise.

**Returns**

**is\_balanced**

**Return type**

bool

**show\_in\_notebook**(*feature\_names=None*)

Plot target distribution or target versus feature relation.

**Parameters**

**feature\_names** (*list, Optional*) – Plot target against a list of features. Display target distribution if feature\_names is not provided.

#### 18.1.1.7.25 ads.dataset.timeseries module

```
class ads.dataset.timeseries.Timeseries(col_name, df, date_range=None, min=None, max=None)
    Bases: object
    plot(**kwargs)
```

#### 18.1.1.7.26 Module contents

### 18.1.1.8 ads.dbmixin package

#### 18.1.1.8.1 Submodules

#### 18.1.1.8.2 ads.dbmixin.db\_pandas\_accessor module

```
class ads.dbmixin.db_pandas_accessor.ConnectionFactory
    Bases: object
    connectionprovider = {'hive': <class 'ads.bds.big_data_service.ADSHiveConnection'>}
    classmethod get(engine='oracle')

class ads.dbmixin.db_pandas_accessor.DBAccessMixin
    Bases: object
    static read_sql(sql: str, connection_parameters: dict, bind_variables: Dict = {}, chunksize: Optional[int]
                    = None, engine='oracle') → Union[DataFrame, Iterator[DataFrame]]
```

Read SQL query from oracle database into a DataFrame.

##### Parameters

- **sql** (str) – SQL query to be executed.
- **connection\_parameters** (dict) – A dictionary of connection\_parameters - {"user\_name": "", "password": "", "service\_name": "", "wallet\_location": ""}
- **bind\_variables** (Optional[Dict]) – Key value of pair of bind variables and corresponding values
- **chunksize** (Optional[int], default None) – If specified, return an iterator where *chunksize* is the number of rows to include in each chunk.
- **engine** ({'oracle', 'mysql', 'hive'}, default 'oracle') – Select the database type - MySQL/Oracle/Hive to store the data

##### Returns

DataFrame or Iterator[DataFrame].

##### Return type

DataFrame or Iterator[DataFrame]

## Examples

```
>>> connection_parameters = {
    "user_name": "<username>",
    "password": "<password>",
    "service_name": "{service_name}_{high|med|low}",
    "wallet_location": "/full/path/to/my_wallet.zip",
}
>>> import pandas as pd
>>> import ads
>>> df = pd.DataFrame.ads.read_sql("SELECT * from Employee", connection_
↳ parameters=connection_parameters)
>>> df_with_bind = pd.DataFrame.ads.read_sql("SELECT * from EMPLOYEE WHERE_
↳ EMPLOYEE_ID = :ID", bind_variables={"ID": "121212", connection_
↳ parameters=connection_parameters)
```

**to\_sql**(*table\_name*: str, *connection\_parameters*: dict, *if\_exists*: str = 'fail', *batch\_size*=100000, *engine*='oracle', *encoding*='utf-8')

To save the dataframe df to database.

### Parameters

- **table\_name** (str) – Name of SQL table.
- **connection\_parameters** (dict) – A dictionary of connection\_parameters - {"user\_name": "", "password": "", "service\_name": "", "wallet\_location": ""}
- **if\_exists** (: {'fail', 'replace', 'append'}, default 'fail') – How to behave if the table already exists. \* fail: Raise a ValueError. If table exists, do nothing \* replace: Drop the table before inserting new values. If table exists, drop it, recreate it, and insert data. \* append: Insert new values to the existing table. If table exists, insert data. Create if does not exist.
- **batch\_size** (int, default 100000) – Inserting in batches improves insertion performance. Choose this value based on available memore and network bandwidth.
- **engine** ({'oracle', 'mysql'}, default 'oracle') – Select the database type - MySQL or Oracle to store the data
- **encoding** (str, default is "utf-8") – Encoding provided will be used for ecoding all columns, when inserting into table

### Returns

Nothing.

### Return type

None



## Examples

```
>>> connection_parameters = {
    "user_name": "<username>",
    "password": "<password>",
    "service_name": "{service_name}_{high|med|low}",
    "wallet_location": "/full/path/to/my_wallet.zip",
}
>>> import pandas as pd
>>> import ads
>>> df2 = pd.read_csv("my/data/csv")
>>> df2.ads.to_sql("MY_DATA_CSV", connection_parameters=connection_parameters)
```

### 18.1.1.8.3 Module contents

### 18.1.1.9 ads.environment package

#### 18.1.1.9.1 Submodules

#### 18.1.1.9.2 ads.environment.ml\_runtime module

#### 18.1.1.9.3 Module contents

### 18.1.1.10 ads.evaluations package

#### 18.1.1.10.1 Submodules

#### 18.1.1.10.2 ads.evaluations.evaluation\_plot module

**class** ads.evaluations.evaluation\_plot.**EvaluationPlot**

Bases: object

EvaluationPlot holds data and methods for plots and it used to output them

**baseline**(*bool*)

whether to plot the null model or zero information model

**baseline\_kwargs**(*dict*)

keyword arguments for the baseline plot

**color\_wheel**(*dict*)

color information used by the plot

**font\_sz**(*dict*)

dictionary of plot methods

**perfect**(*bool*)

determines whether a “perfect” classifier curve is displayed

**perfect\_kwargs**(*dict*)

parameters for the perfect classifier for precision/recall curves

**prob\_type**(*str*)

model type, i.e. classification or regression

**get\_legend\_labels**(*legend\_labels*)

Renders the legend labels on the plot

**plot**(*evaluation, plots, num\_classes, perfect, baseline, legend\_labels*)

Generates the evaluation plot

**baseline** = `None`

**baseline\_kwargs** = {'c': '.2', 'ls': '--'}

**color\_wheel** = ['teal', 'blueviolet', 'forestgreen', 'peru', 'y', 'dodgerblue', 'r']

**double\_overlay\_plots** = ['pr\_and\_roc\_curve', 'lift\_and\_gain\_chart']

**font\_sz** = {'l': 14, 'm': 12, 's': 10, 'xl': 16, 'xs': 8}

**classmethod get\_legend\_labels**(*legend\_labels*)

Gets the legend labels, resolves any conflicts such as length, and renders the labels for the plot

**Parameters**

(**dict**) (*legend\_labels*) – key/value dictionary containing legend label data

**Return type**

Nothing

## Examples

```
EvaluationPlot.get_legend_labels({'class_0': 'green', 'class_1': 'yellow', 'class_2': 'red'})
```

**perfect** = `None`

**perfect\_kwargs** = {'color': 'gold', 'label': 'Perfect Classifier', 'ls': '--'}

**classmethod plot**(*evaluation, plots, num\_classes, perfect=False, baseline=True, legend\_labels=None*)

Generates the evaluation plot

**Parameters**

- (**DataFrame**) (*evaluation*) – DataFrame with models as columns and metrics as rows.
- (**str**) (*plots*) – The plot type based on class attribute *prob\_type*.
- (**int**) (*num\_classes*) – The number of classes for the model.
- (**bool** (*baseline*)) – Whether to display the curve of a perfect classifier. Default value is *False*.
- (**optional**) – Whether to display the curve of a perfect classifier. Default value is *False*.
- (**bool**) – Whether to display the curve of the baseline, featureless model. Default value is *True*.
- (**optional**) – Whether to display the curve of the baseline, featureless model. Default value is *True*.
- (**dict** (*legend\_labels*)) – Legend labels dictionary. Default value is *None*. If legend\_labels not specified class names will be used for plots.

- **optional**) – Legend labels dictionary. Default value is *None*. If legend\_labels not specified class names will be used for plots.

**Return type**

Nothing

**prob\_type** = None**single\_overlay\_plots** = ['lift\_chart', 'gain\_chart', 'roc\_curve', 'pr\_curve']**18.1.1.10.3 ads.evaluations.evaluator module**

**class** ads.evaluations.evaluator.**ADSEvaluator**(*test\_data, models, training\_data=None, positive\_class=None, legend\_labels=None, show\_full\_name=False, classes=None, classification\_threshold=50*)

Bases: object

ADS Evaluator class. This class holds field and methods for creating and using ADS evaluator objects.

**evaluations**

list of evaluations.

**Type**

list[DataFrame]

**is\_classifier**

Whether the dataset looks like a classification problem (versus regression).

**Type**

bool

**legend\_labels**List of legend labels. Defaults to *None*.**Type**

dict

**metrics\_to\_show**

Names of metrics to show.

**Type**

list[str]

**models**The object built using *ADSModel.from\_estimator()*.**Type**list[*ads.common.model.ADSModel*]**positive\_class**

The class to report metrics for binary dataset, assumed to be true.

**Type**

str or int

**show\_full\_name**

Whether to show the name of the evaluator in relevant contexts.

**Type**

bool

**test\_data**

Test data to evaluate model on.

**Type***ads.common.data.ADSDData***training\_data**

Training data to evaluate model.

**Type***ads.common.data.ADSDData***Positive\_Class\_names**

Class attribute listing the ways to represent positive classes

**Type**

list

**add\_metrics**(*func, names*)

Adds the listed metics to the evaluator it is called on

**del\_metrics**(*names*)

Removes listed metrics from the evaluator object it is called on

**add\_models**(*models, show\_full\_name*)

Adds the listed models to the evaluator object

**del\_models**(*names*)

Removes the listed models from the evaluator object

**show\_in\_notebook**(*plots, use\_training\_data, perfect, baseline, legend\_labels*)

Visualize evaluation plots in the notebook

**calculate\_cost**(*tn\_weight, fp\_weight, fn\_weight, tp\_weight, use\_training\_data*)

Returns a cost associated with the input weights

Creates an ads evaluator object.

**Parameters**

- **test\_data** (*ads.common.data.ADSDData instance*) – Test data to evaluate model on. The object can be built using *ADSDData.build()*.
- **models** (*list[ads.common.model.ADSModel]*) – The object can be built using *ADSModel.from\_estimator()*. Maximum length of the list is 3
- **training\_data** (*ads.common.data.ADSDData instance, optional*) – Training data to evaluate model on and compare metrics against test data. The object can be built using *ADSDData.build()*
- **positive\_class** (*str or int, optional*) – The class to report metrics for binary dataset. If the target classes is True or False, positive\_class will be set to True by default. If the dataset is multiclass or multilabel, this will be ignored.
- **legend\_labels** (*dict, optional*) – List of legend labels. Defaults to *None*. If legend\_labels not specified class names will be used for plots.
- **show\_full\_name** (*bool, optional*) – Show the name of the evaluator object. Defaults to *False*.

- **classes** (*List or None, optional*) – A List of the possible labels for y, when evaluating a classification use case
- **classification\_threshold** (*int, defaults to 50*) – The maximum number of unique values that y must have to qualify as classification. If this threshold is exceeded, Evaluator assumes the model is regression.

## Examples

```
>>> train, test = ds.train_test_split()
>>> model1 = MyModelClass1.train(train)
>>> model2 = MyModelClass2.train(train)
>>> evaluator = ADSEvaluator(test, [model1, model2])
```

```
>>> legend_labels={'class_0': 'one', 'class_1': 'two', 'class_2': 'three'}
>>> multi_evaluator = ADSEvaluator(test, models=[model1, model2],
...                               legend_labels=legend_labels)
```

**class EvaluationMetrics**(*ev\_test, ev\_train, use\_training=False, less\_is\_more=None, precision=4*)

Bases: object

Class holding evaluation metrics.

**ev\_test**

evaluation test metrics

**Type**

list

**ev\_train**

evaluation training metrics

**Type**

list

**use\_training**

use training data

**Type**

bool

**less\_is\_more**

metrics list

**Type**

list

**show\_in\_notebook()**

Shows visualization metrics as a color coded table

```
DEFAULT_LABELS_MAP = {'accuracy': 'Accuracy', 'auc': 'ROC AUC', 'f1': 'F1',
'hamming_loss': 'Hamming distance', 'kappa_score_': "Cohen's kappa coefficient",
'precision': 'Precision', 'recall': 'Recall'}
```

**property precision**

```
show_in_notebook(labels={'accuracy': 'Accuracy', 'auc': 'ROC AUC', 'f1': 'F1', 'hamming_loss':
'Hamming distance', 'kappa_score_': "Cohen's kappa coefficient", 'precision':
'Precision', 'recall': 'Recall'})
```

Visualizes evaluation metrics as a color coded table.

**Parameters**

**labels** (*dictionary*) – map printing specific labels for metrics display

**Return type**

Nothing

**Positive\_Class\_Names** = ['yes', 'y', 't', 'true', '1']

**add\_metrics**(*funcs, names*)

Adds the listed metrics to the evaluator object it is called on.

**Parameters**

- **funcs** (*list*) – The list of metrics to be added. This function will be provided *y\_true* and *y\_pred*, the true and predicted values for each model.
- **names** (*list[str]*) – The list of metric names corresponding to the functions.

**Return type**

Nothing

**Examples**

```
>>> def f1(y_true, y_pred):
...     return np.max(y_true - y_pred)
>>> evaluator = ADSEvaluator(test, [model1, model2])
>>> evaluator.add_metrics([f1], ['Max Residual'])
>>> evaluator.metrics
Output table will include the desired metric
```

**add\_models**(*models, show\_full\_name=False*)

Adds the listed models to the evaluator object it is called on.

**Parameters**

- **models** (*list[ADSModel]*) – The list of models to be added
- **show\_full\_name** (*bool, optional*) – Whether to show the full model name. Defaults to False. **\*\* NOT USED \*\***

**Return type**

Nothing

**Examples**

```
>>> evaluator = ADSEvaluator(test, [model1, model2])
>>> evaluator.add_models(["model3"])
```

**calculate\_cost**(*tn\_weight, fp\_weight, fn\_weight, tp\_weight, use\_training\_data=False*)

Returns a cost associated with the input weights.

**Parameters**

- **tn\_weight** (*int, float*) – The weight to assign true negatives in calculating the cost
- **fp\_weight** (*int, float*) – The weight to assign false positives in calculating the cost
- **fn\_weight** (*int, float*) – The weight to assign false negatives in calculating the cost
- **tp\_weight** (*int, float*) – The weight to assign true positives in calculating the cost

- **use\_training\_data**(*bool*, *optional*) – Use training data to pull the metrics. Defaults to False

**Returns**

DataFrame with the cost calculated for each model

**Return type**

pandas.DataFrame

**Examples**

```
>>> evaluator = ADSEvaluator(test, [model1, model2])
>>> costs_table = evaluator.calculate_cost(0, 10, 1000, 0)
```

**del\_metrics**(*names*)

Removes the listed metrics from the evaluator object it is called on.

**Parameters**

**names** (*list[str]*) – The list of names of metrics to be deleted. Names can be found by calling *evaluator.test\_evaluations.index*.

**Returns**

*None*

**Return type**

*None*

**Examples**

```
>>> evaluator = ADSEvaluator(test, [model1, model2])
>>> evaluator.del_metrics(['mse'])
>>> evaluator.metrics
Output table will exclude the desired metric
```

**del\_models**(*names*)

Removes the listed models from the evaluator object it is called on.

**Parameters**

**names** (*list[str]*) – the list of models to be delete. Names are the model names by default, and assigned internally when conflicts exist. Actual names can be found using *evaluator.test\_evaluations.columns*

**Return type**

Nothing

## Examples

```
>>> model3.rename("model3")
>>> evaluator = ADSEvaluator(test, [model1, model2, model3])
>>> evaluator.del_models([model3])
```

### property metrics

Returns evaluation metrics

#### Returns

HTML representation of a table comparing relevant metrics.

#### Return type

metrics

## Examples

```
>>> evaluator = ADSEvaluator(test, [model1, model2])
>>> evaluator.metrics
Outputs table displaying metrics.
```

### property raw\_metrics

Returns the raw metric numbers

#### Parameters

- **metrics** (*list, optional*) – Request metrics to pull. Defaults to all.
- **use\_training\_data** (*bool, optional*) – Use training data to pull metrics. Defaults to False

#### Returns

The requested raw metrics for each model. If *metrics* is *None* return all.

#### Return type

dict

## Examples

```
>>> evaluator = ADSEvaluator(test, [model1, model2])
>>> raw_metrics_dictionary = evaluator.raw_metrics()
```

**show\_in\_notebook**(*plots=None, use\_training\_data=False, perfect=False, baseline=True, legend\_labels=None*)

Visualize evaluation plots.

#### Parameters

- **plots** (*list, optional*) – Filter the plots that are displayed. Defaults to None. The name of the plots are as below:
  - regression - residuals\_qq, residuals\_vs\_fitted
  - binary classification - normalized\_confusion\_matrix, roc\_curve, pr\_curve
  - multi class classification - normalized\_confusion\_matrix, precision\_by\_label, recall\_by\_label, f1\_by\_label



- **use\_training\_data** (*bool*, *optional*) – Use training data to generate plots. Defaults to *False*. By default, this method uses test data to generate plots
- **legend\_labels** (*dict*, *optional*) – Rename legend labels, that used for multi class classification plots. Defaults to *None*. legend\_labels dict keys are the same as class names. legend\_labels dict values are strings. If legend\_labels not specified class names will be used for plots.

**Returns**

Nothing. Outputs several evaluation plots as specified by *plots*.

**Return type**

None

**Examples**

```
>>> evaluator = ADSEvaluator(test, [model1, model2])
>>> evaluator.show_in_notebook()
```

```
>>> legend_labels={'class_0': 'green', 'class_1': 'yellow', 'class_2': 'red'}
>>> multi_evaluator = ADSEvaluator(test, [model1, model2],
...                               legend_labels=legend_labels)
>>> multi_evaluator.show_in_notebook(plots=["normalized_confusion_matrix",
...                                       "precision_by_label", "recall_by_label", "f1_by_label"])
```



Bases: object

BETA FEATURE Evaluator is the new and preferred way to evaluate a model of list of models. It contains a superset of the features of the soon-to-be-deprecated ADSEvaluator.

**display()**

Shows all plots and metrics within the jupyter notebook.

**html()**

Returns the raw string of the html report

**save(filename)**

Saves the html report to the provided file location.

**add\_model(model)**

Adds a model to the existsing report. See documentation for more details.

**add\_metric(metric\_fn)**

Adds a metric to the existsing report. See documentation for more details.

**add\_plot(plotting\_fn)**

Adds a plot to the existing report. See documentation for more details.

Creates an ads evaluator object.

#### Parameters

- **models** (*ads.model.GenericModel instance*) – Test data to evaluate model on. The object can be built using from one of the frameworks supported in *ads.model.framework*
- **X** (*DataFrame-like*) – The data used to make a prediction. Can be set to None if *y\_preds* is given. (And *y\_scores* for more thorough analysis).
- **y** (*array-like*) – The true values corresponding to the input data
- **y\_preds** (*list of array-like, optional*) – The predictions from each model in the same order as the models
- **y\_scores** (*list of array-like, optional*) – The predict\_probabs from each model in the same order as the models
- **X\_train** (*DataFrame-like, optional*) – The data used to train the model
- **y\_train** (*array-like, optional*) – The true values corresponding to the input training data
- **positive\_class** (*str or int, optional*) – The class to report metrics for binary dataset. If the target classes is True or False, positive\_class will be set to True by default. If the dataset is multiclass or multilabel, this will be ignored.
- **legend\_labels** (*dict, optional*) – List of legend labels. Defaults to *None*. If legend\_labels not specified class names will be used for plots.
- **classes** (*List or None, optional*) – A List of the possible labels for y, when evaluating a classification use case
- **use\_case\_type** (*str, optional*) – The type of problem this model is solving. This can be set during *prepare()*. Examples: “binary\_classification”, “regression”, “multinomial\_classification” Full list of supported types can be found here: *ads.common.model\_metadata.UseCaseType*

## Examples

```
>>> import tempfile
>>> from ads.evaluations.evaluator import Evaluator
>>> from sklearn.tree import DecisionTreeClassifier
>>> from sklearn.datasets import make_classification
>>> from sklearn.model_selection import train_test_split
>>> from ads.model.framework.sklearn_model import SklearnModel
>>> from ads.common.model_metadata import UseCaseType
>>>
>>> X, y = make_classification(n_samples=1000)
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.3)
>>> est = DecisionTreeClassifier().fit(X_train, y_train)
>>> model = SklearnModel(estimator=est, artifact_dir=tempfile.mkdtemp())
>>> model.prepare(
    inference_conda_env="generalml_p38_cpu_v1",
    training_conda_env="generalml_p38_cpu_v1",
    X_sample=X_test,
    y_sample=y_test,
    use_case_type=UseCaseType.BINARY_CLASSIFICATION,
)
>>> report = Evaluator([my_model], X=X_test, y=y_test)
>>> report.display()
```

**add\_models**(models: List[GenericModel], y\_preds: Optional[List[Any]] = None, y\_scores: Optional[List[Any]] = None)

Add a model to an existing Evaluator to avoid re-calculating the values.

### Parameters

- **models** (List[ads.model.GenericModel]) – Test data to evaluate model on. The object can be built using from one of the frameworks supported in *ads.model.framework*
- **y\_preds** (list of array-like, optional) – The predictions from each model in the same order as the models
- **y\_scores** (list of array-like, optional) – The predict\_proba from each model in the same order as the models

### Return type

self

## Examples

```
>>> evaluator = Evaluator(models = [model1, model2], X=X, y=y)
>>> evaluator.add_models(models = [model3])
```

**display**(plots=None, perfect=False, baseline=True, legend\_labels=None, precision=4, metrics\_labels=None)

Visualize evaluation report.

### Parameters

- **plots** (list, optional) – Filter the plots that are displayed. Defaults to None. The name of the plots are as below:

- regression - residuals\_qq, residuals\_vs\_fitted
- binary classification - normalized\_confusion\_matrix, roc\_curve, pr\_curve
- multi class classification - normalized\_confusion\_matrix, precision\_by\_label, recall\_by\_label, f1\_by\_label
- **perfect** (*bool, optional (default False)*) – If True, will show how a perfect classifier would perform.
- **baseline** (*bool, optional (default True)*) – If True, will show how a random classifier would perform.
- **legend\_labels** (*dict, optional*) – Rename legend labels, that used for multi class classification plots. Defaults to None. legend\_labels dict keys are the same as class names. legend\_labels dict values are strings. If legend\_labels not specified class names will be used for plots.
- **precision** (*int, optional (default 4)*) – The number of decimal points to show for each score/loss value
- **metrics\_labels** (*List, optional*) – The metrics that should be included in the html table.

**Returns**

Nothing. Outputs several evaluation plots as specified by *plots*.

**Return type**

None

**Examples**

```
>>> evaluator = Evaluator(models=[model1, model2], X=X, y=y)
>>> evaluator.display()
```

```
>>> legend_labels={'class_0': 'green', 'class_1': 'yellow', 'class_2': 'red'}
>>> multi_evaluator = Evaluator(models=[model1, model2], X=X, y=y, legend_
↳ labels=legend_labels)
>>> multi_evaluator.display(plots=["normalized_confusion_matrix",
...                               "precision_by_label", "recall_by_label", "f1_by_label"])
```

**html** (*plots=None, perfect=False, baseline=True, legend\_labels=None, precision=4, metrics\_labels=None*)

Get raw HTML report.

**Parameters**

- **plots** (*list, optional*) – Filter the plots that are displayed. Defaults to None. The name of the plots are as below:
  - regression - residuals\_qq, residuals\_vs\_fitted
  - binary classification - normalized\_confusion\_matrix, roc\_curve, pr\_curve
  - multi class classification - normalized\_confusion\_matrix, precision\_by\_label, recall\_by\_label, f1\_by\_label
- **perfect** (*bool, optional (default False)*) – If True, will show how a perfect classifier would perform.

- **baseline** (*bool, optional (default True)*) – If True, will show how a random classifier would perform.
- **legend\_labels** (*dict, optional*) – Rename legend labels, that used for multi class classification plots. Defaults to None. legend\_labels dict keys are the same as class names. legend\_labels dict values are strings. If legend\_labels not specified class names will be used for plots.
- **precision** (*int, optional (default 4)*) – The number of decimal points to show for each score/loss value
- **metrics\_labels** (*List, optional*) – The metrics that should be included in the html table.

**Returns**

Nothing. Outputs several evaluation plots as specified by *plots*.

**Return type**

None

**Examples**

```
>>> evaluator = Evaluator(models=[model1, model2], X=X, y=y)
>>> raw_html = evaluator.html()
```

**save**(*filename: str, \*\*kwargs*)

Save HTML report.

**Parameters**

- **filename** (*str*) – The name and path of where to save the html report.
- **plots** (*list, optional*) – Filter the plots that are displayed. Defaults to None. The name of the plots are as below:
  - regression - residuals\_qq, residuals\_vs\_fitted
  - binary classification - normalized\_confusion\_matrix, roc\_curve, pr\_curve
  - multi class classification - normalized\_confusion\_matrix, precision\_by\_label, recall\_by\_label, f1\_by\_label
- **perfect** (*bool, optional (default False)*) – If True, will show how a perfect classifier would perform.
- **baseline** (*bool, optional (default True)*) – If True, will show how a random classifier would perform.
- **legend\_labels** (*dict, optional*) – Rename legend labels, that used for multi class classification plots. Defaults to None. legend\_labels dict keys are the same as class names. legend\_labels dict values are strings. If legend\_labels not specified class names will be used for plots.
- **precision** (*int, optional (default 4)*) – The number of decimal points to show for each score/loss value
- **metrics\_labels** (*List, optional*) – The metrics that should be included in the html table.

**Returns**

Nothing. Outputs several evaluation plots as specified by *plots*.

**Return type**

None

**Examples**

```
>>> evaluator = Evaluator(models=[model1, model2], X=X, y=y)
>>> evaluator.save("report.html")
```

**18.1.1.10.4 ads.evaluations.statistical\_metrics module**

```
class ads.evaluations.statistical_metrics.ModelEvaluator(y_true, y_pred, model_name,
                                                         classes=None, positive_class=None,
                                                         y_score=None)
```

Bases: object

ModelEvaluator takes in the true and predicted values and returns a pandas dataframe

**y\_true****Type**

array-like object holding the true values for the model

**y\_pred****Type**

array-like object holding the predicted values for the model

**model\_name**(str)**Type**

the name of the model

**classes**(list)**Type**

list of target classes

**positive\_class**(str)**Type**

label for positive outcome from model

**y\_score****Type**

array-like object holding the scores for true values for the model

**metrics**(dict)**Type**

dictionary object holding model data

**get\_metrics**()

Gets the metrics information in a dataframe based on the number of classes

**safe\_metrics\_call**(scoring\_functions, \\*args)

Applies sklearn scoring functions to parameters in args

**get\_metrics()**

Gets the metrics information in a dataframe based on the number of classes

**Parameters**

**self** ((*ModelEvaluator* instance)) – The *ModelEvaluator* instance with the metrics.

**Returns**

Pandas dataframe containing the metrics

**Return type**

pandas.DataFrame

**safe\_metrics\_call**(*scoring\_functions*, \**args*, \*\**kwargs*)

Applies the sklearn function in *scoring\_functions* to parameters in *args*.

**Parameters**

- **scoring\_functions** ((*dict*)) – Scoring functions dictionary
- **args** ((*keyword arguments*)) – Arguments passed to the sklearn function from metrics

**Returns**

Nothing

**Raises**

**Exception** – If an error is encountered applying the sklearn function fn to arguments.

**18.1.1.10.5 Module contents****class** ads.evaluations.EvaluatorMixin

Bases: object



```

evaluate(X: Union[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]], _SupportsArray[dtype],
Sequence[_SupportsArray[dtype]], Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
y: Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]], _SupportsArray[dtype],
Sequence[_SupportsArray[dtype]], Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
y_pred: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
= None, y_score: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
= None, X_train: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
= None, y_train: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
= None, classes: Optional[List] = None, positive_class: Optional[str] = None, legend_labels:
Optional[dict] = None, perfect: bool = True, filename: Optional[str] = None, use_case_type:
Optional[str] = None)

```

Creates an ads evaluation report.

### Parameters

- **X (DataFrame-like)** – The data used to make a prediction. Can be set to None if *y\_preds* is given. (And *y\_scores* for more thorough analysis).

- **y** (*array-like*) – The true values corresponding to the input data
- **y\_pred** (*array-like, optional*) – The predictions from each model in the same order as the models
- **y\_score** (*array-like, optional*) – The predict\_proba from each model in the same order as the models
- **X\_train** (*DataFrame-like, optional*) – The data used to train the model
- **y\_train** (*array-like, optional*) – The true values corresponding to the input training data
- **classes** (*List or None, optional*) – A List of the possible labels for y, when evaluating a classification use case
- **positive\_class** (*str or int, optional*) – The class to report metrics for binary dataset. If the target classes is True or False, positive\_class will be set to True by default. If the dataset is multiclass or multilabel, this will be ignored.
- **legend\_labels** (*dict, optional*) – List of legend labels. Defaults to *None*. If legend\_labels not specified class names will be used for plots.
- **use\_case\_type** (*str, optional*) – The type of problem this model is solving. This can be set during *prepare()*. Examples: “binary\_classification”, “regression”, “multinomial\_classification” Full list of supported types can be found here: *ads.common.model\_metadata.UseCaseType*
- **filename** (*str, optional*) – If filename is given, the html report will be saved to the location specified.

## Examples

```
>>> import tempfile
>>> from ads.evaluations.evaluator import Evaluator
>>> from sklearn.tree import DecisionTreeClassifier
>>> from sklearn.datasets import make_classification
>>> from sklearn.model_selection import train_test_split
>>> from ads.model.framework.sklearn_model import SklearnModel
>>> from ads.common.model_metadata import UseCaseType
>>>
>>> X, y = make_classification(n_samples=1000)
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.3)
>>> est = DecisionTreeClassifier().fit(X_train, y_train)
>>> model = SklearnModel(estimator=est, artifact_dir=tempfile.mkdtemp())
>>> model.prepare(
>>>     inference_conda_env="generalml_p38_cpu_v1",
>>>     training_conda_env="generalml_p38_cpu_v1",
>>>     X_sample=X_test,
>>>     y_sample=y_test,
>>>     use_case_type=UseCaseType.BINARY_CLASSIFICATION,
>>> )
>>> model.evaluate(X_test, y_test, filename="report.html")
```

### 18.1.1.11 ads.experiments package

#### 18.1.1.11.1 Module contents

### 18.1.1.12 ads.feature\_engineering package

#### 18.1.1.12.1 Subpackages

#### ads.feature\_engineering.accessor package

##### Subpackages

#### ads.feature\_engineering.accessor.mixin package

##### Submodules

#### ads.feature\_engineering.accessor.mixin.correlation module

`ads.feature_engineering.accessor.mixin.correlation.cat_vs_cat(df: DataFrame, normal_form: bool = True) → DataFrame`

Calculates the correlation of all pairs of categorical features and categorical features.

`ads.feature_engineering.accessor.mixin.correlation.cat_vs_cont(df: DataFrame, categorical_columns, continuous_columns, normal_form: bool = True) → DataFrame`

Calculates the correlation of all pairs of categorical features and continuous features.

`ads.feature_engineering.accessor.mixin.correlation.cont_vs_cont(df: DataFrame, normal_form: bool = True) → DataFrame`

Calculates the Pearson correlation between two columns of the DataFrame.

#### ads.feature\_engineering.accessor.mixin.eda\_mixin module

This exploratory data analysis (EDA) Mixin is used in the ADS accessor for the Pandas Dataframe. The series of purpose-driven methods enable the data scientist to complete analysis on the dataframe.

From the accessor we have access to the pandas object the user is interacting with as well as corresponding lists of feature types per column.

**class** `ads.feature_engineering.accessor.mixin.eda_mixin.EDAMixin`

Bases: `object`

**correlation\_ratio()** `→ DataFrame`

Generate a Correlation Ratio data frame for all categorical-continuous variable pairs.

##### Returns

- `pandas.DataFrame`
- *Correlation Ratio correlation data frame with the following 3 columns –*
  1. Column 1 (name of the first categorical/continuous column)

2. Column 2 (name of the second categorical/continuous column)
3. Value (correlation value)

---

**Note:** Pairs will be replicated. For example for variables x and y, we would have (x,y), (y,x) both with same correlation value. We will also have (x,x) and (y,y) with value 1.0.

---

**correlation\_ratio\_plot()** → Axes

Generate a heatmap of the Correlation Ratio correlation for all categorical-continuous variable pairs.

**Returns**

Correlation Ratio correlation plot object that can be updated by the customer

**Return type**

Plot object

**cramersv()** → DataFrame

Generate a Cramer's V correlation data frame for all categorical variable pairs.

Gives a warning for dropped non-categorical columns.

**Returns**

**Cramer's V correlation data frame with the following 3 columns:**

1. Column 1 (name of the first categorical column)
2. Column 2 (name of the second categorical column)
3. Value (correlation value)

**Return type**

pandas.DataFrame

---

**Note:** Pairs will be replicated. For example for variables x and y, we would have (x,y), (y,x) both with same correlation value. We will also have (x,x) and (y,y) with value 1.0.

---

**cramersv\_plot()** → Axes

Generate a heatmap of the Cramer's V correlation for all categorical variable pairs.

Gives a warning for dropped non-categorical columns.

**Returns**

Cramer's V correlation plot object that can be updated by the customer

**Return type**

Plot object

**feature\_count()** → DataFrame

Counts the number of columns for each feature type and each primary feature. The column of primary is the number of primary feature types that is assigned to the column.

**Returns**

The number of columns for each feature type The number of columns for each primary feature

**Return type**

Dataframe with

## Examples

```
>>> df.ads.feature_type
{'PassengerId': ['ordinal', 'category'],
 'Survived': ['ordinal'],
 'Pclass': ['ordinal'],
 'Name': ['category'],
 'Sex': ['category']}
>>> df.ads.feature_count()
   Feature Type  Count  Primary
0    category      3        2
1    ordinal      3        3
```

**feature\_plot()** → DataFrame

For every column in the dataframe plot generate a list of summary plots based on the most relevant feature type.

### Returns

Dataframe with 2 columns: 1. Column - feature name 2. Plot - plot object

### Return type

pandas.DataFrame

**feature\_stat()** → DataFrame

Summary statistics Dataframe provided.

This returns feature stats on each column using FeatureType summary method.

## Examples

```
>>> df = pd.read_csv('~/.advanced-ds/tests/vor_datasets/vor_titanic.csv')
>>> df.ads.feature_stat().head()
   Column  Metric  Value
0  PassengerId  count    891.000
1  PassengerId  mean    446.000
2  PassengerId  standard deviation  257.354
3  PassengerId  sample minimum    1.000
4  PassengerId  lower quartile    223.500
```

### Returns

Dataframe with 3 columns: name, metric, value

### Return type

pandas.DataFrame

**pearson()** → DataFrame

Generate a Pearson correlation data frame for all continuous variable pairs.

Gives a warning for dropped non-numerical columns.

### Returns

- pandas.DataFrame
- *Pearson correlation data frame with the following 3 columns –*

1. Column 1 (name of the first continuous column)
2. Column 2 (name of the second continuous column)
3. Value (correlation value)

---

**Note:** Pairs will be replicated. For example for variables x and y, we'd have (x,y), (y,x) both with same correlation value. We'll also have (x,x) and (y,y) with value 1.0.

---

**pearson\_plot()** → Axes

Generate a heatmap of the Pearson correlation for all continuous variable pairs.

**Returns**

Pearson correlation plot object that can be updated by the customer

**Return type**

Plot object

**warning()** → DataFrame

Generates a data frame that lists feature specific warnings.

**Returns**

The list of feature specific warnings.

**Return type**

pandas.DataFrame

## Examples

```
>>> df.ads.warning()
  Column  Feature Type  Warning  Message  Metric
↪ Value
-----
↪ -----
0      Age  continuous  Zeros    Age has 38 zeros  Count
↪      38
1      Age  continuous  Zeros    Age has 12.2% zeros  Percentage
↪    12.2%
```

## ads.feature\_engineering.accessor.mixin.eda\_mixin\_series module

This exploratory data analysis (EDA) Mixin is used in the ADS accessor for the Pandas Series. The series of purpose-driven methods enable the data scientist to complete univariate analysis.

From the accessor we have access to the pandas object the user is interacting with as well as corresponding list of feature types.

**class** ads.feature\_engineering.accessor.mixin.eda\_mixin\_series.EDAMixinSeries

Bases: object

**feature\_plot()** → Axes

For the series generate a summary plot based on the most relevant feature type.

**Returns**

Plot object for the series based on the most relevant feature type.

**Return type**

matplotlib.axes.\_subplots.AxesSubplot

**feature\_stat()** → DataFrame

Summary statistics Dataframe provided.

This returns feature stats on series using FeatureType summary method.

**Examples**

```
>>> df = pd.read_csv('~/.advanced-ds/tests/vor_datasets/vor_titanic.csv')
>>> df['Cabin'].ads.feature_stat()
   Metric  Value
0    count    891
1  unique    147
2  missing    687
```

**Returns**

Dataframe with 2 columns and rows for different metric values

**Return type**

pandas.DataFrame

**warning()** → DataFrame

Generates a data frame that lists feature specific warnings.

**Returns**

The list of feature specific warnings.

**Return type**

pandas.DataFrame

**Examples**

```
>>> df["Age"].ads.warning()
   Feature Type  Warning  Message  Metric  Value
-----
0  continuous    Zeros  Age has 38 zeros    Count    38
1  continuous    Zeros  Age has 12.2% zeros  Percentage  12.2%
```

**ads.feature\_engineering.accessor.mixin.feature\_types\_mixin module**

The module that represents the ADS Feature Types Mixin class that extends Pandas Series and Dataframe accessors.

## Classes

### ADSFeatureTypesMixin

ADS Feature Types Mixin class that extends Pandas Series and Dataframe accessors.

**class** `ads.feature_engineering.accessor.mixin.feature_types_mixin.ADSFeatureTypesMixin`

Bases: `object`

ADS Feature Types Mixin class that extends Pandas Series and DataFrame accessors.

**warning\_registered**(*cls*) → `pd.DataFrame`

Lists registered warnings for registered feature types.

**validator\_registered**(*cls*) → `pd.DataFrame`

Lists registered validators for registered feature types.

**help**(*self*, *prop*: *str* = *None*) → *None*

Help method that prints either a table of available properties or, given a property, returns its docstring.

**help**(*prop*: *Optional*[*str*] = *None*) → *None*

Help method that prints either a table of available properties or, given an individual property, returns its docstring.

#### Parameters

**prop** (*str*) – The Name of property.

#### Returns

Nothing.

#### Return type

*None*

**validator\_registered**() → `DataFrame`

Lists registered validators for registered feature types.

#### Returns

The list of registered validators for registered feature types

#### Return type

`pandas.DataFrame`

## Examples

```
>>> df.ads.validator_registered()
      Column  Feature Type  Validator  Condition
      ↪      Handler
-----
      ↪ -----
0  PhoneNumber  phone_number  is_phone_number  ()
      ↪      default_handler
1  PhoneNumber  phone_number  is_phone_number  {'country_code': '+7'}
      ↪      specific_country_handler
2  CreditCard  credit_card  is_credit_card  ()
      ↪      default_handler
```



```
>>> df['PhoneNumber'].ads.validator_registered()
```

	Feature Type	Validator	Condition	
	Handler			
	-----			
0	phone_number	is_phone_number	()	
	default_handler			
1	phone_number	is_phone_number	{'country_code': '+7'}	specific_
	country_handler			

**warning\_registered()** → DataFrame

Lists registered warnings for all registered feature types.

**Returns**

The list of registered warnings for registered feature types.

**Return type**

pandas.DataFrame

**Examples**

```
>>> df.ads.warning_registered()
```

	Column	Feature Type	Warning	Handler
	-----			
0	Age	continuous	zeros	zeros_handler
1	Age	continuous	high_cardinality	high_cardinality_handler

```
>>> df["Age"].ads.warning_registered()
```

	Feature Type	Warning	Handler
	-----		
0	continuous	zeros	zeros_handler
1	continuous	high_cardinality	high_cardinality_handler

**ads.feature\_engineering.accessor.mixin.utils module**

**Module contents**

**Submodules**

**ads.feature\_engineering.accessor.dataframe\_accessor module**

The ADS accessor for the Pandas DataFrame. The accessor will be initialized with the pandas object the user is interacting with.

## Examples

```

>>> from ads.feature_engineering.accessor.dataframe_accessor import ADSDataFrameAccessor
>>> from ads.feature_engineering.feature_type.continuous import Continuous
>>> from ads.feature_engineering.feature_type.creditcard import CreditCard
>>> from ads.feature_engineering.feature_type.string import String
>>> from ads.feature_engineering.feature_type.base import Tag
>>> df = pd.DataFrame({'Name': ['Alex'], 'CreditCard': ["4532640527811543"]})
>>> df.ads.feature_type
{'Name': ['string'], 'Credit Card': ['string']}
>>> df.ads.feature_type_description

```

	Column	Feature Type	Description
0	Name	string	Type representing string values.
1	Credit Card	string	Type representing string values.

```

>>> df.ads.default_type
{'Name': 'string', 'Credit Card': 'string'}
>>> df.ads.feature_type = {'Name': ['string', Tag('abc')]}
>>> df.ads.tags
{'Name': ['abc']}
>>> df.ads.feature_type = {'Credit Card': ['credit_card']}
>>> df.ads.feature_select(include=['credit_card'])

```

	Credit Card
0	4532640527811543

**class** `ads.feature_engineering.accessor.dataframe_accessor.ADSDataFrameAccessor`(*pandas\_obj*)

Bases: [ADSFeatureTypesMixin](#), [EDAMixin](#), [DBAccessMixin](#), [DataLabelingAccessMixin](#)

ADS accessor for the Pandas DataFrame.

**columns**

The column labels of the DataFrame.

**Type**

List[str]

**tags**(*self*) → Dict[str, str]

Gets the dictionary of user defined tags for the dataframe.

**default\_type**(*self*) → Dict[str, str]

Gets the map of columns and associated default feature type names.

**feature\_type**(*self*) → Dict[str, List[str]]

Gets the list of registered feature types.

**feature\_type\_description**(*self*) → pd.DataFrame

Gets the list of registered feature types in a DataFrame format.

**sync**(*self*, *src*: Union[pd.DataFrame, pd.Series]) → pd.DataFrame

Syncs feature types of current DataFrame with that from src.

**feature\_select**(*self*, *include*: List[Union[FeatureType, str]] = None, *exclude*: List[Union[FeatureType, str]] = None) → pd.DataFrame

Gets the list of registered feature types in a DataFrame format.

**help**(self, prop: str = None) → None

Provides docstring for affordable methods and properties.

## Examples

```
>>> from ads.feature_engineering.accessor.dataframe_accessor import _
↳ ADSDataFrameAccessor
>>> from ads.feature_engineering.feature_type.continuous import Continuous
>>> from ads.feature_engineering.feature_type.creditcard import CreditCard
>>> from ads.feature_engineering.feature_type.string import String
>>> from ads.feature_engineering.feature_type.base import Tag
df = pd.DataFrame({'Name': ['Alex'], 'CreditCard': ["4532640527811543"]})
>>> df.ads.feature_type
{'Name': ['string'], 'Credit Card': ['string']}
>>> df.ads.feature_type_description

```

	Column	Feature Type	Description
0	Name	string	Type representing string values.
1	Credit Card	string	Type representing string values.

```
>>> df.ads.default_type
{'Name': 'string', 'Credit Card': 'string'}
>>> df.ads.feature_type = {'Name': ['string', Tag('abc')]}
>>> df.ads.tags
{'Name': ['abc']}
>>> df.ads.feature_type = {'Credit Card': ['credit_card']}
>>> df.ads.feature_select(include=['credit_card'])

```

	Credit Card
0	4532640527811543

Initializes ADS Pandas DataFrame Accessor.

### Parameters

**pandas\_obj** (*pandas.DataFrame*) – Pandas dataframe

### Raises

**ValueError** – If provided DataFrame has duplicate columns.

**property default\_type: Dict[str, str]**

Gets the map of columns and associated default feature type names.

### Returns

The dictionary where key is column name and value is the name of default feature type.

### Return type

Dict[str, str]

**feature\_select**(include: Optional[List[Union[FeatureType, str]]] = None, exclude: Optional[List[Union[FeatureType, str]]] = None) → DataFrame

Returns a subset of the DataFrame's columns based on the column feature\_types.

### Parameters

- **include** (*List[Union[FeatureType, str]]*, optional) – Defaults to None. A list of FeatureType subclass or str to be included.

- **exclude** (*List[Union[FeatureType, str]], optional*) – Defaults to None. A list of FeatureType subclass or str to be excluded.

**Raises**

- **ValueError** – If both of include and exclude are empty
- **ValueError** – If include and exclude are used simultaneously

**Returns**

The subset of the frame including the feature types in include and excluding the feature types in exclude.

**Return type**

`pandas.DataFrame`

**property feature\_type: Dict[str, List[str]]**

Gets the list of registered feature types.

**Returns**

The dictionary where key is column name and value is list of associated feature type names.

**Return type**

`Dict[str, List[str]]`

**property feature\_type\_description: DataFrame**

Gets the list of registered feature types in a DataFrame format.

**Return type**

`pandas.DataFrame`

**Examples**

```
>>> df.ads.feature_type_description()
      Column  Feature Type  Description
-----
0      City      string    Type representing string values.
1  Phone Number      string    Type representing string values.
```

**info()** → Any

Gets information about the dataframe.

**Returns**

The information about the dataframe.

**Return type**

Any

**model\_schema**(*max\_col\_num: int = 2000*)

Generates schema from the dataframe.

**Parameters**

**max\_col\_num** (*int, optional. Defaults to 1000*) – The maximum column size of the data that allows to auto generate schema.

## Examples

```
>>> df = pd.read_csv('./orcl_attrition.csv', usecols=['Age', 'Attrition'])
>>> schema = df.ads.model_schema()
>>> schema
Schema:
  - description: Attrition
    domain:
      constraints: []
      stats:
        count: 1470
        unique: 2
        values: String
      dtype: object
      feature_type: String
      name: Attrition
      required: true
  - description: Age
    domain:
      constraints: []
      stats:
        25%: 31.0
        50%: 37.0
        75%: 44.0
        count: 1470.0
        max: 61.0
        mean: 37.923809523809524
        min: 19.0
        std: 9.135373489136732
        values: Integer
      dtype: int64
      feature_type: Integer
      name: Age
      required: true
>>> schema.to_dict()
{'Schema': [{'dtype': 'object',
  'feature_type': 'String',
  'name': 'Attrition',
  'domain': {'values': 'String',
    'stats': {'count': 1470, 'unique': 2},
    'constraints': []},
  'required': True,
  'description': 'Attrition'},
  {'dtype': 'int64',
  'feature_type': 'Integer',
  'name': 'Age',
  'domain': {'values': 'Integer',
    'stats': {'count': 1470.0,
      'mean': 37.923809523809524,
      'std': 9.135373489136732,
      'min': 19.0,
      '25%': 31.0,
      '50%': 37.0,
```

(continues on next page)

(continued from previous page)

```
'75%': 44.0,  
'max': 61.0},  
'constraints': []},  
'required': True,  
'description': 'Age']}]}
```

**Returns**

data schema.

**Return type***ads.feature\_engineering.schema.Schema***Raises***ads.feature\_engineering.schema.DataSizeTooWide* – If the number of columns of input data exceeds *max\_col\_num*.**sync**(*src: Union[DataFrame, Series]*) → *DataFrame*Syncs feature types of current DataFrame with that from *src*.Syncs feature types of current dataframe with that from *src*, where *src* can be a dataframe or a series. In either case, only columns with matched names are synced.**Parameters****src** (*pd.DataFrame* | *pd.Series*) – The source to sync from.**Returns**

Synced dataframe.

**Return type***pandas.DataFrame***property tags: Dict[str, List[str]]**

Gets the dictionary of user defined tags for the dataframe. Key is column name and value is list of tag names.

**Returns**

The map of columns and associated default tags.

**Return type**

Dict[str, List[str]]

**ads.feature\_engineering.accessor.series\_accessor module**

The ADS accessor for the Pandas Series. The accessor will be initialized with the pandas object the user is interacting with.

## Examples

```
>>> from ads.feature_engineering.accessor.series_accessor import ADSSeriesAccessor
>>> from ads.feature_engineering.feature_type.string import String
>>> from ads.feature_engineering.feature_type.ordinal import Ordinal
>>> from ads.feature_engineering.feature_type.base import Tag
>>> series = pd.Series(['name1', 'name2', 'name3'])
>>> series.ads.default_type
'string'
>>> series.ads.feature_type
['string']
>>> series.ads.feature_type_description
  Feature Type      Description
-----
0      string  Type representing string values.
>>> series.ads.feature_type = ['string', Ordinal, Tag('abc')]
>>> series.ads.feature_type
['string', 'ordinal', 'abc']
>>> series1 = series.dropna()
>>> series1.ads.sync(series)
>>> series1.ads.feature_type
['string', 'ordinal', 'abc']
```

**class** `ads.feature_engineering.accessor.series_accessor.ADSSeriesAccessor`(*pandas\_obj: Series*)

Bases: [ADSFeatureTypesMixin](#), [EDAMixinSeries](#)

ADS accessor for Pandas Series.

**name**

The name of Series.

**Type**

str

**tags**

The list of tags for the Series.

**Type**

List[str]

**help**(*self, prop: str = None*) → None

Provides docstring for affordable methods and properties.

**sync**(*self, src: Union[pd.DataFrame, pd.Series]*) → None

Syncs feature types of current series with that from src.

**default\_type**(*self*) → str

Gets the name of default feature type for the series.

**feature\_type**(*self*) → List[str]

Gets the list of registered feature types for the series.

**feature\_type\_description**(*self*) → pd.DataFrame

Gets the list of registered feature types in a DataFrame format.

## Examples

```
>>> from ads.feature_engineering.accessor.series_accessor import ADSSeriesAccessor
>>> from ads.feature_engineering.feature_type.string import String
>>> from ads.feature_engineering.feature_type.ordinal import Ordinal
>>> from ads.feature_engineering.feature_type.base import Tag
>>> series = pd.Series(['name1', 'name2', 'name3'])
>>> series.ads.default_type
'string'
>>> series.ads.feature_type
['string']
>>> series.ads.feature_type_description
  Feature Type      Description
-----
0      string  Type representing string values.
>>> series.ads.feature_type = ['string', Ordinal, Tag('abc')]
>>> series.ads.feature_type
['string', 'ordinal', 'abc']
>>> series1 = series.dropna()
>>> series1.ads.sync(series)
>>> series1.ads.feature_type
['string', 'ordinal', 'abc']
```

Initializes ADS Pandas Series Accessor.

### Parameters

**pandas\_obj** (*pd.Series*) – The pandas series

### property default\_type: str

Gets the name of default feature type for the series.

### Returns

The name of default feature type.

### Return type

str

### property feature\_type: List[str]

Gets the list of registered feature types for the series.

### Returns

Names of feature types.

### Return type

List[str]

## Examples

```
>>> series = pd.Series(['name1'])
>>> series.ads.feature_type = ['name', 'string', Tag('tag for name')]
>>> series.ads.feature_type
['name', 'string', 'tag for name']
```

### property feature\_type\_description: DataFrame

Gets the list of registered feature types in a DataFrame format.



**Returns**

The DataFrame with feature types for this series.

**Return type**

pd.DataFrame

**Examples**

```
>>> series = pd.Series(['name1'])
>>> series.ads.feature_type = ['name', 'string', Tag('Name tag')]
>>> series.ads.feature_type_description
```

	Feature Type	Description
0	name	Type representing name values.
1	string	Type representing string values.
2	Name tag	Tag.

**sync**(src: Union[DataFrame, Series]) → None

Syncs feature types of current series with that from src.

The src could be a dataframe or a series. In either case, only columns with matched names are synced.

**Parameters**

**src** ((pd.DataFrame | pd.Series)) – The source to sync from.

**Returns**

Nothing.

**Return type**

None

**Examples**

```
>>> series = pd.Series(['name1', 'name2', 'name3', None])
>>> series.ads.feature_type = ['name']
>>> series.ads.feature_type
['name', string]
>>> series.dropna().ads.feature_type
['string']
>>> series1 = series.dropna()
>>> series1.ads.sync(series)
>>> series1.ads.feature_type
['name', 'string']
```

**class** ads.feature\_engineering.accessor.series\_accessor.**ADSSeriesValidator**(feature\_type\_list: List[FeatureType], series: Series)

Bases: object

Class helper to invoke registered validator on a series level.

Initializes ADS series validator.

**Parameters**

- **feature\_type\_list** (List[FeatureType]) – The list of feature types.

- **series** (*pd.Series*) – The pandas series.

## Module contents

### ads.feature\_engineering.adsimage package

#### Subpackages

#### ads.feature\_engineering.adsimage.interface package

#### Submodules

#### ads.feature\_engineering.adsimage.interface.reader module

**class** ads.feature\_engineering.adsimage.interface.reader.**Reader**

Bases: ABC

The Data Reader Interface.

**abstract read()** → Generator[Any, Any, Any]

The abstract method to read data.

**Yields**

*Generator[Any, Any, Any]*

## Module contents

#### Submodules

#### ads.feature\_engineering.adsimage.image module

The module helping to load/save images from/to the local path or OCI object storage bucket.

## Classes

### ADSImage

Work with image files that are stored in Oracle Cloud Infrastructure Object Storage.

## Examples

```
>>> from ads.feature_engineering import ADSImage
>>> from IPython.core.display import display
>>> img = ADSImage.open("1.jpg")
>>> display(img)
>>> img.save("oci://<bucket_name>@<namespace>/1.jpg")
>>> img1 = ADSImage.open("oci://<bucket_name>@<namespace>/1.jpg")
>>> display(img1)
```

**class** `ads.feature_engineering.adsimage.image.ADSImage`(*img: Image, filename: Optional[str] = None*)

Bases: `object`

Work with image files that are stored in Oracle Cloud Infrastructure Object Storage. PIL (Python Imaging Library) is used as a backend to represent and manipulate images. The PIL adds support for opening, manipulating, processing and saving various image file formats.

**img**

A PIL Image object.

**Type**

`Image.Image`

**filename**

The image filename.

**Type**

`str`

**save**(*self, path: str, ...*) → `None`

Saves the image under the given filename.

**open**(*cls, path: str, ...*) → `ADSImage`

Opens the given image file.

## Examples

```
>>> from ads.feature_engineering import ADSImage
>>> from IPython.core.display import display
>>> img = ADSImage.open("1.jpg")
>>> img.save("oci://<bucket_name>@<namespace>/1.jpg")
>>> img1 = ADSImage.open("oci://<bucket_name>@<namespace>/1.jpg")
>>> display(img1)
```

Initializes ADSImage object.

### Parameters

- **img** (`PIL.Image.Image`) – The PIL Image object.
- **filename** (`(str, optional)`. Defaults to `None`.) – The image filename.

### Returns

Nothing.

### Return type

`None`

### Raises

- **TypeError** – If *img* is not an instance of `PIL.Image.Image`.
- **ValueError** – If *img* is not provided.

**classmethod open**(*path: str, storage\_options: Optional[Dict] = None*) → `ADSImage`

Opens the given image file.

### Parameters

- **path** (`str`) – The file path to open image. Can be local path or OCI object storage URI.  
Example: `oci://<bucket_name>@<namespace>/1.jpg`

- **storage\_options** ((*Dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.

**Returns**

The instance of *ADSIImage*.

**Return type**

*ADSIImage*

**save**(*path*: *str*, *format*: *Optional[str]* = *None*, *auth*: *Optional[Dict]* = *None*, *\*\*kwargs*: *Optional[Dict]*) → *None*

Save the image under the given filename. If no format is specified, the format to use is determined from the image object or filename extension, if possible.

**Parameters**

- **path** (*str*) – The file path to save image. It can be a local path or an Oracle Cloud Infrastructure Object Storage URI. Example: *oci://<bucket\_name>@<namespace>/1.jpg*
- **format** ((*str*, *optional*). Defaults to *None*.) – If omitted and *path* has a file extension the format of the image will be based on the extension. Can be any format supported by PIL Image. The available options are described in the PIL image format documentation: <https://pillow.readthedocs.io/en/stable/handbook/image-file-formats.html>
- **auth** ((*Dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth()* API. To override the default behavior, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create an authentication signer and provide an *IdentityClient* object.
- **kwargs** – Additional keyword arguments that would be passed to the PIL Image *save()* method.

**Returns**

Nothing.

**Return type**

*None*

**to\_bytes**(*\*\*kwargs*: *Optional[Dict]*) → *BytesIO*

Converts image to bytes. If no format is specified, the format to use is determined from the image object if it possible.

**Parameters**

**kwargs** –

**format:** (*str*, *optional*). Defaults to *None*.

If omitted and *path* has a file extension the format of the image will be based on the extension. Can be any format supported by PIL Image. The available options are described in the PIL image format documentation: <https://pillow.readthedocs.io/en/stable/handbook/image-file-formats.html>

Additional keyword arguments that would be passed to the PIL Image *save()* method.

**Returns**

The image converted to bytes.

**Return type**

*BytesIO*

## ads.feature\_engineering.adsimage.image\_reader module

The module loads and saves images from/to a local path or Oracle Object Storage.

### Classes

#### ADSImageReader

The class reads image files from a local path or an Oracle Cloud Infrastructure Object Storage bucket.

### Examples

```
>>> from ads.feature_engineering import ADSImageReader
>>> image_reader = ADSImageReader.from_uri(path="oci://<bucket_name>@<namespace>/*.jpg")
>>> index=1
>>> for image in image_reader.read():
...     image.save(f"{index}.jpg")
...     index+=1
```

**class** ads.feature\_engineering.adsimage.image\_reader.ADSImageReader(*reader: Reader*)

Bases: object

The class reads image files from a local path or an Oracle Cloud Infrastructure Object Storage bucket.

**from\_uri**(*cls, path: Union[str, List[str]], ...*) → *ADSImageReader*

Constructs the ADSImageReader object.

**read**(*self*) → Generator[*ADSImage*, Any, Any]

Reads images.

### Examples

```
>>> from ads.feature_engineering import ADSImageReader
>>> image_reader = ADSImageReader.from_uri(path="oci://<bucket_name>@<namespace>/*.
↪ jpg")
>>> index=1
>>> for image in image_reader.read():
...     image.save(f"{index}.jpg")
...     index+=1
```

Initializes ADSImageReader instance.

#### Parameters

**reader** (*Reader*) – Can be any reader implementing the `Reader` interface.

#### Returns

Nothing.

#### Return type

None

**classmethod from\_uri**(*path: Union[str, List[str]], auth: Optional[Dict] = None*) → *ADSImageReader*

Constructs the ADSImageReader object.

#### Parameters

- **path** (*Union[str, List[str]]*) – The path where the images located. Can be local path, OCI object storage URI or a list of paths. It is also support globbing. Example:

*oci://<bucket\_name>@<namespace>/1.jpg* [*oci://<bucket\_name>@<namespace>/1.jpg*,  
*oci://<bucket\_name>@<namespace>/2.jpg*] *oci://<bucket\_name>@<namespace>/\*.jpg*

- **auth** (*(Dict, optional)*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.

**Returns**

The *ADSIImageReader* object.

**Return type**

*ADSIImageReader*

**read()** → Generator[*ADSIImage*, Any, Any]

Read image files.

**Yields**

*Generator[ADSIImage, Any, Any]*

```
class ads.feature_engineering.adsimage.image_reader.ImageFileReader(path: Union[str, List[str]],
                                                                    auth: Optional[Dict] =
                                                                    None)
```

Bases: *object*

The class reads image files from a local path or an Oracle Cloud Infrastructure Object Storage bucket.

Initializes *ImageFileReader* instance.

**Parameters**

- **path** (*Union[str, List[str]]*) – The path where the images located. Can be local path, OCI object storage URI or a list of paths. It is also support globbing. Example:

*oci://<bucket\_name>@<namespace>/1.jpg* [*oci://<bucket\_name>@<namespace>/1.jpg*,  
*oci://<bucket\_name>@<namespace>/2.jpg*] *oci://<bucket\_name>@<namespace>/\*.jpg*

- **auth** (*(Dict, optional)*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.

**Returns**

Nothing.

**Return type**

*None*

**Raises**

- **TypeError** – If the *path* is not an instance of *str* or *List[str]*.
- **ValueError** – If the *path* is not provided.

**read()** → Generator[*ADSIImage*, Any, Any]

Read image files.

**Yields**

*Generator[ADSIImage, Any, Any]*

## Module contents

`ads.feature_engineering.adsstring` package

## Subpackages

`ads.feature_engineering.adsstring.oci_language` package

## Module contents

`ads.feature_engineering.adsstring.parsers` package

## Submodules

`ads.feature_engineering.adsstring.parsers.base` module

`class ads.feature_engineering.adsstring.parsers.base.Parser`

Bases: `object`

property `adjective`

property `adverb`

property `bigram`

property `noun`

property `pos`

property `sentence`

property `trigram`

property `verb`

property `word`

property `word_count`

`ads.feature_engineering.adsstring.parsers.nltk_parser` module

`ads.feature_engineering.adsstring.parsers.spacy_parser` module

`class ads.feature_engineering.adsstring.parsers.spacy_parser.SpacyParser`

Bases: `Parser`

property `adjective`: `List[str]`

property `adverb`: `List[str]`

property `bigram`: `DataFrame`

```
property entity_artwork: List[str]
property entity_extract: DataFrame
property entity_location: List[str]
property entity_organization: List[str]
property entity_people: List[str]
property entity_product: List[str]
property lemma: List[str]
property noun: List[str]
property noun_phrase: List[str]
property pos: DataFrame
property sentence: List[str]
property token: List[str]
property trigram: DataFrame
property verb: List[str]
property word: List[str]
property word_count: DataFrame
```

## Module contents

`ads.feature_engineering.adsstring.string` package

## Module contents

## Submodules

`ads.feature_engineering.adsstring.common_regex_mixin` module

```
class ads.feature_engineering.adsstring.common_regex_mixin.CommonRegex(text="")
    Bases: object
    class regex(obj, regex)
        Bases: object
```



```
class ads.feature_engineering.adsstring.common_regex_mixin.CommonRegexMixin
```

**property address**

property date

property ip

**property phone\_number\_US**
$$\text{redact}(\text{fields}: \text{Union}[\text{List}[\text{str}], \text{Dict}[\text{str}, \text{str}]]) \rightarrow \text{str}$$

### 18.1. ads package

**Parameters**

**fields** ((*list(str)* / *dict*)) – either a list of fields to redact, e.g. ['email', 'phone\_number\_US'], in which case the redacted text is replaced with capitalized word like [EMAIL] or [PHONE\_NUMBER\_US\_WITH\_EXT], or a dictionary where key is a field to redact and value is the replacement text, e.g., {'email': 'HIDDEN\_EMAIL'}.

**Returns**

redacted string

**Return type**

str

```
redact_map = {'address': '[ADDRESS]', 'address_with_zip': '[ADDRESS_WITH_ZIP]',
'credit_card': '[CREDIT_CARD]', 'date': '[DATE]', 'email': '[EMAIL]', 'ip': '[IP]',
'ipv6': '[IPV6]', 'link': '[LINK]', 'phone_number_US': '[PHONE_NUMBER_US]',
'phone_number_US_with_ext': '[PHONE_NUMBER_US_WITH_EXT]', 'po_box': '[PO_BOX]',
'price': '[PRICE]', 'ssn': '[SSN]', 'time': '[TIME]', 'zip_code': '[ZIP_CODE]'}
```

property ssn

property time

property zip\_code

[ads.feature\\_engineering.adsstring.oci\\_language module](#)

[ads.feature\\_engineering.adsstring.string module](#)

**Module contents**

[ads.feature\\_engineering.dataset package](#)

**Submodules**

[ads.feature\\_engineering.dataset.zip\\_code\\_data module](#)

The module save the gis data corresponding to zip code.

**Module contents**

[ads.feature\\_engineering.feature\\_type package](#)

**Subpackages**

[ads.feature\\_engineering.feature\\_type.adsstring package](#)

**Subpackages**

[ads.feature\\_engineering.feature\\_type.adsstring.parsers package](#)

## Submodules

### ads.feature\_engineering.feature\_type.adsstring.parsers.base module

**class** ads.feature\_engineering.feature\_type.adsstring.parsers.base.**Parser**

Bases: object

property adjective

property adverb

property bigram

property noun

property pos

property sentence

property trigram

property verb

property word

property word\_count

### ads.feature\_engineering.feature\_type.adsstring.parsers.nltk\_parser module

### ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser module

**class** ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser.**SpacyParser**

Bases: *Parser*

property adjective: List[str]

property adverb: List[str]

property bigram: DataFrame

property entity\_artwork: List[str]

property entity\_extract: DataFrame

property entity\_location: List[str]

property entity\_organization: List[str]

property entity\_people: List[str]

property entity\_product: List[str]

property lemma: List[str]

property noun: List[str]

property noun\_phrase: List[str]

```
property pos: DataFrame
property sentence: List[str]
property token: List[str]
property trigram: DataFrame
property verb: List[str]
property word: List[str]
property word_count: DataFrame
```

## Module contents

### Submodules

**ads.feature\_engineering.feature\_type.adsstring.common\_regex\_mixin** module

```
class ads.feature_engineering.feature_type.adsstring.common_regex_mixin.CommonRegex(text="")
    Bases: object
    class regex(obj, regex)
        Bases: object
```

```
class ads.feature_engineering.feature_type.adsstring.common_regex_mixin.CommonRegexMixin
```

**property address**

property date

property ip

**property phone\_number\_US**
$$\text{redact}(\text{fields}: \text{Union}[\text{List}[\text{str}], \text{Dict}[\text{str}, \text{str}]]) \rightarrow \text{str}$$

### 18.1. ads package

**Parameters**

**fields** ((*list(str)* / *dict*)) – either a list of fields to redact, e.g. ['email', 'phone\_number\_US'], in which case the redacted text is replaced with capitalized word like [EMAIL] or [PHONE\_NUMBER\_US\_WITH\_EXT], or a dictionary where key is a field to redact and value is the replacement text, e.g., {'email': 'HIDDEN\_EMAIL'}.

**Returns**

redacted string

**Return type**

str

```
redact_map = {'address': '[ADDRESS]', 'address_with_zip': '[ADDRESS_WITH_ZIP]',
'credit_card': '[CREDIT_CARD]', 'date': '[DATE]', 'email': '[EMAIL]', 'ip': '[IP]',
'ipv6': '[IPV6]', 'link': '[LINK]', 'phone_number_US': '[PHONE_NUMBER_US]',
'phone_number_US_with_ext': '[PHONE_NUMBER_US_WITH_EXT]', 'po_box': '[PO_BOX]',
'price': '[PRICE]', 'ssn': '[SSN]', 'time': '[TIME]', 'zip_code': '[ZIP_CODE]'}
```

property ssn

property time

property zip\_code

**ads.feature\_engineering.feature\_type.adsstring.oci\_language module**

```
class ads.feature_engineering.feature_type.adsstring.oci_language.OCILanguage(auth=None)
```

Bases: object

Defines the OCILanguage plugin for ADSSString built on top of the OCI Language Services.

**Example**

```
>>> ADSSString.plugin_register(OCILanguage)
>>> s = ADSSString("This movie is awesome.")
>>> s.absa
>>> s.text_classification
>>> s.ner
>>> s.language_dominant
```

**property absa: List[Dict]**

Runs aspect-based sentiment analysis on the text to gauge the mood or the tone of the text.

**property key\_phrase: List[Dict]**

Extracts the most relevant words from the ADSSString object and assigns them a score.

**property language\_dominant: List[Dict]**

Determines the language of the text along with ISO 639-1 language code and a probability score.

**property ner: List[Dict]**

Detects named entities in the text.

**property text\_classification: List[Dict]**

Analyses the text and identifies categories for the content with a confidence score.

**ads.feature\_engineering.feature\_type.adsstring.string module**

**class** ads.feature\_engineering.feature\_type.adsstring.string.**ADSSString**(*text: str,*  
*language='english'*)

Bases: `str`, *FeatureType*, *CommonRegexMixin*

Defines an enhanced string class for the purpose of performing NLP tasks. Its functionalities can be extended by registering plugins.

**plugins**

list of plugins that add functionalities to the class.

**Type**

List

**string**

plain string

**Type**

str

**Example**

```
>>> ADSSString.nlp_backend('nltk')
>>> s = ADSSString("Walking my dog on a breezy day is the best.")
>>> s.lower() # regular string methods still work
>>> s.replace("a", "e")
>>> s.noun
>>> s.pos #parts of speech
>>> s = ADSSString("get in touch with my associate at john.smith@gmail.com to
↳schedule")
>>> s.email
>>> ADSSString.plugin_register(OCILanguage)
>>> s = ADSSString("This movie is awesome.")
>>> s.absa
```

Initialize the class and register plugins.

**Parameters**

- **text** (*str*) – input text
- **language** (*str, optional*) – language of the text, by default “english”.

**Raises**

**TypeError** – input text is not a string.

**capitalize()**

Return a capitalized version of the string.

More specifically, make the first character have upper case and the rest lower case.

**casefold()**

Return a version of the string suitable for caseless comparisons.

**center**(*width*, *fillchar*=' ', /)

Return a centered string of length *width*.

Padding is done using the specified fill character (default is a space).

**count**(*sub*[, *start*[, *end*]]) → int

Return the number of non-overlapping occurrences of substring *sub* in string *S*[*start*:*end*]. Optional arguments *start* and *end* are interpreted as in slice notation.

**description** = 'Type representing enhanced string class.'

**encode**(*encoding*='utf-8', *errors*='strict')

Encode the string using the codec registered for encoding.

**encoding**

The encoding in which to encode the string.

**errors**

The error handling scheme to use for encoding errors. The default is 'strict' meaning that encoding errors raise a `UnicodeEncodeError`. Other possible values are 'ignore', 'replace' and 'xmlcharrefreplace' as well as any other name registered with `codecs.register_error` that can handle `UnicodeEncodeErrors`.

**endswith**(*suffix*[, *start*[, *end*]]) → bool

Return True if *S* ends with the specified *suffix*, False otherwise. With optional *start*, test *S* beginning at that position. With optional *end*, stop comparing *S* at that position. *suffix* can also be a tuple of strings to try.

**expandtabs**(*tabsize*=8)

Return a copy where all tab characters are expanded using spaces.

If *tabsize* is not given, a tab size of 8 characters is assumed.

**find**(*sub*[, *start*[, *end*]]) → int

Return the lowest index in *S* where substring *sub* is found, such that *sub* is contained within *S*[*start*:*end*]. Optional arguments *start* and *end* are interpreted as in slice notation.

Return -1 on failure.

**format**(\**args*, \*\**kwargs*) → str

Return a formatted version of *S*, using substitutions from *args* and *kwargs*. The substitutions are identified by braces ('{' and '}').

**format\_map**(*mapping*) → str

Return a formatted version of *S*, using substitutions from *mapping*. The substitutions are identified by braces ('{' and '}').

**help**() → None

List available properties.

**Parameters**

**plugin** (*Any*) – registered plugin

**Return type**

None

**index**(*sub*[, *start*[, *end*]]) → int

Return the lowest index in *S* where substring *sub* is found, such that *sub* is contained within *S*[*start*:*end*]. Optional arguments *start* and *end* are interpreted as in slice notation.

Raises `ValueError` when the substring is not found.



**isalnum()**

Return True if the string is an alpha-numeric string, False otherwise.

A string is alpha-numeric if all characters in the string are alpha-numeric and there is at least one character in the string.

**isalpha()**

Return True if the string is an alphabetic string, False otherwise.

A string is alphabetic if all characters in the string are alphabetic and there is at least one character in the string.

**isascii()**

Return True if all characters in the string are ASCII, False otherwise.

ASCII characters have code points in the range U+0000-U+007F. Empty string is ASCII too.

**isdecimal()**

Return True if the string is a decimal string, False otherwise.

A string is a decimal string if all characters in the string are decimal and there is at least one character in the string.

**isdigit()**

Return True if the string is a digit string, False otherwise.

A string is a digit string if all characters in the string are digits and there is at least one character in the string.

**isidentifier()**

Return True if the string is a valid Python identifier, False otherwise.

Use keyword.iskeyword() to test for reserved identifiers such as “def” and “class”.

**islower()**

Return True if the string is a lowercase string, False otherwise.

A string is lowercase if all cased characters in the string are lowercase and there is at least one cased character in the string.

**isnumeric()**

Return True if the string is a numeric string, False otherwise.

A string is numeric if all characters in the string are numeric and there is at least one character in the string.

**isprintable()**

Return True if the string is printable, False otherwise.

A string is printable if all of its characters are considered printable in repr() or if it is empty.

**isspace()**

Return True if the string is a whitespace string, False otherwise.

A string is whitespace if all characters in the string are whitespace and there is at least one character in the string.

**istitle()**

Return True if the string is a title-cased string, False otherwise.

In a title-cased string, upper- and title-case characters may only follow uncased characters and lowercase characters only cased ones.

**isupper()**

Return True if the string is an uppercase string, False otherwise.

A string is uppercase if all cased characters in the string are uppercase and there is at least one cased character in the string.

**join(iterable, /)**

Concatenate any number of strings.

The string whose method is called is inserted in between each given string. The result is returned as a new string.

Example: `'.'.join(['ab', 'pq', 'rs']) -> 'ab.pq.rs'`

**language\_model\_cache = {}****ljust(width, fillchar=' ', /)**

Return a left-justified string of length width.

Padding is done using the specified fill character (default is a space).

**lower()**

Return a copy of the string converted to lowercase.

**lstrip(chars=None, /)**

Return a copy of the string with leading whitespace removed.

If chars is given and not None, remove characters in chars instead.

**maketrans(y=None, z=None, /)**

Return a translation table usable for `str.translate()`.

If there is only one argument, it must be a dictionary mapping Unicode ordinals (integers) or characters to Unicode ordinals, strings or None. Character keys will be then converted to ordinals. If there are two arguments, they must be strings of equal length, and in the resulting dictionary, each character in x will be mapped to the character at the same position in y. If there is a third argument, it must be a string, whose characters will be mapped to None in the result.

**nlp\_backend() → None**

Set backend for extracting NLP related properties.

**Parameters**

**backend** (*str*, *optional*) – name of backend, by default 'nltk'.

**Raises**

- **ModuleNotFoundError** – module corresponding to backend is not found.
- **ValueError** – input backend is invalid.

**Return type**

None

**partition(sep, /)**

Partition the string into three parts using the given separator.

This will search for the separator in the string. If the separator is found, returns a 3-tuple containing the part before the separator, the separator itself, and the part after it.

If the separator is not found, returns a 3-tuple containing the original string and two empty strings.

**plugin\_clear()** → None

Clears plugins.

**plugin\_list()** → None

List registered plugins.

**plugin\_register()** → None

Register a plugin

**Parameters**

**plugin** (*Any*) – plugin to register

**Return type**

None

**plugins** = []

**redact**(*fields: Union[List[str], Dict[str, str]]*) → str

Remove personal information in a string. For example, “Jane’s phone number is 123-456-7890” is turned into “Jane’s phone number is [phone\_number\_US].”

**Parameters**

**fields** (*(List[str] | dict)*) – either a list of fields to redact, e.g. ['email', 'phone\_number\_US'], in which case the redacted text is replaced with capitalized word like [EMAIL] or [PHONE\_NUMBER\_US\_WITH\_EXT], or a dictionary where key is a field to redact and value is the replacement text, e.g., {'email': 'HIDDEN\_EMAIL'}.

**Returns**

redacted string

**Return type**

str

**replace**(*old, new, count=-1, /*)

Return a copy with all occurrences of substring old replaced by new.

**count**

Maximum number of occurrences to replace. -1 (the default value) means replace all occurrences.

If the optional argument count is given, only the first count occurrences are replaced.

**rfind**(*sub[, start[, end]]*) → int

Return the highest index in S where substring sub is found, such that sub is contained within S[start:end]. Optional arguments start and end are interpreted as in slice notation.

Return -1 on failure.

**rindex**(*sub[, start[, end]]*) → int

Return the highest index in S where substring sub is found, such that sub is contained within S[start:end]. Optional arguments start and end are interpreted as in slice notation.

Raises ValueError when the substring is not found.

**rjust**(*width, fillchar=' ', /*)

Return a right-justified string of length width.

Padding is done using the specified fill character (default is a space).

**rpartition**(*sep*, /)

Partition the string into three parts using the given separator.

This will search for the separator in the string, starting at the end. If the separator is found, returns a 3-tuple containing the part before the separator, the separator itself, and the part after it.

If the separator is not found, returns a 3-tuple containing two empty strings and the original string.

**rsplit**(*sep=None*, *maxsplit=-1*)

Return a list of the words in the string, using *sep* as the delimiter string.

**sep**

The delimiter according which to split the string. *None* (the default value) means split according to any whitespace, and discard empty strings from the result.

**maxsplit**

Maximum number of splits to do. -1 (the default value) means no limit.

Splits are done starting at the end of the string and working to the front.

**rstrip**(*chars=None*, /)

Return a copy of the string with trailing whitespace removed.

If *chars* is given and not *None*, remove characters in *chars* instead.

**split**(*sep=None*, *maxsplit=-1*)

Return a list of the words in the string, using *sep* as the delimiter string.

**sep**

The delimiter according which to split the string. *None* (the default value) means split according to any whitespace, and discard empty strings from the result.

**maxsplit**

Maximum number of splits to do. -1 (the default value) means no limit.

**splitlines**(*keepends=False*)

Return a list of the lines in the string, breaking at line boundaries.

Line breaks are not included in the resulting list unless *keepends* is given and true.

**startswith**(*prefix*[, *start*[, *end*]]) → bool

Return True if *S* starts with the specified prefix, False otherwise. With optional *start*, test *S* beginning at that position. With optional *end*, stop comparing *S* at that position. *prefix* can also be a tuple of strings to try.

**property string****strip**(*chars=None*, /)

Return a copy of the string with leading and trailing whitespace removed.

If *chars* is given and not *None*, remove characters in *chars* instead.

**swapcase**()

Convert uppercase characters to lowercase and lowercase characters to uppercase.

**title**()

Return a version of the string where each word is titlecased.

More specifically, words start with uppercased characters and all remaining cased characters have lower case.

**translate**(*table*, /)

Replace each character in the string using the given translation table.

**table**

Translation table, which must be a mapping of Unicode ordinals to Unicode ordinals, strings, or None.

The table must implement lookup/indexing via `__getitem__`, for instance a dictionary or list. If this operation raises `LookupError`, the character is left untouched. Characters mapped to None are deleted.

**upper**()

Return a copy of the string converted to uppercase.

**validator** =

`<ads.feature_engineering.feature_type.handler.feature_validator.FeatureValidator object>`

**warning**

The Feature Warning class.

Provides functionality to register warning handlers and invoke them.

**register**(*self*, *name*: *str*, *handler*: *Callable*) → None

Registers a new warning for the feature type.

**unregister**(*self*, *name*: *str*) → None

Unregisters warning.

**registered**(*self*) → `pd.DataFrame`

Gets the list of registered warnings.

## Examples

```
>>> warning = FeatureWarning()
>>> def warning_handler_zeros_count(data):
...     return pd.DataFrame(
...         [['Zeros', 'Age has 38 zeros', 'Count', 38]],
...         columns=['Warning', 'Message', 'Metric', 'Value'])
>>> def warning_handler_zeros_percentage(data):
...     return pd.DataFrame(
...         [['Zeros', 'Age has 12.2% zeros', 'Percentage', '12.2%']],
...         columns=['Warning', 'Message', 'Metric', 'Value'])
>>> warning.register(name="zeros_count", handler=warning_handler_zeros_count)
>>> warning.register(name="zeros_percentage", handler=warning_handler_
↳percentage)
>>> warning.registered()
```

	Warning	Handler
0	zeros_count	warning_handler_zeros_count
1	zeros_percentage	warning_handler_zeros_percentage

```
>>> warning.zeros_percentage(data_series)
```

	Warning	Message	Metric	Value
0	Zeros	Age has 38 zeros	Count	38

```
>>> warning.zeros_count(data_series)
```

	Warning	Message	Metric	Value
1	Zeros	Age has 12.2% zeros	Percentage	12.2%

```
>>> warning(data_series)
```

	Warning	Message	Metric	Value
0	Zeros	Age has 38 zeros	Count	38
1	Zeros	Age has 12.2% zeros	Percentage	12.2%

```
>>> warning.unregister('zeros_count')
>>> warning(data_series)
```

	Warning	Message	Metric	Value
0	Zeros	Age has 12.2% zeros	Percentage	12.2%

**zfill**(width, /)

Pad a numeric string with zeros on the left, to fill a field of the given width.

The string is never truncated.

`ads.feature_engineering.feature_type.adsstring.string.to_adsstring(func: Callable) → Callable`

Decorator that converts output of a function to *ADSSString* if it returns a string.

**Parameters**

**func** (*Callable*) – function to decorate

**Returns**

decorated function

**Return type**

Callable

`ads.feature_engineering.feature_type.adsstring.string.wrap_output_string(decorator: Callable) → Callable`

Class decorator that applies a decorator to all methods of a class.

**Parameters**

**decorator** (*Callable*) – decorator to apply

**Returns**

class decorator

**Return type**

Callable

## Module contents

### ads.feature\_engineering.feature\_type.handler package

#### Submodules

### ads.feature\_engineering.feature\_type.handler.feature\_validator module

The module that helps to register custom validators for the feature types and extending registered validators with dispatching based on the specific arguments.

## Classes

### FeatureValidator

The Feature Validator class to manage custom validators.

### FeatureValidatorMethod

The Feature Validator Method class. Extends methods which requires dispatching based on the specific arguments.

**class** ads.feature\_engineering.feature\_type.handler.feature\_validator.**FeatureValidator**

Bases: object

The Feature Validator class to manage custom validators.

**register**(*self*, *name*: str, *handler*: Callable, *condition*: Union[Tuple, Dict[str, Any]] = None, *replace*: bool = False) → None

Registers new validator.

**unregister**(*self*, *name*: str, *condition*: Union[Tuple, Dict[str, Any]] = None) → None

Unregisters validator.

**registered**(*self*) → pd.DataFrame

Gets the list of registered validators.

## Examples

```
>>> series = pd.Series(['+1-202-555-0141', '+1-202-555-0142'], name='Phone Number')
```

```
>>> def phone_number_validator(data: pd.Series) -> pd.Series:
...     print("phone_number_validator")
...     return data
```

```
>>> def universal_phone_number_validator(data: pd.Series, country_code) -> pd.
↳Series:
...     print("universal_phone_number_validator")
...     return data
```

```
>>> def us_phone_number_validator(data: pd.Series, country_code) -> pd.Series:
...     print("us_phone_number_validator")
...     return data
```

```
>>> PhoneNumber.validator.register(name="is_phone_number", handler=phone_number_
↳validator, replace=True)
>>> PhoneNumber.validator.register(name="is_phone_number", handler=universal_phone_
↳number_validator, condition = ('country_code',))
>>> PhoneNumber.validator.register(name="is_phone_number", handler=us_phone_number_
↳validator, condition = {'country_code': '+1'})
```

```
>>> PhoneNumber.validator.is_phone_number(series)
phone_number_validator
0      +1-202-555-0141
1      +1-202-555-0142
```

```
>>> PhoneNumber.validator.is_phone_number(series, country_code = '+7')
universal_phone_number_validator
0      +1-202-555-0141
1      +1-202-555-0142
```

```
>>> PhoneNumber.validator.is_phone_number(series, country_code = '+1')
us_phone_number_validator
0      +1-202-555-0141
1      +1-202-555-0142
```

```
>>> PhoneNumber.validator.registered()
Validator Condition
↳Handler
-----
↳-
0      is_phone_number      ()      phone_number_
↳validator
1      is_phone_number      ('country_code')      universal_phone_number_
↳validator
2      is_phone_number      {'country_code': '+1'}      us_phone_number_
↳validator
```

```
>>> series.ads.validator.is_phone_number()
phone_number_validator
0      +1-202-555-0141
1      +1-202-555-0142
```

```
>>> series.ads.validator.is_phone_number(country_code = '+7')
universal_phone_number_validator
0      +1-202-555-0141
1      +1-202-555-0142
```

```
>>> series.ads.validator.is_phone_number(country_code = '+1')
us_phone_number_validator
0      +1-202-555-0141
1      +1-202-555-0142
```

Initializes the FeatureValidator.

**register**(name: str, handler: Callable, condition: Optional[Union[Tuple, Dict[str, Any]]] = None, replace: bool = False) → None



Registers new validator.

#### Parameters

- **name** (*str*) – The validator name.
- **handler** (*callable*) – The handler.
- **condition** (*Union[Tuple, Dict[str, Any]]*) – The condition for the validator.
- **replace** (*bool*) – The flag indicating if the registered validator should be replaced with the new one.

#### Returns

Nothing.

#### Return type

None

#### Raises

- **ValueError** – The name is empty or handler is not provided.
- **TypeError** – The handler is not callable. The name of the validator is not a string.
- **ValidatorAlreadyExists** – The validator is already registered.

**registered()** → DataFrame

Gets the list of registered validators.

#### Returns

The list of registerd validators.

#### Return type

pd.DataFrame

**unregister**(*name: str, condition: Optional[Union[Tuple, Dict[str, Any]]] = None*) → None

Unregisters validator.

#### Parameters

- **name** (*str*) – The name of the validator to be unregistered.
- **condition** (*Union[Tuple, Dict[str, Any]]*) – The condition for the validator to be unregistered.

#### Returns

Nothing.

#### Return type

None

#### Raises

- **TypeError** – The name of the validator is not a string.
- **ValidatorNotFound** – The validator not found.
- **ValidatorWithConditionNotFound** – The validator with provided condition not found.

**class** ads.feature\_engineering.feature\_type.handler.feature\_validator.**FeatureValidatorMethod**(*handler: Callable*)

Bases: object

The Feature Validator Method class.

Extends methods which requires dispatching based on the specific arguments.

**register**(*self*, *condition*: Union[Tuple, Dict[str, Any]], *handler*: Callable) → None

Registers new handler.

**unregister**(*self*, *condition*: Union[Tuple, Dict[str, Any]]) → None

Unregisters existing handler.

**registered**(*self*) → pd.DataFrame

Gets the list of registered handlers.

Initializes the Feature Validator Method.

#### Parameters

**handler** (Callable) – The handler that will be called by default if suitable one not found.

**register**(*condition*: Union[Tuple, Dict[str, Any]], *handler*: Callable) → None

Registers new handler.

#### Parameters

- **condition** (Union[Tuple, Dict[str, Any]]) – The condition which will be used to register a new handler.
- **handler** (Callable) – The handler to be registered.

#### Returns

Nothing.

#### Return type

None

#### Raises

**ValueError** – If condition not provided or provided in the wrong format. If handler not provided or has wrong format.

**registered**() → DataFrame

Gets the list of registered handlers.

#### Returns

The list of registerd handlers.

#### Return type

pd.DataFrame

**unregister**(*condition*: Union[Tuple, Dict[str, Any]]) → None

Unregisters existing handler.

#### Parameters

**condition** (Union[Tuple, Dict[str, Any]]) – The condition which will be used to unregister a handler.

#### Returns

Nothing.

#### Return type

None

#### Raises

**ValueError** – If condition not provided or provided in the wrong format. If condition not registered.

**exception** `ads.feature_engineering.feature_type.handler.feature_validator.ValidatorAlreadyExists(name: str)`

Bases: `ValueError`

**exception** `ads.feature_engineering.feature_type.handler.feature_validator.ValidatorNotFound(name: str)`

Bases: `ValueError`

**exception** `ads.feature_engineering.feature_type.handler.feature_validator.ValidatorWithConditionAlreadyExists(name: str)`

Bases: `ValueError`

**exception** `ads.feature_engineering.feature_type.handler.feature_validator.ValidatorWithConditionNotFound(name: str)`

Bases: `ValueError`

**exception** `ads.feature_engineering.feature_type.handler.feature_validator.WrongHandlerMethodSignature(handler_name: str, condition: str, handler_name: str, handler_name: str)`

Bases: `ValueError`

## `ads.feature_engineering.feature_type.handler.feature_warning` module

The module that helps to register custom warnings for the feature types.

### Classes

#### **FeatureWarning**

The Feature Warning class. Provides functionality to register warning handlers and invoke them.

### Examples

```
>>> warning = FeatureWarning()
>>> def warning_handler_zeros_count(data):
...     return pd.DataFrame(
...         [['Zeros', 'Age has 38 zeros', 'Count', 38]],
...         columns=['Warning', 'Message', 'Metric', 'Value'])
>>> def warning_handler_zeros_percentage(data):
...     return pd.DataFrame(
...         [['Zeros', 'Age has 12.2% zeros', 'Percentage', '12.2%']],
...         columns=['Warning', 'Message', 'Metric', 'Value'])
>>> warning.register(name="zeros_count", handler=warning_handler_zeros_count)
>>> warning.register(name="zeros_percentage", handler=warning_handler_percentage)
>>> warning.registered()
Name                                     Handler
```

(continues on next page)

(continued from previous page)

```

-----
0      zeros_count      warning_handler_zeros_count
1      zeros_percentage  warning_handler_zeros_percentage

```

```

>>> warning.zeros_percentage(data_series)
      Warning      Message      Metric      Value
-----
0      Zeros      Age has 38 zeros      Count      38

```

```

>>> warning.zeros_count(data_series)
      Warning      Message      Metric      Value
-----
1      Zeros      Age has 12.2% zeros      Percentage      12.2%

```

```

>>> warning(data_series)
      Warning      Message      Metric      Value
-----
0      Zeros      Age has 38 zeros      Count      38
1      Zeros      Age has 12.2% zeros      Percentage      12.2%

```

```

>>> warning.unregister('zeros_count')
>>> warning(data_series)
      Warning      Message      Metric      Value
-----
0      Zeros      Age has 12.2% zeros      Percentage      12.2%

```

**class** `ads.feature_engineering.feature_type.handler.feature_warning.FeatureWarning`

Bases: `object`

The Feature Warning class.

Provides functionality to register warning handlers and invoke them.

**register**(*self*, *name*: *str*, *handler*: *Callable*) → *None*

Registers a new warning for the feature type.

**unregister**(*self*, *name*: *str*) → *None*

Unregisters warning.

**registered**(*self*) → *pd.DataFrame*

Gets the list of registered warnings.

## Examples

```

>>> warning = FeatureWarning()
>>> def warning_handler_zeros_count(data):
...     return pd.DataFrame(
...         [['Zeros', 'Age has 38 zeros', 'Count', 38]],
...         columns=['Warning', 'Message', 'Metric', 'Value'])
>>> def warning_handler_zeros_percentage(data):
...     return pd.DataFrame(

```

(continues on next page)

(continued from previous page)

```

...     [['Zeros', 'Age has 12.2% zeros', 'Percentage', '12.2%']],
...     columns=['Warning', 'Message', 'Metric', 'Value'])
>>> warning.register(name="zeros_count", handler=warning_handler_zeros_count)
>>> warning.register(name="zeros_percentage", handler=warning_handler_percentage)
>>> warning.registered()

```

	Warning	Handler
0	zeros_count	warning_handler_zeros_count
1	zeros_percentage	warning_handler_zeros_percentage

```

>>> warning.zeros_percentage(data_series)

```

	Warning	Message	Metric	Value
0	Zeros	Age has 38 zeros	Count	38

```

>>> warning.zeros_count(data_series)

```

	Warning	Message	Metric	Value
1	Zeros	Age has 12.2% zeros	Percentage	12.2%

```

>>> warning(data_series)

```

	Warning	Message	Metric	Value
0	Zeros	Age has 38 zeros	Count	38
1	Zeros	Age has 12.2% zeros	Percentage	12.2%

```

>>> warning.unregister('zeros_count')
>>> warning(data_series)

```

	Warning	Message	Metric	Value
0	Zeros	Age has 12.2% zeros	Percentage	12.2%

Initializes the FeatureWarning.

**register**(*name*: str, *handler*: Callable, *replace*: bool = False) → None

Registers a new warning.

#### Parameters

- **name** (str) – The warning name.
- **handler** (callable) – The handler associated with the warning.
- **replace** (bool) – The flag indicating if the registered warning should be replaced with the new one.

#### Returns

Nothing

#### Return type

None

#### Raises

- **ValueError** – If warning name is empty or handler not defined.

- **TypeError** – If handler is not callable.
- **WarningAlreadyExists** – If warning is already registered.

**registered()** → DataFrame

Gets the list of registered warnings.

**Return type**

pd.DataFrame

## Examples

```
>>> The list of registered warnings in DataFrame format.
      Name                                     Handler
-----
0      zeros_count          warning_handler_zeros_count
1  zeros_percentage  warning_handler_zeros_percentage
```

**unregister(name: str)** → None

Unregisters warning.

**Parameters**

**name** (str) – The name of warning to be unregistered.

**Returns**

Nothing.

**Return type**

None

**Raises**

- **ValueError** – If warning name is not provided or empty.
- **WarningNotFound** – If warning not found.

## ads.feature\_engineering.feature\_type.handler.warnings module

The module with all default warnings provided to user. These are registered to relevant feature types directly in the feature type files themselves.

**ads.feature\_engineering.feature\_type.handler.warnings.high\_cardinality\_handler(s: Series)** → DataFrame

Warning if number of unique values (including Nan) in series is greater than or equal to 15.

**Parameters**

**s** (pd.Series) – Pandas series - column of some feature type.

**Returns**

Dataframe with 4 columns 'Warning', 'Message', 'Metric', 'Value' and 1 rows, which lists count of unique values.

**Return type**

pd.DataFrame

**ads.feature\_engineering.feature\_type.handler.warnings.missing\_values\_handler(s: Series)** → DataFrame

Warning for > 5 percent missing values (Nans) in series.

**Parameters**

**s** (*pd.Series*) – Pandas series - column of some feature type.

**Returns**

Dataframe with 4 columns 'Warning', 'Message', 'Metric', 'Value' and 2 rows, where first row is count of missing values and second is percentage of missing values.

**Return type**

pd.DataFrame

`ads.feature_engineering.feature_type.handler.warnings.skew_handler(s: Series) → DataFrame`

Warning if absolute value of skew is greater than 1.

**Parameters**

**s** (*pd.Series*) – Pandas series - column of some feature type, expects continuous values.

**Returns**

Dataframe with 4 columns 'Warning', 'Message', 'Metric', 'Value' and 1 rows, which lists skew value of that column.

**Return type**

pd.DataFrame

`ads.feature_engineering.feature_type.handler.warnings.zeros_handler(s: Series) → DataFrame`

Warning for greater than 10 percent zeros in series.

**Parameters**

**s** (*pd.Series*) – Pandas series - column of some feature type.

**Returns**

Dataframe with 4 columns 'Warning', 'Message', 'Metric', 'Value' and 2 rows, where first row is count of zero values and second is percentage of zero values.

**Return type**

pd.DataFrame

**Module contents****Submodules****ads.feature\_engineering.feature\_type.address module**

The module that represents an Address feature type.

**Classes:****Address**

The Address feature type.

**class** `ads.feature_engineering.feature_type.address.Address`

Bases: *String*

Type representing address.

**description**

The feature type description.

**Type**

str

**name**

The feature type name.

**Type**

str

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**feature\_stat**(*x*: *pd.Series*) → *pd.DataFrame*

Generates feature statistics.

**feature\_plot**(*x*: *pd.Series*) → *plt.Axes*

Shows the location of given address on map base on zip code.

## Example

```
>>> from ads.feature_engineering.feature_type.address import Address
>>> import pandas as pd
>>> address = pd.Series(['1 Miller Drive, New York, NY 12345',
                        '1 Berkeley Street, Boston, MA 67891',
                        '54305 Oxford Street, Seattle, WA 95132',
                        ''])
>>> Address.validator.is_address(address)
0    True
1    True
2    True
3   False
dtype: bool
```

**description** = 'Type representing address.'

**classmethod feature\_domain**(*x*: *Series*) → *Domain*

Generate the domain of the data of this feature type.

## Examples

```
>>> address = pd.Series(['1 Miller Drive, New York, NY 12345',
                        '1 Berkeley Street, Boston, MA 67891',
                        '54305 Oxford Street, Seattle, WA 95132',
                        ''],
                        name='address')
>>> address.ads.feature_type = ['address']
>>> address.ads.feature_domain()
constraints: []
stats:
  count: 4
```

(continues on next page)



(continued from previous page)

```

missing: 1
unique: 3
values: Address

```

**Returns**

Domain based on the Address feature type.

**Return type**

*ads.feature\_engineering.schema.Domain*

**static feature\_plot**(*x: Series*) → Axes

Shows the location of given address on map base on zip code.

**Examples**

```

>>> address = pd.Series(['1 Miller Drive, New York, NY 12345',
                        '1 Berkeley Street, Boston, MA 67891',
                        '54305 Oxford Street, Seattle, WA 95132',
                        ''],
                        name='address')
>>> address.ads.feature_type = ['address']
>>> address.ads.feature_plot()

```

**Returns**

Plot object for the series based on the Address feature type.

**Return type**

matplotlib.axes.\_subplots.AxesSubplot

**static feature\_stat**(*x: Series*) → DataFrame

Generates feature statistics.

Feature statistics include (total)count, unique(count) and missing(count).

**Examples**

```

>>> address = pd.Series(['1 Miller Drive, New York, NY 12345',
                        '1 Berkeley Street, Boston, MA 67891',
                        '54305 Oxford Street, Seattle, WA 95132',
                        ''],
                        name='address')
>>> address.ads.feature_type = ['address']
>>> address.ads.feature_stat()
Metric Value
0      count    4
1     unique    3
2    missing    1

```

**Returns**

Summary statistics of the Series provided.

**Return type**  
pandas.DataFrame

**validator** =  
<ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator  
object>

**warning** =  
<ads.feature\_engineering.feature\_type.handler.feature\_warning.FeatureWarning object>

ads.feature\_engineering.feature\_type.address.default\_handler(*data: Series, \*args, \*\*kwargs*) →  
Series

Processes given data and indicates if the data matches requirements.

**Parameters**  
**data** (*pd.Series*) – The data to process.

**Returns**  
The logical list indicating if the data matches requirements.

**Return type**  
pandas.Series

### ads.feature\_engineering.feature\_type.base module

**class** ads.feature\_engineering.feature\_type.base.FeatureBaseType(*classname, bases, dictionary*)  
Bases: type

The helper metaclass to extend functionality of FeatureType class.

**class** ads.feature\_engineering.feature\_type.base.FeatureBaseTypeMeta(*classname, bases, dictionary*)

Bases: [FeatureBaseType](#), ABCMeta

The class to provide compatibility between ABC and FeatureBaseType metaclass.

**class** ads.feature\_engineering.feature\_type.base.FeatureType  
Bases: ABC

Abstract case for feature types. Default class attribute include name and description. Name is auto generated using camel to snake conversion unless specified.

**description** = 'Base feature type.'

**name** = 'feature\_type'

**validator** =  
<ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator  
object>

**warning** =  
<ads.feature\_engineering.feature\_type.handler.feature\_warning.FeatureWarning object>

**class** ads.feature\_engineering.feature\_type.base.Name  
Bases: object

**class** `ads.feature_engineering.feature_type.base.Tag(name: str)`

Bases: `object`

Class for free form tags. Name must be specified.

Initialize a tag instance.

**Parameters**

**name** (*str*) – The name of the tag.

## **ads.feature\_engineering.feature\_type.boolean module**

The module that represents a Boolean feature type.

**Classes:**

**Boolean**

The feature type that represents binary values True/False.

**Functions:**

**default\_handler(data: `pd.Series`) -> `pd.Series`**

Processes given data and indicates if the data matches requirements.

**class** `ads.feature_engineering.feature_type.boolean.Boolean`

Bases: *FeatureType*

Type representing binary values True/False.

**description**

The feature type description.

**Type**

`str`

**name**

The feature type name.

**Type**

`str`

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**feature\_stat**(*x: `pd.Series`*) → `pd.DataFrame`

Generates feature statistics.

**feature\_plot**(*x: `pd.Series`*) → `plt.Axes`

Show the counts of observations in True/False using bars.

## Examples

```
>>> from ads.feature_engineering.feature_type.boolean import Boolean
>>> import pandas as pd
>>> import numpy as np
>>> s = pd.Series([True, False, True, False, np.NaN, None], name='bool')
>>> s.ads.feature_type = ['boolean']
>>> Boolean.validator.is_boolean(s)
0    True
1    True
2    True
3    True
4   False
5   False
dtype: bool
```

**description** = 'Type representing binary values True/False.'

**classmethod** `feature_domain(x: Series) → Domain`

Generate the domain of the data of this feature type.

## Examples

```
>>> s = pd.Series([True, False, True, False, np.NaN, None], name='bool')
>>> s.ads.feature_type = ['boolean']
>>> s.ads.feature_domain()
constraints:
- expression: $x in [True, False]
  language: python
stats:
  count: 6
  missing: 2
  unique: 2
values: Boolean
```

### Returns

Domain based on the Boolean feature type.

### Return type

*ads.feature\_engineering.schema.Domain*

**static** `feature_plot(x: Series) → Axes`

Shows the counts of observations in True/False using bars.

### Parameters

**x** (pandas.Series) – The feature being evaluated.

### Returns

Plot object for the series based on the Boolean feature type.

### Return type

matplotlib.axes.\_subplots.AxesSubplot

## Examples

```
>>> s = pd.Series([True, False, True, False, np.NaN, None], name='bool')
>>> s.ads.feature_type = ['boolean']
>>> s.ads.feature_plot()
```

**static** `feature_stat(x: Series) → DataFrame`

Generates feature statistics.

Feature statistics include (total)count, unique(count) and missing(count).

### Parameters

**x** (pandas.Series) – The feature being evaluated.

### Returns

Summary statistics of the Series or Dataframe provided.

### Return type

pandas.DataFrame

## Examples

```
>>> s = pd.Series([True, False, True, False, np.NaN, None], name='bool')
>>> s.ads.feature_type = ['boolean']
>>> s.ads.feature_stat()
Metric Value
0      count  6
1     unique  2
2    missing  2
```

**validator =**

<ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator object>

**warning =**

<ads.feature\_engineering.feature\_type.handler.feature\_warning.FeatureWarning object>

`ads.feature_engineering.feature_type.boolean.default_handler(data: Series, *args, **kwargs) → Series`

Processes given data and indicates if the data matches requirements.

### Parameters

**data** (pandas.Series) – The data to process.

### Returns

The logical list indicating if the data matches requirements.

### Return type

pandas.Series

**ads.feature\_engineering.feature\_type.category module**

The module that represents a Category feature type.

**Classes:****Category**

The Category feature type.

**class** ads.feature\_engineering.feature\_type.category.**Category**

Bases: *FeatureType*

Type representing discrete unordered values.

**description**

The feature type description.

**Type**

str

**name**

The feature type name.

**Type**

str

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**feature\_stat**(*x*: *pd.Series*) → *pd.DataFrame*

Generates feature statistics.

**feature\_plot**(*x*: *pd.Series*) → *plt.Axes*

Shows the counts of observations in each categorical bin using bar chart.

**description** = 'Type representing discrete unordered values.'

**classmethod** **feature\_domain**(*x*: *Series*) → *Domain*

Generate the domain of the data of this feature type.

**Examples**

```
>>> cat = pd.Series(['S', 'C', 'S', 'S', 'S', 'Q', 'S', 'S', 'S', 'C', 'S', 'S',  
→ 'S',  
                    'S', 'S', 'S', 'Q', 'S', 'S', '', np.NaN, None], name='category')  
>>> cat.ads.feature_type = ['category']  
>>> cat.ads.feature_domain()  
constraints:  
- expression: $x in ['S', 'C', 'Q', '']  
  language: python  
stats:
```

(continues on next page)

(continued from previous page)

```
count: 22
missing: 3
unique: 3
values: Category
```

**Returns**

Domain based on the Category feature type.

**Return type**

*ads.feature\_engineering.schema.Domain*

**static feature\_plot**(*x: Series*) → Axes

Shows the counts of observations in each categorical bin using bar chart.

**Parameters**

**x** (pandas.Series) – The feature being evaluated.

**Returns**

Plot object for the series based on the Category feature type.

**Return type**

matplotlib.axes.\_subplots.AxesSubplot

**Examples**

```
>>> cat = pd.Series(['S', 'C', 'S', 'S', 'S', 'Q', 'S', 'S', 'S', 'C', 'S', 'S',
→ 'S',
                    'S', 'S', 'S', 'Q', 'S', 'S', '', np.NaN, None], name='ategory')
>>> cat.ads.feature_type = ['ategory']
>>> cat.ads.feature_plot()
```

**static feature\_stat**(*x: Series*) → DataFrame

Generates feature statistics.

Feature statistics include (total)count, unique(count) and missing(count) if there are any.

**Parameters**

**x** (pandas.Series) – The feature being evaluated.

**Returns**

Summary statistics of the Series or Dataframe provided.

**Return type**

pandas.DataFrame

## Examples

```
>>> cat = pd.Series(['S', 'C', 'S', 'S', 'S', 'Q', 'S', 'S', 'S', 'C', 'S', 'S',  
↪ 'S',  
                    'S', 'S', 'S', 'Q', 'S', 'S', '', np.NaN, None], name='category')  
>>> cat.ads.feature_type = ['category']  
>>> cat.ads.feature_stat()  
Metric Value  
0      count    22  
1      unique     3  
2      missing     3
```

**validator** =

<ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator  
object>

**warning** =

<ads.feature\_engineering.feature\_type.handler.feature\_warning.FeatureWarning object>

## ads.feature\_engineering.feature\_type.constant module

The module that represents a Constant feature type.

**Classes:**

**Constant**

The Constant feature type.

**class** ads.feature\_engineering.feature\_type.constant.Constant

Bases: *FeatureType*

Type representing constant values.

**description**

The feature type description.

**Type**

str

**name**

The feature type name.

**Type**

str

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**feature\_stat**(x: *pd.Series*) → *pd.DataFrame*

Generates feature statistics.



**feature\_plot**(*x*: *pd.Series*) → *plt.Axes*

Shows the counts of observations in bars.

**description** = 'Type representing constant values.'

**classmethod feature\_domain**(*x*: *Series*) → *Domain*

Generate the domain of the data of this feature type. .. rubric:: Example

```
>>> s = pd.Series([1, 1, 1, 1, 1], name='constant')
>>> s.ads.feature_type = ['constant']
>>> s.ads.feature_domain()
constraints: []
stats:
  count: 5
  unique: 1
values: Constant
```

#### Returns

Domain based on the Constant feature type.

#### Return type

*ads.feature\_engineering.schema.Domain*

**static feature\_plot**(*x*: *Series*) → *Axes*

Shows the counts of observations in bars.

#### Parameters

**x** (*pandas.Series*) – The feature being shown.

### Examples

```
>>> s = pd.Series([1, 1, 1, 1, 1], name='constant')
>>> s.ads.feature_type = ['constant']
>>> s.ads.feature_plot()
```

#### Returns

Plot object for the series based on the Constant feature type.

#### Return type

*matplotlib.axes.\_subplots.AxesSubplot*

**static feature\_stat**(*x*: *Series*) → *DataFrame*

Generates feature statistics.

Feature statistics include (total)count, unique(count) and missing(count).

#### Parameters

**x** (*pandas.Series*) – The feature being evaluated.

#### Returns

Summary statistics of the Series provided.

#### Return type

*pandas.DataFrame*

## Examples

```
>>> s = pd.Series([1, 1, 1, 1, 1], name='constant')
>>> s.ads.feature_type = ['constant']
>>> s.ads.feature_stat()
Metric Value
0      count    5
1      unique    1
```

**validator** =

<ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator object>

**warning** =

<ads.feature\_engineering.feature\_type.handler.feature\_warning.FeatureWarning object>

## ads.feature\_engineering.feature\_type.continuous module

The module that represents a Continuous feature type.

### Classes:

#### **Continuous**

The Continuous feature type.

**class** ads.feature\_engineering.feature\_type.continuous.**Continuous**

Bases: *FeatureType*

Type representing continuous values.

#### **description**

The feature type description.

#### **Type**

str

#### **name**

The feature type name.

#### **Type**

str

#### **warning**

Provides functionality to register warnings and invoke them.

#### **Type**

*FeatureWarning*

#### **validator**

Provides functionality to register validators and invoke them.

**feature\_stat**(*x: pd.Series*) → pd.DataFrame

Generates feature statistics.

**feature\_plot**(*x: pd.Series*) → plt.Axes

Shows distributions of datasets using box plot.

**description** = 'Type representing continuous values.'

**classmethod** **feature\_domain**(*x*: *Series*) → *Domain*

Generate the domain of the data of this feature type.

### Examples

```
>>> cts = pd.Series([13.32, 3.32, 4.3, 2.45, 6.34, 2.25,
                    4.43, 3.26, np.NaN, None], name='continuous')
>>> cts.ads.feature_type = ['continuous']
>>> cts.ads.feature_domain()
constraints: []
stats:
  count: 10.0
  lower quartile: 3.058
  mean: 4.959
  median: 3.81
  missing: 2.0
  sample maximum: 13.32
  sample minimum: 2.25
  skew: 2.175
  standard deviation: 3.62
  upper quartile: 4.908
values: Continuous
```

#### Returns

Domain based on the Continuous feature type.

#### Return type

*ads.feature\_engineering.schema.Domain*

**static** **feature\_plot**(*x*: *Series*) → *Axes*

Shows distributions of datasets using box plot.

### Examples

```
>>> cts = pd.Series([13.32, 3.32, 4.3, 2.45, 6.34, 2.25,
                    4.43, 3.26, np.NaN, None], name='continuous')
>>> cts.ads.feature_type = ['continuous']
>>> cts.ads.feture_plot()
```

#### Returns

Plot object for the series based on the Continuous feature type.

#### Return type

*matplotlib.axes.\_subplots.AxesSubplot*

**static** **feature\_stat**(*x*: *Series*) → *DataFrame*

Generates feature statistics.

Feature statistics include (total)count, mean, standard deviation, sample minimum, lower quartile, median, 75%, upper quartile, skew and missing(count).

## Examples

```
>>> cts = pd.Series([13.32, 3.32, 4.3, 2.45, 6.34, 2.25,
                    4.43, 3.26, np.NaN, None], name='continuous')
>>> cts.ads.feature_type = ['continuous']
>>> cts.ads.feature_stat()
  Metric      Value
0    count    10.000
1    mean     4.959
2  standard deviation    3.620
3  sample minimum     2.250
4  lower quartile     3.058
5    median     3.810
6  upper quartile     4.908
7  sample maximum    13.320
8    skew     2.175
9  missing     2.000
```

### Returns

Summary statistics of the Series or Dataframe provided.

### Return type

`pandas.DataFrame`

`validator =`

`<ads.feature_engineering.feature_type.handler.feature_validator.FeatureValidator object>`

`warning =`

`<ads.feature_engineering.feature_type.handler.feature_warning.FeatureWarning object>`

## `ads.feature_engineering.feature_type.creditcard` module

The module that represents a CreditCard feature type.

### Classes:

#### **CreditCard**

The CreditCard feature type.

### Functions:

#### **default\_handler(data: `pd.Series`) -> `pd.Series`**

Processes given data and indicates if the data matches requirements.

#### **\_luhn\_checksum(card\_number: `str`) -> `float`**

Implements Luhn algorithm to validate a credit card number.

**class** `ads.feature_engineering.feature_type.creditcard.CreditCard`

Bases: `String`

Type representing credit card numbers.

#### **description**

The feature type description.

**Type**  
str

**name**

The feature type name.

**Type**  
str

**warning**

Provides functionality to register warnings and invoke them.

**Type**  
*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**feature\_stat**(*x: pd.Series*) → *pd.DataFrame*

Generates feature statistics.

**feature\_plot**(*x: pd.Series*) → *plt.Axes*

Shows the counts of observations in each credit card type using bar chart.

## Examples

```
>>> from ads.feature_engineering.feature_type.creditcard import CreditCard
>>> import pandas as pd
>>> s = pd.Series(["4532640527811543", None, "4556929308150929", "4539944650919740",
↳ "4485348152450846", "4556593717607190"], name='credit_card')
>>> s.ads.feature_type = ['credit_card']
>>> CreditCard.validator.is_credit_card(s)
0      True
1     False
2      True
3      True
4      True
5      True
Name: credit_card, dtype: bool
```

**description** = 'Type representing credit card numbers.'

**classmethod feature\_domain**(*x: Series*) → *Domain*

Generate the domain of the data of this feature type.

## Examples

```
>>> visa = [
    "4532640527811543",
    None,
    "4556929308150929",
    "4539944650919740",
    "4485348152450846",
```

(continues on next page)

(continued from previous page)

```

    "4556593717607190",
    ]
>>> mastercard = [
    "5334180299390324",
    "5111466404826446",
    "5273114895302717",
    "543097215222336",
    "5536426859893306",
    ]
>>> amex = [
    "371025944923273",
    "374745112042294",
    "340984902710890",
    "375767928645325",
    "370720852891659",
    ]
>>> creditcard_list = visa + mastercard + amex
>>> creditcard_series = pd.Series(creditcard_list,name='card')
>>> creditcard_series.ads.feature_type = ['credit_card']
>>> creditcard_series.ads.feature_domain()
constraints: []
stats:
  count: 16
  count_Amex: 5
  count_Diners Club: 2
  count_MasterCard: 3
  count_Visa: 5
  count_missing: 1
  missing: 1
  unique: 15
values: CreditCard

```

**Returns**

Domain based on the CreditCard feature type.

**Return type**

*ads.feature\_engineering.schema.Domain*

**static feature\_plot**(*x: Series*) → Axes

Shows the counts of observations in each credit card type using bar chart.

**Examples**

```

>>> visa = [
    "4532640527811543",
    None,
    "4556929308150929",
    "4539944650919740",
    "4485348152450846",
    "4556593717607190",
    ]

```

(continues on next page)

(continued from previous page)

```

>>> mastercard = [
    "5334180299390324",
    "5111466404826446",
    "5273114895302717",
    "543097215222336",
    "5536426859893306",
    ]
>>> amex = [
    "371025944923273",
    "374745112042294",
    "340984902710890",
    "375767928645325",
    "370720852891659",
    ]
>>> creditcard_list = visa + mastercard + amex
>>> creditcard_series = pd.Series(creditcard_list,name='card')
>>> creditcard_series.ads.feature_type = ['credit_card']
>>> creditcard_series.ads.feature_plot()

```

**Returns**

Plot object for the series based on the CreditCard feature type.

**Return type**

matplotlib.axes.\_subplots.AxesSubplot

**static feature\_stat(*x*: Series)**

Generates feature statistics.

**Feature statistics include (total)count, unique(count), missing(count) and count of each credit card type.**

**Examples**

```

>>> visa = [
    "4532640527811543",
    None,
    "4556929308150929",
    "4539944650919740",
    "4485348152450846",
    "4556593717607190",
    ]
>>> mastercard = [
    "5334180299390324",
    "5111466404826446",
    "5273114895302717",
    "543097215222336",
    "5536426859893306",
    ]
>>> amex = [
    "371025944923273",
    "374745112042294",

```

(continues on next page)

(continued from previous page)

```

    "340984902710890",
    "375767928645325",
    "370720852891659",
    ]
>>> creditcard_list = visa + mastercard + amex
>>> creditcard_series = pd.Series(creditcard_list,name='card')
>>> creditcard_series.ads.feature_type = ['credit_card']
>>> creditcard_series.ads.feature_stat()

```

	Metric	Value
0	count	16
1	unique	15
2	missing	1
3	count_Amex	5
4	count_Visa	5
5	count_MasterCard	3
6	count_Diners Club	2
7	count_missing	1

**Returns**

Summary statistics of the Series or Dataframe provided.

**Return type**

pandas.DataFrame

**validator =**

<ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator object>

**warning =**

<ads.feature\_engineering.feature\_type.handler.feature\_warning.FeatureWarning object>

ads.feature\_engineering.feature\_type.creditcard.default\_handler(*data: Series, \*args, \*\*kwargs*)  
→ Series

Processes given data and indicates if the data matches requirements.

**Parameters**

**data** (pandas.Series) – The data to process.

**Returns**

The logical list indicating if the data matches requirements.

**Return type**

pandas.Series



**ads.feature\_engineering.feature\_type.datetime module**

The module that represents a DateTime feature type.

**Classes:****DateTime**

The DateTime feature type.

**class** ads.feature\_engineering.feature\_type.datetime.DateTime

Bases: *FeatureType*

Type representing date and/or time.

**description**

The feature type description.

**Type**

str

**name**

The feature type name.

**Type**

str

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**feature\_stat**(x: *pd.Series*) → *pd.DataFrame*

Generates feature statistics.

**feature\_plot**(x: *pd.Series*) → *plt.Axes*

Shows distributions of datetime datasets using histograms.

**Example**

```
>>> from ads.feature_engineering.feature_type.datetime import DateTime
>>> import pandas as pd
>>> s = pd.Series(["12/12/12", "12/12/13", None, "12/12/14"], name='datetime')
>>> s.ads.feature_type = ['date_time']
>>> DateTime.validator.is_datetime(s)
0    True
1    True
2   False
3    True
Name: datetime, dtype: bool
```

**description** = 'Type representing date and/or time.'

**classmethod** feature\_domain(x: *Series*) → *Domain*

Generate the domain of the data of this feature type.

## Examples

```
>>> s = pd.Series(['3/11/2000', '3/12/2000', '3/13/2000', '', None, np.nan,
↳ 'April/13/2011', 'April/15/11'], name='datetime')
>>> s.ads.feature_type = ['date_time']
>>> s.ads.feature_domain()
constraints: []
stats:
  count: 8
  missing: 3
  sample maximum: April/15/11
  sample minimum: 3/11/2000
values: DateTime
```

### Returns

Domain based on the DateTime feature type.

### Return type

*ads.feature\_engineering.schema.Domain*

**static feature\_plot**(*x: Series*) → Axes

Shows distributions of datetime datasets using histograms.

## Examples

```
>>> x = pd.Series(['3/11/2000', '3/12/2000', '3/13/2000', '', None, np.nan,
↳ 'April/13/2011', 'April/15/11'], name='datetime')
>>> x.ads.feature_type = ['date_time']
>>> x.ads.feature_plot()
```

### Returns

Plot object for the series based on the DateTime feature type.

### Return type

*matplotlib.axes.\_subplots.AxesSubplot*

**static feature\_stat**(*x: Series*) → DataFrame

Generates feature statistics.

Feature statistics include (total)count, sample maximum, sample minimum, and missing(count) if there is any.

## Examples

```
>>> x = pd.Series(['3/11/2000', '3/12/2000', '3/13/2000', '', None, np.nan,
↳ 'April/13/2011', 'April/15/11'], name='datetime')
>>> x.ads.feature_type = ['date_time']
>>> x.ads.feature_stat()
Metric      Value
0      count      8
1  sample maximum  April/15/11
```

(continues on next page)

(continued from previous page)

2	sample minimum	3/11/2000
3	missing	3

**Returns**

Summary statistics of the Series or Dataframe provided.

**Return type**`pandas.DataFrame`**validator =**<`ads.feature_engineering.feature_type.handler.feature_validator.FeatureValidator` object>**warning =**<`ads.feature_engineering.feature_type.handler.feature_warning.FeatureWarning` object>

`ads.feature_engineering.feature_type.datetime.default_handler`(*data: Series, \*args, \*\*kwargs*) → Series

Processes given data and indicates if the data matches requirements.

**Parameters****data** (`pandas.Series`) – The data to process.**Returns**

The logical list indicating if the data matches requirements.

**Return type**`pandas.Series`**ads.feature\_engineering.feature\_type.discrete module**

The module that represents a Discrete feature type.

**Classes:****Discrete**

The Discrete feature type.

**class** `ads.feature_engineering.feature_type.discrete.Discrete`Bases: *FeatureType*

Type representing discrete values.

**description**

The feature type description.

**Type**

str

**name**

The feature type name.

**Type**

str

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**feature\_stat**(*x: pd.Series*) → *pd.DataFrame*

Generates feature statistics.

**feature\_plot**(*x: pd.Series*) → *plt.Axes*

Shows distributions of datasets using box plot.

**description** = 'Type representing discrete values.'

**classmethod feature\_domain**(*x: Series*) → *Domain*

Generate the domain of the data of this feature type.

**Examples**

```
>>> discrete_numbers = pd.Series([35, 25, 13, 42],
                                name='discrete')
>>> discrete_numbers.ads.feature_type = ['discrete']
>>> discrete_numbers.ads.feature_domain()
constraints: []
stats:
  count: 4
  unique: 4
values: Discrete
```

**Returns**

Domain based on the Discrete feature type.

**Return type**

*ads.feature\_engineering.schema.Domain*

**static feature\_plot**(*x: Series*) → *Axes*

Shows distributions of datasets using box plot.

**Examples**

```
>>> discrete_numbers = pd.Series([35, 25, 13, 42],
                                name='discrete')
>>> discrete_numbers.ads.feature_type = ['discrete']
>>> discrete_numbers.ads.feature_stat()
Metric Value
0      count  4
1     unique  4
```

**Returns**

Plot object for the series based on the Discrete feature type.

**Return type**

matplotlib.axes.\_subplots.AxesSubplot

**static** `feature_stat(x: Series) → DataFrame`

Generates feature statistics.

Feature statistics include (total)count, unique(count) and missing(count).

**Examples**

```
>>> discrete_numbers = pd.Series([35, 25, 13, 42],
                                name='discrete')
>>> discrete_numbers.ads.feature_type = ['discrete']
>>> discrete_numbers.ads.feature_stat()
discrete
count    4
unique   4
```

**Returns**

Summary statistics of the Series provided.

**Return type**

pandas.DataFrame

**validator =**

&lt;ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator object&gt;

**warning =**

&lt;ads.feature\_engineering.feature\_type.handler.feature\_warning.FeatureWarning object&gt;

**ads.feature\_engineering.feature\_type.document module**

The module that represents a Document feature type.

**Classes:****Document**

The Document feature type.

**class** `ads.feature_engineering.feature_type.document.Document`Bases: *FeatureType*

Type representing document values.

**description**

The feature type description.

**Type**

str

**name**

The feature type name.

**Type**

str

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**description** = 'Type representing document values.'

**classmethod** **feature\_domain()**

**Returns**

Nothing.

**Return type**

None

**validator** =

<ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator object>

**warning** =

<ads.feature\_engineering.feature\_type.handler.feature\_warning.FeatureWarning object>

**ads.feature\_engineering.feature\_type.gis module**

The module that represents a GIS feature type.

**Classes:****GIS**

The GIS feature type.

**class** ads.feature\_engineering.feature\_type.gis.GIS

Bases: *FeatureType*

Type representing geographic information.

**description**

The feature type description.

**Type**

str

**name**

The feature type name.

**Type**

str

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**feature\_stat**(*x*: *pd.Series*) → *pd.DataFrame*

Generates feature statistics.

**feature\_plot**(*x*: *pd.Series*) → *plt.Axes*

Shows the location of given address on map base on longitude and latitude.

**Example**

```
>>> from ads.feature_engineering.feature_type.gis import GIS
>>> import pandas as pd
>>> s = pd.Series(["-18.2193965, -93.587285",
                  "-21.0255305, -122.478584",
                  "85.103913, 19.405744",
                  "82.913736, 178.225672",
                  "62.9795085, -66.989705",
                  "54.5604395, 95.235090",
                  "24.2811855, -162.380403",
                  "-1.818319, -80.681214",
                  None,
                  "(51.816119, 175.979008)",
                  "(54.3392995, -11.801615)"],
                  name='gis')
>>> s.ads.feature_type = ['gis']
>>> GIS.validator.is_gis(s)
0      True
1      True
2      True
3      True
4      True
5      True
6      True
7      True
8     False
9      True
10     True
Name: gis, dtype: bool
```

**description** = 'Type representing geographic information.'

**classmethod feature\_domain**(*x*: *Series*) → *Domain*

Generate the domain of the data of this feature type.

## Examples

```
>>> gis = pd.Series([
    "69.196241,-125.017615",
    "5.2272595,-143.465712",
    "-33.9855425,-153.445155",
    "43.340610,86.460554",
    "24.2811855,-162.380403",
    "2.7849025,-7.328156",
    "45.033805,157.490179",
    "-1.818319,-80.681214",
    "-44.510428,-169.269477",
    "-56.3344375,-166.407038",
    "",
    np.NaN,
    None
],
    name='gis'
)
>>> gis.ads.feature_type = ['gis']
>>> gis.ads.feature_domain()
constraints: []
stats:
  count: 13
  missing: 3
  unique: 10
values: GIS
```

### Returns

Domain based on the GIS feature type.

### Return type

*ads.feature\_engineering.schema.Domain*

**static** `feature_plot(x: Series) → Axes`

Shows the location of given address on map base on longitude and latitude.

## Examples

```
>>> gis = pd.Series([
    "69.196241,-125.017615",
    "5.2272595,-143.465712",
    "-33.9855425,-153.445155",
    "43.340610,86.460554",
    "24.2811855,-162.380403",
    "2.7849025,-7.328156",
    "45.033805,157.490179",
    "-1.818319,-80.681214",
    "-44.510428,-169.269477",
    "-56.3344375,-166.407038",
    "",
    np.NaN,
```

(continues on next page)



(continued from previous page)

```

    None
    ],
    name='gis'
)
>>> gis.ads.feature_type = ['gis']
>>> gis.ads.feature_plot()

```

**Returns**

Plot object for the series based on the GIS feature type.

**Return type**

matplotlib.axes.\_subplots.AxesSubplot

**static** `feature_stat(x: Series) → DataFrame`

Generates feature statistics.

Feature statistics include (total)count, unique(count) and missing(count).

**Examples**

```

>>> gis = pd.Series([
    "69.196241,-125.017615",
    "5.2272595,-143.465712",
    "-33.9855425,-153.445155",
    "43.340610,86.460554",
    "24.2811855,-162.380403",
    "2.7849025,-7.328156",
    "45.033805,157.490179",
    "-1.818319,-80.681214",
    "-44.510428,-169.269477",
    "-56.3344375,-166.407038",
    "",
    np.NaN,
    None
    ],
    name='gis'
)
>>> gis.ads.feature_type = ['gis']
>>> gis.ads.feature_stat()
      gis
count   13
unique   10
missing   3

```

**Returns**

Summary statistics of the Series provided.

**Return type**

pandas.DataFrame

**validator =**

<ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator object>

```
warning =  
<ads.feature_engineering.feature_type.handler.feature_warning.FeatureWarning object>
```

`ads.feature_engineering.feature_type.gis.default_handler(data: Series, *args, **kwargs) → Series`  
Processes given data and indicates if the data matches requirements.

**Parameters**

**data** (pandas.Series) – The data to process.

**Returns**

The logical list indicating if the data matches requirements.

**Return type**

pandas.Series

### `ads.feature_engineering.feature_type.integer` module

The module that represents an Integer feature type.

**Classes:**

**Integer**

The Integer feature type.

```
class ads.feature_engineering.feature_type.integer.Integer
```

Bases: *FeatureType*

Type representing integer values.

**description**

The feature type description.

**Type**

str

**name**

The feature type name.

**Type**

str

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**feature\_stat**(x: *pd.Series*) → *pd.DataFrame*

Generates feature statistics.

**feature\_plot**(x: *pd.Series*) → *plt.Axes*

Shows distributions of datasets using box plot.

**description** = 'Type representing integer values.'

**classmethod** `feature_domain(x: Series) → Domain`

Generate the domain of the data of this feature type.

### Examples

```
>>> s = pd.Series([True, False, True, False, np.NaN, None], name='integer')
>>> s.ads.feature_type = ['integer']
>>> s.ads.feature_domain()
constraints: []
stats:
  count: 6
  freq: 2
  missing: 2
  top: true
  unique: 2
values: Integer
```

#### Returns

Domain based on the Integer feature type.

#### Return type

*ads.feature\_engineering.schema.Domain*

**static** `feature_plot(x: Series) → Axes`

Shows distributions of datasets using box plot.

### Examples

```
>>> x = pd.Series([1, 0, 1, 2, 3, 4, np.nan], name='integer')
>>> x.ads.feature_type = ['integer']
>>> x.ads.feature_plot()
```

#### Returns

Plot object for the series based on the Integer feature type.

#### Return type

*matplotlib.axes.\_subplots.AxesSubplot*

**static** `feature_stat(x: Series) → DataFrame`

Generates feature statistics.

Feature statistics include (total)count, mean, standard deviation, sample minimum, lower quartile, median, 75%, upper quartile, max and missing(count) if there is any.

## Examples

```
>>> x = pd.Series([1, 0, 1, 2, 3, 4, np.nan], name='integer')
>>> x.ads.feature_type = ['integer']
>>> x.ads.feature_stat()
   Metric      Value
0    count         7
1    mean          1
2  standard deviation    1
3  sample minimum       0
4  lower quartile       1
5    median          1
6  upper quartile       2
7  sample maximum       4
8    missing         1
```

### Returns

Summary statistics of the Series or Dataframe provided.

### Return type

`pandas.DataFrame`

`validator =`

`<ads.feature_engineering.feature_type.handler.feature_validator.FeatureValidator object>`

`warning =`

`<ads.feature_engineering.feature_type.handler.feature_warning.FeatureWarning object>`

## `ads.feature_engineering.feature_type.ip_address` module

The module that represents an IPAddress feature type.

### Classes:

#### **IPAddress**

The IPAddress feature type.

**class** `ads.feature_engineering.feature_type.ip_address.IPAddress`

Bases: `FeatureType`

Type representing IP Address.

#### **description**

The feature type description.

#### **Type**

`str`

#### **name**

The feature type name.

#### **Type**

`str`

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**feature\_stat**(*x*: *pd.Series*) → *pd.DataFrame*

Generates feature statistics.

**Example**

```
>>> from ads.feature_engineering.feature_type.ip_address import IPAddress
>>> import pandas as pd
>>> import numpy as np
>>> s = pd.Series(['192.168.0.1', '2001:db8::', '', np.NaN, None], name='ip_address'
↳')
>>> s.ads.feature_type = ['ip_address']
>>> IPAddress.validator.is_ip_address(s)
0      True
1      True
2     False
3     False
4     False
Name: ip_address, dtype: bool
```

**description** = 'Type representing IP Address.'

**classmethod feature\_domain**(*x*: *Series*) → *Domain*

Generate the domain of the data of this feature type.

**Examples**

```
>>> s = pd.Series(['2002:db8::', '192.168.0.1', '2001:db8::', '2002:db8::', np.
↳NaN, None], name='ip_address')
>>> s.ads.feature_type = ['ip_address']
>>> s.ads.feature_domain()
constraints: []
stats:
  count: 6
  missing: 2
  unique: 3
values: IPAddress
```

**Returns**

Domain based on the IPAddress feature type.

**Return type**

*ads.feature\_engineering.schema.Domain*

**static** `feature_stat(x: Series) → DataFrame`

Generates feature statistics.

Feature statistics include (total)count, unique(count) and missing(count).

### Examples

```
>>> s = pd.Series(['2002:db8::', '192.168.0.1', '2001:db8::', '2002:db8::', np.
↳NaN, None], name='ip_address')
>>> s.ads.feature_type = ['ip_address']
>>> s.ads.feature_stat()
   Metric  Value
0      count     6
1     unique     2
2     missing     2
```

#### Returns

Summary statistics of the Series provided.

#### Return type

`pandas.DataFrame`

**validator =**

`<ads.feature_engineering.feature_type.handler.feature_validator.FeatureValidator object>`

**warning =**

`<ads.feature_engineering.feature_type.handler.feature_warning.FeatureWarning object>`

`ads.feature_engineering.feature_type.ip_address.default_handler(data: Series, *args, **kwargs)`  
→ Series

Processes given data and indicates if the data matches requirements.

#### Parameters

**data** (`pandas.Series`) – The data to process.

#### Returns

The logical list indicating if the data matches requirements.

#### Return type

`pandas.Series`

### `ads.feature_engineering.feature_type.ip_address_v4` module

The module that represents an `IpAddressV4` feature type.

#### Classes:

##### `IpAddressV4`

The `IpAddressV4` feature type.

**class** `ads.feature_engineering.feature_type.ip_address_v4.IpAddressV4`

Bases: `FeatureType`

Type representing IP Address V4.

**description**

The feature type description.

**Type**

str

**name**

The feature type name.

**Type**

str

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**feature\_stat**(*x: pd.Series*) → *pd.DataFrame*

Generates feature statistics.

**Example**

```
>>> from ads.feature_engineering.feature_type.ip_address_v4 import IpAddressV4
>>> import pandas as pd
>>> import numpy as np
>>> s = pd.Series(['192.168.0.1', '2001:db8::', '', np.NaN, None], name='ip_address',
↳ ')
>>> s.ads.feature_type = ['ip_address_v4']
>>> IpAddressV4.validator.is_ip_address_v4(s)
0      True
1     False
2     False
3     False
4     False
Name: ip_address, dtype: bool
```

**description** = 'Type representing IP Address V4.'

**classmethod feature\_domain**(*x: Series*) → *Domain*

Generate the domain of the data of this feature type.

**Examples**

```
>>> s = pd.Series(['192.168.0.1', '192.168.0.2', '192.168.0.3', '192.168.0.4',
↳ np.NaN, None], name='ip_address_v4')
>>> s.ads.feature_type = ['ip_address_v4']
>>> s.ads.feature_domain()
constraints: []
stats:
```

(continues on next page)

(continued from previous page)

```

count: 6
missing: 2
unique: 4
values: IPAddressV4

```

**Returns**

Domain based on the IPAddressV4 feature type.

**Return type**

*ads.feature\_engineering.schema.Domain*

**static feature\_stat**(*x: Series*) → DataFrame

Generates feature statistics.

Feature statistics include (total)count, unique(count) and missing(count).

**Examples**

```

>>> s = pd.Series(['192.168.0.1', '192.168.0.2', '192.168.0.3', '192.168.0.4',
↳ np.NaN, None], name='ip_address')
>>> s.ads.feature_type = ['ip_address_v4']
>>> s.ads.feature_stat()
   Metric  Value
0      count    6
1     unique    4
2     missing    2

```

**Returns**

Summary statistics of the Series provided.

**Return type**

pandas.DataFrame

**validator =**

<ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator object>

**warning =**

<ads.feature\_engineering.feature\_type.handler.feature\_warning.FeatureWarning object>

**ads.feature\_engineering.feature\_type.ip\_address\_v4.default\_handler**(*data: Series, \*args, \*\*kwargs*) → Series

Processes given data and indicates if the data matches requirements.

**Parameters**

**data** (pandas.Series) – The data to process.

**Returns**

The logical list indicating if the data matches requirements.

**Return type**

pandas.Series



**ads.feature\_engineering.feature\_type.ip\_address\_v6 module**

The module that represents an IPAddressV6 feature type.

**Classes:****IPAddressV6**

The IPAddressV6 feature type.

**class** ads.feature\_engineering.feature\_type.ip\_address\_v6.**IPAddressV6**

Bases: *FeatureType*

Type representing IP Address V6.

**description**

The feature type description.

**Type**

str

**name**

The feature type name.

**Type**

str

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**feature\_stat**(*x*: *pd.Series*) → *pd.DataFrame*

Generates feature statistics.

**Example**

```
>>> from ads.feature_engineering.feature_type.ip_address_v6 import IPAddressV6
>>> import pandas as pd
>>> import numpy as np
>>> s = pd.Series(['192.168.0.1', '2001:db8::', '', np.NaN, None], name='ip_address
↪')
>>> s.ads.feature_type = ['ip_address_v6']
>>> IPAddressV6.validator.is_ip_address_v6(s)
0    False
1     True
2    False
3    False
4    False
Name: ip_address, dtype: bool
```

**description** = 'Type representing IP Address V6.'

**classmethod** **feature\_domain**(*x*: *Series*) → *Domain*

Generate the domain of the data of this feature type.

## Examples

```
>>> s = pd.Series(['2002:db8::', '2001:db8::', '2001:db8::', '2002:db8::', np.
↳NaN, None], name='ip_address_v6')
>>> s.ads.feature_type = ['ip_address_v6']
>>> s.ads.feature_domain()
constraints: []
stats:
  count: 6
  missing: 2
  unique: 2
values: IPAddressV6
```

### Returns

Domain based on the IPAddressV6 feature type.

### Return type

*ads.feature\_engineering.schema.Domain*

**static feature\_stat**(x: Series) → DataFrame

Generates feature statistics.

Feature statistics include (total)count, unique(count) and missing(count).

## Examples

```
>>> s = pd.Series(['2002:db8::', '2001:db8::', '2001:db8::', '2002:db8::', np.
↳NaN, None], name='ip_address')
>>> s.ads.feature_type = ['ip_address_v6']
>>> s.ads.feature_stat()
Metric Value
0      count    6
1     unique    2
2    missing    2
```

### Returns

Summary statistics of the Series provided.

### Return type

Pandas Dataframe

**validator =**

<ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator object>

**warning =**

<ads.feature\_engineering.feature\_type.handler.feature\_warning.FeatureWarning object>

**ads.feature\_engineering.feature\_type.ip\_address\_v6.default\_handler**(data: Series, \*args, \*\*kwargs) → Series

Processes given data and indicates if the data matches requirements.

### Parameters

**data** (pandas.Series) – The data to process.

**Returns**

The logical list indicating if the data matches requirements.

**Return type**

`pandas.Series`

**ads.feature\_engineering.feature\_type.lat\_long module**

The module that represents a LatLong feature type.

**Classes:****LatLong**

The LatLong feature type.

**Functions:****default\_handler(data: pd.Series) -> pd.Series**

Processes given data and indicates if the data matches requirements.

**class ads.feature\_engineering.feature\_type.lat\_long.LatLong**

Bases: *String*

Type representing longitude and latitude.

**description**

The feature type description.

**Type**

str

**name**

The feature type name.

**Type**

str

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**feature\_stat(x: pd.Series) → pd.DataFrame**

Generates feature statistics.

**feature\_plot(x: pd.Series) → plt.Axes**

Shows the location of given address on map base on longitude and latitude.

### Example

```

>>> from ads.feature_engineering.feature_type.lat_long import LatLong
>>> import pandas as pd
>>> s = pd.Series(["-18.2193965, -93.587285",
                  "-21.0255305, -122.478584",
                  "85.103913, 19.405744",
                  "82.913736, 178.225672",
                  "62.9795085, -66.989705",
                  "54.5604395, 95.235090",
                  "24.2811855, -162.380403",
                  "-1.818319, -80.681214",
                  None,
                  "(51.816119, 175.979008)",
                  "(54.3392995, -11.801615)"],
                  name='latlong')
>>> s.ads.feature_type = ['lat_long']
>>> LatLong.validator.is_lat_long(s)
0      True
1      True
2      True
3      True
4      True
5      True
6      True
7      True
8     False
9      True
10     True
Name: latlong, dtype: bool

```

**description** = 'Type representing longitude and latitude.'

**classmethod** `feature_domain(x: Series) → Domain`

Generate the domain of the data of this feature type.

### Examples

```

>>> latlong_series = pd.Series([
    "69.196241, -125.017615",
    "5.2272595, -143.465712",
    "-33.9855425, -153.445155",
    "43.340610, 86.460554",
    "24.2811855, -162.380403",
    "2.7849025, -7.328156",
    "45.033805, 157.490179",
    "-1.818319, -80.681214",
    "-44.510428, -169.269477",
    "-56.3344375, -166.407038",
    "",
    np.NaN,
    None
])

```

(continues on next page)

(continued from previous page)

```

    ],
    name='latlong'
)
>>> latlong_series.ads.feature_type = ['lat_long']
>>> latlong_series.ads.feature_domain()
constraints: []
stats:
  count: 13
  missing: 3
  unique: 10
values: LatLong

```

**Returns**

Domain based on the LatLong feature type.

**Return type**

*ads.feature\_engineering.schema.Domain*

**static feature\_plot**(*x: Series*) → Axes

Shows the location of given address on map base on longitude and latitude.

**Examples**

```

>>> latlong_series = pd.Series([
    "69.196241,-125.017615",
    "5.2272595,-143.465712",
    "-33.9855425,-153.445155",
    "43.340610,86.460554",
    "24.2811855,-162.380403",
    "2.7849025,-7.328156",
    "45.033805,157.490179",
    "-1.818319,-80.681214",
    "-44.510428,-169.269477",
    "-56.3344375,-166.407038",
    "",
    np.NaN,
    None
],
    name='latlong'
)
>>> latlong_series.ads.feature_type = ['lat_long']
>>> latlong_series.ads.feature_plot()

```

**Returns**

Plot object for the series based on the LatLong feature type.

**Return type**

*matplotlib.axes.\_subplots.AxesSubplot*

**static feature\_stat**(*x: Series*) → DataFrame

Generate feature statistics.

Feature statistics include (total)count, unique(count) and missing(count) if there is any.

### Examples

```
>>> latlong_series = pd.Series([
    "69.196241,-125.017615",
    "5.2272595,-143.465712",
    "-33.9855425,-153.445155",
    "43.340610,86.460554",
    "24.2811855,-162.380403",
    "2.7849025,-7.328156",
    "45.033805,157.490179",
    "-1.818319,-80.681214",
    "-44.510428,-169.269477",
    "-56.3344375,-166.407038",
    "",
    np.NaN,
    None
],
    name='latlong')
>>> latlong_series.ads.feature_type = ['lat_long']
>>> latlong_series.ads.feature_stat()
Metric Value
0      count    13
1     unique    10
2     missing     3
```

#### Returns

Summary statistics of the Series or Dataframe provided.

#### Return type

pandas.DataFrame

**validator =**

<ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator object>

**warning =**

<ads.feature\_engineering.feature\_type.handler.feature\_warning.FeatureWarning object>

**ads.feature\_engineering.feature\_type.lat\_long.default\_handler**(*data: Series, \*args, \*\*kwargs*) → Series

Processes given data and indicates if the data matches requirements.

#### Parameters

**data** (pandas.Series) – The data to process.

#### Returns

The logical list indicating if the data matches requirements.

#### Return type

pandas.Series

**ads.feature\_engineering.feature\_type.object module**

The module that represents an Object feature type.

**Classes:****Object**

The Object feature type.

**class** ads.feature\_engineering.feature\_type.object.**Object**

Bases: *FeatureType*

Type representing object.

**description**

The feature type description.

**Type**

str

**name**

The feature type name.

**Type**

str

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**description** = 'Type representing object.'

**classmethod** feature\_domain()

**Returns**

Nothing.

**Return type**

None

**validator** =

<ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator object>

**warning** =

<ads.feature\_engineering.feature\_type.handler.feature\_warning.FeatureWarning object>

**ads.feature\_engineering.feature\_type.ordinal module**

The module that represents an Ordinal feature type.

**Classes:****Ordinal**

The Ordinal feature type.

**class** ads.feature\_engineering.feature\_type.ordinal.**Ordinal**

Bases: *FeatureType*

Type representing ordered values.

**description**

The feature type description.

**Type**

str

**name**

The feature type name.

**Type**

str

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**feature\_stat**(*x: pd.Series*) → pd.DataFrame

Generates feature statistics.

**feature\_plot**(*x: pd.Series*) → plt.Axes

Shows the counts of observations in each categorical bin using bar chart.

**description** = 'Type representing ordered values.'

**classmethod feature\_domain**(*x: Series*) → *Domain*

Generate the domain of the data of this feature type.

**Examples**

```
>>> x = pd.Series([1, 2, 3, 4, 5, 6, 7, 8, 9, np.nan], name='ordinal')
>>> x.ads.feature_type = ['ordinal']
>>> x.ads.feature_domain()
constraints:
- expression: $x in [1.0, 2.0, 3.0, 4.0, 5.0, 6.0, 7.0, 8.0, 9.0]
  language: python
stats:
  count: 10
  missing: 1
```

(continues on next page)



(continued from previous page)

```
unique: 9
values: Ordinal
```

**Returns**

Domain based on the Ordinal feature type.

**Return type**

*ads.feature\_engineering.schema.Domain*

**static feature\_plot**(*x: Series*) → Axes

Shows the counts of observations in each categorical bin using bar chart.

**Examples**

```
>>> x = pd.Series([1, 2, 3, 4, 5, 6, 7, 8, 9, np.nan], name='ordinal')
>>> x.ads.feature_type = ['ordinal']
>>> x.ads.feature_plot()
```

**Returns**

The bart chart plot object for the series based on the Continuous feature type.

**Return type**

matplotlib.axes.\_subplots.AxesSubplot

**static feature\_stat**(*x: Series*) → DataFrame

Generates feature statistics.

Feature statistics include (total)count, unique(count), and missing(count) if there is any.

**Examples**

```
>>> x = pd.Series([1, 2, 3, 4, 5, 6, 7, 8, 9, np.nan], name='ordinal')
>>> x.ads.feature_type = ['ordinal']
>>> x.ads.feature_stat()
Metric Value
0      count    10
1     unique     9
2    missing     1
```

**Returns**

Summary statistics of the Series or Dataframe provided.

**Return type**

pandas.DataFrame

**validator =**

<ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator object>

**warning =**

<ads.feature\_engineering.feature\_type.handler.feature\_warning.FeatureWarning object>

**ads.feature\_engineering.feature\_type.phone\_number module**

The module that represents a Phone Number feature type.

**Classes:****PhoneNumber**

The Phone Number feature type.

**Functions:****default\_handler(data: pd.Series) -> pd.Series**

Processes given data and indicates if the data matches requirements.

**class** ads.feature\_engineering.feature\_type.phone\_number.**PhoneNumber**

Bases: *String*

Type representing phone numbers.

**description**

The feature type description.

**Type**

str

**name**

The feature type name.

**Type**

str

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**feature\_stat**(x: *pd.Series*) → *pd.DataFrame*

Generates feature statistics.

**Examples**

```
>>> from ads.feature_engineering.feature_type.phone_number import PhoneNumber
>>> import pandas as pd
>>> s = pd.Series([None, "1-640-124-5367", "1-573-916-4412"])
>>> PhoneNumber.validator.is_phone_number(s)
0    False
1     True
2     True
dtype: bool
```

**description** = 'Type representing phone numbers.'

**classmethod** **feature\_domain**(x: *Series*) → *Domain*

Generate the domain of the data of this feature type.

## Examples

```
>>> s = pd.Series(['2068866666', '6508866666', '2068866666', '', np.NaN, np.nan,
↪ None], name='phone')
>>> s.ads.feature_type = ['phone_number']
>>> s.ads.feature_domain()
constraints: []
stats:
  count: 7
  missing: 4
  unique: 2
values: PhoneNumber
```

### Returns

Domain based on the PhoneNumber feature type.

### Return type

*ads.feature\_engineering.schema.Domain*

**static feature\_stat**(x: Series) → DataFrame

Generates feature statistics.

Feature statistics include (total)count, unique(count) and missing(count) if there is any.

## Examples

```
>>> s = pd.Series(['2068866666', '6508866666', '2068866666', '', np.NaN, np.nan,
↪ None], name='phone')
>>> s.ads.feature_type = ['phone_number']
>>> s.ads.feature_stat()
Metric Value
1      count    7
2      unique    2
3      missing   4
```

### Returns

Summary statistics of the Series or Dataframe provided.

### Return type

*pandas.DataFrame*

**validator =**

**<ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator object>**

**warning =**

**<ads.feature\_engineering.feature\_type.handler.feature\_warning.FeatureWarning object>**

**ads.feature\_engineering.feature\_type.phone\_number.default\_handler**(data: Series, \*args, \*\*kwargs) → Series

Processes given data and indicates if the data matches requirements.

### Parameters

**data** (pandas.Series) – The data to process.

**Returns**

The logical list indicating if the data matches requirements.

**Return type**

`pandas.Series`

**ads.feature\_engineering.feature\_type.string module**

The module that represents a String feature type.

**Classes:****String**

The feature type that represents string values.

**class** `ads.feature_engineering.feature_type.string.String`

Bases: *FeatureType*

Type representing string values.

**description**

The feature type description.

**Type**

`str`

**name**

The feature type name.

**Type**

`str`

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**feature\_stat**(*x: pd.Series*) → `pd.DataFrame`

Generates feature statistics.

**feature\_plot**(*x: pd.Series*) → `plt.Axes`

Shows distributions of datasets using wordcloud.

**Example**

```
>>> from ads.feature_engineering.feature_type.string import String
>>> import pandas as pd
>>> s = pd.Series(["Hello", "world", None], name='string')
>>> String.validator.is_string(s)
0    True
1    True
2   False
Name: string, dtype: bool
```

**description** = 'Type representing string values.'

**classmethod** **feature\_domain**(*x: Series*) → *Domain*

Generate the domain of the data of this feature type.

### Examples

```
>>> string = pd.Series(['S', 'C', 'S', 'S', 'S', 'Q', 'S', 'S', 'S', 'C', 'S',
↳ 'S', 'S',
    'S', 'S', 'S', 'Q', 'S', 'S', '', np.NaN, None], name='string')
>>> string.ads.feature_type = ['string']
>>> string.ads.feature_domain()
constraints: []
stats:
  count: 22
  missing: 3
  unique: 3
values: String
```

#### Returns

Domain based on the String feature type.

#### Return type

*ads.feature\_engineering.schema.Domain*

**static** **feature\_plot**(*x: Series*) → *Axes*

Shows distributions of datasets using wordcloud.

### Examples

```
>>> string = pd.Series(['S', 'C', 'S', 'S', 'S', 'Q', 'S', 'S', 'S', 'C', 'S',
↳ 'S', 'S',
    'S', 'S', 'S', 'Q', 'S', 'S', '', np.NaN, None], name='string')
>>> string.ads.feature_type = ['string']
>>> string.ads.feature_plot()
```

#### Returns

Plot object for the series based on the String feature type.

#### Return type

*matplotlib.axes.\_subplots.AxesSubplot*

**static** **feature\_stat**(*x: Series*) → *DataFrame*

Generates feature statistics.

Feature statistics include (total)count, unique(count) and missing(count) if there is any.

## Examples

```
>>> string = pd.Series(['S', 'C', 'S', 'S', 'S', 'Q', 'S', 'S', 'S', 'C', 'S',  
↪ 'S', 'S',  
    'S', 'S', 'S', 'Q', 'S', 'S', '', np.NaN, None], name='string')  
>>> string.ads.feature_type = ['string']  
>>> string.ads.feature_stat()  
Metric Value  
0      count    22  
1      unique     3  
2      missing     3
```

### Returns

Summary statistics of the Series or Dataframe provided.

### Return type

Pandas Dataframe

**validator =**

<ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator object>

**warning =**

<ads.feature\_engineering.feature\_type.handler.feature\_warning.FeatureWarning object>

ads.feature\_engineering.feature\_type.string.default\_handler(*data: Series, \*args, \*\*kwargs*) →  
Series

Processes given data and indicates if the data matches requirements.

### Parameters

**data** (*pd.Series*) – The data to process.

### Returns

**pd.Series**

### Return type

The logical list indicating if the data matches requirements.

## ads.feature\_engineering.feature\_type.text module

The module that represents a Text feature type.

### Classes:

#### Text

The Text feature type.

**class** ads.feature\_engineering.feature\_type.text.Text

Bases: *String*

Type representing text values.

### description

The feature type description.

### Type

str

**name**

The feature type name.

**Type**

str

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**feature\_plot**(*x*: *pd.Series*) → *plt.Axes*

Shows distributions of datasets using wordcloud.

**description** = 'Type representing text values.'

**classmethod** **feature\_domain**()

**Returns**

Nothing.

**Return type**

None

**static** **feature\_plot**(*x*: *Series*) → *Axes*

Shows distributions of datasets using wordcloud.

**Examples**

```
>>> text = pd.Series(['S', 'C', 'S', 'S', 'S', 'Q', 'S', 'S', 'S', 'C', 'S', 'S',
↳ 'S', 'S', 'S', 'Q', 'S', 'S', ' ', np.NaN, None], name='text')
>>> text.ads.feature_type = ['text']
>>> text.ads.feature_plot()
```

**Returns**

Plot object for the series based on the Text feature type.

**Return type**

matplotlib.axes.\_subplots.AxesSubplot

**validator** =

```
<ads.feature_engineering.feature_type.handler.feature_validator.FeatureValidator
object>
```

**warning** =

```
<ads.feature_engineering.feature_type.handler.feature_warning.FeatureWarning
object>
```

**ads.feature\_engineering.feature\_type.unknown module**

The module that represents an Unknown feature type.

**Classes:****Text**

The Unknown feature type.

**class** ads.feature\_engineering.feature\_type.unknown.**Unknown**

Bases: *FeatureType*

Type representing third-party dtypes.

**description**

The feature type description.

**Type**

str

**name**

The feature type name.

**Type**

str

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**description** = 'Type representing unknown type.'

**classmethod** feature\_domain()

**Returns**

Nothing.

**Return type**

None

**validator** =

<ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator object>

**warning** =

<ads.feature\_engineering.feature\_type.handler.feature\_warning.FeatureWarning object>



**ads.feature\_engineering.feature\_type.zip\_code module**

The module that represents a ZipCode feature type.

**Classes:****ZipCode**

The ZipCode feature type.

**Functions:****default\_handler(data: pd.Series) -> pd.Series**

Processes given data and indicates if the data matches requirements.

**class ads.feature\_engineering.feature\_type.zip\_code.ZipCode**

Bases: *String*

Type representing postal code.

**description**

The feature type description.

**Type**

str

**name**

The feature type name.

**Type**

str

**warning**

Provides functionality to register warnings and invoke them.

**Type**

*FeatureWarning*

**validator**

Provides functionality to register validators and invoke them.

**feature\_stat(x: pd.Series) → pd.DataFrame**

Generates feature statistics.

**feature\_plot(x: pd.Series) → plt.Axes**

Shows the geometry distribution base on location of zipcode.

**Example**

```
>>> from ads.feature_engineering.feature_type.zip_code import ZipCode
>>> import pandas as pd
>>> import numpy as np
>>> s = pd.Series(["94065", "90210", np.NaN, None], name='zipcode')
>>> ZipCode.validator.is_zip_code(s)
0    True
1    True
2   False
3   False
Name: zipcode, dtype: bool
```

**description** = 'Type representing postal code.'

**classmethod** **feature\_domain**(*x: Series*) → *Domain*

Generate the domain of the data of this feature type.

### Examples

```
>>> zipcode = pd.Series([94065, 90210, np.NaN, None], name='zipcode')
>>> zipcode.ads.feature_type = ['zip_code']
>>> zipcode.ads.feature_domain()
constraints: []
stats:
  count: 4
  missing: 2
  unique: 2
values: ZipCode
```

#### Returns

Domain based on the ZipCode feature type.

#### Return type

*ads.feature\_engineering.schema.Domain*

**static** **feature\_plot**(*x: Series*) → *Axes*

Shows the geometry distribution base on location of zipcode.

### Examples

```
>>> zipcode = pd.Series([94065, 90210, np.NaN, None], name='zipcode')
>>> zipcode.ads.feature_type = ['zip_code']
>>> zipcode.ads.feature_plot()
```

#### Returns

Plot object for the series based on the ZipCode feature type.

#### Return type

*matplotlib.axes.\_subplots.AxesSubplot*

**static** **feature\_stat**(*x: Series*) → *DataFrame*

Generates feature statistics.

Feature statistics include (total)count, unique(count) and missing(count).

## Examples

```
>>> zipcode = pd.Series([94065, 90210, np.NaN, None], name='zipcode')
>>> zipcode.ads.feature_type = ['zip_code']
>>> zipcode.ads.feature_stat()
Metric Value
0      count    4
1     unique    2
2     missing    2
```

### Returns

Summary statistics of the Series provided.

### Return type

Pandas Dataframe

**validator =**

<ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator object>

**warning =**

<ads.feature\_engineering.feature\_type.handler.feature\_warning.FeatureWarning object>

**ads.feature\_engineering.feature\_type.zip\_code.default\_handler**(data: Series, \*args, \*\*kwargs) → Series

Processes given data and indicates if the data matches requirements.

### Parameters

**data** (*pd.Series*) – The data to process.

### Returns

**pd.Series**

### Return type

The logical list indicating if the data matches requirements.

## Module contents

### Address

Type representing address.

### Boolean

Type representing binary values True/False.

### Category

Type representing discrete unordered values.

### Constant

Type representing constant values.

### Continuous

Type representing continuous values.

### CreditCard

Type representing credit card numbers.

**DateTime**

Type representing date and/or time.

**Document**

Type representing document values.

**Discrete**

Type representing discrete values.

**FeatureType**

Base class for all feature types.

**GIS**

Type representing geographic information.

**Integer**

Type representing integer values.

**IpAddress**

Type representing IP Address.

**IpAddressV4**

Type representing IP Address V4.

**IpAddressV6**

Type representing IP Address V6.

**LatLong**

Type representing longitude and latitude.

**Object**

Type representing object.

**Ordinal**

Type representing ordered values.

**PhoneNumber**

Type representing phone numbers.

**String**

Type representing string values.

**Tag**

Free form tag.

**Text**

Type representing text values.

**ZipCode**

Type representing postal code.

**Unknown**

Type representing third-party dtypes.

### 18.1.1.12.2 Submodules

#### 18.1.1.12.3 `ads.feature_engineering.exceptions` module

**exception** `ads.feature_engineering.exceptions.InvalidFeatureType(tname: str)`

Bases: `TypeError`

**exception** `ads.feature_engineering.exceptions.NameAlreadyRegistered(name: str)`

Bases: `NameError`

**exception** `ads.feature_engineering.exceptions.TypeAlreadyAdded(tname: str)`

Bases: `TypeError`

**exception** `ads.feature_engineering.exceptions.TypeAlreadyRegistered(tname: str)`

Bases: `TypeError`

**exception** `ads.feature_engineering.exceptions.TypeNotFound(tname: str)`

Bases: `TypeError`

**exception** `ads.feature_engineering.exceptions.WarningAlreadyExists(name: str)`

Bases: `ValueError`

**exception** `ads.feature_engineering.exceptions.WarningNotFound(name: str)`

Bases: `ValueError`

#### 18.1.1.12.4 `ads.feature_engineering.feature_type_manager` module

The module that helps to manage feature types. Provides functionalities to register, unregister, list feature types.

### Classes

#### **FeatureTypeManager**

Feature Types Manager class that manages feature types.

### Examples

```
>>> from ads.feature_engineering.feature_type.base import FeatureType
>>> class NewType(FeatureType):
...     description="My personal type."
...     pass
>>> FeatureTypeManager.feature_type_register(NewType)
>>> FeatureTypeManager.feature_type_registered()
```

	Name	Feature Type	Description
0	Continuous	continuous	Type representing continuous values.
1	DateTime	date_time	Type representing date and/or time.
2	Category	category	Type representing discrete unordered values.
3	Ordinal	ordinal	Type representing ordered values.
4	NewType	new_type	My personal type.

```
>>> FeatureTypeManager.warning_registered()
Feature Type      Warning      Handler
-----
0  continuous      zeros      zeros_handler
1  continuous      high_cardinality  high_cardinality_handler
```

```
>>> FeatureTypeManager.validator_registered()
Feature Type      Validator      Condition
↪Handler
-----
↪--
0  phone_number    is_phone_number      ()      default_
↪handler
1  phone_number    is_phone_number      {'country_code': '+7'}  specific_country_
↪handler
2  credit_card      is_credit_card      ()      default_
↪handler
```

```
>>> FeatureTypeManager.feature_type_unregister(NewType)
>>> FeatureTypeManager.feature_type_reset()
>>> FeatureTypeManager.feature_type_object('continuous')
Continuous
```

**class** `ads.feature_engineering.feature_type_manager.FeatureTypeManager`

Bases: `object`

Feature Types Manager class that manages feature types.

Provides functionalities to register, unregister, list feature types.

**feature\_type\_object**(*cls, feature\_type: Union[FeatureType, str]*) → *FeatureType*

Gets a feature type by class object or name.

**feature\_type\_register**(*cls, feature\_type\_cls: FeatureType*) → `None`

Registers a feature type.

**feature\_type\_unregister**(*cls, feature\_type\_cls: Union[FeatureType, str]*) → `None`

Unregisters a feature type.

**feature\_type\_reset**(*cls*) → `None`

Resets feature types to be default.

**feature\_type\_registered**(*cls*) → `pd.DataFrame`

Lists all registered feature types as a `DataFrame`.

**warning\_registered**(*cls*) → `pd.DataFrame`

Lists registered warnings for all registered feature types.

**validator\_registered**(*cls*) → `pd.DataFrame`

Lists registered validators for all registered feature types.

## Examples

```
>>> from ads.feature_engineering.feature_type.base import FeatureType
>>> class NewType(FeatureType):
...     pass
>>> FeatureTypeManager.register_feature_type(NewType)
>>> FeatureTypeManager.feature_type_registered()
```

	Name	Feature Type	Description
0	Continuous	continuous	Type representing continuous values.
1	DateTime	date_time	Type representing date and/or time.
2	Category	category	Type representing discrete unordered values.
3	Ordinal	ordinal	Type representing ordered values.

```
>>> FeatureTypeManager.warning_registered()
```

	Feature Type	Warning	Handler
0	continuous	zeros	zeros_handler
1	continuous	high_cardinality	high_cardinality_handler

```
>>> FeatureTypeManager.validator_registered()
```

	Feature Type	Validator	Condition	Handler
0	phone_number	is_phone_number	()	default_handler
1	phone_number	is_phone_number	{'country_code': '+7'}	specific_country_handler
2	credit_card	is_credit_card	()	default_handler

```
>>> FeatureTypeManager.feature_type_unregister(NewType)
>>> FeatureTypeManager.feature_type_reset()
>>> FeatureTypeManager.feature_type_object('continuous')
Continuous
```

**classmethod** `feature_type_object(feature_type: Union[FeatureType, str]) → FeatureType`

Gets a feature type by class object or name.

### Parameters

**feature\_type** (`Union[FeatureType, str]`) – The FeatureType subclass or a str indicating feature type.

### Returns

Found feature type.

### Return type

*FeatureType*

### Raises

- **TypeNotFound** – If provided feature type not registered.
- **TypeError** – If provided feature type not a subclass of FeatureType.

**classmethod** `feature_type_register(feature_type_cls: FeatureType) → None`

Registers new feature type.

**Parameters**

**feature\_type** (`FeatureType`) – Subclass of `FeatureType` to be registered.

**Returns**

Nothing.

**Return type**

None

**Raises**

- **TypeError** – Type is not a subclass of `FeatureType`.
- **TypeError** – Type has already been registered.
- **NameError** – Name has already been used.

**classmethod** `feature_type_registered() → DataFrame`

Lists all registered feature types as a `DataFrame`.

**Returns**

The list of feature types in a `DataFrame` format.

**Return type**

`pd.DataFrame`

**classmethod** `feature_type_reset() → None`

Resets feature types to be default.

**Returns**

Nothing.

**Return type**

None

**classmethod** `feature_type_unregister(feature_type: Union[FeatureType, str]) → None`

Unregisters a feature type.

**Parameters**

**feature\_type** (`(FeatureType | str)`) – The `FeatureType` subclass or a `str` indicating feature type.

**Returns**

Nothing.

**Return type**

None

**Raises**

**TypeError** – In attempt to unregister a default feature type.

**classmethod** `is_type_registered(feature_type: Union[FeatureType, str]) → bool`

Checks if provided feature type registered in the system.

**Parameters**

**feature\_type** (`Union[FeatureType, str]`) – The `FeatureType` subclass or a `str` indicating feature type.

**Returns**

True if provided feature type registered, False otherwise.



**Return type**  
bool

**classmethod** `validator_registered()` → DataFrame

Lists registered validators for registered feature types.

**Returns**  
The list of registered validators for registered feature types in a DataFrame format.

**Return type**  
pd.DataFrame

**Examples**

```
>>> FeatureTypeManager.validator_registered()
  Feature Type      Validator      Condition
  ↳ Handler
  -----
  ↳ -----
0  phone_number  is_phone_number      ()
  ↳ default_handler
1  phone_number  is_phone_number  {'country_code': '+7'}  specific_
  ↳ country_handler
2  credit_card   is_credit_card      ()
  ↳ default_handler
```

**classmethod** `warning_registered()` → DataFrame

Lists registered warnings for all registered feature types.

**Returns**  
The list of registered warnings for registered feature types in a DataFrame format.

**Return type**  
pd.DataFrame

**Examples**

```
>>> FeatureTypeManager.warning_registered()
  Feature Type      Warning      Handler
  -----
0  continuous      zeros      zeros_handler
1  continuous  high_cardinality  high_cardinality_handler
```

18.1.1.12.5 `ads.feature_engineering.schema` module

**class** `ads.feature_engineering.schema.Attribute`(*dtype: str, feature\_type: str, name: str, domain: Domain, required: bool, description: str, order: Optional[int] = None*)

Bases: `DataClassSerializable`

Attribute describes the column/feature/element. It holds following information - \* *dtype* - Type of data - float, int64, etc. Matches with Pandas dtypes \* *feature\_type* - Feature type of data - Integer, String, etc. Matches with ads feature types. \* *name* - Name of the feature \* *domain* - Represented by the Domain class \* *required* - Boolean

- True or False \* description - Description about the column/feature \* order - order of the column/feature in the data

## Examples

```
>>> attr_fruits = Attribute(
...     dtype = "category",
...     feature_type = "category",
...     name = "fruits",
...     domain = Domain(values="Apple, Orange, Grapes", stats={"mode": "Orange"},
...     ↪ constraints=[Expression("in ['Apple', 'Orange', 'Grapes']")]),
...     required = True,
...     description = "Names of fruits",
...     order = 0
... )
>>> attr_fruits
description: Names of fruits
domain:
  constraints:
    - expression: in ['Apple', 'Orange', 'Grapes']
      language: python
  stats:
    mode: Orange
  values: Apple, Orange, Grapes
dtype: category
feature_type: category
name: fruits
order: 0
required: true
>>> attr_fruits.key
'fruits'
```

**description:** str

**domain:** *Domain*

**dtype:** str

**feature\_type:** str

**property key**

**name:** str

**order:** Optional[int] = None

**required:** bool

**sort\_index:** int

**to\_dict**(\*\*kwargs) → dict

Serializes instance of class into a dictionary

## kwargs

### side\_effect: Optional[SideEffect]

side effect to take on the dictionary. The side effect can be either convert the dictionary keys to “lower” (SideEffect.CONVERT\_KEYS\_TO\_LOWER.value) or “upper”(SideEffect.CONVERT\_KEYS\_TO\_UPPER.value) cases.

### returns

A dictionary.

### rtype

Dict

### class ads.feature\_engineering.schema.BaseSchemaLoader

Bases: ABC

Base Schema Loader which load and validate schema.

#### load\_schema(self)

Load and validate schema from a file and return the normalized schema.

#### load\_schema(schema\_path)

Load and validate schema from a file and return the normalized schema.

### exception ads.feature\_engineering.schema.DataSizeTooWide(data\_col\_num: int, max\_col\_num: int)

Bases: ValueError

### class ads.feature\_engineering.schema.Domain(values: str = "", stats: ~typing.Dict = <factory>, constraints: ~typing.List[~ads.feature\_engineering.schema.Expression] = <factory>)

Bases: *DataClassSerializable*

Domain describes the data. It holds following information - \* stats - Statistics of the data. \* constraints - List of Expression which defines the constraint for the data. \* Domain values.

## Examples

```
>>> Domain(values='Rational Numbers', stats={"mean":50, "median":51, "min": 5, "max":100}, constraints=[Expression('$x > 5')])
constraints:
- expression: $x > 5
  language: python
stats:
  max: 100
  mean: 50
  median: 51
  min: 5
values: Rational Numbers
```

constraints: List[*Expression*]

stats: Dict

```
values: str = ''
```

```
class ads.feature_engineering.schema.Expression(expression: str, language: str = 'python')
```

Bases: [DataClassSerializable](#)

Expression allows specifying string representation of an expression which can be evaluated by the language corresponding to the value provided in *language* attribute

Default value for language is python

#### Parameters

- **expression** (Must use *string.Template* format for specifying the expression) – type: str
- **language** (default value is python. It could be any language. *evaluate* method expects the expression to be of type python) –

#### Examples

```
>>> exp = Expression("($x > 10 and $x <100) or ($x < -1 and $x > -500)")
>>> exp.evaluate(x=500)
False
>>> exp.evaluate(x=20)
True
>>> exp.evaluate(x=9)
False
>>> exp.evaluate(x=-9)
True
```

```
evaluate(**kwargs)
```

```
expression: str
```

```
language: str = 'python'
```

```
class ads.feature_engineering.schema.JsonSchemaLoader
```

Bases: [BaseSchemaLoader](#)

Json Schema which load and validate schema from json file.

```
load_schema(self)
```

Load and validate schema from json file and return the normalized schema.

#### Examples

```
>>> schema_loader = JsonSchemaLoader()
>>> schema_dict = schema_loader.load_schema('schema.json')
>>> schema_dict
{'Schema': [{'dtype': 'object',
  'feature_type': 'String',
  'name': 'Attrition',
  'domain': {'values': 'String',
    'stats': {'count': 1470, 'unique': 2},
    'constraints': []},
```

(continues on next page)

(continued from previous page)

```

    'required': True,
    'description': 'Attrition'},
    {'dtype': 'int64',
     'feature_type': 'Integer',
     'name': 'Age',
     'domain': {'values': 'Integer',
                 'stats': {'count': 1470.0,
                           'mean': 37.923809523809524,
                           'std': 9.135373489136732,
                           'min': 19.0,
                           '25%': 31.0,
                           '50%': 37.0,
                           '75%': 44.0,
                           'max': 61.0},
                 'constraints': []},
     'required': True,
     'description': 'Age'}}}]

```

**class** `ads.feature_engineering.schema.Schema`(*\_version: str = '1.1'*)

Bases: `object`

Schema describes the structure of the data.

**add**(*self, item: Attribute, replace: bool = False*)

Adds a new attribute item. Replaces existing one if replace flag is True.

**from\_dict**(*self*)

Constructs an instance of Schema from a dictionary.

**from\_file**(*cls, file\_path*):

Loads the data schema from a file.

**to\_dict**(*self*)

Serializes the data schema into a dictionary.

**to\_yaml**(*self*)

Serializes the data schema into a YAML.

**to\_json**(*self*)

Serializes the data schema into a json string.

**to\_json\_file**(*self*)

Saves the data schema into a json file.

**to\_yaml\_file**(*self*)

Save to a yaml file.

**add**(*self, item: Attribute, replace=False*) → `None`

Adds a new attribute item. Replaces existing one if replace flag is True.

## Examples

```

>>> attr_fruits = Attribute(
...     dtype = "category",
...     feature_type = "category",
...     name = "fruits",
...     domain = Domain(values="Apple, Orange, Grapes", stats={"mode": "Orange"},
↳ constraints=[Expression("in ['Apple', 'Orange', 'Grapes']")]),
...     required = True,
...     description = "Names of fruits",
...     order = 0,
... )
>>> attr_animals = Attribute(
...     dtype = "category",
...     feature_type = "category",
...     name = "animals",
...     domain = Domain(values="Dog, Cat, Python", stats={"mode": "Dog"},
↳ constraints=[Expression("in ['Dog', 'Cat', 'Python']")]),
...     required = True,
...     description = "Names of animals",
...     order = 1,
... )
>>> schema = Schema()
>>> schema.add(attr_fruits)
>>> schema.add(attr_animals)
>>> schema
schema:
- description: Names of fruits
domain:
  constraints:
    - expression: in ['Apple', 'Orange', 'Grapes']
    language: python
    stats:
      mode: Orange
      values: Apple, Orange, Grapes
dtype: category
feature_type: category
name: fruits
order: 0
required: true
- description: Names of animals
domain:
  constraints:
    - expression: in ['Dog', 'Cat', 'Python']
    language: python
    stats:
      mode: Dog
      values: Dog, Cat, Python
dtype: category
feature_type: category
name: animals
order: 1
required: true

```

(continues on next page)

(continued from previous page)

```
>>> schema.to_dict()
{'schema': [{'dtype': 'category',
'feature_type': 'category',
'name': 'fruits',
'domain': {'values': 'Apple, Orange, Grapes',
'stats': {'mode': 'Orange'},
'constraints': [{'expression': "in ['Apple', 'Orange', 'Grapes']",
'language': 'python'}]},
'required': True,
'description': 'Names of fruits',
'order': 0},
{'dtype': 'category',
'feature_type': 'category',
'name': 'animals',
'domain': {'values': 'Dog, Cat, Python',
'stats': {'mode': 'Dog'},
'constraints': [{'expression': "in ['Dog', 'Cat', 'Python']",
'language': 'python'}]},
'required': True,
'description': 'Names of animals',
'order': 1}]}
```

**add**(*item*: [Attribute](#), *replace*: *bool* = *False*)

Adds a new attribute item. Replaces existing one if replace flag is True.

Overrides the existing one if replace flag is True.

#### Parameters

- **item** ([Attribute](#)) – The attribute instance of a column/feature/element.
- **replace** (*bool*) – Overrides the existing attribute item if replace flag is True.

#### Returns

Nothing.

#### Return type

None

#### Raises

- **ValueError** – If item is already registered and replace flag is False.
- **TypeError** – If input data has a wrong format.

**classmethod from\_dict**(*schema*: *dict*)

Constructs an instance of Schema from a dictionary.

#### Parameters

**schema** (*dict*) – Data schema in dictionary format.

#### Returns

An instance of Schema.

#### Return type

[Schema](#)

**classmethod from\_file**(*file\_path*: *str*)

Loads the data schema from a file.

**Parameters**

**file\_path** (*str*) – File Path to load the data schema.

**Returns**

An instance of Schema.

**Return type**

*Schema*

**classmethod from\_json**(*schema: str*)

Constructs an instance of Schema from a Json.

**Parameters**

**schema** (*str*) – Data schema in Json format.

**Returns**

An instance of Schema.

**Return type**

*Schema*

**property keys: list**

Returns all registered Attribute keys.

**Returns**

The list of Attribute keys.

**Return type**

Tuple[str]

**to\_dict()**

Serializes data schema into a dictionary.

**Returns**

The dictionary representation of data schema.

**Return type**

dict

**to\_json()**

Serializes the data schema into a json string. :returns: The json representation of data schema. :rtype: str

**to\_json\_file**(*file\_path*)

Saves the data schema into a json file.

**Parameters**

**file\_path** (*str*) – File Path to store the schema in json format.

**Returns**

Nothing.

**Return type**

None

**to\_yaml()**

Serializes the data schema into a YAML. :returns: The yaml representation of data schema. :rtype: str

**to\_yaml\_file**(*file\_path*)

Saves the data schema into a yaml file. :param file\_path: File Path to store the schema in yaml format. :type file\_path: str



**Returns**

Nothing.

**Return type**

None

**validate\_schema()**

Validate the schema.

**validate\_size()** → bool

Validates schema size.

Validates the size of schema. Throws an error if the size of the schema exceeds expected value.

**Returns**

True if schema does not exceeds the size limit.

**Return type**

bool

**Raises***SchemaSizeTooLarge* – If the size of the schema exceeds expected value.**class** ads.feature\_engineering.schema.**SchemaFactory**

Bases: object

Schema Factory.

**register\_format**(*self*)

Register a new type of schema class.

**get\_schema**(*self*)

Get the YamlSchema or JsonSchema based on the format.

**default\_schema**(*cls*)

Construct a SchemaFactory instance and register yaml and json loader.

**Examples**

```

>>> factory = SchemaFactory.default_schema()
>>> schema_loader = factory.get_schema('.json')
>>> schema_dict = schema_loader.load_schema('schema.json')
>>> schema = Schema.from_dict(schema_dict)
>>> schema
Schema:
- description: Attrition
domain:
  constraints: []
  stats:
    count: 1470
    unique: 2
    values: String
dtype: object
feature_type: String
name: Attrition
required: true
- description: Age

```

(continues on next page)

(continued from previous page)

```

domain:
  constraints: []
  stats:
    25%: 31.0
    50%: 37.0
    75%: 44.0
  count: 1470.0
  max: 61.0
  mean: 37.923809523809524
  min: 19.0
  std: 9.135373489136732
  values: Integer
dtype: int64
feature_type: Integer
name: Age
required: true

```

**classmethod** `default_schema()`

**get\_schema**(*file\_format*)

Get the YamlSchema or JsonSchema based on the format.

**register\_format**(*file\_format*, *creator*)

Register a new type of schema class.

**exception** `ads.feature_engineering.schema.SchemaSizeTooLarge`(*size: int*)

Bases: `ValueError`

**class** `ads.feature_engineering.schema.YamlSchemaLoader`

Bases: [`BaseSchemaLoader`](#)

Yaml Schema which loads and validates schema from a yaml file.

**load\_schema**(*self*)

Loads and validates schema from a yaml file and returns the normalized schema.

## Examples

```

>>> schema_loader = YamlSchemaLoader()
>>> schema_dict = schema_loader.load_schema('schema.yaml')
>>> schema_dict
{'Schema': [{'description': 'Attrition',
  'domain': {'constraints': [],
    'stats': {'count': 1470, 'unique': 2},
    'values': 'String'},
  'dtype': 'object',
  'feature_type': 'String',
  'name': 'Attrition',
  'required': True},
  {'description': 'Age',
    'domain': {'constraints': [],
      'stats': {'25%': 31.0,

```

(continues on next page)

(continued from previous page)

```

    '50%': 37.0,
    '75%': 44.0,
    'count': 1470.0,
    'max': 61.0,
    'mean': 37.923809523809524,
    'min': 19.0,
    'std': 9.135373489136732},
    'values': 'Integer'},
    'dtype': 'int64',
    'feature_type': 'Integer',
    'name': 'Age',
    'required': True}}}]

```

#### 18.1.1.12.6 ads.feature\_engineering.utils module

The module that represents utility functions.

##### Functions:

**is\_boolean(value: Any) -> bool**  
 Checks if value type is boolean.

**class ads.feature\_engineering.utils.SchemeNeutral**

Bases: str

**AREA\_DARK** = '#9E9892'

**AREA\_LIGHT** = '#BCB6B1'

**BACKGROUND\_DARK** = '#E4E1DD'

**BACKGROUND\_LIGHT** = '#F5F4F2'

**LINE\_DARK** = '#47423E'

**LINE\_LIGHT** = '#665F5B'

**class ads.feature\_engineering.utils.SchemeTeal**

Bases: str

**AREA\_DARK** = '#76A2A0'

**AREA\_LIGHT** = '#9ABFBF'

**BACKGROUND\_DARK** = '#D6E5E5'

**BACKGROUND\_LIGHT** = '#F0f6f5'

**LINE\_DARK** = '#2B484B'

**LINE\_LIGHT** = '#3E686C'

**ads.feature\_engineering.utils.assign\_issuer(cardnumber)**

`ads.feature_engineering.utils.is_boolean(value: Any) → bool`

Checks if value type is boolean.

**Parameters**

**value** (*Any*) – The value to check.

**Returns**

**bool**

**Return type**

True if value is boolean, False otherwise.

`ads.feature_engineering.utils.random_color_func(z, word=None, font_size=None, position=None, orientation=None, font_path=None, random_state=None)`

Returns random color function use for `color_func` in creating WordCloud

#### 18.1.1.12.7 Module contents

#### 18.1.1.13 ads.hpo package

##### 18.1.1.13.1 Subpackages

##### ads.hpo.visualization package

##### Module contents

##### 18.1.1.13.2 Submodules

##### 18.1.1.13.3 ads.hpo.ads\_search\_space module

`class ads.hpo.ads_search_space.DecisionTreeClassifierSearchSpace(strategy)`

Bases: [\*ModelSearchSpace\*](#)

**suggest\_space**(\*\*kwargs)

`class ads.hpo.ads_search_space.DecisionTreeRegressorSearchSpace(strategy)`

Bases: [\*ModelSearchSpace\*](#)

**suggest\_space**(\*\*kwargs)

`class ads.hpo.ads_search_space.ElasticNetSearchSpace(strategy)`

Bases: [\*ModelSearchSpace\*](#)

**suggest\_space**(\*\*kwargs)

`class ads.hpo.ads_search_space.ExtraTreesClassifierSearchSpace(strategy)`

Bases: [\*ModelSearchSpace\*](#)

**suggest\_space**(\*\*kwargs)

`class ads.hpo.ads_search_space.ExtraTreesRegressorSearchSpace(strategy)`

Bases: [\*ExtraTreesClassifierSearchSpace\*](#)

```

class ads.hpo.ads_search_space.GradientBoostingClassifierSearchSpace(strategy)
    Bases: GradientBoostingRegressorSearchSpace

class ads.hpo.ads_search_space.GradientBoostingRegressorSearchSpace(strategy)
    Bases: ModelSearchSpace
    suggest_space(**kwargs)

class ads.hpo.ads_search_space.LGBMClassifierSearchSpace(strategy)
    Bases: ModelSearchSpace
    suggest_space(**kwargs)

class ads.hpo.ads_search_space.LGBMRegressorSearchSpace(strategy)
    Bases: LGBMClassifierSearchSpace

class ads.hpo.ads_search_space.LassoSearchSpace(strategy)
    Bases: RidgeSearchSpace

class ads.hpo.ads_search_space.LinearSVCSearchSpace(strategy)
    Bases: ModelSearchSpace
    suggest_space(**kwargs)

class ads.hpo.ads_search_space.LinearSVRSearchSpace(strategy)
    Bases: ModelSearchSpace
    suggest_space(**kwargs)

class ads.hpo.ads_search_space.LogisticRegressionSearchSpace(strategy)
    Bases: ModelSearchSpace
    suggest_space(**kwargs)

class ads.hpo.ads_search_space.ModelSearchSpace(strategy)
    Bases: ABC
    Defines an abstract base class for setting the search space and strategy used during hyperparameter optimization
    suggest_space(**kwargs)

class ads.hpo.ads_search_space.RandomForestClassifierSearchSpace(strategy)
    Bases: ExtraTreesClassifierSearchSpace

class ads.hpo.ads_search_space.RandomForestRegressorSearchSpace(strategy)
    Bases: ExtraTreesClassifierSearchSpace

class ads.hpo.ads_search_space.RidgeClassifierSearchSpace(strategy)
    Bases: RidgeSearchSpace

class ads.hpo.ads_search_space.RidgeSearchSpace(strategy)
    Bases: ModelSearchSpace
    suggest_space(**kwargs)

class ads.hpo.ads_search_space.SGDClassifierSearchSpace(strategy)
    Bases: ModelSearchSpace

```

```
    suggest_space(**kwargs)

class ads.hpo.ads_search_space.SGDRegressorSearchSpace(strategy)
    Bases: SGDClassifierSearchSpace

class ads.hpo.ads_search_space.SVCSearchSpace(strategy)
    Bases: ModelSearchSpace

    suggest_space(**kwargs)

class ads.hpo.ads_search_space.SVRSearchSpace(strategy)
    Bases: SVCSearchSpace

class ads.hpo.ads_search_space.XGBClassifierSearchSpace(strategy)
    Bases: ModelSearchSpace

    suggest_space(**kwargs)

class ads.hpo.ads_search_space.XGBRegressorSearchSpace(strategy)
    Bases: XGBClassifierSearchSpace

ads.hpo.ads_search_space.get_model2searchspace()
```

#### 18.1.1.13.4 ads.hpo.distributions module

```
class ads.hpo.distributions.CategoricalDistribution(choices: Sequence[Union[None, bool, int, float, str]])

    Bases: Distribution

    A categorical distribution.
```

##### Parameters

**choices** – Parameter value candidates. It is recommended to restrict the types of the choices to the following: None, bool, int, float and str.

```
class ads.hpo.distributions.DiscreteUniformDistribution(low: float, high: float, step: float)

    Bases: Distribution

    A discretized uniform distribution in the linear domain.
```

---

**Note:** If the range [low, high] is not divisible by  $q$ , high will be replaced with the maximum of  $kq + \text{low}$  high, where  $k$  is an integer.

---

##### Parameters

- **low** (*float*) – Lower endpoint of the range of the distribution. *low* is included in the range.
- **high** (*float*) – Upper endpoint of the range of the distribution. *high* is included in the range.
- **step** (*float*) – A discretization step.

```
class ads.hpo.distributions.Distribution(dist)

    Bases: object

    Defines the abstract base class for hyperparameter search distributions
```

**get\_distribution()**

Returns the distribution

```
class ads.hpo.distributions.DistributionEncode(*, skipkeys=False, ensure_ascii=True,
                                             check_circular=True, allow_nan=True,
                                             sort_keys=False, indent=None, separators=None,
                                             default=None)
```

Bases: `JSONEncoder`

Constructor for `JSONEncoder`, with sensible defaults.

If `skipkeys` is false, then it is a `TypeError` to attempt encoding of keys that are not str, int, float or None. If `skipkeys` is True, such items are simply skipped.

If `ensure_ascii` is true, the output is guaranteed to be str objects with all incoming non-ASCII characters escaped. If `ensure_ascii` is false, the output can contain non-ASCII characters.

If `check_circular` is true, then lists, dicts, and custom encoded objects will be checked for circular references during encoding to prevent an infinite recursion (which would cause an `OverflowError`). Otherwise, no such check takes place.

If `allow_nan` is true, then NaN, Infinity, and -Infinity will be encoded as such. This behavior is not JSON specification compliant, but is consistent with most JavaScript based encoders and decoders. Otherwise, it will be a `ValueError` to encode such floats.

If `sort_keys` is true, then the output of dictionaries will be sorted by key; this is useful for regression tests to ensure that JSON serializations can be compared on a day-to-day basis.

If `indent` is a non-negative integer, then JSON array elements and object members will be pretty-printed with that indent level. An indent level of 0 will only insert newlines. None is the most compact representation.

If specified, `separators` should be an (item\_separator, key\_separator) tuple. The default is (', ', ': ') if `indent` is None and (', ', ': ') otherwise. To get the most compact JSON representation, you should specify (',', ':') to eliminate whitespace.

If specified, `default` is a function that gets called for objects that can't otherwise be serialized. It should return a JSON encodable version of the object or raise a `TypeError`.

**default** (*dist*: [Distribution](#)) → Dict[str, Any]

Implement this method in a subclass such that it returns a serializable object for `o`, or calls the base implementation (to raise a `TypeError`).

For example, to support arbitrary iterators, you could implement `default` like this:

```
def default(self, o):
    try:
        iterable = iter(o)
    except TypeError:
        pass
    else:
        return list(iterable)
    # Let the base class default method raise the TypeError
    return JSONEncoder.default(self, o)
```

**static from\_json** (*json\_object*: Dict[Any, Any])

```
class ads.hpo.distributions.IntLogUniformDistribution(low: float, high: float, step: float = 1)
```

Bases: [Distribution](#)

A uniform distribution on integers in the log domain.

**Parameters**

- **low** – Lower endpoint of the range of the distribution. *low* is included in the range.
- **high** – Upper endpoint of the range of the distribution. *high* is included in the range.
- **step** – A step for spacing between values.

**class** ads.hpo.distributions.**IntUniformDistribution**(*low: float, high: float, step: float = 1*)

Bases: *Distribution*

A uniform distribution on integers.

---

**Note:** If the range [low, high] is not divisible by step, high will be replaced with the maximum of  $k \times \text{step} + \text{lowhigh}$ , where  $k$  is an integer.

---

**Parameters**

- **low** – Lower endpoint of the range of the distribution. *low* is included in the range.
- **high** – Upper endpoint of the range of the distribution. *high* is included in the range.
- **step** – A step for spacing between values.

**class** ads.hpo.distributions.**LogUniformDistribution**(*low: float, high: float*)

Bases: *Distribution*

A uniform distribution in the log domain.

**Parameters**

- **low** – Lower endpoint of the range of the distribution. *low* is included in the range.
- **high** – Upper endpoint of the range of the distribution. *high* is excluded from the range.

**class** ads.hpo.distributions.**UniformDistribution**(*low: float, high: float*)

Bases: *Distribution*

A uniform distribution in the linear domain.

**Parameters**

- **low** – Lower endpoint of the range of the distribution. *low* is included in the range.
- **high** – Upper endpoint of the range of the distribution. *high* is excluded from the range.

ads.hpo.distributions.**decode**(*s: str*)

Decodes a string to an object

**Parameters**

**s** (*str*) – The string being decoded to a distribution object

**Returns**

Decoded string

**Return type**

*Distribution* or Dict

ads.hpo.distributions.**encode**(*o: Distribution*) → str

Encodes a distribution to a string

**Parameters**

**o** (*Distribution*) – The distribution to encode



**Returns**

The distribution encoded as a string

**Return type**

str (*DistributionEncode*)

**18.1.1.13.5 ads.hpo.objective module****18.1.1.13.6 ads.hpo.search\_cv module**

```
class ads.hpo.search_cv.ADSTuner(model, strategy='perfunctory', scoring=None, cv=5, study_name=None,
                                storage=None, load_if_exists=True, random_state=None, loglevel=20,
                                n_jobs=1, X=None, y=None)
```

Bases: BaseEstimator

Hyperparameter search with cross-validation.

Returns a hyperparameter tuning object

**Parameters**

- **model** – Object to use to fit the data. This is assumed to implement the scikit-learn estimator or pipeline interface.
- **strategy** – *perfunctory*, *detailed* or a dictionary/mapping of hyperparameter and its distribution . If obj:*perfunctory*, picks a few relatively more important hyperparameters to tune . If obj:*detailed*, extends to a larger search space. If obj:dict, user defined search space: Dictionary where keys are hyperparameters and values are distributions. Distributions are assumed to implement the ads distribution interface.
- **scoring** (*Optional[Union[Callable[..., float], str]]*) – String or callable to evaluate the predictions on the validation data. If *None*, score on the estimator is used.
- **cv** (*int*) – Integer to specify the number of folds in a CV splitter. If estimator is a classifier and y is either binary or multiclass, `sklearn.model_selection.StratifiedKFold` is used. otherwise, `sklearn.model_selection.KFold` is used.
- **study\_name** (*str*,) – Name of the current experiment for the ADSTuner object. One ADSTuner object can only be attached to one study\_name.
- **storage** – Database URL. (e.g. `sqlite:///example.db`). Default to `sqlite:///tmp/hpo_*.db`.
- **load\_if\_exists** – Flag to control the behavior to handle a conflict of study names. In the case where a study named `study_name` already exists in the storage, a *DuplicatedStudyError* is raised if `load_if_exists` is set to *False*. Otherwise, the existing one is returned.
- **random\_state** – Seed of the pseudo random number generator. If *int*, this is the seed used by the random number generator. If *None*, the global random state from `numpy.random` is used.
- **loglevel** – loglevel. can be `logging.NOTSET`, `logging.INFO`, `logging.DEBUG`, `logging.WARNING`
- **n\_jobs** (*int*) – Number of parallel jobs. -1 means using all processors.
- **X** (*TwoDimArrayLikeType, Union[List[List[float]], np.ndarray]*,) –
- **pd.DataFrame** – Training data.
- **spmatrix** – Training data.

- **ADSDData**] – Training data.
- **y** (*Union*[*OneDimArrayLikeType*, *TwoDimArrayLikeType*], *optional*) –
- **OneDimArrayLikeType** (*Union*[*List*[*float*], *np.ndarray*, *pd.Series*]) –
- **TwoDimArrayLikeType** (*Union*[*List*[*List*[*float*]], *np.ndarray*, *pd.DataFrame*, *spmatrix*, [ADSDData](#)]) – Target.

Example:

```
from ads.hpo.stopping_criterion import *
from ads.hpo.search_cv import ADSTuner
from sklearn.datasets import load_iris
from sklearn.svm import SVC

tuner = ADSTuner(
    SVC(),
    strategy='detailed',
    scoring='f1_weighted',
    random_state=42
)

X, y = load_iris(return_X_y=True)
tuner.tune(X=X, y=y, exit_criterion=[TimeBudget(1)])
```

**property best\_index**

returns: Index which corresponds to the best candidate parameter setting. :rtype: int

**property best\_params**

returns: Parameters of the best trial. :rtype: Dict[str, Any]

**property best\_score**

returns: Mean cross-validated score of the best estimator. :rtype: float

**best\_scores**(*n*: int = 5, *reverse*: bool = True)

Return the best scores from the study

**Parameters**

- **n** (*int*) – The maximum number of results to show. Defaults to 5. If *None* or negative return all.
- **reverse** (*bool*) – Whether to reverse the sort order so results are in descending order. Defaults to *True*

**Returns**

List of the best scores

**Return type**

list[float or int]

**Raises**

**ValueError** –

**get\_status**()

return the status of the current tuning process.

Alias for the property *status*.

**Returns**

The status of the process

**Return type**

Status

Example:

```
from ads.hpo.stopping_criterion import *
from ads.hpo.search_cv import ADSTuner
from sklearn.datasets import load_iris
from sklearn.linear_model import SGDClassifier

tuner = ADSTuner(
    SGDClassifier(),
    strategy='detailed',
    scoring='f1_weighted',
    random_state=42
)
tuner.search_space({'max_iter': 100})
X, y = load_iris(return_X_y=True)
tuner.tune(X=X, y=y, exit_criterion=[TimeBudget(1)])
tuner.get_status()
```

**halt()**

Halt the current running tuning process.

**Returns**

Nothing

**Return type**

None

**Raises**

*InvalidStateTransition* –

Example:

```
from ads.hpo.stopping_criterion import *
from ads.hpo.search_cv import ADSTuner
from sklearn.datasets import load_iris
from sklearn.linear_model import SGDClassifier

tuner = ADSTuner(
    SGDClassifier(),
    strategy='detailed',
    scoring='f1_weighted',
    random_state=42
)
tuner.search_space({'max_iter': 100})
X, y = load_iris(return_X_y=True)
tuner.tune(X=X, y=y, exit_criterion=[TimeBudget(1)])
tuner.halt()
```

**is\_completed()****Returns**

*True* if the *ADSTuner* instance has completed; *False* otherwise.

**Return type**

bool

**is\_halted()****Returns***True* if the *ADSTuner* instance is halted; *False* otherwise.**Return type**

bool

**is\_running()****Returns***True* if the *ADSTuner* instance is running; *False* otherwise.**Return type**

bool

**is\_terminated()****Returns***True* if the *ADSTuner* instance has been terminated; *False* otherwise.**Return type**

bool

**property n\_trials**returns: Number of completed trials. Alias for *trial\_count*. :rtype: int**static optimizer**(*study\_name*, *pruner*, *sampler*, *storage*, *load\_if\_exists*, *objective\_func*, *global\_start*, *global\_stop*, *\*\*kwargs*)

Static method for running ADSTuner tuning process

**Parameters**

- **study\_name** (*str*) – The name of the study.
- **pruner** – The pruning method for pruning trials.
- **sampler** – The sampling method used for tuning.
- **storage** (*str*) – Storage endpoint.
- **load\_if\_exists** (*bool*) – Load existing study if it exists.
- **objective\_func** – The objective function to be maximized.
- **global\_start** (*multiprocessing.Value*) – The global start time.
- **global\_stop** (*multiprocessing.Value*) – The global stop time.
- **kwargs** (*dict*) – Keyword/value pairs passed into the optimize process

**Raises****Exception** – Raised for any exceptions thrown by the underlying optimization process**Returns**

Nothing

**Return type**

None

**plot\_best\_scores**(*best=True, inferior=True, time\_interval=1, fig\_size=(800, 500)*)

Plot optimization history of all trials in a study.

**Parameters**

- **best** – controls whether to plot the lines for the best scores so far.
- **inferior** – controls whether to plot the dots for the actual objective scores.
- **time\_interval** – how often(in seconds) the plot refresh to check on the new trial results.
- **fig\_size** (*tuple*) – width and height of the figure.

**Returns**

Nothing.

**Return type**

None

**plot\_contour\_scores**(*params=None, time\_interval=1, fig\_size=(800, 500)*)

Contour plot of the scores.

**Parameters**

- **params** (*Optional[List[str]]*) – Parameter list to visualize. Defaults to all.
- **time\_interval** (*float*) – Time interval for the plot. Defaults to 1.
- **fig\_size** (*tuple[int, int]*) – Figure size. Defaults to (800, 500).

**Returns**

Nothing.

**Return type**

None

**plot\_edf\_scores**(*time\_interval=1, fig\_size=(800, 500)*)

Plot the EDF (empirical distribution function) of the scores.

Only completed trials are used.

**Parameters**

- **time\_interval** (*float*) – Time interval for the plot. Defaults to 1.
- **fig\_size** (*tuple[int, int]*) – Figure size. Defaults to (800, 500).

**Returns**

Nothing.

**Return type**

None

**plot\_intermediate\_scores**(*time\_interval=1, fig\_size=(800, 500)*)

Plot intermediate values of all trials in a study.

**Parameters**

- **time\_interval** (*float*) – Time interval for the plot. Defaults to 1.
- **fig\_size** (*tuple[int, int]*) – Figure size. Defaults to (800, 500).

**Returns**

Nothing.

**Return type**

None

**plot\_parallel\_coordinate\_scores**(*params=None, time\_interval=1, fig\_size=(800, 500)*)

Plot the high-dimentional parameter relationships in a study.

Note that, If a parameter contains missing values, a trial with missing values is not plotted.

**Parameters**

- **params** (*Optional[List[str]]*) – Parameter list to visualize. Defaults to all.
- **time\_interval** (*float*) – Time interval for the plot. Defaults to 1.
- **fig\_size** (*tuple[int, int]*) – Figure size. Defaults to (800, 500).

**Returns**

Nothing.

**Return type**

None

**plot\_param\_importance**(*importance\_evaluator='Fanova', time\_interval=1, fig\_size=(800, 500)*)

Plot hyperparameter importances.

**Parameters**

- **importance\_evaluator** (*str*) – Importance evaluator. Valid values: “Fanova”, “Mean-DecreaseImpurity”. Defaults to “Fanova”.
- **time\_interval** (*float*) – How often the plot refresh to check on the new trial results.
- **fig\_size** (*tuple*) – Width and height of the figure.

**Raises**

**NotImplementedError** – Raised for unsupported importance evaluators

**Returns**

Nothing.

**Return type**

None

**resume()**

Resume the current halted tuning process.

**Returns**

Nothing

**Return type**

None

Example:

```
from ads.hpo.stopping_criterion import *
from ads.hpo.search_cv import ADSTuner
from sklearn.datasets import load_iris
from sklearn.linear_model import SGDClassifier

tuner = ADSTuner(
    SGDClassifier(),
    strategy='detailed',
    scoring='f1_weighted',
    random_state=42
)
```

(continues on next page)

(continued from previous page)

```
tuner.search_space({'max_iter': 100})
X, y = load_iris(return_X_y=True)
tuner.tune(X=X, y=y, exit_criterion=[TimeBudget(1)])
tuner.halt()
tuner.resume()
```

**property score\_remaining**

returns: The difference between the best score and the optimal score. :rtype: float

**Raises**

**ExitCriterionError** – Error is raised if there is no score-based criteria for tuning.

**property scoring\_name**

returns: Scoring name. :rtype: str

**search\_space(strategy=None, overwrite=False)**

Returns the search space. If strategy is not passed in, return the existing search space. When strategy is passed in, overwrite the existing search space if overwrite is set True, otherwise, only update the existing search space.

**Parameters**

- **strategy** (*Union[str, dict]*, *optional*) – perfunctory, detailed or a dictionary/mapping of the hyperparameters and their distributions. If obj:*perfunctory*, picks a few relatively more important hyperparameters to tune. If obj:*detailed*, extends to a larger search space. If obj:*dict*, user defined search space: Dictionary where keys are parameters and values are distributions. Distributions are assumed to implement the ads distribution interface.
- **overwrite** (*bool*, *optional*) – Ignored when strategy is None. Otherwise, search space is overwritten if overwrite is set True and updated if it is False.

**Returns**

A mapping of the hyperparameters and their distributions.

**Return type**

dict

Example:

```
from ads.hpo.stopping_criterion import *
from ads.hpo.search_cv import ADSTuner
from sklearn.datasets import load_iris
from sklearn.linear_model import SGDClassifier

tuner = ADSTuner(
    SGDClassifier(),
    strategy='detailed',
    scoring='f1_weighted',
    random_state=42
)
tuner.search_space({'max_iter': 100})
X, y = load_iris(return_X_y=True)
tuner.tune(X=X, y=y, exit_criterion=[TimeBudget(1)])
tuner.search_space()
```

**property sklearn\_steps**

returns: Search space which corresponds to the best candidate parameter setting. :rtype: int

**property status**

returns: The status of the current tuning process. :rtype: Status

**terminate()**

Terminate the current tuning process.

**Returns**

Nothing

**Return type**

None

Example:

```
from ads.hpo.stopping_criterion import *
from ads.hpo.search_cv import ADSTuner
from sklearn.datasets import load_iris
from sklearn.linear_model import SGDClassifier

tuner = ADSTuner(
    SGDClassifier(),
    strategy='detailed',
    scoring='f1_weighted',
    random_state=42
)
tuner.search_space({'max_iter': 100})
X, y = load_iris(return_X_y=True)
tuner.tune(X=X, y=y, exit_criterion=[TimeBudget(1)])
tuner.terminate()
```

**property time\_elapsed**

Return the time in seconds that the HPO process has been searching

**Returns**

int

**Return type**

The number of seconds the HPO process has been searching

**property time\_remaining**

Returns the number of seconds remaining in the study

**Returns**

int

**Return type**

Number of seconds remaining in the budget. 0 if complete/terminated

**Raises**

[\*ExitCriterionError\*](#) – Error is raised if time has not been included in the budget.

**property time\_since\_resume**

Return the seconds since the process has been resumed from a halt.

**Returns**

int



**Return type**

the number of seconds since the process was last resumed

**Raises**

*NoRestartError* –

**property trial\_count**

returns: Number of completed trials. Alias for *trial\_count*. :rtype: int

**property trials**

returns: Trial data up to this point. :rtype: `pandas.DataFrame`

**trials\_export**(*file\_uri*, *metadata*=None, *script\_dict*={'model': None, 'scoring': None})

Export the meta data as well as files needed to reconstruct the ADSTuner object to the object storage. Data is not stored. To resume the same ADSTuner object from object storage and continue tuning from previous trials, you have to provide the dataset.

**Parameters**

- **file\_uri** (*str*) – Object storage path, 'oci://bucketname@namespace/filepath/on/objectstorage'. For example, *oci://test\_bucket@ociodscust/tuner/test.zip*
- **metadata** (*str*, *optional*) – User defined metadata
- **script\_dict** (*dict*, *optional*) – Script paths for model and scoring. This is only recommended for unsupported models and user-defined scoring functions. You can store the model and scoring function in a dictionary with keys *model* and *scoring* and the respective paths as values. The model and scoring scripts must import necessary libraries for the script to run. The *model* and *scoring* variables must be set to your model and scoring function.

**Returns**

Nothing

**Return type**

None

Example:

```
# Print out a list of supported models
from ads.hpo.ads_search_space import model_list
print(model_list)

# Example scoring dictionary
{'model': '/home/datascience/advanced-ds/notebooks/scratch/ADSTunerV2/mymodel.py',
 'scoring': '/home/datascience/advanced-ds/notebooks/scratch/ADSTunerV2/
customized_scoring.py'}
```

Example:

```
from ads.hpo.stopping_criterion import *
from ads.hpo.search_cv import ADSTuner
from sklearn.datasets import load_iris
from sklearn.linear_model import SGDClassifier

tuner = ADSTuner(
    SGDClassifier(),
```

(continues on next page)

(continued from previous page)

```

        strategy='detailed',
        scoring='fl_weighted',
        random_state=42
    )
    tuner.search_space({'max_iter': 100})
    X, y = load_iris(return_X_y=True)
    tuner.tune(X=X, y=y, exit_criterion=[TimeBudget(1)], synchronous=True)
    tuner.trials_export('oci://<bucket_name>@<namespace>/tuner/test.zip')

```

**classmethod** `trials_import(file_uri, delete_zip_file=True, target_file_path=None)`

Import the database file from the object storage

#### Parameters

- **file\_uri** (*str*) – ‘oci://bucketname@namespace/filepath/on/objectstorage’ Example: ‘oci://<bucket\_name>@<namespace>/tuner/test.zip’
- **delete\_zip\_file** (*bool*, defaults to *True*, optional) – Whether delete the zip file afterwards.
- **target\_file\_path** (*str*, optional) – The path where the zip file will be saved. For example, ‘/home/datascience/myfile.zip’.

#### Returns

ADSTuner object

#### Return type

*ADSTuner*

### Examples

```

>>> from ads.hpo.stopping_criterion import *
>>> from ads.hpo.search_cv import ADSTuner
>>> from sklearn.datasets import load_iris
>>> from sklearn.linear_model import SGDClassifier
>>> X, y = load_iris(return_X_y=True)
>>> tuner = ADSTuner.trials_import('oci://<bucket_name>@<namespace>/tuner/test.
↳zip')
>>> tuner.tune(X=X, y=y, exit_criterion=[TimeBudget(1)], synchronous=True)

```

#### property `trials_remaining`

returns: The number of trials remaining in the budget. :rtype: int

#### Raises

*ExitCriterionError* – Raised if the current tuner does not include a trials-based exit condition.

**tune**(*X=None, y=None, exit\_criterion=[], loglevel=None, synchronous=False*)

Run hyperparameter tuning until one of the `exit_criterion` is met. The default is to run 50 trials.

#### Parameters

- **X** (*TwoDimArrayLikeType, Union[List[List[float]], np.ndarray, pd.DataFrame, spmatrix, ADSDData]*) – Training data.
- **y** (*Union[OneDimArrayLikeType, TwoDimArrayLikeType]*, optional) –

- **OneDimArrayLikeType** (*Union[[List\[float\]](#), [np.ndarray](#), [pd.Series](#)]*) –
- **TwoDimArrayLikeType** (*Union[[List\[\[List\\[float\\]\]\(#\)\]](#), [np.ndarray](#), [pd.DataFrame](#), [spmatrix](#), [ADSData](#)]*) – Target.
- **exit\_criterion** (*list, optional*) – A list of ads stopping criterion. Can be [ScoreValue\(\)](#), [NTrials\(\)](#), [TimeBudget\(\)](#). For example, [[ScoreValue\(0.96\)](#), [NTrials\(40\)](#), [TimeBudget\(10\)](#)]. It will exit when any of the stopping criterion is satisfied in the *exit\_criterion* list. By default, the run will stop after 50 trials.
- **loglevel** (*int, optional*) – Log level.
- **synchronous** (*boolean, optional*) – Tune synchronously or not. Defaults to *False*

**Returns**

Nothing

**Return type**

None

Example:

```
from ads.hpo.stopping_criterion import *
from ads.hpo.search_cv import ADSTuner
from sklearn.datasets import load_iris
from sklearn.svm import SVC

tuner = ADSTuner(
    SVC(),
    strategy='detailed',
    scoring='f1_weighted',
    random_state=42
)
tuner.search_space({'max_iter': 100})
X, y = load_iris(return_X_y=True)
tuner.tune(X=X, y=y, exit_criterion=[TimeBudget(1)])
```

**wait()**

Wait for the current tuning process to finish running.

**Returns**

Nothing

**Return type**

None

Example:

```
from ads.hpo.stopping_criterion import *
from ads.hpo.search_cv import ADSTuner
from sklearn.datasets import load_iris
from sklearn.linear_model import SGDClassifier

tuner = ADSTuner(
    SGDClassifier(),
    strategy='detailed',
    scoring='f1_weighted',
    random_state=42
)
```

(continues on next page)

(continued from previous page)

```
    )
    tuner.search_space({'max_iter': 100})
    X, y = load_iris(return_X_y=True)
    tuner.tune(X=X, y=y, exit_criterion=[TimeBudget(1)])
    tuner.wait()
```

**class** `ads.hpo.search_cv.DataScienceObjective(objective, X_res, y_res)`

Bases: `object`

This class is to replace the previous lambda function to solve the problem that python does not allow pickle local function/lambda function.

**exception** `ads.hpo.search_cv.DuplicatedStudyError`

Bases: `Exception`

*DuplicatedStudyError* is raised when a new tuner process is created with a study name that already exists in storage.

**exception** `ads.hpo.search_cv.ExitCriterionError`

Bases: `Exception`

*ExitCriterionError* is raised when an attempt is made to check exit status for a different exit type than the tuner was initialized with. For example, if an HPO study has an exit criteria based on the number of trials and a request is made for the time remaining, which is a different exit criterion, an exception is raised.

**exception** `ads.hpo.search_cv.InvalidStateTransition`

Bases: `Exception`

*Invalid State Transition* is raised when an invalid transition request is made, such as calling halt without a running process.

**exception** `ads.hpo.search_cv.NoRestartError`

Bases: `Exception`

*NoRestartError* is raised when an attempt is made to check how many seconds have transpired since the HPO process was last resumed from a halt. This can happen if the process has been terminated or it was never halted and then resumed to begin with.

**class** `ads.hpo.search_cv.State(value)`

Bases: `Enum`

An enumeration.

**COMPLETED** = 5

**HALTED** = 3

**INITIATED** = 1

**RUNNING** = 2

**TERMINATED** = 4

### 18.1.1.13.7 ads.hpo.stopping\_criterion module

**class** ads.hpo.stopping\_criterion.NTrials(*n\_trials: int*)

Bases: object

Exit based on number of trials.

**Parameters**

**n\_trials** (*int*) – Number of trials (sets of hyperparamters tested). If *None*, there is no limitation on the number of trials.

**Returns**

NTrials object

**Return type**

*NTrials*

**class** ads.hpo.stopping\_criterion.ScoreValue(*score: float*)

Bases: object

Exit if the score is greater than or equal to the threshold.

**Parameters**

**score** (*float*) – The threshold for exiting the tuning process. If a trial value is greater or equal to *score*, process exits.

**Returns**

ScoreValue object

**Return type**

*ScoreValue*

**class** ads.hpo.stopping\_criterion.TimeBudget(*seconds: float*)

Bases: object

Exit based on the number of seconds.

**Parameters**

**seconds** (*float*) – Time limit, in seconds. If *None* there is no time limit.

**Returns**

TimeBudget object

**Return type**

*TimeBudget*

### 18.1.1.13.8 ads.hpo.tuner\_artifact module

**class** ads.hpo.tuner\_artifact.DownloadTunerArtifact(*file\_uri, target\_file\_path=None, auth=None*)

Bases: object

Download the tuner artifact from the cloud and deserialize the tuner args

**deserialize\_tuner\_args**(*file\_path\_dict*)

deserialize the tuner args

**Parameters**

**file\_path\_dict** (*dict*) – dict which contains the path of different files

**download\_from\_cloud()**

Download the artifact and unpack the archive at the target file path

**extract\_tuner\_args**(*delete\_zip\_file=False*)

deserialize tuner argument from the zip file

**static load\_model**(*script\_path*)

**static load\_scoring**(*script\_path*)

**static load\_target\_from\_script**(*script\_path*)

**exception** `ads.hpo.tuner_artifact.NotPickableError`(*message*)

Bases: `Exception`

**class** `ads.hpo.tuner_artifact.UploadTunerArtifact`(*tuner, file\_uri, metadata, auth=None*)

Bases: `object`

**json\_serialize\_tuner\_args**(*script\_dict*)

json serialize the tuner args

**prepare\_tuner\_artifact**(*script\_dict*)

zip and save all the tuner files

**Parameters**

**script\_dict** (*dict*) – dict which contains the script names and path

**upload**(*script\_dict*)

**upload\_to\_cloud**(*tuner\_zip*)

`ads.hpo.tuner_artifact.get_supported_model_mappings()`

#### 18.1.1.13.9 `ads.hpo.utils` module

#### 18.1.1.13.10 `ads.hpo.validation` module

`ads.hpo.validation.assert_is_estimator`(*estimator*)

`ads.hpo.validation.assert_model_is_supported`(*estimator*)

`ads.hpo.validation.assert_strategy_valid`(*param\_distributions, new\_strategy, old\_strategy=None*)

`ads.hpo.validation.assert_tuner_is_fitted`(*estimator, msg=None*)

`ads.hpo.validation.validate_fit_params`(*X, fit\_params, indices*)

`ads.hpo.validation.validate_params_for_plot`(*params, param\_distributions*)

`ads.hpo.validation.validate_pipeline`(*model*)

`ads.hpo.validation.validate_search_space`(*params, param\_distributions*)

#### 18.1.1.13.11 Module contents

#### 18.1.1.14 ads.jobs package

##### 18.1.1.14.1 Subpackages

#### ads.jobs.builders package

#### Subpackages

#### ads.jobs.builders.infrastructure package

#### Submodules

#### ads.jobs.builders.infrastructure.base module

```
class ads.jobs.builders.infrastructure.base.Infrastructure(spec: Optional[Dict] = None,
                                                         **kwargs)
```

Bases: *Builder*

Base class for job infrastructure

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

##### Parameters

- **spec** (*dict*, *optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

```
create(runtime: Runtime, **kwargs)
```

Create/deploy a job on the infrastructure.

##### Parameters

- **runtime** (*Runtime*) – a runtime object
- **kwargs** (*dict*) – additional arguments

```
delete()
```

Deletes a job from the infrastructure.

```
property kind: str
```

Kind of the object to be stored in YAML. All runtimes will have “infrastructure” as kind. Subclass will have different types.

```
list_jobs(**kwargs) → list
```

List jobs from the infrastructure.

##### Parameters

**kwargs** (*keyword arguments for filtering the results*) –

##### Returns

list of infrastructure objects, each representing a job from the infrastructure.

##### Return type

list

**property name: str**

The name of the job from the infrastructure.

**run**(*name: Optional[str] = None, args: Optional[str] = None, env\_var: Optional[dict] = None, freeform\_tags: Optional[dict] = None, wait: bool = False*)

Runs a job on the infrastructure.

**Parameters**

- **name** (*str, optional*) – The name of the job run, by default None
- **args** (*str, optional*) – Command line arguments for the job run, by default None.
- **env\_var** (*dict, optional*) – Environment variable for the job run, by default None
- **freeform\_tags** (*dict, optional*) – Freeform tags for the job run, by default None
- **wait** (*bool, optional*) – Indicate if this method should wait for the run to finish before it returns, by default False.

**update**(*runtime: Runtime*)

Updates a job.

**Parameters**

**runtime** – a runtime object

**class** ads.jobs.builders.infrastructure.base.RunInstance

Bases: object

**cancel()**

Cancel a run.

**create()**

Create a RunInstance Object.

**delete()**

Delete a run.

**property run\_details\_link: str**

Link to run details page in OCI console

**Returns**

The link to the details page in OCI console.

**Return type**

str

**property status**

Return status of the run.

**watch()**

Show logs of a run.



**ads.jobs.builders.infrastructure.dataflow module**

**class** ads.jobs.builders.infrastructure.dataflow.**DataFlow**(spec: *Optional[dict]* = None, *\*\*kwargs*)

Bases: *Infrastructure*

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

**Parameters**

- **spec** (*dict*, *optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

CONST\_BUCKET\_URI = 'logs\_bucket\_uri'

CONST\_COMPARTMENT\_ID = 'compartment\_id'

CONST\_CONFIG = 'configuration'

CONST\_DRIVER\_SHAPE = 'driver\_shape'

CONST\_DRIVER\_SHAPE\_CONFIG = 'driver\_shape\_config'

CONST\_EXECUTE = 'execute'

CONST\_EXECUTOR\_SHAPE = 'executor\_shape'

CONST\_EXECUTOR\_SHAPE\_CONFIG = 'executor\_shape\_config'

CONST\_ID = 'id'

CONST\_LANGUAGE = 'language'

CONST\_MEMORY\_IN\_GBS = 'memory\_in\_gbs'

CONST\_METASTORE\_ID = 'metastore\_id'

CONST\_NUM\_EXECUTORS = 'num\_executors'

CONST\_OCPUS = 'ocpus'

CONST\_PRIVATE\_ENDPOINT\_ID = 'private\_endpoint\_id'

CONST\_SPARK\_VERSION = 'spark\_version'

CONST\_WAREHOUSE\_BUCKET\_URI = 'warehouse\_bucket\_uri'

```
attribute_map = {'compartment_id': 'compartmentId', 'configuration':
'configuration', 'driver_shape': 'driverShape', 'driver_shape_config':
'driverShapeConfig', 'execute': 'execute', 'executor_shape': 'executorShape',
'executor_shape_config': 'executorShapeConfig', 'id': 'id', 'logs_bucket_uri':
'logsBucketUri', 'memory_in_gbs': 'memoryInGBs', 'metastore_id': 'metastoreId',
'num_executors': 'numExecutors', 'ocpus': 'ocpus', 'private_endpoint_id':
'privateEndpointId', 'spark_version': 'sparkVersion', 'warehouse_bucket_uri':
'warehouseBucketUri'}
```

**create**(*runtime*: [DataFlowRuntime](#), *\*\*kwargs*) → [DataFlow](#)

Create a Data Flow job given a runtime.

**Parameters**

- **runtime** – runtime to bind to the Data Flow job
- **kwargs** – additional keyword arguments

**Returns**

a Data Flow job instance

**Return type**

[DataFlow](#)

**delete**()

Delete a Data Flow job and canceling associated runs.

**Return type**

None

**classmethod from\_dict**(*config*: *dict*) → [DataFlow](#)

Load a Data Flow job instance from a dictionary of configurations.

**Parameters**

**config** (*dict*) – dictionary of configurations

**Returns**

a Data Flow job instance

**Return type**

[DataFlow](#)

**classmethod from\_id**(*id*: *str*) → [DataFlow](#)

Load a Data Flow job given an id.

**Parameters**

**id** (*str*) – id of the Data Flow job to load

**Returns**

a Data Flow job instance

**Return type**

[DataFlow](#)

**property job\_id**: [Optional](#)[*str*]

The OCID of the job

**classmethod list\_jobs**(*compartment\_id*: [Optional](#)[*str*] = *None*, *\*\*kwargs*) → [List](#)[[DataFlow](#)]

List Data Flow jobs in a given compartment.

**Parameters**

- **compartment\_id** (*str*) – id of that compartment
- **kwargs** – additional keyword arguments for filtering jobs

**Returns**

list of Data Flow jobs

**Return type**

[List](#)[[DataFlow](#)]

**property name: str**

Display name of the job

**run**(*name: Optional[str] = None, args: Optional[List[str]] = None, env\_vars: Optional[Dict[str, str]] = None, freeform\_tags: Optional[Dict[str, str]] = None, wait: bool = False, \*\*kwargs*) → *DataFlowRun*

Run a Data Flow job.

**Parameters**

- **name**(*str, optional*) – name of the run. If a name is not provided, a randomly generated easy to remember name with timestamp will be generated, like ‘strange-spider-2022-08-17-23:55.02’.
- **args**(*List[str], optional*) – list of command line arguments
- **env\_vars**(*Dict[str, str], optional*) – dictionary of environment variables (not used for data flow)
- **freeform\_tags**(*Dict[str, str], optional*) – freeform tags
- **wait**(*bool, optional*) – whether to wait for a run to terminate
- **kwargs** – additional keyword arguments

**Returns**

a DataFlowRun instance

**Return type**

*DataFlowRun*

**run\_list**(*\*\*kwargs*) → List[*DataFlowRun*]

List runs associated with a Data Flow job.

**Parameters**

**kwargs** – additional arguments for filtering runs.

**Returns**

list of DataFlowRun instances

**Return type**

List[*DataFlowRun*]

**to\_dict**() → dict

Serialize job to a dictionary.

**Returns**

serialized job as a dictionary

**Return type**

dict

**to\_yaml**() → str

Serializes the object into YAML string.

**Returns**

YAML stored in a string.

**Return type**

str

**with\_compartment\_id**(*id: str*) → *DataFlow*

Set compartment id for a Data Flow job.

**Parameters**

**id** (*str*) – compartment id

**Returns**

the Data Flow instance itself

**Return type**

*DataFlow*

**with\_configuration**(*configs: dict*) → *DataFlow*

Set configuration for a Data Flow job.

**Parameters**

**configs** (*dict*) – dictionary of configurations

**Returns**

the Data Flow instance itself

**Return type**

*DataFlow*

**with\_driver\_shape**(*shape: str*) → *DataFlow*

Set driver shape for a Data Flow job.

**Parameters**

**shape** (*str*) – driver shape

**Returns**

the Data Flow instance itself

**Return type**

*DataFlow*

**with\_driver\_shape\_config**(*memory\_in\_gbs: float, ocpus: float, \*\*kwargs: Dict[str, Any]*) → *DataFlow*

Sets the driver shape config details of Data Flow job infrastructure. Specify only when a flex shape is selected. For example *VM.Standard.E3.Flex* allows the *memory\_in\_gbs* and *cpu* count to be specified.

**Parameters**

- **memory\_in\_gbs** (*float*) – The size of the memory in GBs.
- **ocpus** (*float*) – The OCPUs count.
- **kwargs** – Additional keyword arguments.

**Returns**

the Data Flow instance itself.

**Return type**

*DataFlow*

**with\_execute**(*exec: str*) → *DataFlow*

Set command for spark-submit.

**Parameters**

**exec** (*str*) – str of commands

**Returns**

the Data Flow instance itself

**Return type**

*DataFlow*

**with\_executor\_shape**(*shape: str*) → *DataFlow*

Set executor shape for a Data Flow job.

**Parameters**

**shape** (*str*) – executor shape

**Returns**

the Data Flow instance itself

**Return type**

*DataFlow*

**with\_executor\_shape\_config**(*memory\_in\_gbs: float, ocpus: float, \*\*kwargs: Dict[str, Any]*) → *DataFlow*

Sets the executor shape config details of Data Flow job infrastructure. Specify only when a flex shape is selected. For example *VM.Standard.E3.Flex* allows the *memory\_in\_gbs* and *cpu* count to be specified.

**Parameters**

- **memory\_in\_gbs** (*float*) – The size of the memory in GBs.
- **ocpus** (*float*) – The OCPUs count.
- **kwargs** – Additional keyword arguments.

**Returns**

the Data Flow instance itself.

**Return type**

*DataFlow*

**with\_id**(*id: str*) → *DataFlow*

Set id for a Data Flow job.

**Parameters**

**id** (*str*) – id of a job

**Returns**

the Data Flow instance itself

**Return type**

*DataFlow*

**with\_language**(*lang: str*) → *DataFlow*

Set language for a Data Flow job.

**Parameters**

**lang** (*str*) – language for the job

**Returns**

the Data Flow instance itself

**Return type**

*DataFlow*

**with\_logs\_bucket\_uri**(*uri: str*) → *DataFlow*

Set logs bucket uri for a Data Flow job.

**Parameters**

**uri** (*str*) – uri to logs bucket

**Returns**

the Data Flow instance itself

**Return type***DataFlow***with\_metastore\_id**(*id: str*) → *DataFlow*

Set Hive metastore id for a Data Flow job.

**Parameters****id** (*str*) – metastore id**Returns**

the Data Flow instance itself

**Return type***DataFlow***with\_num\_executors**(*n: int*) → *DataFlow*

Set number of executors for a Data Flow job.

**Parameters****n** (*int*) – number of executors**Returns**

the Data Flow instance itself

**Return type***DataFlow***with\_private\_endpoint\_id**(*private\_endpoint\_id: str*) → *DataFlow*

Set the private endpoint ID for a Data Flow job infrastructure.

**Parameters****private\_endpoint\_id** (*str*) – The OCID of a private endpoint.**Returns**

the Data Flow instance itself

**Return type***DataFlow***with\_spark\_version**(*ver: str*) → *DataFlow*Set spark version for a Data Flow job. Currently supported versions are 2.4.4, 3.0.2 and 3.2.1 Documentation: [https://docs.oracle.com/en-us/iaas/data-flow/using/dfs\\_getting\\_started.htm#before\\_you\\_begin](https://docs.oracle.com/en-us/iaas/data-flow/using/dfs_getting_started.htm#before_you_begin)**Parameters****ver** (*str*) – spark version**Returns**

the Data Flow instance itself

**Return type***DataFlow***with\_warehouse\_bucket\_uri**(*uri: str*) → *DataFlow*

Set warehouse bucket uri for a Data Flow job.

**Parameters****uri** (*str*) – uri to warehouse bucket**Returns**

the Data Flow instance itself

**Return type***DataFlow*

```
class ads.jobs.builders.infrastructure.dataflow.DataFlowApp(config: Optional[dict] = None, signer: Optional[Signer] = None, client_kwargs: Optional[dict] = None, **kwargs)
```

Bases: [\*OCIModelMixin\*](#), [\*Application\*](#)

Initializes a service/resource with OCI client as a property. If config or signer is specified, it will be used to initialize the OCI client. If neither of them is specified, the client will be initialized with `ads.common.auth.default_signer`. If both of them are specified, both of them will be passed into the OCI client, and the authentication will be determined by OCI Python SDK.

#### Parameters

- **config** (*dict, optional*) – OCI API key config dictionary, by default None.
- **signer** (*oci.signer.Signer, optional*) – OCI authentication signer, by default None.
- **client\_kwargs** (*dict, optional*) – Additional keyword arguments for initializing the OCI client.

**property client:** [\*DataFlowClient\*](#)

OCI client

**create()** → [\*DataFlowApp\*](#)

Create a Data Flow application.

#### Returns

a [\*DataFlowApp\*](#) instance

#### Return type

[\*DataFlowApp\*](#)

**delete()** → None

Delete a Data Flow application.

#### Return type

None

**classmethod init\_client** (*\*\*kwargs*) → [\*DataFlowClient\*](#)

Initializes the OCI client specified in the “client” keyword argument Sub-class should override this method and call `cls._init_client(client=OCI_CLIENT)`

#### Parameters

**\*\*kwargs** – Additional keyword arguments for initializing the OCI client.

#### Return type

An instance of OCI client.

**to\_yaml()** → str

Serializes the object into YAML string.

#### Returns

YAML stored in a string.

#### Return type

str

```
class ads.jobs.builders.infrastructure.dataflow.DataFlowLogs(run_id)
```

Bases: [\*object\*](#)

**property application**

**property driver**

**property executor**

```
class ads.jobs.builders.infrastructure.dataflow.DataFlowRun(config: Optional[dict] = None, signer: Optional[Signer] = None, client_kwargs: Optional[dict] = None, **kwargs)
```

Bases: [\*OCIModelMixin\*](#), [\*Run\*](#), [\*RunInstance\*](#)

Initializes a service/resource with OCI client as a property. If config or signer is specified, it will be used to initialize the OCI client. If neither of them is specified, the client will be initialized with `ads.common.auth.default_signer`. If both of them are specified, both of them will be passed into the OCI client, and the authentication will be determined by OCI Python SDK.

#### Parameters

- **config** (*dict, optional*) – OCI API key config dictionary, by default None.
- **signer** (*oci.signer.Signer, optional*) – OCI authentication signer, by default None.
- **client\_kwargs** (*dict, optional*) – Additional keyword arguments for initializing the OCI client.

**TERMINATED\_STATES** = ['CANCELED', 'FAILED', 'SUCCEEDED']

**cancel()** → [\*DataFlowRun\*](#)

Cancel a Data Flow run if it is not yet terminated. Will be executed synchronously.

#### Returns

The dataflow run instance.

#### Return type

`self`

**property client:** [\*DataFlowClient\*](#)

OCI client

**create()** → [\*DataFlowRun\*](#)

Create a Data Flow run.

#### Returns

a [\*DataFlowRun\*](#) instance

#### Return type

[\*DataFlowRun\*](#)

**delete()** → [\*DataFlowRun\*](#)

Cancel and delete a Data Flow run if it is not yet terminated. Will be executed asynchronously.

#### Returns

The dataflow run instance.

#### Return type

`self`



**classmethod** `init_client(**kwargs) → DataFlowClient`

Initializes the OCI client specified in the “client” keyword argument Sub-class should override this method and call `cls._init_client(client=OCI_CLIENT)`

**Parameters**

**\*\*kwargs** – Additional keyword arguments for initializing the OCI client.

**Return type**

An instance of OCI client.

**property** `logs: DataFlowLogs`

Show logs from a run. There are three types of logs: application log, driver log and executor log, each with stdout and stderr separately. To access each type of logs, `>>> dfr.logs.application.stdout >>> dfr.logs.driver.stderr`

**Returns**

an instance of DataFlowLogs

**Return type**

*DataFlowLogs*

**property** `status: str`

Show status (lifecycle state) of a run.

**Returns**

status of the run

**Return type**

str

**to\_yaml()** → str

Serializes the object into YAML string.

**Returns**

YAML stored in a string.

**Return type**

str

**wait(interval: int = 3) → DataFlowRun**

Wait for a run to terminate.

**Parameters**

**interval** (*int*, *optional*) – interval to wait before probing again

**Returns**

a DataFlowRun instance

**Return type**

*DataFlowRun*

**watch(interval: int = 3) → DataFlowRun**

This is an alias of `wait()` method. It waits for a run to terminate.

**Parameters**

**interval** (*int*, *optional*) – interval to wait before probing again

**Returns**

a DataFlowRun instance

**Return type**

*DataFlowRun*

```
ads.jobs.builders.infrastructure.dataflow.conda_pack_name_to_dataflow_config(conda_uri)
```

### `ads.jobs.builders.infrastructure.dsc_job` module

```
class ads.jobs.builders.infrastructure.dsc_job.DSCJob(artifact: Optional[Union[str, Artifact]] =  
                                                    None, **kwargs)
```

Bases: `OCIDataScienceMixin`, `Job`

Represents an OCI Data Science Job This class contains all attributes of the `oci.data_science.models.Job`. The main purpose of this class is to link the `oci.data_science.models.Job` model and the related client methods. Mainly, linking the Job model (payload) to Create/Update/Get/List/Delete methods.

A DSCJob can be initialized by unpacking a the properties stored in a dictionary (payload):

```
job_properties = {  
    "display_name": "my_job",  
    "job_infrastructure_configuration_details": {"shape_name": "VM.MY_SHAPE"}  
}  
job = DSCJob(**job_properties)
```

The properties can also be OCI REST API payload, in which the keys are in camel format.

```
job_payload = {  
    "projectId": "<project_ocid>",  
    "compartmentId": "<compartment_ocid>",  
    "displayName": "<job_name>",  
    "jobConfigurationDetails": {  
        "jobType": "DEFAULT",  
        "commandLineArguments": "pos_arg1 pos_arg2 --key1 val1 --key2 val2",  
        "environmentVariables": {  
            "KEY1": "VALUE1",  
            "KEY2": "VALUE2",  
            # User specifies conda env via env var  
            "CONDA_ENV_TYPE": "service",  
            "CONDA_ENV_SLUG": "mlcpuv1"  
        }  
    },  
    "jobInfrastructureConfigurationDetails": {  
        "jobInfrastructureType": "STANDALONE",  
        "shapeName": "VM.Standard.E3.Flex",  
        "jobShapeConfigDetails": {  
            "memoryInGBs": 16,  
            "ocpus": 1  
        },  
        "blockStorageSizeInGBs": "100",  
        "subnetId": "<subnet_ocid>"  
    }  
}  
job = DSCJob(**job_payload)
```

Initialize a DSCJob object.

#### Parameters

- **artifact** (*str* or *Artifact*) – Job artifact, which can be a path or an Artifact object. Defaults to None.
- **kwargs** – Same as kwargs in `oci.data_science.models.Job`. Keyword arguments are passed into OCI Job model to initialize the properties.

**CONST\_DEFAULT\_BLOCK\_STORAGE\_SIZE** = 50

**DEFAULT\_INFRA\_TYPE** = 'ME\_STANDALONE'

**property artifact:** Union[*str*, *Artifact*]

Job artifact.

#### Returns

When creating a job, this be a path or an Artifact object. When loading the job from OCI, this will be the filename of the job artifact.

#### Return type

*str* or *Artifact*

**create()** → *DSCJob*

Create the job on OCI Data Science platform

#### Returns

The DSCJob instance (self), which allows chaining additional method.

#### Return type

*DSCJob*

**delete()** → *DSCJob*

Deletes the job and the corresponding job runs.

#### Returns

The DSCJob instance (self), which allows chaining additional method.

#### Return type

*DSCJob*

**download\_artifact**(*artifact\_path: str*) → *DSCJob*

Downloads the artifact from OCI

#### Parameters

**artifact\_path** (*str*) – Local path to store the job artifact.

#### Returns

The DSCJob instance (self), which allows chaining additional method.

#### Return type

*DSCJob*

**classmethod from\_ocid**(*ocid*) → *DSCJob*

Gets a job by OCID

#### Parameters

**ocid** (*str*) – The OCID of the job.

#### Returns

An instance of DSCJob.

#### Return type

*DSCJob*

**load\_defaults()** → *DSCJob*

**load\_properties\_from\_env()** → None

Loads default properties from the environment

**run(\*\*kwargs)** → *DataScienceJobRun*

Runs the job

**Parameters**

- **\*\*kwargs** – Keyword arguments for initializing a Data Science Job Run. The keys can be any keys in supported by OCI JobConfigurationDetails and JobRun, including:
  - \* hyperparameter\_values: dict(str, str) \* environment\_variables: dict(str, str) \* command\_line\_arguments: str \* maximum\_runtime\_in\_minutes: int \* display\_name: str
- **specified** (*If display\_name is not*) –
- **"<JOB\_NAME>-run-<TIMESTAMP>"**. (*it will be generated as*) –

**Returns**

An instance of DSCJobRun, which can be used to monitor the job run.

**Return type**

DSCJobRun

**run\_list(\*\*kwargs)** → list[*DataScienceJobRun*]

Lists the runs of this job.

**Parameters**

**\*\*kwargs** – Keyword arguments to be passed into the OCI list\_job\_runs() for filtering the job runs.

**Returns**

A list of DSCJobRun objects

**Return type**

list

**update()** → *DSCJob*

Updates the Data Science Job.

**upload\_artifact**(*artifact\_path: Optional[str] = None*) → *DSCJob*

Uploads the job artifact to OCI

**Parameters**

**artifact\_path** (*str, optional*) – Local path to the job artifact file to be uploaded, by default None. If artifact\_path is None, the path in self.artifact will be used.

**Returns**

The DSCJob instance (self), which allows chaining additional method.

**Return type**

*DSCJob*

ads.jobs.builders.infrastructure.dsc\_job.DSCJobRun

alias of *DataScienceJobRun*

**class** ads.jobs.builders.infrastructure.dsc\_job.**DataScienceJob**(*spec: Optional[Dict] = None, \*\*kwargs*)

Bases: *Infrastructure*

Represents the OCI Data Science Job infrastructure.

To configure the infrastructure for a Data Science Job:

```
infrastructure = (
    DataScienceJob()
    # Configure logging for getting the job run outputs.
    .with_log_group_id("<log_group_ocid>")
    # Log resource will be auto-generated if log ID is not specified.
    .with_log_id("<log_ocid>")
    # If you are in an OCI data science notebook session,
    # the following configurations are not required.
    # Configurations from the notebook session will be used as defaults.
    .with_compartment_id("<compartment_ocid>")
    .with_project_id("<project_ocid>")
    .with_subnet_id("<subnet_ocid>")
    .with_shape_name("VM.Standard.E3.Flex")
    # Shape config details are applicable only for the flexible shapes.
    .with_shape_config_details(memory_in_gbs=16, ocpus=1)
    # Minimum/Default block storage size is 50 (GB).
    .with_block_storage_size(50)
)
```

Initializes a data science job infrastructure

#### Parameters

- **spec** (*dict*, *optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

CONST\_BLOCK\_STORAGE = 'blockStorageSize'

CONST\_COMPARTMENT\_ID = 'compartmentId'

CONST\_DISPLAY\_NAME = 'displayName'

CONST\_JOB\_INFRA = 'jobInfrastructureType'

CONST\_JOB\_TYPE = 'jobType'

CONST\_LOG\_GROUP\_ID = 'logGroupId'

CONST\_LOG\_ID = 'logId'

CONST\_MEMORY\_IN\_GBS = 'memoryInGBs'

CONST\_OCPUS = 'ocpus'

CONST\_PROJECT\_ID = 'projectId'

CONST\_SHAPE\_CONFIG\_DETAILS = 'shapeConfigDetails'

CONST\_SHAPE\_NAME = 'shapeName'

CONST\_SUBNET\_ID = 'subnetId'

```
attribute_map = {'blockStorageSize': 'block_storage_size', 'compartmentId':
'compartment_id', 'displayName': 'display_name', 'jobInfrastructureType':
'job_infrastructure_type', 'jobType': 'job_type', 'logGroupId': 'log_group_id',
'logId': 'log_id', 'projectId': 'project_id', 'shapeConfigDetails':
'shape_config_details', 'shapeName': 'shape_name', 'subnetId': 'subnet_id'}
```

**property block\_storage\_size: int**

Block storage size for the job

**build()** → *DataScienceJob*

**property compartment\_id: Optional[str]**

The compartment OCID

**create(runtime, \*\*kwargs)** → *DataScienceJob*

Creates a job with runtime.

**Parameters**

**runtime** (*Runtime*) – An ADS job runtime.

**Returns**

The DataScienceJob instance (self)

**Return type**

*DataScienceJob*

**delete()** → None

Deletes a job

**classmethod fast\_launch\_shapes**(*compartment\_id: Optional[str] = None, \*\*kwargs*) → list

Lists the supported fast launch shapes for running jobs in a compartment.

**Parameters**

**compartment\_id** (*str, optional*) – The compartment ID for running the jobs, by default None. This is optional in a OCI Data Science notebook session. If this is not specified, the compartment ID of the notebook session will be used.

**Returns**

A list of `oci.data_science.models.FastLaunchJobConfigSummary` objects containing the information of the supported shapes.

**Return type**

list

## Examples

To get a list of shape names:

```
shapes = DataScienceJob.fast_launch_shapes(  
    compartment_id=os.environ["PROJECT_COMPARTMENT_OCID"]  
)  
shape_names = [shape.shape_name for shape in shapes]
```

**classmethod from\_dsc\_job**(*dsc\_job: DSCJob*) → *DataScienceJob*

Initialize a DataScienceJob instance from a DSCJob

**Parameters**

**dsc\_job** (*DSCJob*) – An instance of DSCJob

**Returns**

An instance of DataScienceJob

**Return type***DataScienceJob***classmethod** `from_id(job_id: str) → DataScienceJob`

Gets an existing job using Job OCID

**Parameters****job\_id** (*str*) – Job OCID**Returns**

An instance of DataScienceJob

**Return type***DataScienceJob***classmethod** `instance_shapes(compartment_id: Optional[str] = None, **kwargs) → list`

Lists the supported shapes for running jobs in a compartment.

**Parameters****compartment\_id** (*str*, *optional*) – The compartment ID for running the jobs, by default None. This is optional in a OCI Data Science notebook session. If this is not specified, the compartment ID of the notebook session will be used.**Returns**A list of `oci.data_science.models.JobShapeSummary` objects containing the information of the supported shapes.**Return type**

list

**Examples**

To get a list of shape names:

```
shapes = DataScienceJob.fast_launch_shapes(
    compartment_id=os.environ["PROJECT_COMPARTMENT_OCID"]
)
shape_names = [shape.name for shape in shapes]
```

**property** `job_id: Optional[str]`

The OCID of the job

**property** `job_infrastructure_type: Optional[str]`

Job infrastructure type

**property** `job_type: Optional[str]`

Job type

**classmethod** `list_jobs(compartment_id: Optional[str] = None, **kwargs) → List[DataScienceJob]`

Lists all jobs in a compartment.

**Parameters**

- **compartment\_id** (*str*, *optional*) – The compartment ID for running the jobs, by default None. This is optional in a OCI Data Science notebook session. If this is not specified, the compartment ID of the notebook session will be used.
- **\*\*kwargs** – Keyword arguments to be passed into OCI `list_jobs` API for filtering the jobs.

**Returns**

A list of DataScienceJob object.

**Return type**

List[[\*DataScienceJob\*](#)]

**property log\_group\_id: str**

Log group OCID of the data science job

**Returns**

Log group OCID

**Return type**

str

**property log\_id: str**

Log OCID for the data science job.

**Returns**

Log OCID

**Return type**

str

**property name: str**

Display name of the job

```
payload_attribute_map = {'blockStorageSize':
'job_infrastructure_configuration_details.block_storage_size_in_gbs',
'compartmentId': 'compartment_id', 'displayName': 'display_name',
'jobInfrastructureType':
'job_infrastructure_configuration_details.job_infrastructure_type', 'jobType':
'job_configuration_details.job_type', 'logGroupId':
'job_log_configuration_details.log_group_id', 'logId':
'job_log_configuration_details.log_id', 'projectId': 'project_id',
'shapeConfigDetails':
'job_infrastructure_configuration_details.job_shape_config_details', 'shapeName':
'job_infrastructure_configuration_details.shape_name', 'subnetId':
'job_infrastructure_configuration_details.subnet_id'}
```

**property project\_id: Optional[str]**

Project OCID

**run**(name=None, args=None, env\_var=None, freeform\_tags=None, wait=False) → [\*DataScienceJobRun\*](#)

Runs a job on OCI Data Science job

**Parameters**

- **name** (*str*, *optional*) – The name of the job run, by default None.
- **args** (*str*, *optional*) – Command line arguments for the job run, by default None.
- **env\_var** (*dict*, *optional*) – Environment variable for the job run, by default None
- **freeform\_tags** (*dict*, *optional*) – Freeform tags for the job run, by default None
- **wait** (*bool*, *optional*) – Indicate if this method should wait for the run to finish before it returns, by default False.

**Returns**

A Data Science Job Run instance.



**Return type***DataScienceJobRun***run\_list**(\*\*kwargs) → List[*DataScienceJobRun*]

Gets a list of job runs.

**Parameters****\*\*kwargs** – Keyword arguments for filtering the job runs. These arguments will be passed to OCI API.**Returns**

A list of job runs.

**Return type**

List[DSCJobRun]

**property shape\_config\_details:** Dict

The details for the job run shape configuration.

**shape\_config\_details\_attribute\_map** = {'memoryInGBs': 'memory\_in\_gbs', 'ocpus': 'ocpus'}**property shape\_name:** Optional[str]

Shape name

```
snake_to_camel_map = {'block_storage_size_in_gbs': 'blockStorageSize',
'compartment_id': 'compartmentId', 'display_name': 'displayName',
'job_infrastructure_type': 'jobInfrastructureType', 'job_shape_config_details':
'shapeConfigDetails', 'job_type': 'jobType', 'log_group_id': 'logGroupId', 'log_id':
'logId', 'project_id': 'projectId', 'shape_name': 'shapeName', 'subnet_id':
'subnetId'}
```

**static standardize\_spec**(spec)**property status:** Optional[str]

Status of the job.

**Returns**

Status of the job.

**Return type**

str

**property subnet\_id:** str

Subnet ID

**with\_block\_storage\_size**(size\_in\_gb: int) → *DataScienceJob*

Sets the block storage size in GB

**Parameters****size\_in\_gb** (int) – Block storage size in GB**Returns**

The DataScienceJob instance (self)

**Return type***DataScienceJob*

**with\_compartment\_id**(*compartment\_id: str*) → *DataScienceJob*

Sets the compartment OCID

**Parameters**

**compartment\_id** (*str*) – The compartment OCID

**Returns**

The *DataScienceJob* instance (self)

**Return type**

*DataScienceJob*

**with\_job\_infrastructure\_type**(*infrastructure\_type: str*) → *DataScienceJob*

Sets the job infrastructure type

**Parameters**

**infrastructure\_type** (*str*) – Job infrastructure type as string

**Returns**

The *DataScienceJob* instance (self)

**Return type**

*DataScienceJob*

**with\_job\_type**(*job\_type: str*) → *DataScienceJob*

Sets the job type

**Parameters**

**job\_type** (*str*) – Job type as string

**Returns**

The *DataScienceJob* instance (self)

**Return type**

*DataScienceJob*

**with\_log\_group\_id**(*log\_group\_id: str*) → *DataScienceJob*

Sets the log group OCID for the data science job. If log group ID is specified but log ID is not, a new log resource will be created automatically for each job run to store the logs.

**Parameters**

**log\_group\_id** (*str*) – Log Group OCID

**Returns**

The *DataScienceJob* instance (self)

**Return type**

*DataScienceJob*

**with\_log\_id**(*log\_id: str*) → *DataScienceJob*

Sets the log OCID for the data science job. If log ID is specified, setting the log group ID (`with_log_group_id()`) is not strictly needed. ADS will look up the log group ID automatically. However, this may require additional permission, and the look up may not be available for newly created log group. Specifying both log ID (`with_log_id()`) and log group ID (`with_log_group_id()`) can avoid such lookup and speed up the job creation.

**Parameters**

**log\_id** (*str*) – Log resource OCID.

**Returns**

The *DataScienceJob* instance (self)

**Return type***DataScienceJob***with\_project\_id**(*project\_id: str*) → *DataScienceJob*

Sets the project OCID

**Parameters****project\_id** (*str*) – The project OCID**Returns**

The DataScienceJob instance (self)

**Return type***DataScienceJob***with\_shape\_config\_details**(*memory\_in\_gbs: float, ocpus: float, \*\*kwargs: Dict[str, Any]*) → *DataScienceJob*Sets the details for the job run shape configuration. Specify only when a flex shape is selected. For example *VM.Standard.E3.Flex* allows the *memory\_in\_gbs* and *cpu* count to be specified.**Parameters**

- **memory\_in\_gbs** (*float*) – The size of the memory in GBs.
- **ocpus** (*float*) – The OCPUs count.
- **kwargs** – Additional keyword arguments.

**Returns**

The DataScienceJob instance (self)

**Return type***DataScienceJob***with\_shape\_name**(*shape\_name: str*) → *DataScienceJob*

Sets the shape name for running the job

**Parameters****shape\_name** (*str*) – Shape name**Returns**

The DataScienceJob instance (self)

**Return type***DataScienceJob***with\_subnet\_id**(*subnet\_id: str*) → *DataScienceJob*

Sets the subnet ID

**Parameters****subnet\_id** (*str*) – Subnet ID**Returns**

The DataScienceJob instance (self)

**Return type***DataScienceJob*

```
class ads.jobs.builders.infrastructure.dsc_job.DataScienceJobRun(config: Optional[dict] = None,
                                                                signer: Optional[Signer] =
                                                                None, client_kwargs:
                                                                Optional[dict] = None,
                                                                **kwargs)
```

Bases: *OCIDataScienceMixin*, *JobRun*, *RunInstance*

Represents a Data Science Job run

Initializes a service/resource with OCI client as a property. If config or signer is specified, it will be used to initialize the OCI client. If neither of them is specified, the client will be initialized with `ads.common.auth.default_signer`. If both of them are specified, both of them will be passed into the OCI client, and the authentication will be determined by OCI Python SDK.

#### Parameters

- **config** (*dict*, *optional*) – OCI API key config dictionary, by default None.
- **signer** (*oci.signer.Signer*, *optional*) – OCI authentication signer, by default None.
- **client\_kwargs** (*dict*, *optional*) – Additional keyword arguments for initializing the OCI client.

**TERMINAL\_STATES** = ['SUCCEEDED', 'FAILED', 'CANCELED', 'DELETED']

**cancel()** → *DataScienceJobRun*

Cancels a job run This method will wait for the job run to be canceled before returning.

#### Returns

The job run instance.

#### Return type

*self*

**create()** → *DataScienceJobRun*

Creates a job run

**download(to\_dir)**

Downloads files from job run output URI to local.

#### Parameters

**to\_dir** (*str*) – Local directory to which the files will be downloaded to.

#### Returns

The job run instance (self)

#### Return type

*DataScienceJobRun*

**property job**

The job instance of this run.

#### Returns

An ADS Job instance

#### Return type

*Job*

**property log\_group\_id: str**

The log group ID from OCI logging service containing the logs from the job run.

**property log\_id: str**

The log ID from OCI logging service containing the logs from the job run.

**property logging:** *OCILog*

The OCILog object containing the logs from the job run

**logs**(*limit: Optional[int] = None*) → list

Gets the logs of the job run.

**Parameters**

**limit** (*int, optional*) – Limit the number of logs to be returned. Defaults to None. All logs will be returned.

**Returns**

A list of log records. Each log record is a dictionary with the following keys: id, time, message.

**Return type**

list

**property status:** str

Lifecycle status

**Returns**

Status in a string.

**Return type**

str

**to\_yaml**() → str

Serializes the object into YAML string.

**Returns**

YAML stored in a string.

**Return type**

str

**watch**(*interval: float = 3, wait: float = 90*) → *DataScienceJobRun*

Watches the job run until it finishes. Before the job start running, this method will output the job run status. Once the job start running, the logs will be streamed until the job is success, failed or cancelled.

**Parameters**

- **interval** (*float*) – Time interval in seconds between each request to update the logs. Defaults to 3 (seconds).
- **wait** (*float*) – Time in seconds to keep updating the logs after the job run finished. It may take some time for logs to appear in OCI logging service after the job run is finished. Defaults to 90 (seconds).

**ads.jobs.builders.infrastructure.dsc\_job\_runtime module**

Contains classes for conversion between ADS runtime and OCI Data Science Job implementation. This module is for ADS developers only. In this module, a payload is defined as a dictionary for initializing a DSCJob object. The DSCJob can be initialized with the same arguments for initializing oci.data\_science.models.Job,

plus an “artifact” argument for job artifact.

The payload also contain infrastructure information. The conversion from a runtime to a payload is called translate in this module. The conversion from a DSCJob to a runtime is called extract in this module.

```
class ads.jobs.builders.infrastructure.dsc_job_runtime.CondaRuntimeHandler(data_science_job)
```

Bases: [RuntimeHandler](#)

Runtime Handler for CondaRuntime

Initialize the runtime handler.

**Parameters**

**data\_science\_job** ([DataScienceJob](#)) – An instance of the DataScienceJob to be created or extracted from.

**CONST\_CONDA\_BUCKET** = 'CONDA\_ENV\_BUCKET'

**CONST\_CONDA\_NAMESPACE** = 'CONDA\_ENV\_NAMESPACE'

**CONST\_CONDA\_OBJ\_NAME** = 'CONDA\_ENV\_OBJECT\_NAME'

**CONST\_CONDA\_REGION** = 'CONDA\_ENV\_REGION'

**CONST\_CONDA\_SLUG** = 'CONDA\_ENV\_SLUG'

**CONST\_CONDA\_TYPE** = 'CONDA\_ENV\_TYPE'

**RUNTIME\_CLASS**

alias of [CondaRuntime](#)

```
class ads.jobs.builders.infrastructure.dsc_job_runtime.ContainerRuntimeHandler(data_science_job)
```

Bases: [RuntimeHandler](#)

Initialize the runtime handler.

**Parameters**

**data\_science\_job** ([DataScienceJob](#)) – An instance of the DataScienceJob to be created or extracted from.

**CMD\_DELIMITER** = ','

**CONST\_CONTAINER\_CMD** = 'CONTAINER\_CMD'

**CONST\_CONTAINER\_ENTRYPOINT** = 'CONTAINER\_ENTRYPOINT'

**CONST\_CONTAINER\_IMAGE** = 'CONTAINER\_CUSTOM\_IMAGE'

**RUNTIME\_CLASS**

alias of [ContainerRuntime](#)

**static split\_args**(args: str) → list

Splits the cmd or entrypoint arguments for BYOC job into a list. BYOC jobs uses environment variables to store the values of cmd and entrypoint. In the values, comma(,) is used to separate cmd or entrypoint arguments. In YAML, the arguments are formatted into a list (Exec form).

```
>>> ContainerRuntimeHandler.split_args("/bin/bash")
["/bin/bash"]
>>> ContainerRuntimeHandler.split_args("-c,echo Hello World")
['-c', 'echo Hello World']
```

**Parameters**

**args** (str) – Arguments in a comma separated string.

**Returns**

Arguments in a list

**Return type**

list

```
class ads.jobs.builders.infrastructure.dsc_job_runtime.DataScienceJobRuntimeManager(data_science_job)
```

Bases: *RuntimeHandler*

This class is used by the DataScienceJob infrastructure to handle the runtime conversion. The translate() method determines the actual runtime handler by matching the RUNTIME\_CLASS. The extract() method determines the actual runtime handler by checking if the runtime can be extracted. The order in runtime\_handlers is used for extraction until a runtime is extracted. RuntimeHandler on the top of the list will have higher priority. If a runtime is a specify case of another runtime, the handler should be placed with higher priority.

Initialize the runtime handler.

**Parameters**

**data\_science\_job** (*DataScienceJob*) – An instance of the DataScienceJob to be created or extracted from.

```
extract(dsc_job)
```

Extract the runtime from an OCI data science job object.

This method determines the actual runtime handler by checking if the runtime can be extracted.

**Parameters**

**dsc\_job** (*DSCJob* or *oci.datascience.models.Job*) – The data science job containing runtime information.

**Returns**

The runtime extracted from the data science job.

**Return type***Runtime*

```
runtime_handlers = [<class
'ads.jobs.builders.infrastructure.dsc_job_runtime.ContainerRuntimeHandler'>, <class
'ads.jobs.builders.infrastructure.dsc_job_runtime.GitPythonRuntimeHandler'>, <class
'ads.jobs.builders.infrastructure.dsc_job_runtime.NotebookRuntimeHandler'>, <class
'ads.jobs.builders.infrastructure.dsc_job_runtime.PythonRuntimeHandler'>, <class
'ads.jobs.builders.infrastructure.dsc_job_runtime.ScriptRuntimeHandler'>]
```

```
translate(runtime) → dict
```

Translates the runtime into a JSON payload for OCI API. This method determines the actual runtime handler by matching the RUNTIME\_CLASS.

**Parameters**

**runtime** (*Runtime*) – An instance of the runtime to be converted to a JSON payload.

**Returns**

JSON payload for defining a Data Science Job with OCI API

**Return type**

dict

```
class ads.jobs.builders.infrastructure.dsc_job_runtime.GitPythonRuntimeHandler(data_science_job)
```

Bases: *CondaRuntimeHandler*

Runtime Handler for GitPythonRuntime

Initialize the runtime handler.

**Parameters**

**data\_science\_job** ([DataScienceJob](#)) – An instance of the `DataScienceJob` to be created or extracted from.

`CONST_ENTRYPOINT = 'GIT_ENTRYPOINT'`

`CONST_ENTRY_FUNCTION = 'ENTRY_FUNCTION'`

`CONST_GIT_BRANCH = 'GIT_BRANCH'`

`CONST_GIT_CODE_DIR = 'CODE_DIR'`

`CONST_GIT_COMMIT = 'GIT_COMMIT'`

`CONST_GIT_SSH_SECRET_ID = 'GIT_SECRET_OCID'`

`CONST_GIT_URL = 'GIT_URL'`

`CONST_JOB_ENTRYPOINT = 'JOB_RUN_ENTRYPOINT'`

`CONST_OUTPUT_DIR = 'OUTPUT_DIR'`

`CONST_OUTPUT_URI = 'OUTPUT_URI'`

`CONST_PYTHON_PATH = 'PYTHON_PATH'`

`CONST_SKIP_METADATA = 'SKIP_METADATA_UPDATE'`

`CONST_WORKING_DIR = 'WORKING_DIR'`

`PATH_DELIMITER = ':'`

`RUNTIME_CLASS`

alias of [GitPythonRuntime](#)

```
SPEC_MAPPINGS = {'branch': 'GIT_BRANCH', 'commit': 'GIT_COMMIT', 'entryFunction':  
'ENTRY_FUNCTION', 'entrypoint': 'GIT_ENTRYPOINT', 'gitSecretId': 'GIT_SECRET_OCID',  
'outputDir': 'OUTPUT_DIR', 'outputUri': 'OUTPUT_URI', 'pythonPath': 'PYTHON_PATH',  
'url': 'GIT_URL', 'workingDir': 'WORKING_DIR'}
```

**exception** `ads.jobs.builders.infrastructure.dsc_job_runtime.IncompatibleRuntime`

Bases: `Exception`

Represents an exception when runtime is not compatible with the OCI data science job configuration. This exception is designed to be raised during the extraction of a runtime from OCI data science job. The data science job does not explicitly contain information of the type of the ADS runtime. Each runtime handler should determine if the configuration of the job can be converted to the runtime. This exception should be raised during the `extract()` call if the configuration cannot be converted. The `RuntimeManager` uses this exception to determine if the conversion is successful.

**class** `ads.jobs.builders.infrastructure.dsc_job_runtime.NotebookRuntimeHandler(data_science_job)`

Bases: [CondaRuntimeHandler](#)

Runtime Handler for `NotebookRuntime`

Initialize the runtime handler.

**Parameters**

**data\_science\_job** ([DataScienceJob](#)) – An instance of the `DataScienceJob` to be created or extracted from.



```

CONST_ENTRYPOINT = 'JOB_RUN_ENTRYPOINT'

CONST_EXCLUDE_TAGS = 'NOTEBOOK_EXCLUDE_TAGS'

CONST_NOTEBOOK_ENCODING = 'NOTEBOOK_ENCODING'

CONST_NOTEBOOK_NAME = 'JOB_RUN_NOTEBOOK'

CONST_OUTPUT_URI = 'OUTPUT_URI'

RUNTIME_CLASS
    alias of NotebookRuntime

SPEC_MAPPINGS = {'excludeTags': 'NOTEBOOK_EXCLUDE_TAGS', 'notebookEncoding':
'NOTEBOOK_ENCODING', 'outputUri': 'OUTPUT_URI'}

```

**class** `ads.jobs.builders.infrastructure.dsc_job_runtime.PythonRuntimeHandler(data_science_job)`

Bases: *CondaRuntimeHandler*

Runtime Handler for PythonRuntime

Initialize the runtime handler.

#### Parameters

**data\_science\_job** (*DataScienceJob*) – An instance of the DataScienceJob to be created or extracted from.

```

CONST_CODE_ENTRYPOINT = 'CODE_ENTRYPOINT'

CONST_ENTRY_FUNCTION = 'ENTRY_FUNCTION'

CONST_JOB_ENTRYPOINT = 'JOB_RUN_ENTRYPOINT'

CONST_OUTPUT_DIR = 'OUTPUT_DIR'

CONST_OUTPUT_URI = 'OUTPUT_URI'

CONST_PYTHON_PATH = 'PYTHON_PATH'

CONST_WORKING_DIR = 'WORKING_DIR'

PATH_DELIMITER = ':'

```

**RUNTIME\_CLASS**

alias of *PythonRuntime*

```

SPEC_MAPPINGS = {'entryFunction': 'ENTRY_FUNCTION', 'entrypoint': 'CODE_ENTRYPOINT',
'outputDir': 'OUTPUT_DIR', 'outputUri': 'OUTPUT_URI', 'pythonPath': 'PYTHON_PATH',
'workingDir': 'WORKING_DIR'}

```

**class** `ads.jobs.builders.infrastructure.dsc_job_runtime.RuntimeHandler(data_science_job)`

Bases: `object`

Base class for Runtime Handler.

Each runtime handler should define the `RUNTIME_CLASS` to be the runtime it can handle.

Each runtime handler is initialized with a `DataScienceJob` instance. This instance is a reference and the modification will be exposed to the users.

Each runtime handler expose two methods: `translate()` and `extract()`. In this class, `translate` or `extract` signals the direction of conversion. All method starts with “translate” handles the conversion from ADS runtime to OCI API

payload. All method starts with “extract” handles the conversion from OCI data science Job to ADS runtime. This base class defines the default handling for `translate()` and `extract()`. Each sub-class can override the two methods to provide additional handling. Alternatively, a sub-class can also override a sub-method, which is called by the `translate()` or `extract()` method. For example, `_translate_env()` handles the conversion of environment variables from ADS runtime to OCI API payload.

See the individual methods for more details.

Initialize the runtime handler.

**Parameters**

**data\_science\_job** ([DataScienceJob](#)) – An instance of the `DataScienceJob` to be created or extracted from.

**RUNTIME\_CLASS**

alias of [Runtime](#)

**extract**(*dsc\_job*)

Extract the runtime from an OCI data science job object. This method calls the following sub-methods: `*_extract_tags()` `*_extract_args()` `*_extract_envs()` `*_extract_artifact()` `*_extract_runtime_minutes()` Each of these method returns a dict for specifying the runtime. The dictionaries are combined before initializing the runtime. A sub-class can modify one of more of these methods.

**Parameters**

**dsc\_job** ([DSCJob](#) or `oci.datascience.models.Job`) – The data science job containing runtime information.

**Returns**

The runtime extracted from the data science job.

**Return type**

[Runtime](#)

**translate**(*runtime*: [Runtime](#)) → dict

Translates the runtime into a JSON payload for OCI API. This method calls the following sub-methods: `*_translate_artifact()` `*_translate_config()`

- `_translate_env()`

A sub-class can modify one of more of these methods.

**Parameters**

**runtime** ([Runtime](#)) – An instance of the runtime to be converted to a JSON payload.

**Returns**

JSON payload for defining a Data Science Job with OCI API

**Return type**

dict

**class** `ads.jobs.builders.infrastructure.dsc_job_runtime.ScriptRuntimeHandler`(*data\_science\_job*)

Bases: [CondaRuntimeHandler](#)

Runtime Handler for ScriptRuntime

Initialize the runtime handler.

**Parameters**

**data\_science\_job** ([DataScienceJob](#)) – An instance of the `DataScienceJob` to be created or extracted from.

**CONST\_ENTRYPOINT** = 'JOB\_RUN\_ENTRYPOINT'

**RUNTIME\_CLASS**alias of *ScriptRuntime***ads.jobs.builders.infrastructure.utils module**`ads.jobs.builders.infrastructure.utils.get_value(obj, attr, default=None)`

Gets a copy of the value from a nested dictionary of an object with nested attributes.

**Parameters**

- **obj** – An object or a dictionary
- **attr** – Attributes as a string separated by dot(.)
- **default** – Default value to be returned if attribute is not found.

**Returns**

A copy of the attribute value. For dict or list, a deepcopy will be returned.

**Return type**

Any

`ads.jobs.builders.infrastructure.utils.normalize_config(config: dict) → dict`

Normalize property names in a configuration so that they work directly with ADS.

**Parameters****config** (*dict*) – input configuration, usually coming directly from an OCI response**Returns**

output configuration

**Return type**

dict

**Module contents****ads.jobs.builders.runtimes package****Submodules****ads.jobs.builders.runtimes.artifact module****class** `ads.jobs.builders.runtimes.artifact.Artifact(source, runtime=None)`

Bases: object

Represents a OCI Data Science Job artifact. The Artifact class is designed to add an additional processing step on runtime/source code. before uploading it as data science job artifact.

A sub-class should implement the `build()` method to do the additional processing. A sub-class is designed to be used with context manager so that the temporary files are cleaned up properly.

For example, the NotebookArtifact implements the `build()` method to convert the notebook to python script. with `NotebookArtifact(runtime)` as artifact:

- The `build()` method will be called when entering the context manager
- The final artifact for the job will be stored in `artifact.path` `upload_artifact(artifact.path)`

- Files are cleaned up when exit or if there is an exception.

```
CONST_DRIVER_NOTEBOOK = 'driver_notebook.py'
```

```
CONST_DRIVER_UTILS = 'driver_utils.py'
```

```
build()
```

Builds the runtime artifact in the temporary directory. Subclass should implement this method to: 1. Process the runtime 2. Set the self.path to the final artifact path

#### Raises

**NotImplementedError** – When this method is not implemented in the subclass.

```
static copy_from_uri(uri, to_path, unpack=False, **storage_options)
```

Copy file(s) to local path

#### Parameters

- **uri** (*str*) – The URI of the source file or directory, which can be local path of OCI object storage URI.
- **to\_path** (*path-like object*) – The local destination path. If this is a directory, the source file/directory will be placed under it.
- **unpack** (*bool*) – Indicate if zip or tar.gz file specified by the uri should be unpacked. This option has no effect on other files.
- **storage\_options** – Storage options for fsspec. For OCI object storage, the default\_signer from ads.common.auth will be used if storage option is not specified.

#### Returns

The actual path of file/directory at destination.

- For copying a single file and to\_path is a filename, this will be the same as to\_path.
- For copying a single file and to\_path is a directory, this will be to\_path + filename.
- For copying a directory, this will be to\_path + directory name.

#### Return type

str or path-like object

```
class ads.jobs.builders.runtimes.artifact.GitPythonArtifact
```

Bases: [Artifact](#)

```
CONST_DRIVER_SCRIPT = 'driver_oci.py'
```

```
build()
```

Prepares job artifact for GitPythonRuntime.

```
class ads.jobs.builders.runtimes.artifact.NotebookArtifact(source, runtime=None)
```

Bases: [PythonArtifact](#)

Represents a NotebookRuntime job artifact

```
CONST_DRIVER_SCRIPT = 'driver_notebook.py'
```

```
build()
```

Prepares job artifact for notebook runtime

```
class ads.jobs.builders.runtimes.artifact.PythonArtifact(source, runtime=None)
```

Bases: [Artifact](#)

Represents a PythonRuntime job artifact

```
CONST_DRIVER_SCRIPT = 'driver_python.py'
```

```
USER_CODE_DIR = 'code'
```

```
build()
```

Prepares job artifact for PythonRuntime.

```
class ads.jobs.builders.runtimes.artifact.ScriptArtifact(source, runtime=None)
```

Bases: [Artifact](#)

Represents a ScriptRuntime job artifact

```
build()
```

Prepares job artifact for script runtime. If the source is a file, it will be returned as is. If the source is a directory, it will be compressed as a zip file.

## ads.jobs.builders.runtimes.base module

```
class ads.jobs.builders.runtimes.base.Runtime(spec: Optional[Dict] = None, **kwargs)
```

Bases: [Builder](#)

Base class for job runtime

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

### Parameters

- **spec** (*dict*, *optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

```
CONST_ARGS = 'args'
```

```
CONST_ENV_VAR = 'env'
```

```
CONST_MAXIMUM_RUNTIME_IN_MINUTES = 'maximumRuntimeInMinutes'
```

```
CONST_TAG = 'freeformTags'
```

```
property args: list
```

Command line arguments

```
attribute_map = {'env': 'env', 'freeformTags': 'freeform_tags'}
```

```
property environment_variables: dict
```

Environment variables

### Returns

The runtime environment variables. The returned dictionary is a copy.

### Return type

dict

**property envs: dict**

Environment variables

**property freeform\_tags: dict**

**property kind: str**

Kind of the object to be stored in YAML. All runtime implementations will have “runtime” as kind. Sub-class will have different types.

**property maximum\_runtime\_in\_minutes: int**

Maximum runtime in minutes

**property type: str**

The type of the object as showing in YAML

**with\_argument(\*args, \*\*kwargs) → Self**

Adds command line arguments to the runtime.

This method can be called (chained) multiple times to add various arguments.

#### Parameters

- **args** – Positional arguments. In a single method call, positional arguments are always added before keyword arguments. You can call `with_argument()` to add positional arguments after keyword arguments.
- **kwargs** – Keyword arguments. To add a keyword argument without value, set the value to `None`.

#### Returns

This method returns self to support chaining methods.

#### Return type

Self

#### Raises

**ValueError** – Keyword arguments with space in a key.

## Examples

```
>>> runtime = Runtime().with_argument(key1="val1", key2="val2").with_argument(
↪ "pos1")
>>> print(runtime.args)
["--key1", "val1", "--key2", "val2", "pos1"]
```

```
>>> runtime = Runtime()
>>> runtime.with_argument("pos1")
>>> runtime.with_argument(key1="val1", key2="val2.1 val2.2")
>>> runtime.with_argument("pos2")
>>> print(runtime.args)
['pos1', '--key1', 'val1', '--key2', 'val2.1 val2.2', 'pos2']
```

```
>>> runtime = Runtime()
>>> runtime.with_argument("pos1")
>>> runtime.with_argument(key1=None, key2="val2")
>>> runtime.with_argument("pos2")
```

(continues on next page)

(continued from previous page)

```
>>> print(runtime.args)
["pos1", "--key1", "--key2", "val2", "pos2"]
```

**with\_environment\_variable(\*\*kwargs) → Self**

Sets environment variables

Environment variables enclosed by `${...}` will be substituted.

- You can use `$$` to escape the substitution.
- Undefined variable enclosed by `${}` will be ignored.
- Double dollar signs `$$` will be substituted by a single one `$`.

#### Returns

This method returns self to support chaining methods.

#### Return type

Self

### Examples

```
>>> runtime = (
...     PythonRuntime()
...     .with_environment_variable(
...         HOST="10.0.0.1",
...         PORT="443",
...         URL="http://${HOST}:${PORT}/path/",
...         ESCAPED_URL="http://${HOST}:${PORT}/path/",
...         MISSING_VAR="This is ${UNDEFINED}",
...         VAR_WITH_DOLLAR="$10",
...         DOUBLE_DOLLAR="$$10"
...     )
... )
>>> for k, v in runtime.environment_variables.items():
...     print(f"{k}: {v}")
HOST: 10.0.0.1
PORT: 443
URL: http://10.0.0.1:443/path/
ESCAPED_URL: http://${HOST}:${PORT}/path/
MISSING_VAR: This is ${UNDEFINED}
VAR_WITH_DOLLAR: $10
DOUBLE_DOLLAR: $10
```

**with\_freeform\_tag(\*\*kwargs) → Self**

Sets freeform tag

#### Returns

This method returns self to support chaining methods.

#### Return type

Self

**with\_maximum\_runtime\_in\_minutes(maximum\_runtime\_in\_minutes: int) → Self**

Sets maximum runtime in minutes

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

`ads.jobs.builders.runtimes.base.Self`

Special type to represent the current enclosed class.

This type is used by factory class method or when a method returns self.

alias of `TypeVar('Self', bound=Runtime)`

**ads.jobs.builders.runtimes.container\_runtime module**

```
class ads.jobs.builders.runtimes.container_runtime.ContainerRuntime(spec: Optional[Dict] =  
                                                                    None, **kwargs)
```

Bases: *Runtime*

Represents a container job runtime

To define container runtime:

```
>>> ContainerRuntime()  
>>> .with_image("iad.ocir.io/<your_tenancy>/<your_image>")  
>>> .with_cmd("sleep 5 && echo Hello World")  
>>> .with_entrypoint(["/bin/sh", "-c"])  
>>> .with_environment_variable(MY_ENV="MY_VALUE")
```

Alternatively, you can define the entrypoint and cmd along with the image.

```
>>> ContainerRuntime()  
>>> .with_image(  
>>>     "iad.ocir.io/<your_tenancy>/<your_image>",  
>>>     entrypoint=["/bin/sh", "-c"],  
>>>     cmd="sleep 5 && echo Hello World",  
>>> )  
>>> .with_environment_variable(MY_ENV="MY_VALUE")
```

The entrypoint and cmd can be either “exec form” or “shell form” (See references). The exec form is used when a list is passed in. The shell form is used when a space separated string is passed in.

When using the ContainerRuntime with OCI Data Science Job, the exec form is recommended. For most images, when the entrypoint is set to `["/bin/sh", "-c"]`, cmd can be a string as if you are running shell command.

**References**

<https://docs.docker.com/engine/reference/builder/#entrypoint>  
[builder/#cmd](https://docs.docker.com/engine/reference/builder/#cmd)

<https://docs.docker.com/engine/reference/builder/#cmd>

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

**Parameters**

- **spec** (*dict*, *optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.



```
CONST_CMD = 'cmd'
```

```
CONST_ENTRYPOINT = 'entrypoint'
```

```
CONST_IMAGE = 'image'
```

```
attribute_map = {'cmd': 'cmd', 'entrypoint': 'entrypoint', 'env': 'env',
'freeformTags': 'freeform_tags', 'image': 'image'}
```

**property cmd: str**

Command of the container job

**property entrypoint: str**

Entrypoint of the container job

**property image: str**

The container image

**with\_cmd**(cmd: str) → *ContainerRuntime*

Specifies the command for the container job.

**Parameters**

**cmd** (str) – Command for the container job

**Returns**

The runtime instance.

**Return type**

*ContainerRuntime*

**with\_entrypoint**(entrypoint: Union[str, list]) → *ContainerRuntime*

Specifies the entrypoint for the container job.

**Parameters**

**entrypoint** (str or list) – Entrypoint for the container job

**Returns**

The runtime instance.

**Return type**

*ContainerRuntime*

**with\_image**(image: str, entrypoint: Optional[Union[str, list]] = None, cmd: Optional[str] = None) → *ContainerRuntime*

Specify the image for the container job.

**Parameters**

- **image** (str) – The container image, e.g. iad.ocir.io/<your\_tenancy>/<your\_image>:<your\_tag>
- **entrypoint** (str or list, optional) – Entrypoint for the job, by default None (the entrypoint defined in the image will be used).
- **cmd** (str, optional) – Command for the job, by default None.

**Returns**

The runtime instance.

**Return type**

*ContainerRuntime*

**ads.jobs.builders.runtimes.python\_runtime module**

```
class ads.jobs.builders.runtimes.python_runtime.CondaRuntime(spec: Optional[Dict] = None,  
                                                           **kwargs)
```

Bases: [Runtime](#)

Represents a job runtime with conda pack This is the base class for Runtime using conda environment. The CondaRuntime is not designed to be used directly when creating a job.

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

**Parameters**

- **spec** (*dict*, *optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

```
CONST_CONDA = 'conda'
```

```
CONST_CONDA_REGION = 'region'
```

```
CONST_CONDA_SLUG = 'slug'
```

```
CONST_CONDA_TYPE = 'type'
```

```
CONST_CONDA_TYPE_CUSTOM = 'published'
```

```
CONST_CONDA_TYPE_SERVICE = 'service'
```

```
CONST_CONDA_URI = 'uri'
```

```
attribute_map = {'conda': 'conda', 'env': 'env', 'freeformTags': 'freeform_tags'}
```

```
property conda: dict
```

The conda environment specification.

For service conda environment, the specification contains:

- **type**, the type of the conda environment. This is always **service** for service conda environment.
- **slug**, the slug of the conda environment.

For custom conda environment, the specification contains:

- **type**, the type of the conda environment. This is always **published** for custom conda environment.
- **uri**, the uri of the conda environment, e.g. oci://bucket@namespace/prefix/to/conda
- **region**, the region of the bucket in which the conda environment is stored. By default, ADS will determine the region based on the authenticated API key or resource principal. This is only needed if your conda environment is stored in a different region.

**Returns**

A dictionary containing the conda environment specifications.

**Return type**

dict

**with\_custom\_conda**(*uri: str, region: Optional[str] = None*)

Specifies the custom conda pack for running the job Make sure you have configured the IAM policy for the job run to access the conda environment.

#### Parameters

- **uri** (*str*) – The OCI object storage URI for the conda pack, e.g. “oci://your\_bucket@namespace/object\_name.” In the Environment Explorer of an OCI notebook session, this is shown as the “source” of the conda pack.
- **region** (*str, optional*) – The region of the bucket storing the custom conda pack, by default None. If region is not specified, ADS will use the region from your authentication credentials:
  - For API Key, config[“region”] is used.
  - For Resource Principal, signer.region is used.

This is required if the conda pack is stored in a different region.

#### Returns

The runtime instance.

#### Return type

self

#### See also:

#### https

[//docs.oracle.com/en-us/iaas/data-science/using/conda\\_publishs\\_object.htm](https://docs.oracle.com/en-us/iaas/data-science/using/conda_publishs_object.htm)

**with\_service\_conda**(*slug: str*)

Specifies the service conda pack for running the job

#### Parameters

**slug** (*str*) – The slug name of the service conda pack

#### Returns

The runtime instance.

#### Return type

self

**class** `ads.jobs.builders.runtimes.python_runtime.DataFlowNotebookRuntime`(*spec: Optional[Dict] = None, \*\*kwargs*)

Bases: `DataFlowRuntime`, `NotebookRuntime`

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

#### Parameters

- **spec** (*dict, optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

**convert**(*overwrite=False*)

**class** `ads.jobs.builders.runtimes.python_runtime.DataFlowRuntime`(*spec: Optional[Dict] = None, \*\*kwargs*)

Bases: `CondaRuntime`

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

**Parameters**

- **spec** (*dict*, *optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

**CONST\_ARCHIVE\_BUCKET** = 'archiveBucket'

**CONST\_ARCHIVE\_URI** = 'archiveUri'

**CONST\_CONDA\_AUTH\_TYPE** = 'condaAuthType'

**CONST\_CONFIGURATION** = 'configuration'

**CONST\_OVERWRITE** = 'overwrite'

**CONST\_SCRIPT\_BUCKET** = 'scriptBucket'

**CONST\_SCRIPT\_PATH** = 'scriptPathURI'

**property archive\_bucket: str**

Bucket to save archive zip

**property archive\_uri**

The Uri of archive zip

**attribute\_map** = {'archiveUri': 'archive\_uri', 'condaAuthType': 'conda\_auth\_type', 'configuration': 'configuration', 'env': 'env', 'freeformTags': 'freeform\_tags', 'overwrite': 'overwrite', 'scriptBucket': 'script\_bucket', 'scriptPathURI': 'script\_path\_uri'}

**property configuration: dict**

Configuration for Spark

**convert**(\*\*kwargs)

**property overwrite: str**

Whether to overwrite the existing script in object storage (script bucket).

**property script\_bucket: str**

Bucket to save script

**property script\_uri: str**

The URI of the source code

**with\_archive\_bucket**(bucket) → *DataFlowRuntime*

Set object storage bucket to save the archive zip, in case archive uri given is local.

**Parameters**

**bucket** (*str*) – name of the bucket

**Returns**

runtime instance itself

**Return type**

*DataFlowRuntime*

**with\_archive\_uri**(uri: str) → *DataFlowRuntime*

Set archive uri (which is a zip file containing dependencies).

**Parameters**

**uri** (str) – uri to the archive zip

**Returns**

runtime instance itself

**Return type**

*DataFlowRuntime*

**with\_conda**(conda\_spec: Optional[dict] = None)

**with\_configuration**(config: dict) → *DataFlowRuntime*

Set Configuration for Spark.

**Parameters**

**config** (dict) – dictionary of configuration details <https://spark.apache.org/docs/latest/configuration.html#available-properties>. Example: { “spark.app.name”: “My App Name”, “spark.shuffle.io.maxRetries”: “4” }

**Returns**

runtime instance itself

**Return type**

*DataFlowRuntime*

**with\_custom\_conda**(uri: str, region: Optional[str] = None, auth\_type: Optional[str] = None)

Specifies the custom conda pack for running the job

**Parameters**

- **uri** (str) – The OCI object storage URI for the conda pack, e.g. “oci://your\_bucket@namespace/object\_name.” In the Environment Explorer of an OCI notebook session, this is shown as the “source” of the conda pack.
- **region** (str, optional) – The region of the bucket storing the custom conda pack, by default None. If region is not specified, ADS will use the region from your authentication credentials, \* For API Key, config[“region”] is used. \* For Resource Principal, signer.region is used. This is required if the conda pack is stored in a different region.
- **auth\_type** (str, (=“resource\_principal”)) – One of “resource\_principal”, “api\_keys”, “instance\_principal”, etc. Auth mechanism used to read the conda back uri provided.

**Returns**

The runtime instance.

**Return type**

self

**See also:**

**https**

[//docs.oracle.com/en-us/iaas/data-science/using/conda\\_publishs\\_object.htm](https://docs.oracle.com/en-us/iaas/data-science/using/conda_publishs_object.htm)

**with\_overwrite**(overwrite: bool) → *DataFlowRuntime*

Whether to overwrite the existing script in object storage (script bucket). If the Object Storage bucket already contains a script with the same name, then it will be overwritten with the new one if the *overwrite* flag equal to *True*.

**Parameters**

**overwrite** (*bool*) – Whether to overwrite the existing script in object storage (script bucket).

**Returns**

The DataFlowRuntime instance (self).

**Return type**

*DataFlowRuntime*

**with\_script\_bucket**(*bucket*) → *DataFlowRuntime*

Set object storage bucket to save the script, in case script uri given is local.

**Parameters**

**bucket** (*str*) – name of the bucket

**Returns**

runtime instance itself

**Return type**

*DataFlowRuntime*

**with\_script\_uri**(*path: str*) → *DataFlowRuntime*

Set script uri.

**Parameters**

**path** (*str*) – uri to the script

**Returns**

runtime instance itself

**Return type**

*DataFlowRuntime*

**with\_service\_conda**(*slug: str*)

Specifies the service conda pack for running the job

**Parameters**

**slug** (*str*) – The slug name of the service conda pack

**Returns**

The runtime instance.

**Return type**

self

```
class ads.jobs.builders.runtimes.python_runtime.GitPythonRuntime(spec: Optional[Dict] = None,
                                                                **kwargs)
```

Bases: *CondaRuntime*, *\_PythonRuntimeMixin*

Represents a job runtime with source code from git repository

Example:

```
runtime = (
    GitPythonRuntime()
    .with_environment_variable(GREETINGS="Welcome to OCI Data Science")
    # Specify the service conda environment by slug name.
    .with_service_conda("pytorch19_p37_gpu_v1")
    # Specify the git repository
    # Optionally, you can specify the branch or commit
    .with_source("https://github.com/pytorch/tutorials.git")
```

(continues on next page)

(continued from previous page)

```

# Entrypoint is a relative path from the root of the git repo.
.with_entrypoint("beginner_source/examples_nn/polynomial_nn.py")
# Copy files in "beginner_source/examples_nn" to object storage after job_
→finishes.
.with_output(
    output_dir="beginner_source/examples_nn",
    output_uri="oci://bucket_name@namespace/path/to/dir"
)
)

```

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

#### Parameters

- **spec** (*dict*, *optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

**CONST\_BRANCH** = 'branch'

**CONST\_COMMIT** = 'commit'

**CONST\_GIT\_SSH\_SECRET\_ID** = 'gitSecretId'

**CONST\_GIT\_URL** = 'url'

**CONST\_SKIP\_METADATA** = 'skipMetadataUpdate'

```

attribute_map = {'branch': 'branch', 'commit': 'commit', 'conda': 'conda',
'entryFunction': 'entry_function', 'entrypoint': 'entrypoint', 'env': 'env',
'freeformTags': 'freeform_tags', 'gitSecretId': 'git_secret_id', 'outputDir':
'output_dir', 'outputUri': 'output_uri', 'pythonPath': 'python_path',
'skipMetadataUpdate': 'skip_metadata_update', 'url': 'url', 'workingDir':
'working_dir'}

```

**property branch: str**

Git branch name.

**property commit: str**

Git commit ID (SHA1 hash)

**property skip\_metadata\_update**

Indicate if the metadata update should be skipped after the job run

By default, the job run metadata will be updated with the following freeform tags: \* repo: The URL of the Git repository \* commit: The Git commit ID \* module: The entry script/module \* method: The entry function/method \* outputs. The prefix of the output files in object storage.

This update step also requires resource principals to have the permission to update the job run.

#### Returns

True if the metadata update will be skipped. Otherwise False.

#### Return type

bool

**property ssh\_secret\_ocid: str**

The OCID of the OCI Vault secret storing the Git SSH key.

**property url: str**

URL of the Git repository.

**with\_source**(url: str, branch: Optional[str] = None, commit: Optional[str] = None, secret\_ocid: Optional[str] = None)

Specifies the Git repository and branch/commit for the job source code.

#### Parameters

- **url** (str) – URL of the Git repository.
- **branch** (str, optional) – Git branch name, by default None, the default branch will be used.
- **commit** (str, optional) – Git commit ID (SHA1 hash), by default None, the most recent commit will be used.
- **secret\_ocid** (str) – The secret OCID storing the SSH key content for checking out the Git repository.

#### Returns

The runtime instance.

#### Return type

self

**class** ads.jobs.builders.runtimes.python\_runtime.**NotebookRuntime**(spec: Optional[Dict] = None, \*\*kwargs)

Bases: [CondaRuntime](#)

Represents a job runtime with Jupyter notebook

To run a job with a single Jupyter notebook, you can define the run time as:

```
runtime = (
    NotebookRuntime()
    .with_notebook(
        path="https://raw.githubusercontent.com/tensorflow/docs/master/site/en/
↳ tutorials/customization/basics.ipynb",
        encoding='utf-8'
    )
    .with_service_conda("tensorflow28_p38_cpu_v1")
    .with_environment_variable(GREETINGS="Welcome to OCI Data Science")
    .with_exclude_tag(["ignore", "remove"])
    .with_output("oci://bucket_name@namespace/path/to/dir")
)
```

Note that the notebook path can be local or remote path supported by fsspec, including OCI object storage path like `oci://bucket@namespace/path/to/notebook`

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

#### Parameters

- **spec** (dict, optional) – Object specification, by default None
- **kwargs** (dict) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.



```

CONST_ENTRYPOINT = 'entrypoint'

CONST_EXCLUDE_TAG = 'excludeTags'

CONST_NOTEBOOK_ENCODING = 'notebookEncoding'

CONST_NOTEBOOK_PATH = 'notebookPathURI'

CONST_OUTPUT_URI = 'outputUri'

CONST_OUTPUT_URI_ALT = 'outputURI'

CONST_SOURCE = 'source'

attribute_map = {'conda': 'conda', 'entrypoint': 'entrypoint', 'env': 'env',
'excludeTags': 'exclude_tags', 'freeformTags': 'freeform_tags', 'notebookEncoding':
'notebook_encoding', 'notebookPathURI': 'notebook_path_uri', 'outputUri':
'output_uri', 'source': 'source'}

```

**property exclude\_tag: list**

A list of cell tags indicating cells to be excluded from the job

**property notebook: str**

The path of the notebook relative to the source.

**property notebook\_encoding: str**

The encoding of the notebook

**property notebook\_uri: str**

The URI of the notebook

**property output\_uri: list**

URI for storing the output notebook and files

**property source: str**

The source code location.

**with\_exclude\_tag(\*tags) → *NotebookRuntime***

Specifies the cell tags in the notebook to exclude cells from the job script.

#### Parameters

**\*tags** (*list*) – A list of tags (strings).

#### Returns

The runtime instance.

#### Return type

self

**with\_notebook(path: str, encoding='utf-8') → *NotebookRuntime***

Specifies the notebook to be run as a job. Use this method if you would like to run a single notebook. Use `with_source()` method if you would like to run a notebook with additional dependency files.

#### Parameters

- **path** (*str*) – The path of the Jupyter notebook
- **encoding** (*str*) – The encoding for opening the notebook. Defaults to utf-8.

#### Returns

The runtime instance.

**Return type**

self

**with\_output**(*output\_uri: str*) → *NotebookRuntime*

Specifies the output URI for storing the output notebook and files. All files in the directory containing the notebook will be saved.

**Parameters**

**output\_uri** (*str*) – URI for a directory storing the output notebook and files. For example, oci://bucket@namespace/path/to/dir

**Returns**

The runtime instance.

**Return type**

self

**with\_source**(*uri: str, notebook: str, encoding='utf-8'*)

Specify source code directory containing the notebook and dependencies for the job. Use this method if you would like to run a notebook with additional dependency files. Use the *with\_notebook()* method if you would like to run a single notebook.

In the following example, local folder “path/to/source” contains the notebook and dependencies, The local path of the notebook is “path/to/source/relative/path/to/notebook.ipynb”:

```
runtime.with_source(uri="path/to/source", notebook="relative/path/to/notebook.
↳ipynb")
```

**Parameters**

- **uri** (*str*) – URI of the source code directory. This can be local or on OCI object storage.
- **notebook** (*str*) – The relative path of the notebook from the source URI.
- **encoding** (*str*) – The encoding for opening the notebook. Defaults to utf-8.

**Returns**

The runtime instance.

**Return type**

Self

```
class ads.jobs.builders.runtimes.python_runtime.PythonRuntime(spec: Optional[Dict] = None,
                                                             **kwargs)
```

Bases: *ScriptRuntime*, *\_PythonRuntimeMixin*

Represents a job runtime using ADS driver script to run Python code

Example:

```
runtime = (
    PythonRuntime()
    # Specify the service conda environment by slug name.
    .with_service_conda("pytorch110_p38_cpu_v1")
    # The job artifact can be a single Python script, a directory or a zip file.
    .with_source("local/path/to/code_dir")
    # Environment variable
    .with_environment_variable(NAME="Welcome to OCI Data Science.")
    # Command line argument, arg1 --key arg2
```

(continues on next page)

(continued from previous page)

```

        .with_argument("arg1", key="arg2")
        # Set the working directory
        # When using a directory as source, the default working dir is the parent of
        ↪ code_dir.
        # Working dir should be a relative path beginning from the source directory.
        ↪ (code_dir)
        .with_working_dir("code_dir")
        # The entrypoint is applicable only to directory or zip file as source
        # The entrypoint should be a path relative to the working dir.
        # Here my_script.py is a file in the code_dir/my_package directory
        .with_entrypoint("my_package/my_script.py")
        # Add an additional Python path, relative to the working dir (code_dir/other_
        ↪ packages).
        .with_python_path("other_packages")
        # Copy files in "code_dir/output" to object storage after job finishes.
        .with_output("output", "oci://bucket_name@namespace/path/to/dir")
    )

```

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

#### Parameters

- **spec** (*dict*, *optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

```

attribute_map = {'conda': 'conda', 'entryFunction': 'entry_function', 'entrypoint':
'entrypoint', 'env': 'env', 'freeformTags': 'freeform_tags', 'outputDir':
'output_dir', 'outputUri': 'output_uri', 'pythonPath': 'python_path',
'scriptPathURI': 'script_path_uri', 'workingDir': 'working_dir'}

```

```

class ads.jobs.builders.runtimes.python_runtime.ScriptRuntime(spec: Optional[Dict] = None,
                                                              **kwargs)

```

Bases: [CondaRuntime](#)

Represents job runtime with scripts and conda pack.

This runtime is designed to define job artifacts and configurations supported by OCI Data Science Jobs natively. It can be used with any script types that is supported by the OCI Data Science Jobs, including shell scripts and python scripts.

To run a script with all dependencies contained in a local folder:

```

runtime = (
    ScriptRuntime()
    # Specify the service conda environment by slug name.
    .with_service_conda("pytorch110_p38_cpu_v1")
    # The job artifact can be a single Python script, a directory or a zip file.
    .with_source("local/path/to/code_dir")
    # Environment variable
    .with_environment_variable(NAME="Welcome to OCI Data Science.")
    # Command line argument
    .with_argument("100 linux "hi there")
    # The entrypoint is applicable only to directory or zip file as source

```

(continues on next page)

(continued from previous page)

```

# The entrypoint should be a path relative to the working dir.
# Here my_script.sh is a file in the code_dir/my_package directory
.with_entrypoint("my_package/my_script.sh")
)

```

## References

<https://docs.oracle.com/en-us/iaas/data-science/using/jobs-artifact.htm>

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

### Parameters

- **spec** (*dict*, *optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

**CONST\_ENTRYPOINT** = 'entrypoint'

**CONST\_SCRIPT\_PATH** = 'scriptPathURI'

**attribute\_map** = {'conda': 'conda', 'entrypoint': 'entrypoint', 'env': 'env',  
'freeformTags': 'freeform\_tags', 'scriptPathURI': 'script\_path\_uri'}

**property entrypoint: str**

The relative path of the script to be set as entrypoint when source is a zip/tar/directory.

**property script\_uri: str**

The URI of the source code

**property source\_uri: str**

The URI of the source code

**with\_entrypoint**(*entrypoint: str*)

Specify the entrypoint for the job

### Parameters

**entrypoint** (*str*) – The relative path of the script to be set as entrypoint when source is a zip/tar/directory.

### Returns

The runtime instance.

### Return type

self

**with\_script**(*uri: str*)

Specifies the source code script for the job

### Parameters

**uri** (*str*) – URI to the source code script, which can be any URI supported by fsspec, including <http://>, <https://> and OCI object storage. For example: `oci://your_bucket@your_namespace/path/to/script.py`

### Returns

The runtime instance.

**Return type**

self

**with\_source**(uri: str, entrypoint: Optional[str] = None)

Specifies the source code for the job

**Parameters**

- **uri** (str) – URI to the source code, which can be a (.py/.sh) script, a zip/tar file or directory containing the scripts/modules. If the source code is a single file, URI can be any URI supported by fsspec, including <http://>, <https://> and OCI object storage. For example: `oci://your_bucket@your_namespace/path/to/script.py`. URI can also be a folder or a zip file containing the source code. In that case, entrypoint is required.
- **entrypoint** (str, optional) – The relative path of the script to be set as entrypoint when source is a zip/tar/directory. By default None. This is not needed when the source is a single script.

**Returns**

The runtime instance.

**Return type**

self

**Module contents****Submodules****ads.jobs.builders.base module****class** ads.jobs.builders.base.**Builder**(spec: Optional[Dict] = None, \*\*kwargs)Bases: [Serializable](#)

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

**Parameters**

- **spec** (dict, optional) – Object specification, by default None
- **kwargs** (dict) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

**attribute\_map** = {}**classmethod** **from\_dict**(obj\_dict: dict) → Self

Initialize the object from a Python dictionary

**get\_spec**(key: str, default: Optional[Any] = None) → Any

Gets the value of a specification property

**Parameters**

- **key** (str) – The name of the property.
- **default** (Any, optional) – The default value to be used, if the property does not exist, by default None.

**Returns**

The value of the property.

**Return type**

Any

**property kind: str**

The kind of the object as showing in YAML. Subclass should overwrite this value.

**set\_spec**(*k: str, v: Any*) → Self

Sets a specification property for the object.

**Parameters**

- **k** (*str*) – key, the name of the property.
- **v** (*Any*) – value, the value of the property.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**to\_dict**() → dict

Converts the object to dictionary with kind, type and spec as keys.

**property type: str**

The type of the object as showing in YAML.

This implementation returns the class name with the first letter covered to lower case.

**ads.jobs.builders.base.Self**

Special type to represent the current enclosed class.

This type is used by factory class method or when a method returns `self`.

alias of `TypeVar('Self', bound=Builder)`

**Module contents****ads.jobs.schema package****Submodules****ads.jobs.schema.validator module****class** ads.jobs.schema.validator.**ValidateInfrastructure**(*file*)

Bases: object

Class used to validate an Engine YAML

**validate**()

Validates the Engine YAML

**Raises**

**ValueError** – if invalid

**Returns**

Returns normalized dictionary if input matches a known schema, else raises error

**Return type**

[dict]

**class** ads.jobs.schema.validator.**ValidateJob**(*file*)

Bases: object

Class used to validate a Job YAML

**validate()**

Validates the Job YAML

**Raises****ValueError** – if invalid**Returns**

Returns normalized dictionary if input matches a known schema, else raises error

**Return type**

[dict]

**class** ads.jobs.schema.validator.**ValidateRuntime**(*file*)

Bases: object

Class used to validate a Runtime YAML

**validate()**

Validates the Runtime YAML

**Raises****ValueError** – if invalid**Returns**

Returns normalized dictionary if input matches a known schema, else raises error

**Return type**

[dict]

**class** ads.jobs.schema.validator.**ValidatorFactory**(*file*)

Bases: object

**ValidatorFactory is a factory class that calls appropriate**

Validator class based on the ‘kind’

**Usage:**

spec = { } validated\_dict = ValidatorFactory(spec).validate():

**validate()**

Calls correct validator based on ‘kind’

**Raises****TypeError** – raised when ‘kind’ is not known**Returns**

Returns True if input matches a known schema, else False

**Return type**

[boolean]

ads.jobs.schema.validator.**load\_schema**(*schema\_path*)

## Module contents

### ads.jobs.templates package

#### Submodules

### ads.jobs.templates.container module

### ads.jobs.templates.driver\_notebook module

This module runs a Jupyter Python notebook with nbconvert and print the outputs. This is a driver script auto-generated by Oracle ADS.

The following environment variables are used: JOB\_RUN\_NOTEBOOK:

The relative path of the jupyter Python notebook to be executed.

#### NOTEBOOK\_EXCLUDE\_TAGS:

Optional, a list of tags serialized to JSON string. Notebook cells with one of the tags will be excluded from running.

#### NOTEBOOK\_ENCODING:

Optional, the encoding for opening the notebook.

#### OUTPUT\_URI:

Optional, object storage URI for saving files from the output directory.

**class** ads.jobs.templates.driver\_notebook.ADSExecutePreprocessor(\*\*kwargs: Any)

Bases: ExecutePreprocessor

Customized Execute Preprocessor for running notebook.

Initialize the preprocessor

#### Parameters

**exclude\_tags** (*list*, *optional*) – A list of cell tags, notebook cells with any of these cell tag will be skipped. Defaults to None.

**preprocess\_cell** (*cell*, *resources*, *\*args*, *\*\*kwargs*)

Runs the notebook cell and print out the outputs

ads.jobs.templates.driver\_notebook.main() → None

Runs the driver to execute a notebook.

ads.jobs.templates.driver\_notebook.run\_notebook(*notebook\_path*: str, *working\_dir*: Optional[str] = None, *exclude\_tags*: Optional[list] = None) → Optional[CellExecutionError]

Runs a notebook

#### Parameters

- **notebook\_path** (*str*) – The path of the notebook
- **working\_dir** (*str*, *optional*) – The working directory for running the notebook, by default None. If this is None, the same directory of the notebook\_path will be used.
- **exclude\_tags** (*list*, *optional*) – Tags for excluding cells, by default None

#### Returns

Exception object when there is an error in a notebook cell. Otherwise, None.



**Return type**

CellExecutionError or None

**ads.jobs.templates.driver\_oci module**

This is a driver script from Oracle ADS to run Python script in OCI Data Science Jobs. The following environment variables are used: GIT\_URL:

URL to the Git repository.

**GIT\_BRANCH:**

Optional, the Git branch to checkout.

**GIT\_COMMIT:**

Optional, the Git commit to checkout. By default, the most recent git commit will be checked out.

**CODE\_DIR:**

Optional, the directory for saving the user code from Git repository. Defaults to “~/Code”

**GIT\_ENTRYPOINT:**

Relative path to the entry script/module file in the Git repository.

**ENTRY\_FUNCTION:**

Optional, function name in the entry script/module to be invoked. If this is not specified, the entry script will be run as Python script.

**PYTHON\_PATH:**

Optional, additional paths to be added to sys.path for looking up modules and packages. The root of the Git repository will be added by default. Multiple paths can be separated by os.pathsep, which is colon(:) for Linux and Mac, semicolon(;) for Windows.

**OUTPUT\_DIR:**

Optional, output directory to be copied to object storage.

**OUTPUT\_URI:**

Optional, object storage URI for saving files from the output directory.

**GIT\_SECRET\_OCID:**

The OCID of the OCI vault secret storing the SSH key for Git commands.

**SKIP\_METADATA\_UPDATE:**

If this variable exists, the update metadata step will be skipped.

**OCI\_IAM\_TYPE:**

Authentication method for OCI services. OCI API key will be used if this is set to api\_key. Otherwise resource principal will be used.

**OCI\_CONFIG\_LOCATION:**

The location of OCI API key when OCI\_IAM\_TYPE is set to api\_key. If this is not set, oci.config.DEFAULT\_LOCATION will be used.

**OCI\_CONFIG\_PROFILE:**

The profile name to be used for API key authentication. If this is not set, oci.config.DEFAULT\_PROFILE will be used.

**OCI\_GIT\_SSH\_KEY\_PATH:**

The location to save the SSH Key for accessing the git repository.

**JOB\_RUN\_OCID:**

The OCID of the job run. This is set by the job run.

This module requires the following packages: oci requests GitPython git openssh

**class** `ads.jobs.templates.driver_oci.CredentialManager`

Bases: `object`

**static read\_secret**(*secret\_id*)

Reads and decode the value of of a secret from OCI vault.

**Parameters**

**secret\_id** (*str*) – OCID of the secret

**Returns**

The value of the secret decoded with ASCII.

**Return type**

`str`

**class** `ads.jobs.templates.driver_oci.GitJobRunner`(*git\_manager*: `GitManager`, *job\_run\_ocid*: `Optional[str] = None`)

Bases: `JobRunner`

Contains methods for running the job.

Initialize the job runner

**Parameters**

- **job\_run\_ocid** (*str*, *optional*) – Job run OCID, by default “”.
- **purpose** (*For local testing*) –
- **string** (*job run OCID can be set to empty*) –

**run**(*entrypoint*: `Optional[str] = None`, *entry\_function*: `Optional[str] = None`)

Runs the job

**Parameters**

**argv** (*list*, *optional*) – A list of arguments for the entry script/function, by default `None`

**save\_metadata**() → `None`

Saves the metadata to job run

**update\_job\_run\_metadata\_with\_rest\_api**(*client*: `DataScienceClient`, *metadata*: `dict`) → `None`

Updates the metadata of the job run by call OCI REST API.

**Parameters**

- **client** (`DataScienceClient`) – OCI DataScienceClient
- **metadata** (`dict`) – Metadata to be saved as freeform tags.

**class** `ads.jobs.templates.driver_oci.GitManager`(*repo\_url*: `str`, *code\_dir*: `Optional[str] = None`)

Bases: `object`

Contains methods for fetching code from Git repository

Initialize the GitManager

**Parameters**

- **repo\_url** (*str*) – The URL of the repository.
- **code\_dir** (*str*) – The local directory for storing the code from Git repository.

**Raises**

**ValueError** – URL is not specified.

**checkout\_code**(*branch: Optional[str] = None, commit: Optional[str] = None*)

Checkouts the branch or commit of the Git repository.

If neither branch nor commit is specified, the tip of the default branch will be used. If both branch and commit are specified, the commit will be used.

**Parameters**

- **branch** (*str, optional*) – The name of the branch, by default None
- **commit** (*str, optional*) – The commit ID (SHA1 hash), by default None

**fetch\_repo()**

Clones the Git repository.

**class** `ads.jobs.templates.driver_oci.GitSSHKey(secret_id)`

Bases: object

`ads.jobs.templates.driver_oci.main()`

The main function for running the job.

**ads.jobs.templates.driver\_python module**

This is a driver script auto-generated by Oracle ADS to run Python script in OCI Data Science Jobs.

The following environment variables are used: CODE\_ENTRYPOINT:

Relative path to the entry script/module file in the user code directory.

**ENTRY\_FUNCTION:**

Optional, function name in the entry script/module to be invoked. If this is not specified, the entry script will be run as Python script.

**PYTHON\_PATH:**

Optional, additional paths to be added to sys.path for looking up modules and packages. The root of the user code will be added by default. Multiple paths can be separated by os.pathsep, which is colon(:) for Linux and Mac, semicolon(;) for Windows.

**OUTPUT\_DIR:**

Optional, output directory to be copied to object storage.

**OUTPUT\_URI:**

Optional, object storage URI for saving files from the output directory.

**WORKING\_DIR:**

Optional, the working directory of the user code. This can be specified as a relative path from /home/datascience/decompressed\_artifact/code. If this is not specified, the working directory will be /home/datascience/decompressed\_artifact/code

This module requires the following package: oci

`ads.jobs.templates.driver_python.main()`

The main function for running the job.

## Module contents

### 18.1.1.14.2 Submodules

#### ads.jobs.ads\_job module

**class** ads.jobs.ads\_job.Job(name: Optional[str] = None, infrastructure=None, runtime=None)

Bases: *Builder*

Represents a Job defined by infrastructure and runtime.

#### Examples

Here is an example for creating and running a job:

```
from ads.jobs import Job, DataScienceJob, PythonRuntime

# Define an OCI Data Science job to run a python script
job = (
    Job(name="<job_name>")
    .with_infrastructure(
        DataScienceJob()
        # Configure logging for getting the job run outputs.
        .with_log_group_id("<log_group_ocid>")
        # Log resource will be auto-generated if log ID is not specified.
        .with_log_id("<log_ocid>")
        # If you are in an OCI data science notebook session,
        # the following configurations are not required.
        # Configurations from the notebook session will be used as defaults.
        .with_compartment_id("<compartment_ocid>")
        .with_project_id("<project_ocid>")
        .with_subnet_id("<subnet_ocid>")
        .with_shape_name("VM.Standard.E3.Flex")
        # Shape config details are applicable only for the flexible shapes.
        .with_shape_config_details(memory_in_gbs=16, ocpus=1)
        # Minimum/Default block storage size is 50 (GB).
        .with_block_storage_size(50)
    )
    .with_runtime(
        PythonRuntime()
        # Specify the service conda environment by slug name.
        .with_service_conda("pytorch110_p38_cpu_v1")
        # The job artifact can be a single Python script, a directory or a zip file.
        .with_source("local/path/to/code_dir")
        # Environment variable
        .with_environment_variable(NAME="Welcome to OCI Data Science.")
        # Command line argument, arg1 --key arg2
        .with_argument("arg1", key="arg2")
        # Set the working directory
        # When using a directory as source, the default working dir is the parent_
        ↪ of code_dir.
        # Working dir should be a relative path beginning from the source directory_
        ↪
```

(continues on next page)

(continued from previous page)

```

→(code_dir)
    .with_working_dir("code_dir")
    # The entrypoint is applicable only to directory or zip file as source
    # The entrypoint should be a path relative to the working dir.
    # Here my_script.py is a file in the code_dir/my_package directory
    .with_entrypoint("my_package/my_script.py")
    # Add an additional Python path, relative to the working dir (code_dir/
→other_packages).
    .with_python_path("other_packages")
    # Copy files in "code_dir/output" to object storage after job finishes.
    .with_output("output", "oci://bucket_name@namespace/path/to/dir")
)
)
# Create and Run the job
run = job.create().run()
# Stream the job run outputs
run.watch()

```

If you are in an OCI notebook session and you would like to use the same infrastructure configurations, the infrastructure configuration can be simplified. Here is another example of creating and running a jupyter notebook as a job:

```

from ads.jobs import Job, DataScienceJob, NotebookRuntime

# Define an OCI Data Science job to run a jupyter Python notebook
job = (
    Job(name="<job_name>")
    .with_infrastructure(
        # The same configurations as the OCI notebook session will be used.
        DataScienceJob()
        .with_log_group_id("<log_group_ocid>")
        .with_log_id("<log_ocid>")
    )
    .with_runtime(
        NotebookRuntime()
        .with_notebook("path/to/notebook.ipynb")
        .with_service_conda(tensorflow28_p38_cpu_v1")
        # Saves the notebook with outputs to OCI object storage.
        .with_output("oci://bucket_name@namespace/path/to/dir")
    )
).create()
# Run and monitor the job
run = job.run().watch()
# Download the notebook and outputs to local directory
run.download(to_dir="path/to/local/dir/")

```

See also:

**https**

[//docs.oracle.com/en-us/iaas/tools/ads-sdk/latest/user\\_guide/jobs/index.html](https://docs.oracle.com/en-us/iaas/tools/ads-sdk/latest/user_guide/jobs/index.html)

Initializes a job.

The infrastructure and runtime can be configured when initializing the job, or by calling `with_infrastructure()` and `with_runtime()`.

The infrastructure should be a subclass of ADS job Infrastructure, e.g., `DataScienceJob`, `DataFlow`. The runtime should be a subclass of ADS job Runtime, e.g., `PythonRuntime`, `NotebookRuntime`.

#### Parameters

- **name** (*str*, *optional*) – The name of the job, by default `None`. If it is `None`, a default name may be generated by the infrastructure, depending on the implementation of the infrastructure. For OCI data science job, the default name contains the job artifact name and a timestamp. If no artifact, a randomly generated easy to remember name with timestamp will be generated, like ‘strange-spider-2022-08-17-23:55.02’.
- **infrastructure** (*Infrastructure*, *optional*) – Job infrastructure, by default `None`
- **runtime** (*Runtime*, *optional*) – Job runtime, by default `None`.

**attribute\_map** = {}

**build()** → *Job*

Load default values from the environment for the job infrastructure.

**create**(\*\**kwargs*) → *Job*

Creates the job on the infrastructure.

#### Returns

The job instance (self)

#### Return type

*Job*

**static dataflow\_job**(*compartment\_id: Optional[str] = None*, \*\**kwargs*) → List[*Job*]

List data flow jobs under a given compartment.

#### Parameters

- **compartment\_id** (*str*) – compartment id
- **kwargs** – additional keyword arguments

#### Returns

list of Job instances

#### Return type

List[*Job*]

**static datascience\_job**(*compartment\_id: Optional[str] = None*, \*\**kwargs*) → List[*DataScienceJob*]

Lists the existing data science jobs in the compartment.

#### Parameters

**compartment\_id** (*str*) – The compartment ID for listing the jobs. This is optional if running in an OCI notebook session. The jobs in the same compartment of the notebook session will be returned.

#### Returns

A list of Job objects.

#### Return type

list

**delete()** → `None`

Deletes the job from the infrastructure.

**download**(*to\_dir*: str, *output\_uri*=None, *\*\*storage\_options*)

Downloads files from remote output URI to local.

**Parameters**

- **to\_dir** (str) – Local directory to which the files will be downloaded to.
- **output\_uri** ((str, optional). Default is None.) – The remote URI from which the files will be downloaded. Defaults to None. If output\_uri is not specified, this method will try to get the output\_uri from the runtime.
- **storage\_options** – Extra keyword arguments for particular storage connection. This method uses fsspec to download the files from remote URI. storage\_options will to be passed into fsspec.open\_files().

**Returns**

The job instance (self)

**Return type**

*Job*

**Raises**

**AttributeError** – The output\_uri is not specified and the runtime is not configured with output\_uri.

**static from\_dataflow\_job**(*job\_id*: str) → *Job*

Create a Data Flow job given a job id.

**Parameters**

**job\_id** (str) – id of the job

**Returns**

a Job instance

**Return type**

*Job*

**static from\_datascience\_job**(*job\_id*) → *Job*

Loads a data science job from OCI.

**Parameters**

**job\_id** (str) – OCID of an existing data science job.

**Returns**

A job instance.

**Return type**

*Job*

**classmethod from\_dict**(*config*: dict) → *Job*

Initializes a job from a dictionary containing the configurations.

**Parameters**

**config** (dict) – A dictionary containing the infrastructure and runtime specifications.

**Returns**

A job instance

**Return type**

*Job*

**Raises**

**NotImplementedError** – If the type of the infrastructure or runtime is not supported.

**classmethod** `from_json`(*json\_string*: *~typing.Optional[str] = None*, *uri*: *~typing.Optional[str] = None*, *decoder*: *callable = <class 'json.decoder.JSONDecoder'>*, *\*\*kwargs*) → Self

Creates an object from JSON string provided or from URI location containing JSON string

#### Parameters

- **json\_string** (*str*, *optional*) – JSON string. Defaults to None.
- **uri** (*str*, *optional*) – URI location of file containing JSON string. Defaults to None.
- **decoder** (*callable*, *optional*) – Custom decoder. Defaults to simple JSON decoder.
- **kwargs** (*dict*) – keyword arguments to be passed into `fspec.open()`. For OCI object storage, this should be `config="path/to/.oci/config"`. For other storage connections consider e.g. host, port, username, password, etc.
- **json\_string** – JSON string, by default None
- **uri** – URI location of file containing JSON string, by default None
- **decoder** – Decoder for custom data structures, by default `json.JSONDecoder`
- **kwargs** – keyword arguments to be passed into `fspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

#### Raises

- **ValueError** – Raised if neither string nor uri is provided
- **ValueError** – Both `json_string` and `uri` are empty, or The input is not a valid JSON.

#### Returns

Returns instance of the class

#### Return type

cls

#### Returns

Object initialized from JSON data.

#### Return type

Type[Self]

**classmethod** `from_string`(*obj\_string*: *~typing.Optional[str] = None*, *uri*: *~typing.Optional[str] = None*, *loader*: *callable = <class 'yaml.loader.SafeLoader'>*, *\*\*kwargs*) → Self

Initializes an object from YAML/JSON string or URI location containing the YAML/JSON

#### Parameters

- **obj\_string** (*str*, *optional*) – YAML/JSON string, by default None
- **uri** (*str*, *optional*) – URI location of file containing YAML/JSON, by default None
- **loader** (*callable*, *optional*) – Custom YAML loader, by default `yaml.SafeLoader`

#### Returns

Object initialized from the YAML.

#### Return type

Self

**classmethod** `from_yaml`(*yaml\_string*: *~typing.Optional[str] = None*, *uri*: *~typing.Optional[str] = None*, *loader*: *callable = <class 'yaml.loader.SafeLoader'>*, *\*\*kwargs*) → Self

Initializes an object from YAML string or URI location containing the YAML



**Parameters**

- **yaml\_string** (*str*, *optional*) – YAML string, by default None
- **uri** (*str*, *optional*) – URI location of file containing YAML, by default None
- **loader** (*callable*, *optional*) – Custom YAML loader, by default `yaml.SafeLoader`

**Returns**

Object initialized from the YAML.

**Return type**

Self

**Raises**

**ValueError** – Raised if neither string nor uri is provided

**get\_spec**(*key: str*, *default: Optional[Any] = None*) → Any

Gets the value of a specification property

**Parameters**

- **key** (*str*) – The name of the property.
- **default** (*Any*, *optional*) – The default value to be used, if the property does not exist, by default None.

**Returns**

The value of the property.

**Return type**

Any

**property id: str**

The ID of the job. For jobs running on OCI, this is the OCID.

**Returns**

ID of the job.

**Return type**

str

**property infrastructure: Union[[DataScienceJob](#), [DataFlow](#)]**

The job infrastructure.

**Returns**

Job infrastructure.

**Return type**

[Infrastructure](#)

**property kind: str**

The kind of the object as showing in YAML.

**Returns**

“job”

**Return type**

str

**property name: str**

The name of the job. For jobs running on OCI, this is the display name.

**Returns**

The name of the job.

**Return type**

str

**run**(*name=None, args=None, env\_var=None, freeform\_tags=None, wait=False*) →

Union[[DataScienceJobRun](#), [DataFlowRun](#)]

Runs the job.

**Parameters**

- **name** (*str, optional*) – Name of the job run, by default None. The infrastructure handles the naming of the job run. For data science job, if a name is not provided, a default name will be generated containing the job name and the timestamp of the run. If no artifact, a randomly generated easy to remember name with timestamp will be generated, like ‘strange-spider-2022-08-17-23:55.02’.
- **args** (*str, optional*) – Command line arguments for the job run, by default None. This will override the configurations on the job. If this is None, the args from the job configuration will be used.
- **env\_var** (*dict, optional*) – Additional environment variables for the job run, by default None
- **freeform\_tags** (*dict, optional*) – Freeform tags for the job run, by default None
- **wait** (*bool, optional*) – Indicate if this method call should wait for the job run. By default False, this method returns as soon as the job run is created. If this is set to True, this method will stream the job logs and wait until it finishes, similar to *job.run().watch()*.

**Returns**

A job run instance, depending on the infrastructure.

**Return type**

Job Run Instance

**Examples**

To run a job and override the configurations:

```
job_run = job.run(
    name="<my_job_run_name>",
    args="new_arg --new_key new_val",
    env_var={"new_env": "new_val"},
    freeform_tags={"new_tag": "new_tag_val"}
)
```

**run\_list**(*\*\*kwargs*) → list

Gets a list of runs of the job.

**Returns**

A list of job run instances, the actual object type depends on the infrastructure.

**Return type**

list

**property runtime:** [Runtime](#)

The job runtime.

**Returns**

The job runtime

**Return type**

*Runtime*

**set\_spec**(*k*: str, *v*: Any) → Self

Sets a specification property for the object.

**Parameters**

- **k** (*str*) – key, the name of the property.
- **v** (*Any*) – value, the value of the property.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**status**() → str

Status of the job

**Returns**

Status of the job

**Return type**

str

**to\_dict**() → dict

Serialize the job specifications to a dictionary.

**Returns**

A dictionary containing job specifications.

**Return type**

dict

**to\_json**(*uri*: ~typing.Optional[str] = None, *encoder*: callable = <class 'json.encoder.JSONEncoder'>, *\*\*kwargs*) → str

Returns the object serialized as a JSON string

**Parameters**

- **uri** (*str*, *optional*) – URI location to save the JSON string, by default None
- **encoder** (*callable*, *optional*) – Encoder for custom data structures, by default json.JSONEncoder
- **kwargs** (*dict*) – keyword arguments to be passed into fsspec.open(). For OCI object storage, this can be config="path/to/.oci/config".

**Returns**

object serialized as a JSON string

**Return type**

str

**to\_yaml**(*uri*: ~typing.Optional[str] = None, *dumper*: callable = <class 'yaml.dumper.SafeDumper'>, *\*\*kwargs*) → Optional[str]

Returns object serialized as a YAML string

**Parameters**

- **uri** (*str*, *optional*) – URI location to save the YAML string, by default None
- **dumper** (*callable*, *optional*) – Custom YAML Dumper, by default `yaml.SafeDumper`
- **kwargs** (*dict*) – keyword arguments to be passed into `fsspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

**Returns**

If uri is specified, None will be returned. Otherwise, the yaml content will be returned.

**Return type**

`Union[str, None]`

**property type: str**

The type of the object as showing in YAML.

This implementation returns the class name with the first letter converted to lower case.

**with\_infrastructure**(*infrastructure*) → *Job*

Sets the infrastructure for the job.

**Parameters**

**infrastructure** (*Infrastructure*) – Job infrastructure.

**Returns**

The job instance (self)

**Return type**

*Job*

**with\_name**(*name: str*) → *Job*

Sets the job name.

**Parameters**

**name** (*str*) – Job name.

**Returns**

The job instance (self)

**Return type**

*Job*

**with\_runtime**(*runtime*) → *Job*

Sets the runtime for the job.

**Parameters**

**runtime** (*Runtime*) – Job runtime.

**Returns**

The job instance (self)

**Return type**

*Job*

**ads.jobs.cli module****ads.jobs.env\_var\_parser module**

**class** ads.jobs.env\_var\_parser.**EnvVarInterpolation**

Bases: `ExtendedInterpolation`

Modified version of `ExtendedInterpolation` to ignore errors

<https://github.com/python/cpython/blob/main/Lib/configparser.py>

**before\_get**(*parser, section, option, value, defaults*)

**before\_read**(*parser, section, option, value*)

**before\_set**(*parser, section: str, option: str, value: str*) → `str`

**before\_write**(*parser, section, option, value*)

ads.jobs.env\_var\_parser.**escape**(*s: str*) → `str`

ads.jobs.env\_var\_parser.**parse**(*env\_var: Union[Dict, List[dict]]*) → `dict`

Parse the environment variables and perform substitutions. This will also convert kubernetes style environment variables from a list to a dictionary.

**Parameters**

**env\_var** (*dict or list*) – Environment variables specified as a list or a dictionary. If `env_var` is a list, it should be in the format of:

```
[{"name": "ENV_NAME_1", "value": "ENV_VALUE_1"}, {"name":
"ENV_NAME_2", "value": "ENV_VALUE_2"}]
```

**Returns**

Environment variable as a dictionary.

**Return type**

`dict`

**ads.jobs.extension module**

ads.jobs.extension.**dataflow**(*line, cell=None*)

ads.jobs.extension.**dataflow\_log**(*options, args*)

ads.jobs.extension.**dataflow\_run**(*options, args, cell*)

ads.jobs.extension.**load\_ipython\_extension**(*ipython*)

**ads.jobs.serializer module****ads.jobs.serializer.Self**

Special type to represent the current enclosed class.

This type is used by factory class method or when a method returns self.

alias of `TypeVar('Self', bound=Serializable)`

**class ads.jobs.serializer.Serializable**

Bases: ABC

Base class that represents a serializable item.

**abstract classmethod from\_dict(obj\_dict: dict)**

Initialize an instance of the class from a dictionary

**Parameters**

**obj\_dict** (*dict*) – Dictionary representation of the object

**classmethod from\_json(json\_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, decoder: callable = <class 'json.decoder.JSONDecoder'>, \*\*kwargs) → Self**

Creates an object from JSON string provided or from URI location containing JSON string

**Parameters**

- **json\_string** (*str*, *optional*) – JSON string. Defaults to None.
- **uri** (*str*, *optional*) – URI location of file containing JSON string. Defaults to None.
- **decoder** (*callable*, *optional*) – Custom decoder. Defaults to simple JSON decoder.
- **kwargs** (*dict*) – keyword arguments to be passed into `fsspec.open()`. For OCI object storage, this should be `config="path/to/.oci/config"`. For other storage connections consider e.g. `host`, `port`, `username`, `password`, etc.
- **json\_string** – JSON string, by default None
- **uri** – URI location of file containing JSON string, by default None
- **decoder** – Decoder for custom data structures, by default `json.JSONDecoder`
- **kwargs** – keyword arguments to be passed into `fsspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

**Raises**

- **ValueError** – Raised if neither string nor uri is provided
- **ValueError** – Both `json_string` and `uri` are empty, or The input is not a valid JSON.

**Returns**

Returns instance of the class

**Return type**

`cls`

**Returns**

Object initialized from JSON data.

**Return type**

`Type[Self]`

**classmethod from\_string**(*obj\_string*: ~typing.Optional[str] = None, *uri*: ~typing.Optional[str] = None, *loader*: callable = <class 'yaml.loader.SafeLoader'>, \*\*kwargs) → Self

Initializes an object from YAML/JSON string or URI location containing the YAML/JSON

**Parameters**

- **obj\_string** (*str*, *optional*) – YAML/JSON string, by default None
- **uri** (*str*, *optional*) – URI location of file containing YAML/JSON, by default None
- **loader** (*callable*, *optional*) – Custom YAML loader, by default yaml.SafeLoader

**Returns**

Object initialized from the YAML.

**Return type**

Self

**classmethod from\_yaml**(*yaml\_string*: ~typing.Optional[str] = None, *uri*: ~typing.Optional[str] = None, *loader*: callable = <class 'yaml.loader.SafeLoader'>, \*\*kwargs) → Self

Initializes an object from YAML string or URI location containing the YAML

**Parameters**

- **yaml\_string** (*str*, *optional*) – YAML string, by default None
- **uri** (*str*, *optional*) – URI location of file containing YAML, by default None
- **loader** (*callable*, *optional*) – Custom YAML loader, by default yaml.SafeLoader

**Returns**

Object initialized from the YAML.

**Return type**

Self

**Raises**

**ValueError** – Raised if neither string nor uri is provided

**abstract to\_dict**() → dict

Serializes an instance of class into a dictionary

**to\_json**(*uri*: ~typing.Optional[str] = None, *encoder*: callable = <class 'json.encoder.JSONEncoder'>, \*\*kwargs) → str

Returns the object serialized as a JSON string

**Parameters**

- **uri** (*str*, *optional*) – URI location to save the JSON string, by default None
- **encoder** (*callable*, *optional*) – Encoder for custom data structures, by default json.JSONEncoder
- **kwargs** (*dict*) – keyword arguments to be passed into fsspec.open(). For OCI object storage, this can be config="path/to/.oci/config".

**Returns**

object serialized as a JSON string

**Return type**

str

```
to_yaml(uri: ~typing.Optional[str] = None, dumper: callable = <class 'yaml.dumper.SafeDumper'>,
        **kwargs) → Optional[str]
```

Returns object serialized as a YAML string

#### Parameters

- **uri** (*str*, *optional*) – URI location to save the YAML string, by default None
- **dumper** (*callable*, *optional*) – Custom YAML Dumper, by default `yaml.SafeDumper`
- **kwargs** (*dict*) – keyword arguments to be passed into `fspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

#### Returns

If uri is specified, None will be returned. Otherwise, the yaml content will be returned.

#### Return type

Union[str, None]

### ads.jobs.utils module

```
class ads.jobs.utils.DataFlowConfig(path: Optional[str] = None, oci_profile: Optional[str] = None)
```

Bases: Application

Create a DataFlowConfig object. If a path to config file is given it is loaded from the path.

#### Parameters

- **path** (*str*, *optional*) – path to configuration file, by default None
- **oci\_profile** (*str*, *optional*) – oci profile to use, by default None

```
LANGUAGE_JAVA = 'JAVA'
```

A constant which can be used with the language property of a Application. This constant has a value of “JAVA”

```
LANGUAGE_PYTHON = 'PYTHON'
```

A constant which can be used with the language property of a Application. This constant has a value of “PYTHON”

```
LANGUAGE_SCALA = 'SCALA'
```

A constant which can be used with the language property of a Application. This constant has a value of “SCALA”

```
LANGUAGE_SQL = 'SQL'
```

A constant which can be used with the language property of a Application. This constant has a value of “SQL”

```
LIFECYCLE_STATE_ACTIVE = 'ACTIVE'
```

A constant which can be used with the lifecycle\_state property of a Application. This constant has a value of “ACTIVE”

```
LIFECYCLE_STATE_DELETED = 'DELETED'
```

A constant which can be used with the lifecycle\_state property of a Application. This constant has a value of “DELETED”

```
LIFECYCLE_STATE_INACTIVE = 'INACTIVE'
```

A constant which can be used with the lifecycle\_state property of a Application. This constant has a value of “INACTIVE”



**TYPE\_BATCH = 'BATCH'**

A constant which can be used with the type property of a Application. This constant has a value of “BATCH”

**TYPE\_SESSION = 'SESSION'**

A constant which can be used with the type property of a Application. This constant has a value of “SESSION”

**TYPE\_STREAMING = 'STREAMING'**

A constant which can be used with the type property of a Application. This constant has a value of “STREAMING”

**property application\_log\_config**

Gets the application\_log\_config of this Application.

**Returns**

The application\_log\_config of this Application.

**Return type**

oci.data\_flow.models.ApplicationLogConfig

**property archive\_bucket**

//<bucket-name>@<namespace>/<prefix>.

**Returns**

archive bucket (path)

**Return type**

str

**Type**

Bucket to save archive zip. Also accept a prefix in the format of oci

**property archive\_uri**

Gets the archive\_uri of this Application. A comma separated list of one or more archive files as Oracle Cloud Infrastructure URIs. For example, `oci://path/to/a.zip,oci://path/to/b.zip`. An Oracle Cloud Infrastructure URI of an archive.zip file containing custom dependencies that may be used to support the execution of a Python, Java, or Scala application. See <https://docs.cloud.oracle.com/iaas/Content/API/SDKDocs/hdfsconnector.htm#uriformat>.

**Returns**

The archive\_uri of this Application.

**Return type**

str

**property arguments**

Gets the arguments of this Application. The arguments passed to the running application as command line arguments. An argument is either a plain text or a placeholder. Placeholders are replaced using values from the parameters map. Each placeholder specified must be represented in the parameters map else the request (POST or PUT) will fail with a HTTP 400 status code. Placeholders are specified as *Service Api Spec*, where *name* is the name of the parameter. Example: [ “-input”, “\${input\_file}”, “-name”, “John Doe” ] If “input\_file” has a value of “mydata.xml”, then the value above will be translated to `-input mydata.xml -name “John Doe”`

**Returns**

The arguments of this Application.

**Return type**

list[str]

**property class\_name**

Gets the class\_name of this Application. The class for the application.

**Returns**

The class\_name of this Application.

**Return type**

str

**property compartment\_id**

**[Required]** Gets the compartment\_id of this Application. The OCID of a compartment.

**Returns**

The compartment\_id of this Application.

**Return type**

str

**property configuration**

Gets the configuration of this Application. The Spark configuration passed to the running process. See <https://spark.apache.org/docs/latest/configuration.html#available-properties>. Example: { "spark.app.name" : "My App Name", "spark.shuffle.io.maxRetries" : "4" } Note: Not all Spark properties are permitted to be set. Attempting to set a property that is not allowed to be overwritten will cause a 400 status to be returned.

**Returns**

The configuration of this Application.

**Return type**

dict(str, str)

**property defined\_tags**

Gets the defined\_tags of this Application. Defined tags for this resource. Each key is predefined and scoped to a namespace. For more information, see [Resource Tags](#). Example: { "Operations": { "CostCenter": "42" } }

**Returns**

The defined\_tags of this Application.

**Return type**

dict(str, dict(str, object))

**property description**

Gets the description of this Application. A user-friendly description.

**Returns**

The description of this Application.

**Return type**

str

**property display\_name**

**[Required]** Gets the display\_name of this Application. A user-friendly name. This name is not necessarily unique.

**Returns**

The display\_name of this Application.

**Return type**

str

**property driver\_shape**

**[Required]** Gets the driver\_shape of this Application. The VM shape for the driver. Sets the driver cores and memory.

**Returns**

The driver\_shape of this Application.

**Return type**

str

**property driver\_shape\_config**

Gets the driver\_shape\_config of this Application.

**Returns**

The driver\_shape\_config of this Application.

**Return type**

oci.data\_flow.models.ShapeConfig

**property execute**

Gets the execute of this Application. The input used for spark-submit command. For more details see <https://spark.apache.org/docs/latest/submitting-applications.html#launching-applications-with-spark-submit>. Supported options include --class, --file, --jars, --conf, --py-files, and main application file with arguments. Example: --jars oci://path/to/a.jar,oci://path/to/b.jar --files oci://path/to/a.json,oci://path/to/b.csv --py-files oci://path/to/a.py,oci://path/to/b.py --conf spark.sql.crossJoin.enabled=true --class org.apache.spark.examples.SparkPi oci://path/to/main.jar 10 Note: If execute is specified together with applicationId, className, configuration, fileUri, language, arguments, parameters during application create/update, or run create/submit, Data Flow service will use derived information from execute input only.

**Returns**

The execute of this Application.

**Return type**

str

**property executor\_shape**

**[Required]** Gets the executor\_shape of this Application. The VM shape for the executors. Sets the executor cores and memory.

**Returns**

The executor\_shape of this Application.

**Return type**

str

**property executor\_shape\_config**

Gets the executor\_shape\_config of this Application.

**Returns**

The executor\_shape\_config of this Application.

**Return type**

oci.data\_flow.models.ShapeConfig

**property file\_uri**

**[Required]** Gets the file\_uri of this Application. An Oracle Cloud Infrastructure URI of the file containing the application to execute. See <https://docs.cloud.oracle.com/iaas/Content/API/SDKDocs/hdfsconnector.htm#uriformat>.

**Returns**

The file\_uri of this Application.

**Return type**

str

**property freeform\_tags**

Gets the freeform\_tags of this Application. Free-form tags for this resource. Each tag is a simple key-value pair with no predefined name, type, or namespace. For more information, see [Resource Tags](#). Example: `{"Department": "Finance"}`

**Returns**

The freeform\_tags of this Application.

**Return type**

dict(str, str)

**property id**

**[Required]** Gets the id of this Application. The application ID.

**Returns**

The id of this Application.

**Return type**

str

**property idle\_timeout\_in\_minutes**

Gets the idle\_timeout\_in\_minutes of this Application. The timeout value in minutes used to manage Runs. A Run would be stopped after inactivity for this amount of time period. Note: This parameter is currently only applicable for Runs of type *SESSION*. Default value is 2880 minutes (2 days)

**Returns**

The idle\_timeout\_in\_minutes of this Application.

**Return type**

int

**property language**

**[Required]** Gets the language of this Application. The Spark language.

Allowed values for this property are: "SCALA", "JAVA", "PYTHON", "SQL", 'UNKNOWN\_ENUM\_VALUE'. Any unrecognized values returned by a service will be mapped to 'UNKNOWN\_ENUM\_VALUE'.

**Returns**

The language of this Application.

**Return type**

str

**property lifecycle\_state**

**[Required]** Gets the lifecycle\_state of this Application. The current state of this application.

Allowed values for this property are: "ACTIVE", "DELETED", "INACTIVE", 'UNKNOWN\_ENUM\_VALUE'. Any unrecognized values returned by a service will be mapped to 'UNKNOWN\_ENUM\_VALUE'.

**Returns**

The lifecycle\_state of this Application.

**Return type**

str

**property logs\_bucket\_uri**

Gets the logs\_bucket\_uri of this Application. An Oracle Cloud Infrastructure URI of the bucket where the Spark job logs are to be uploaded. See <https://docs.cloud.oracle.com/iaas/Content/API/SDKDocs/hdfsconnector.htm#uriformat>.

**Returns**

The logs\_bucket\_uri of this Application.

**Return type**

str

**property max\_duration\_in\_minutes**

Gets the max\_duration\_in\_minutes of this Application. The maximum duration in minutes for which an Application should run. Data Flow Run would be terminated once it reaches this duration from the time it transitions to *IN\_PROGRESS* state.

**Returns**

The max\_duration\_in\_minutes of this Application.

**Return type**

int

**property metastore\_id**

Gets the metastore\_id of this Application. The OCID of OCI Hive Metastore.

**Returns**

The metastore\_id of this Application.

**Return type**

str

**property num\_executors**

**[Required]** Gets the num\_executors of this Application. The number of executor VMs requested.

**Returns**

The num\_executors of this Application.

**Return type**

int

**property owner\_principal\_id**

**[Required]** Gets the owner\_principal\_id of this Application. The OCID of the user who created the resource.

**Returns**

The owner\_principal\_id of this Application.

**Return type**

str

**property owner\_user\_name**

Gets the owner\_user\_name of this Application. The username of the user who created the resource. If the username of the owner does not exist, *null* will be returned and the caller should refer to the ownerPrincipalId value instead.

**Returns**

The owner\_user\_name of this Application.

**Return type**

str

**property parameters**

Gets the parameters of this Application. An array of name/value pairs used to fill placeholders found in properties like *Application.arguments*. The name must be a string of one or more word characters (a-z, A-Z, 0-9, \_). The value can be a string of 0 or more characters of any kind. Example: [ { name: "iterations", value: "10"}, { name: "input\_file", value: "mydata.xml" }, { name: "variable\_x", value: "\${x}" } ]

**Returns**

The parameters of this Application.

**Return type**

list[oci.data\_flow.models.ApplicationParameter]

**property private\_endpoint\_id**

Gets the private\_endpoint\_id of this Application. The OCID of a private endpoint.

**Returns**

The private\_endpoint\_id of this Application.

**Return type**

str

**property script\_bucket**

//<bucket-name>@<namespace>/<prefix>.

**Returns**

script bucket (path)

**Return type**

str

**Type**

Bucket to save user script. Also accept a prefix in the format of oci

**property spark\_version**

**[Required]** Gets the spark\_version of this Application. The Spark version utilized to run the application.

**Returns**

The spark\_version of this Application.

**Return type**

str

**property time\_created**

**[Required]** Gets the time\_created of this Application. The date and time a application was created, expressed in [RFC 3339](#) timestamp format. Example: *2018-04-03T21:10:29.600Z*

**Returns**

The time\_created of this Application.

**Return type**

datetime

**property time\_updated**

**[Required]** Gets the time\_updated of this Application. The date and time a application was updated, expressed in [RFC 3339](#) timestamp format. Example: *2018-04-03T21:10:29.600Z*

**Returns**

The time\_updated of this Application.

**Return type**

datetime

**property type**

Gets the type of this Application. The Spark application processing type.

Allowed values for this property are: “BATCH”, “STREAMING”, “SESSION”, ‘UNKNOWN\_ENUM\_VALUE’. Any unrecognized values returned by a service will be mapped to ‘UNKNOWN\_ENUM\_VALUE’.

**Returns**

The type of this Application.

**Return type**

str

**property warehouse\_bucket\_uri**

Gets the warehouse\_bucket\_uri of this Application. An Oracle Cloud Infrastructure URI of the bucket to be used as default warehouse directory for BATCH SQL runs. See <https://docs.cloud.oracle.com/iaas/Content/API/SDKDocs/hdfsconnector.htm#uriformat>.

**Returns**

The warehouse\_bucket\_uri of this Application.

**Return type**

str

`ads.jobs.utils.get_dataflow_config(path=None, oci_profile=None)`

**18.1.1.14.3 Module contents**

**class** `ads.jobs.ContainerRuntime`(*spec: Optional[Dict] = None, \*\*kwargs*)

Bases: *Runtime*

Represents a container job runtime

To define container runtime:

```
>>> ContainerRuntime()
>>> .with_image("iad.ocir.io/<your_tenancy>/<your_image>")
>>> .with_cmd("sleep 5 && echo Hello World")
>>> .with_entrypoint(["/bin/sh", "-c"])
>>> .with_environment_variable(MY_ENV="MY_VALUE")
```

Alternatively, you can define the entrypoint and cmd along with the image.

```
>>> ContainerRuntime()
>>> .with_image(
>>>     "iad.ocir.io/<your_tenancy>/<your_image>",
>>>     entrypoint=["/bin/sh", "-c"],
>>>     cmd="sleep 5 && echo Hello World",
>>> )
>>> .with_environment_variable(MY_ENV="MY_VALUE")
```

The entrypoint and cmd can be either “exec form” or “shell form” (See references). The exec form is used when a list is passed in. The shell form is used when a space separated string is passed in.

When using the ContainerRuntime with OCI Data Science Job, the exec form is recommended. For most images, when the entrypoint is set to ["/bin/sh", "-c"], cmd can be a string as if you are running shell command.

## References

<https://docs.docker.com/engine/reference/builder/#entrypoint>  
[builder/#cmd](https://docs.docker.com/engine/reference/builder/#cmd)

<https://docs.docker.com/engine/reference/builder/#cmd>

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

### Parameters

- **spec** (*dict*, *optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

**CONST\_ARGS** = 'args'

**CONST\_CMD** = 'cmd'

**CONST\_ENTRYPOINT** = 'entrypoint'

**CONST\_ENV\_VAR** = 'env'

**CONST\_IMAGE** = 'image'

**CONST\_MAXIMUM\_RUNTIME\_IN\_MINUTES** = 'maximumRuntimeInMinutes'

**CONST\_TAG** = 'freeformTags'

**property args: list**

Command line arguments

**attribute\_map** = {'cmd': 'cmd', 'entrypoint': 'entrypoint', 'env': 'env', 'freeformTags': 'freeform\_tags', 'image': 'image'}

**property cmd: str**

Command of the container job

**property entrypoint: str**

Entrypoint of the container job

**property environment\_variables: dict**

Environment variables

### Returns

The runtime environment variables. The returned dictionary is a copy.

### Return type

dict

**property envs: dict**

Environment variables

**property freeform\_tags: dict**

**classmethod from\_dict**(*obj\_dict: dict*) → Self

Initialize the object from a Python dictionary

**classmethod from\_json**(*json\_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, decoder: callable = <class 'json.decoder.JSONDecoder'>, \*\*kwargs*) → Self

Creates an object from JSON string provided or from URI location containing JSON string



**Parameters**

- **json\_string** (*str*, *optional*) – JSON string. Defaults to None.
- **uri** (*str*, *optional*) – URI location of file containing JSON string. Defaults to None.
- **decoder** (*callable*, *optional*) – Custom decoder. Defaults to simple JSON decoder.
- **kwargs** (*dict*) – keyword arguments to be passed into `fsspec.open()`. For OCI object storage, this should be `config="path/to/.oci/config"`. For other storage connections consider e.g. host, port, username, password, etc.
- **json\_string** – JSON string, by default None
- **uri** – URI location of file containing JSON string, by default None
- **decoder** – Decoder for custom data structures, by default `json.JSONDecoder`
- **kwargs** – keyword arguments to be passed into `fsspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

**Raises**

- **ValueError** – Raised if neither string nor uri is provided
- **ValueError** – Both `json_string` and `uri` are empty, or The input is not a valid JSON.

**Returns**

Returns instance of the class

**Return type**

`cls`

**Returns**

Object initialized from JSON data.

**Return type**

`Type[Self]`

**classmethod from\_string** (*obj\_string*: `~typing.Optional[str] = None`, *uri*: `~typing.Optional[str] = None`, *loader*: `callable = <class 'yaml.loader.SafeLoader'>`, *\*\*kwargs*) → `Self`

Initializes an object from YAML/JSON string or URI location containing the YAML/JSON

**Parameters**

- **obj\_string** (*str*, *optional*) – YAML/JSON string, by default None
- **uri** (*str*, *optional*) – URI location of file containing YAML/JSON, by default None
- **loader** (*callable*, *optional*) – Custom YAML loader, by default `yaml.SafeLoader`

**Returns**

Object initialized from the YAML.

**Return type**

`Self`

**classmethod from\_yaml** (*yaml\_string*: `~typing.Optional[str] = None`, *uri*: `~typing.Optional[str] = None`, *loader*: `callable = <class 'yaml.loader.SafeLoader'>`, *\*\*kwargs*) → `Self`

Initializes an object from YAML string or URI location containing the YAML

**Parameters**

- **yaml\_string** (*str*, *optional*) – YAML string, by default None
- **uri** (*str*, *optional*) – URI location of file containing YAML, by default None

- **loader** (*callable*, *optional*) – Custom YAML loader, by default `yaml.SafeLoader`

**Returns**

Object initialized from the YAML.

**Return type**

Self

**Raises**

**ValueError** – Raised if neither string nor uri is provided

**get\_spec**(*key: str*, *default: Optional[Any] = None*) → Any

Gets the value of a specification property

**Parameters**

- **key** (*str*) – The name of the property.
- **default** (*Any*, *optional*) – The default value to be used, if the property does not exist, by default None.

**Returns**

The value of the property.

**Return type**

Any

**property image: str**

The container image

**property kind: str**

Kind of the object to be stored in YAML. All runtime implementations will have “runtime” as kind. Sub-class will have different types.

**property maximum\_runtime\_in\_minutes: int**

Maximum runtime in minutes

**set\_spec**(*k: str*, *v: Any*) → Self

Sets a specification property for the object.

**Parameters**

- **k** (*str*) – key, the name of the property.
- **v** (*Any*) – value, the value of the property.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**to\_dict**() → dict

Converts the object to dictionary with kind, type and spec as keys.

**to\_json**(*uri: ~typing.Optional[str] = None*, *encoder: callable = <class 'json.encoder.JSONEncoder'>*, *\*\*kwargs*) → str

Returns the object serialized as a JSON string

**Parameters**

- **uri** (*str*, *optional*) – URI location to save the JSON string, by default None

- **encoder** (*callable, optional*) – Encoder for custom data structures, by default `json.JSONEncoder`
- **kwargs** (*dict*) – keyword arguments to be passed into `fspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

**Returns**

object serialized as a JSON string

**Return type**

`str`

**to\_yaml** (*uri: ~typing.Optional[str] = None, dumper: callable = <class 'yaml.dumper.SafeDumper'>, \*\*kwargs*) → `Optional[str]`

Returns object serialized as a YAML string

**Parameters**

- **uri** (*str, optional*) – URI location to save the YAML string, by default `None`
- **dumper** (*callable, optional*) – Custom YAML Dumper, by default `yaml.SafeDumper`
- **kwargs** (*dict*) – keyword arguments to be passed into `fspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

**Returns**

If `uri` is specified, `None` will be returned. Otherwise, the `yaml` content will be returned.

**Return type**

`Union[str, None]`

**property type: str**

The type of the object as showing in YAML

**with\_argument** (*\*args, \*\*kwargs*) → `Self`

Adds command line arguments to the runtime.

This method can be called (chained) multiple times to add various arguments.

**Parameters**

- **args** – Positional arguments. In a single method call, positional arguments are always added before keyword arguments. You can call `with_argument()` to add positional arguments after keyword arguments.
- **kwargs** – Keyword arguments. To add a keyword argument without value, set the value to `None`.

**Returns**

This method returns self to support chaining methods.

**Return type**

`Self`

**Raises**

**ValueError** – Keyword arguments with space in a key.

## Examples

```
>>> runtime = Runtime().with_argument(key1="val1", key2="val2").with_argument(
↳ "pos1")
>>> print(runtime.args)
["--key1", "val1", "--key2", "val2", "pos1"]
```

```
>>> runtime = Runtime()
>>> runtime.with_argument("pos1")
>>> runtime.with_argument(key1="val1", key2="val2.1 val2.2")
>>> runtime.with_argument("pos2")
>>> print(runtime.args)
['pos1', '--key1', 'val1', '--key2', 'val2.1 val2.2', 'pos2']
```

```
>>> runtime = Runtime()
>>> runtime.with_argument("pos1")
>>> runtime.with_argument(key1=None, key2="val2")
>>> runtime.with_argument("pos2")
>>> print(runtime.args)
["pos1", "--key1", "--key2", "val2", "pos2"]
```

**with\_cmd**(cmd: str) → *ContainerRuntime*

Specifies the command for the container job.

### Parameters

**cmd** (str) – Command for the container job

### Returns

The runtime instance.

### Return type

*ContainerRuntime*

**with\_entrypoint**(entrypoint: Union[str, list]) → *ContainerRuntime*

Specifies the entrypoint for the container job.

### Parameters

**entrypoint** (str or list) – Entrypoint for the container job

### Returns

The runtime instance.

### Return type

*ContainerRuntime*

**with\_environment\_variable**(\*\*kwargs) → Self

Sets environment variables

Environment variables enclosed by `${...}` will be substituted.

- You can use `$$` to escape the substitution.
- Undefined variable enclosed by `${}` will be ignored.
- Double dollar signs `$$` will be substituted by a single one `$`.

### Returns

This method returns self to support chaining methods.

**Return type**

Self

**Examples**

```

>>> runtime = (
...     PythonRuntime()
...     .with_environment_variable(
...         HOST="10.0.0.1",
...         PORT="443",
...         URL="http://${HOST}:${PORT}/path/",
...         ESCAPED_URL="http://${HOST}:${PORT}/path/",
...         MISSING_VAR="This is ${UNDEFINED}",
...         VAR_WITH_DOLLAR="$10",
...         DOUBLE_DOLLAR="$$10"
...     )
... )
>>> for k, v in runtime.environment_variables.items():
...     print(f"{k}: {v}")
HOST: 10.0.0.1
PORT: 443
URL: http://10.0.0.1:443/path/
ESCAPED_URL: http://${HOST}:${PORT}/path/
MISSING_VAR: This is ${UNDEFINED}
VAR_WITH_DOLLAR: $10
DOUBLE_DOLLAR: $10

```

**with\_freeform\_tag**(\*\*kwargs) → Self

Sets freeform tag

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**with\_image**(image: str, entrypoint: Optional[Union[str, list]] = None, cmd: Optional[str] = None) → *ContainerRuntime*

Specify the image for the container job.

**Parameters**

- **image** (str) – The container image, e.g. iad.ocir.io/<your\_tenancy>/<your\_image>:<your\_tag>
- **entrypoint** (str or list, optional) – Entrypoint for the job, by default None (the entrypoint defined in the image will be used).
- **cmd** (str, optional) – Command for the job, by default None.

**Returns**

The runtime instance.

**Return type***ContainerRuntime*

**with\_maximum\_runtime\_in\_minutes**(maximum\_runtime\_in\_minutes: int) → Self

Sets maximum runtime in minutes

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

```
class ads.jobs.DataFlow(spec: Optional[dict] = None, **kwargs)
```

Bases: [Infrastructure](#)

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

**Parameters**

- **spec** (*dict*, *optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

```
CONST_BUCKET_URI = 'logs_bucket_uri'
```

```
CONST_COMPARTMENT_ID = 'compartment_id'
```

```
CONST_CONFIG = 'configuration'
```

```
CONST_DRIVER_SHAPE = 'driver_shape'
```

```
CONST_DRIVER_SHAPE_CONFIG = 'driver_shape_config'
```

```
CONST_EXECUTE = 'execute'
```

```
CONST_EXECUTOR_SHAPE = 'executor_shape'
```

```
CONST_EXECUTOR_SHAPE_CONFIG = 'executor_shape_config'
```

```
CONST_ID = 'id'
```

```
CONST_LANGUAGE = 'language'
```

```
CONST_MEMORY_IN_GBS = 'memory_in_gbs'
```

```
CONST_METASTORE_ID = 'metastore_id'
```

```
CONST_NUM_EXECUTORS = 'num_executors'
```

```
CONST_OCPUS = 'ocpus'
```

```
CONST_PRIVATE_ENDPOINT_ID = 'private_endpoint_id'
```

```
CONST_SPARK_VERSION = 'spark_version'
```

```
CONST_WAREHOUSE_BUCKET_URI = 'warehouse_bucket_uri'
```

```
attribute_map = {'compartment_id': 'compartmentId', 'configuration':  
'configuration', 'driver_shape': 'driverShape', 'driver_shape_config':  
'driverShapeConfig', 'execute': 'execute', 'executor_shape': 'executorShape',  
'executor_shape_config': 'executorShapeConfig', 'id': 'id', 'logs_bucket_uri':  
'logsBucketUri', 'memory_in_gbs': 'memoryInGBs', 'metastore_id': 'metastoreId',  
'num_executors': 'numExecutors', 'ocpus': 'ocpus', 'private_endpoint_id':  
'privateEndpointId', 'spark_version': 'sparkVersion', 'warehouse_bucket_uri':  
'warehouseBucketUri'}
```

**create**(*runtime*: *DataFlowRuntime*, *\*\*kwargs*) → *DataFlow*

Create a Data Flow job given a runtime.

**Parameters**

- **runtime** – runtime to bind to the Data Flow job
- **kwargs** – additional keyword arguments

**Returns**

a Data Flow job instance

**Return type**

*DataFlow*

**delete**()

Delete a Data Flow job and canceling associated runs.

**Return type**

None

**classmethod from\_dict**(*config*: *dict*) → *DataFlow*

Load a Data Flow job instance from a dictionary of configurations.

**Parameters**

**config** (*dict*) – dictionary of configurations

**Returns**

a Data Flow job instance

**Return type**

*DataFlow*

**classmethod from\_id**(*id*: *str*) → *DataFlow*

Load a Data Flow job given an id.

**Parameters**

**id** (*str*) – id of the Data Flow job to load

**Returns**

a Data Flow job instance

**Return type**

*DataFlow*

**classmethod from\_json**(*json\_string*: *~typing.Optional[str] = None*, *uri*: *~typing.Optional[str] = None*, *decoder*: *callable = <class 'json.decoder.JSONDecoder'>*, *\*\*kwargs*) → *Self*

Creates an object from JSON string provided or from URI location containing JSON string

**Parameters**

- **json\_string** (*str*, *optional*) – JSON string. Defaults to None.
- **uri** (*str*, *optional*) – URI location of file containing JSON string. Defaults to None.
- **decoder** (*callable*, *optional*) – Custom decoder. Defaults to simple JSON decoder.
- **kwargs** (*dict*) – keyword arguments to be passed into `fspec.open()`. For OCI object storage, this should be `config="path/to/.oci/config"`. For other storage connections consider e.g. host, port, username, password, etc.
- **json\_string** – JSON string, by default None
- **uri** – URI location of file containing JSON string, by default None

- **decoder** – Decoder for custom data structures, by default `json.JSONDecoder`
- **kwargs** – keyword arguments to be passed into `fsspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

**Raises**

- **ValueError** – Raised if neither string nor uri is provided
- **ValueError** – Both `json_string` and `uri` are empty, or The input is not a valid JSON.

**Returns**

Returns instance of the class

**Return type**

`cls`

**Returns**

Object initialized from JSON data.

**Return type**

`Type[Self]`

**classmethod from\_string**(*obj\_string*: *~typing.Optional[str] = None*, *uri*: *~typing.Optional[str] = None*,  
*loader*: *callable = <class 'yaml.loader.SafeLoader'>*, *\*\*kwargs*) → *Self*

Initializes an object from YAML/JSON string or URI location containing the YAML/JSON

**Parameters**

- **obj\_string** (*str*, *optional*) – YAML/JSON string, by default `None`
- **uri** (*str*, *optional*) – URI location of file containing YAML/JSON, by default `None`
- **loader** (*callable*, *optional*) – Custom YAML loader, by default `yaml.SafeLoader`

**Returns**

Object initialized from the YAML.

**Return type**

*Self*

**classmethod from\_yaml**(*yaml\_string*: *~typing.Optional[str] = None*, *uri*: *~typing.Optional[str] = None*,  
*loader*: *callable = <class 'yaml.loader.SafeLoader'>*, *\*\*kwargs*) → *Self*

Initializes an object from YAML string or URI location containing the YAML

**Parameters**

- **yaml\_string** (*str*, *optional*) – YAML string, by default `None`
- **uri** (*str*, *optional*) – URI location of file containing YAML, by default `None`
- **loader** (*callable*, *optional*) – Custom YAML loader, by default `yaml.SafeLoader`

**Returns**

Object initialized from the YAML.

**Return type**

*Self*

**Raises**

**ValueError** – Raised if neither string nor uri is provided

**get\_spec**(*key*: *str*, *default*: *Optional[Any] = None*) → *Any*

Gets the value of a specification property

**Parameters**



- **key** (*str*) – The name of the property.
- **default** (*Any*, *optional*) – The default value to be used, if the property does not exist, by default *None*.

**Returns**

The value of the property.

**Return type**

*Any*

**property job\_id:** *Optional[str]*

The OCID of the job

**property kind:** *str*

Kind of the object to be stored in YAML. All runtimes will have “infrastructure” as kind. Subclass will have different types.

**classmethod list\_jobs**(*compartment\_id: Optional[str] = None*, *\*\*kwargs*) → *List[DataFlow]*

List Data Flow jobs in a given compartment.

**Parameters**

- **compartment\_id** (*str*) – id of that compartment
- **kwargs** – additional keyword arguments for filtering jobs

**Returns**

list of Data Flow jobs

**Return type**

*List[DataFlow]*

**property name:** *str*

Display name of the job

**run**(*name: Optional[str] = None*, *args: Optional[List[str]] = None*, *env\_vars: Optional[Dict[str, str]] = None*, *freeform\_tags: Optional[Dict[str, str]] = None*, *wait: bool = False*, *\*\*kwargs*) → *DataFlowRun*

Run a Data Flow job.

**Parameters**

- **name** (*str*, *optional*) – name of the run. If a name is not provided, a randomly generated easy to remember name with timestamp will be generated, like ‘strange-spider-2022-08-17-23:55.02’.
- **args** (*List[str]*, *optional*) – list of command line arguments
- **env\_vars** (*Dict[str, str]*, *optional*) – dictionary of environment variables (not used for data flow)
- **freeform\_tags** (*Dict[str, str]*, *optional*) – freeform tags
- **wait** (*bool*, *optional*) – whether to wait for a run to terminate
- **kwargs** – additional keyword arguments

**Returns**

a *DataFlowRun* instance

**Return type**

*DataFlowRun*

**run\_list**(\*\*kwargs) → List[DataFlowRun]

List runs associated with a Data Flow job.

**Parameters**

**kwargs** – additional arguments for filtering runs.

**Returns**

list of DataFlowRun instances

**Return type**

List[DataFlowRun]

**set\_spec**(k: str, v: Any) → Self

Sets a specification property for the object.

**Parameters**

- **k** (str) – key, the name of the property.
- **v** (Any) – value, the value of the property.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**to\_dict**() → dict

Serialize job to a dictionary.

**Returns**

serialized job as a dictionary

**Return type**

dict

**to\_json**(uri: ~typing.Optional[str] = None, encoder: callable = <class 'json.encoder.JSONEncoder'>, \*\*kwargs) → str

Returns the object serialized as a JSON string

**Parameters**

- **uri** (str, optional) – URI location to save the JSON string, by default None
- **encoder** (callable, optional) – Encoder for custom data structures, by default json.JSONEncoder
- **kwargs** (dict) – keyword arguments to be passed into fsspec.open(). For OCI object storage, this can be config="path/to/.oci/config".

**Returns**

object serialized as a JSON string

**Return type**

str

**to\_yaml**() → str

Serializes the object into YAML string.

**Returns**

YAML stored in a string.

**Return type**

str

**property type: str**

The type of the object as showing in YAML.

This implementation returns the class name with the first letter covered to lower case.

**update(runtime: Runtime)**

Updates a job.

**Parameters**

**runtime** – a runtime object

**with\_compartment\_id(id: str) → DataFlow**

Set compartment id for a Data Flow job.

**Parameters**

**id** (str) – compartment id

**Returns**

the Data Flow instance itself

**Return type**

*DataFlow*

**with\_configuration(configs: dict) → DataFlow**

Set configuration for a Data Flow job.

**Parameters**

**configs** (dict) – dictionary of configurations

**Returns**

the Data Flow instance itself

**Return type**

*DataFlow*

**with\_driver\_shape(shape: str) → DataFlow**

Set driver shape for a Data Flow job.

**Parameters**

**shape** (str) – driver shape

**Returns**

the Data Flow instance itself

**Return type**

*DataFlow*

**with\_driver\_shape\_config(memory\_in\_gbs: float, ocpus: float, \*\*kwargs: Dict[str, Any]) → DataFlow**

Sets the driver shape config details of Data Flow job infrastructure. Specify only when a flex shape is selected. For example *VM.Standard.E3.Flex* allows the *memory\_in\_gbs* and *cpu* count to be specified.

**Parameters**

- **memory\_in\_gbs** (float) – The size of the memory in GBs.
- **ocpus** (float) – The OCPUs count.
- **kwargs** – Additional keyword arguments.

**Returns**

the Data Flow instance itself.

**Return type**

*DataFlow*

**with\_execute**(*exec: str*) → *DataFlow*

Set command for spark-submit.

**Parameters**

**exec** (*str*) – str of commands

**Returns**

the Data Flow instance itself

**Return type**

*DataFlow*

**with\_executor\_shape**(*shape: str*) → *DataFlow*

Set executor shape for a Data Flow job.

**Parameters**

**shape** (*str*) – executor shape

**Returns**

the Data Flow instance itself

**Return type**

*DataFlow*

**with\_executor\_shape\_config**(*memory\_in\_gbs: float, ocpus: float, \*\*kwargs: Dict[str, Any]*) → *DataFlow*

Sets the executor shape config details of Data Flow job infrastructure. Specify only when a flex shape is selected. For example *VM.Standard.E3.Flex* allows the *memory\_in\_gbs* and *cpu* count to be specified.

**Parameters**

- **memory\_in\_gbs** (*float*) – The size of the memory in GBs.
- **ocpus** (*float*) – The OCPUs count.
- **kwargs** – Additional keyword arguments.

**Returns**

the Data Flow instance itself.

**Return type**

*DataFlow*

**with\_id**(*id: str*) → *DataFlow*

Set id for a Data Flow job.

**Parameters**

**id** (*str*) – id of a job

**Returns**

the Data Flow instance itself

**Return type**

*DataFlow*

**with\_language**(*lang: str*) → *DataFlow*

Set language for a Data Flow job.

**Parameters**

**lang** (*str*) – language for the job

**Returns**

the Data Flow instance itself

**Return type***DataFlow***with\_logs\_bucket\_uri**(uri: str) → *DataFlow*

Set logs bucket uri for a Data Flow job.

**Parameters****uri** (str) – uri to logs bucket**Returns**

the Data Flow instance itself

**Return type***DataFlow***with\_metastore\_id**(id: str) → *DataFlow*

Set Hive metastore id for a Data Flow job.

**Parameters****id** (str) – metastore id**Returns**

the Data Flow instance itself

**Return type***DataFlow***with\_num\_executors**(n: int) → *DataFlow*

Set number of executors for a Data Flow job.

**Parameters****n** (int) – number of executors**Returns**

the Data Flow instance itself

**Return type***DataFlow***with\_private\_endpoint\_id**(private\_endpoint\_id: str) → *DataFlow*

Set the private endpoint ID for a Data Flow job infrastructure.

**Parameters****private\_endpoint\_id** (str) – The OCID of a private endpoint.**Returns**

the Data Flow instance itself

**Return type***DataFlow***with\_spark\_version**(ver: str) → *DataFlow*Set spark version for a Data Flow job. Currently supported versions are 2.4.4, 3.0.2 and 3.2.1 Documentation: [https://docs.oracle.com/en-us/iaas/data-flow/using/dfs\\_getting\\_started.htm#before\\_you\\_begin](https://docs.oracle.com/en-us/iaas/data-flow/using/dfs_getting_started.htm#before_you_begin)**Parameters****ver** (str) – spark version**Returns**

the Data Flow instance itself

**Return type***DataFlow*

**with\_warehouse\_bucket\_uri**(uri: str) → *DataFlow*

Set warehouse bucket uri for a Data Flow job.

**Parameters**

**uri** (str) – uri to warehouse bucket

**Returns**

the Data Flow instance itself

**Return type**

*DataFlow*

**class** ads.jobs.**DataFlowNotebookRuntime**(spec: Optional[Dict] = None, \*\*kwargs)

Bases: *DataFlowRuntime*, *NotebookRuntime*

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

**Parameters**

- **spec** (dict, optional) – Object specification, by default None
- **kwargs** (dict) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

CONST\_ARCHIVE\_BUCKET = 'archiveBucket'

CONST\_ARCHIVE\_URI = 'archiveUri'

CONST\_ARGS = 'args'

CONST\_CONDA = 'conda'

CONST\_CONDA\_AUTH\_TYPE = 'condaAuthType'

CONST\_CONDA\_REGION = 'region'

CONST\_CONDA\_SLUG = 'slug'

CONST\_CONDA\_TYPE = 'type'

CONST\_CONDA\_TYPE\_CUSTOM = 'published'

CONST\_CONDA\_TYPE\_SERVICE = 'service'

CONST\_CONDA\_URI = 'uri'

CONST\_CONFIGURATION = 'configuration'

CONST\_ENTRYPOINT = 'entrypoint'

CONST\_ENV\_VAR = 'env'

CONST\_EXCLUDE\_TAG = 'excludeTags'

CONST\_MAXIMUM\_RUNTIME\_IN\_MINUTES = 'maximumRuntimeInMinutes'

CONST\_NOTEBOOK\_ENCODING = 'notebookEncoding'

CONST\_NOTEBOOK\_PATH = 'notebookPathURI'

CONST\_OUTPUT\_URI = 'outputUri'

```
CONST_OUTPUT_URI_ALT = 'outputURI'
```

```
CONST_OVERWRITE = 'overwrite'
```

```
CONST_SCRIPT_BUCKET = 'scriptBucket'
```

```
CONST_SCRIPT_PATH = 'scriptPathURI'
```

```
CONST_SOURCE = 'source'
```

```
CONST_TAG = 'freeformTags'
```

```
property archive_bucket: str
```

Bucket to save archive zip

```
property archive_uri
```

The Uri of archive zip

```
property args: list
```

Command line arguments

```
attribute_map = {'archiveUri': 'archive_uri', 'condaAuthType': 'conda_auth_type',
'configuration': 'configuration', 'env': 'env', 'freeformTags': 'freeform_tags',
'overwrite': 'overwrite', 'scriptBucket': 'script_bucket', 'scriptPathURI':
'script_path_uri'}
```

```
property conda: dict
```

The conda environment specification.

For service conda environment, the specification contains:

- `type`, the type of the conda environment. This is always `service` for service conda environment.
- `slug`, the slug of the conda environment.

For custom conda environment, the specification contains:

- `type`, the type of the conda environment. This is always `published` for custom conda environment.
- `uri`, the uri of the conda environment, e.g. `oci://bucket@namespace/prefix/to/conda`
- `region`, the region of the bucket in which the conda environment is stored. By default, ADS will determine the region based on the authenticated API key or resource principal. This is only needed if your conda environment is stored in a different region.

#### Returns

A dictionary containing the conda environment specifications.

#### Return type

dict

```
property configuration: dict
```

Configuration for Spark

```
convert(overwrite=False)
```

```
property environment_variables: dict
```

Environment variables

#### Returns

The runtime environment variables. The returned dictionary is a copy.

**Return type**

dict

**property envs: dict**

Environment variables

**property exclude\_tag: list**

A list of cell tags indicating cells to be excluded from the job

**property freeform\_tags: dict****classmethod from\_dict(obj\_dict: dict) → Self**

Initialize the object from a Python dictionary

**classmethod from\_json(json\_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, decoder: callable = <class 'json.decoder.JSONDecoder'>, \*\*kwargs) → Self**

Creates an object from JSON string provided or from URI location containing JSON string

**Parameters**

- **json\_string** (*str*, *optional*) – JSON string. Defaults to None.
- **uri** (*str*, *optional*) – URI location of file containing JSON string. Defaults to None.
- **decoder** (*callable*, *optional*) – Custom decoder. Defaults to simple JSON decoder.
- **kwargs** (*dict*) – keyword arguments to be passed into fsspec.open(). For OCI object storage, this should be config="path/to/.oci/config". For other storage connections consider e.g. host, port, username, password, etc.
- **json\_string** – JSON string, by default None
- **uri** – URI location of file containing JSON string, by default None
- **decoder** – Decoder for custom data structures, by default json.JSONDecoder
- **kwargs** – keyword arguments to be passed into fsspec.open(). For OCI object storage, this can be config="path/to/.oci/config".

**Raises**

- **ValueError** – Raised if neither string nor uri is provided
- **ValueError** – Both json\_string and uri are empty, or The input is not a valid JSON.

**Returns**

Returns instance of the class

**Return type**

cls

**Returns**

Object initialized from JSON data.

**Return type**

Type[Self]

**classmethod from\_string(obj\_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, loader: callable = <class 'yaml.loader.SafeLoader'>, \*\*kwargs) → Self**

Initializes an object from YAML/JSON string or URI location containing the YAML/JSON

**Parameters**

- **obj\_string** (*str*, *optional*) – YAML/JSON string, by default None



- **uri** (*str*, *optional*) – URI location of file containing YAML/JSON, by default None
- **loader** (*callable*, *optional*) – Custom YAML loader, by default `yaml.SafeLoader`

**Returns**

Object initialized from the YAML.

**Return type**

Self

**classmethod** **from\_yaml**(*yaml\_string*: *~typing.Optional[str]* = None, *uri*: *~typing.Optional[str]* = None, *loader*: *callable* = <class 'yaml.loader.SafeLoader'>, *\*\*kwargs*) → Self

Initializes an object from YAML string or URI location containing the YAML

**Parameters**

- **yaml\_string** (*str*, *optional*) – YAML string, by default None
- **uri** (*str*, *optional*) – URI location of file containing YAML, by default None
- **loader** (*callable*, *optional*) – Custom YAML loader, by default `yaml.SafeLoader`

**Returns**

Object initialized from the YAML.

**Return type**

Self

**Raises**

**ValueError** – Raised if neither string nor uri is provided

**get\_spec**(*key*: *str*, *default*: *Optional[Any]* = None) → Any

Gets the value of a specification property

**Parameters**

- **key** (*str*) – The name of the property.
- **default** (*Any*, *optional*) – The default value to be used, if the property does not exist, by default None.

**Returns**

The value of the property.

**Return type**

Any

**property kind: str**

Kind of the object to be stored in YAML. All runtime implementations will have “runtime” as kind. Sub-class will have different types.

**property maximum\_runtime\_in\_minutes: int**

Maximum runtime in minutes

**property notebook: str**

The path of the notebook relative to the source.

**property notebook\_encoding: str**

The encoding of the notebook

**property notebook\_uri: str**

The URI of the notebook

**property output\_uri: list**

URI for storing the output notebook and files

**property overwrite: str**

Whether to overwrite the existing script in object storage (script bucket).

**property script\_bucket: str**

Bucket to save script

**property script\_uri: str**

The URI of the source code

**set\_spec**(*k: str, v: Any*) → Self

Sets a specification property for the object.

**Parameters**

- **k** (*str*) – key, the name of the property.
- **v** (*Any*) – value, the value of the property.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**property source: str**

The source code location.

**to\_dict**() → dict

Converts the object to dictionary with kind, type and spec as keys.

**to\_json**(*uri: ~typing.Optional[str] = None, encoder: callable = <class 'json.encoder.JSONEncoder'>, \*\*kwargs*) → str

Returns the object serialized as a JSON string

**Parameters**

- **uri** (*str, optional*) – URI location to save the JSON string, by default None
- **encoder** (*callable, optional*) – Encoder for custom data structures, by default json.JSONEncoder
- **kwargs** (*dict*) – keyword arguments to be passed into fsspec.open(). For OCI object storage, this can be config="path/to/.oci/config".

**Returns**

object serialized as a JSON string

**Return type**

str

**to\_yaml**(*uri: ~typing.Optional[str] = None, dumper: callable = <class 'yaml.dumper.SafeDumper'>, \*\*kwargs*) → Optional[str]

Returns object serialized as a YAML string

**Parameters**

- **uri** (*str, optional*) – URI location to save the YAML string, by default None
- **dumper** (*callable, optional*) – Custom YAML Dumper, by default yaml.SafeDumper

- **kwargs** (*dict*) – keyword arguments to be passed into `fsspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

**Returns**

If uri is specified, None will be returned. Otherwise, the yaml content will be returned.

**Return type**

Union[str, None]

**property type: str**

The type of the object as showing in YAML

**with\_archive\_bucket**(*bucket*) → *DataFlowRuntime*

Set object storage bucket to save the archive zip, in case archive uri given is local.

**Parameters**

**bucket** (*str*) – name of the bucket

**Returns**

runtime instance itself

**Return type**

*DataFlowRuntime*

**with\_archive\_uri**(*uri: str*) → *DataFlowRuntime*

Set archive uri (which is a zip file containing dependencies).

**Parameters**

**uri** (*str*) – uri to the archive zip

**Returns**

runtime instance itself

**Return type**

*DataFlowRuntime*

**with\_argument**(\**args*, \*\**kwargs*) → Self

Adds command line arguments to the runtime.

This method can be called (chained) multiple times to add various arguments.

**Parameters**

- **args** – Positional arguments. In a single method call, positional arguments are always added before keyword arguments. You can call `with_argument()` to add positional arguments after keyword arguments.
- **kwargs** – Keyword arguments. To add a keyword argument without value, set the value to None.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**Raises**

**ValueError** – Keyword arguments with space in a key.

## Examples

```
>>> runtime = Runtime().with_argument(key1="val1", key2="val2").with_argument(
↪ "pos1")
>>> print(runtime.args)
["--key1", "val1", "--key2", "val2", "pos1"]
```

```
>>> runtime = Runtime()
>>> runtime.with_argument("pos1")
>>> runtime.with_argument(key1="val1", key2="val2.1 val2.2")
>>> runtime.with_argument("pos2")
>>> print(runtime.args)
['pos1', '--key1', 'val1', '--key2', 'val2.1 val2.2', 'pos2']
```

```
>>> runtime = Runtime()
>>> runtime.with_argument("pos1")
>>> runtime.with_argument(key1=None, key2="val2")
>>> runtime.with_argument("pos2")
>>> print(runtime.args)
["pos1", "--key1", "--key2", "val2", "pos2"]
```

**with\_conda**(conda\_spec: *Optional*[dict] = None)

**with\_configuration**(config: dict) → *DataFlowRuntime*

Set Configuration for Spark.

### Parameters

**config** (dict) – dictionary of configuration details <https://spark.apache.org/docs/latest/configuration.html#available-properties>. Example: { “spark.app.name”: “My App Name”, “spark.shuffle.io.maxRetries”: “4” }

### Returns

runtime instance itself

### Return type

*DataFlowRuntime*

**with\_custom\_conda**(uri: str, region: *Optional*[str] = None, auth\_type: *Optional*[str] = None)

Specifies the custom conda pack for running the job

### Parameters

- **uri** (str) – The OCI object storage URI for the conda pack, e.g. “oci://your\_bucket@namespace/object\_name.” In the Environment Explorer of an OCI notebook session, this is shown as the “source” of the conda pack.
- **region** (str, *optional*) – The region of the bucket storing the custom conda pack, by default None. If region is not specified, ADS will use the region from your authentication credentials, \* For API Key, config[“region”] is used. \* For Resource Principal, signer.region is used. This is required if the conda pack is stored in a different region.
- **auth\_type** (str, (="resource\_principal")) – One of “resource\_principal”, “api\_keys”, “instance\_principal”, etc. Auth mechanism used to read the conda back uri provided.

### Returns

The runtime instance.

**Return type**

self

**See also:****https**[//docs.oracle.com/en-us/iaas/data-science/using/conda\\_publishs\\_object.htm](https://docs.oracle.com/en-us/iaas/data-science/using/conda_publishs_object.htm)**with\_environment\_variable**(\**kwargs*) → Self

Sets environment variables

Environment variables enclosed by `${...}` will be substituted.

- You can use `$$` to escape the substitution.
- Undefined variable enclosed by `${}` will be ignored.
- Double dollar signs `$$` will be substituted by a single one `$`.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**Examples**

```

>>> runtime = (
...     PythonRuntime()
...     .with_environment_variable(
...         HOST="10.0.0.1",
...         PORT="443",
...         URL="http://${HOST}:${PORT}/path/",
...         ESCAPED_URL="http://$$${HOST}$$${PORT}/path/",
...         MISSING_VAR="This is ${UNDEFINED}",
...         VAR_WITH_DOLLAR="$10",
...         DOUBLE_DOLLAR="$$10"
...     )
... )
>>> for k, v in runtime.environment_variables.items():
...     print(f"{k}: {v}")
HOST: 10.0.0.1
PORT: 443
URL: http://10.0.0.1:443/path/
ESCAPED_URL: http://${HOST}:${PORT}/path/
MISSING_VAR: This is ${UNDEFINED}
VAR_WITH_DOLLAR: $10
DOUBLE_DOLLAR: $10

```

**with\_exclude\_tag**(\**tags*) → *NotebookRuntime*

Specifies the cell tags in the notebook to exclude cells from the job script.

**Parameters****\*tags** (*list*) – A list of tags (strings).**Returns**

The runtime instance.

**Return type**

self

**with\_freeform\_tag**(\*\**kwargs*) → Self

Sets freeform tag

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**with\_maximum\_runtime\_in\_minutes**(*maximum\_runtime\_in\_minutes: int*) → Self

Sets maximum runtime in minutes

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**with\_notebook**(*path: str, encoding='utf-8'*) → *NotebookRuntime*

Specifies the notebook to be run as a job. Use this method if you would like to run a single notebook. Use `with_source()` method if you would like to run a notebook with additional dependency files.

**Parameters**

- **path** (*str*) – The path of the Jupyter notebook
- **encoding** (*str*) – The encoding for opening the notebook. Defaults to utf-8.

**Returns**

The runtime instance.

**Return type**

self

**with\_output**(*output\_uri: str*) → *NotebookRuntime*

Specifies the output URI for storing the output notebook and files. All files in the directory containing the notebook will be saved.

**Parameters**

**output\_uri** (*str*) – URI for a directory storing the output notebook and files. For example, `oci://bucket@namespace/path/to/dir`

**Returns**

The runtime instance.

**Return type**

self

**with\_overwrite**(*overwrite: bool*) → *DataFlowRuntime*

Whether to overwrite the existing script in object storage (script bucket). If the Object Storage bucket already contains a script with the same name, then it will be overwritten with the new one if the *overwrite* flag equal to *True*.

**Parameters**

**overwrite** (*bool*) – Whether to overwrite the existing script in object storage (script bucket).

**Returns**

The DataFlowRuntime instance (self).

**Return type***DataFlowRuntime***with\_script\_bucket**(*bucket*) → *DataFlowRuntime*

Set object storage bucket to save the script, in case script uri given is local.

**Parameters****bucket** (*str*) – name of the bucket**Returns**

runtime instance itself

**Return type***DataFlowRuntime***with\_script\_uri**(*path: str*) → *DataFlowRuntime*

Set script uri.

**Parameters****path** (*str*) – uri to the script**Returns**

runtime instance itself

**Return type***DataFlowRuntime***with\_service\_conda**(*slug: str*)

Specifies the service conda pack for running the job

**Parameters****slug** (*str*) – The slug name of the service conda pack**Returns**

The runtime instance.

**Return type**

self

**with\_source**(*uri: str, notebook: str, encoding='utf-8'*)

Specify source code directory containing the notebook and dependencies for the job. Use this method if you would like to run a notebook with additional dependency files. Use the *with\_notebook()* method if you would like to run a single notebook.

In the following example, local folder “path/to/source” contains the notebook and dependencies, The local path of the notebook is “path/to/source/relative/path/to/notebook.ipynb”:

```
runtime.with_source(uri="path/to/source", notebook="relative/path/to/notebook.  
↪ipynb")
```

**Parameters**

- **uri** (*str*) – URI of the source code directory. This can be local or on OCI object storage.
- **notebook** (*str*) – The relative path of the notebook from the source URI.
- **encoding** (*str*) – The encoding for opening the notebook. Defaults to utf-8.

**Returns**

The runtime instance.

**Return type**

Self

```
class ads.jobs.DataFlowRun(config: Optional[dict] = None, signer: Optional[Signer] = None, client_kwargs:  
                          Optional[dict] = None, **kwargs)
```

Bases: [\*OCIModelMixin\*](#), [\*Run\*](#), [\*RunInstance\*](#)

Initializes a service/resource with OCI client as a property. If config or signer is specified, it will be used to initialize the OCI client. If neither of them is specified, the client will be initialized with `ads.common.auth.default_signer`. If both of them are specified, both of them will be passed into the OCI client,

and the authentication will be determined by OCI Python SDK.

**Parameters**

- **config** (*dict, optional*) – OCI API key config dictionary, by default None.
- **signer** (*oci.signer.Signer, optional*) – OCI authentication signer, by default None.
- **client\_kwargs** (*dict, optional*) – Additional keyword arguments for initializing the OCI client.

```
CONS_COMPARTMENT_ID = 'compartment_id'
```

```
LANGUAGE_JAVA = 'JAVA'
```

A constant which can be used with the language property of a Run. This constant has a value of “JAVA”

```
LANGUAGE_PYTHON = 'PYTHON'
```

A constant which can be used with the language property of a Run. This constant has a value of “PYTHON”

```
LANGUAGE_SCALA = 'SCALA'
```

A constant which can be used with the language property of a Run. This constant has a value of “SCALA”

```
LANGUAGE_SQL = 'SQL'
```

A constant which can be used with the language property of a Run. This constant has a value of “SQL”

```
LIFECYCLE_STATE_ACCEPTED = 'ACCEPTED'
```

A constant which can be used with the lifecycle\_state property of a Run. This constant has a value of “ACCEPTED”

```
LIFECYCLE_STATE_CANCELED = 'CANCELED'
```

A constant which can be used with the lifecycle\_state property of a Run. This constant has a value of “CANCELED”

```
LIFECYCLE_STATE_CANCELING = 'CANCELING'
```

A constant which can be used with the lifecycle\_state property of a Run. This constant has a value of “CANCELING”

```
LIFECYCLE_STATE_FAILED = 'FAILED'
```

A constant which can be used with the lifecycle\_state property of a Run. This constant has a value of “FAILED”

```
LIFECYCLE_STATE_IN_PROGRESS = 'IN_PROGRESS'
```

A constant which can be used with the lifecycle\_state property of a Run. This constant has a value of “IN\_PROGRESS”



**LIFECYCLE\_STATE\_STOPPED = 'STOPPED'**

A constant which can be used with the `lifecycle_state` property of a Run. This constant has a value of “STOPPED”

**LIFECYCLE\_STATE\_STOPPING = 'STOPPING'**

A constant which can be used with the `lifecycle_state` property of a Run. This constant has a value of “STOPPING”

**LIFECYCLE\_STATE\_SUCCEEDED = 'SUCCEEDED'**

A constant which can be used with the `lifecycle_state` property of a Run. This constant has a value of “SUCCEEDED”

**OCI\_MODEL\_PATTERN = 'oci.[^.] + \\.models[\\..\*] ?'**

**TERMINATED\_STATES = ['CANCELED', 'FAILED', 'SUCCEEDED']**

**TYPE\_BATCH = 'BATCH'**

A constant which can be used with the `type` property of a Run. This constant has a value of “BATCH”

**TYPE\_SESSION = 'SESSION'**

A constant which can be used with the `type` property of a Run. This constant has a value of “SESSION”

**TYPE\_STREAMING = 'STREAMING'**

A constant which can be used with the `type` property of a Run. This constant has a value of “STREAMING”

**property application\_id**

**[Required]** Gets the `application_id` of this Run. The application ID.

**Returns**

The `application_id` of this Run.

**Return type**

str

**property application\_log\_config**

Gets the `application_log_config` of this Run.

**Returns**

The `application_log_config` of this Run.

**Return type**

oci.data\_flow.models.ApplicationLogConfig

**property archive\_uri**

Gets the `archive_uri` of this Run. A comma separated list of one or more archive files as Oracle Cloud Infrastructure URIs. For example, `oci://path/to/a.zip,oci://path/to/b.zip`. An Oracle Cloud Infrastructure URI of an archive.zip file containing custom dependencies that may be used to support the execution of a Python, Java, or Scala application. See <https://docs.cloud.oracle.com/iaas/Content/API/SDKDocs/hdfsconnector.htm#uriformat>.

**Returns**

The `archive_uri` of this Run.

**Return type**

str

**property arguments**

Gets the arguments of this Run. The arguments passed to the running application as command line arguments. An argument is either a plain text or a placeholder. Placeholders are replaced using values from the `parameters` map. Each placeholder specified must be represented in the `parameters` map else the request

(POST or PUT) will fail with a HTTP 400 status code. Placeholders are specified as *Service Api Spec*, where *name* is the name of the parameter. Example: [ “-input”, “\${input\_file}”, “-name”, “John Doe” ] If “input\_file” has a value of “mydata.xml”, then the value above will be translated to -input mydata.xml -name “John Doe”

**Returns**

The arguments of this Run.

**Return type**

list[str]

**property auth: dict**

The ADS authentication config used to initialize the client. This auth has the same format as those obtained by calling functions in ads.common.auth. The config is a dict containing the following key-value pairs: config: The config contains the config loaded from the configuration loaded from *oci\_config*. signer: The signer contains the signer object created from the api keys. client\_kwargs: client\_kwargs contains the *client\_kwargs* that was passed in as input parameter.

**cancel()** → [DataFlowRun](#)

Cancel a Data Flow run if it is not yet terminated. Will be executed synchronously.

**Returns**

The dataflow run instance.

**Return type**

self

**static check\_compartment\_id**(compartment\_id: Optional[str]) → str**Checks if a compartment ID has value and**

return the value from NB\_SESSION\_COMPARTMENT\_OCID environment variable if it is not specified.

**Parameters**

**compartment\_id**(str) – Compartment OCID or None

**Returns**

str: Compartment OCID

**Return type**

type

**Raises**

**ValueError** – compartment\_id is not specified and NB\_SESSION\_COMPARTMENT\_OCID environment variable is not set

**property class\_name**

Gets the class\_name of this Run. The class for the application.

**Returns**

The class\_name of this Run.

**Return type**

str

**property client: DataFlowClient**

OCI client

**property compartment\_id**

[Required] Gets the compartment\_id of this Run. The OCID of a compartment.

**Returns**

The compartment\_id of this Run.

**Return type**

str

**config = None**

**property configuration**

Gets the configuration of this Run. The Spark configuration passed to the running process. See <https://spark.apache.org/docs/latest/configuration.html#available-properties>. Example: { "spark.app.name" : "My App Name", "spark.shuffle.io.maxRetries" : "4" } Note: Not all Spark properties are permitted to be set. Attempting to set a property that is not allowed to be overwritten will cause a 400 status to be returned.

**Returns**

The configuration of this Run.

**Return type**

dict(str, str)

**create()** → *DataFlowRun*

Create a Data Flow run.

**Returns**

a DataFlowRun instance

**Return type**

*DataFlowRun*

**classmethod create\_instance(\*args, \*\*kwargs)**

Creates an instance using the same authentication as the class or an existing instance. If this method is called by a class, the default ADS authentication method will be used. If this method is called by an instance, the authentication method set in the instance will be used.

**property data\_read\_in\_bytes**

Gets the data\_read\_in\_bytes of this Run. The data read by the run in bytes.

**Returns**

The data\_read\_in\_bytes of this Run.

**Return type**

int

**property data\_written\_in\_bytes**

Gets the data\_written\_in\_bytes of this Run. The data written by the run in bytes.

**Returns**

The data\_written\_in\_bytes of this Run.

**Return type**

int

**property defined\_tags**

Gets the defined\_tags of this Run. Defined tags for this resource. Each key is predefined and scoped to a namespace. For more information, see [Resource Tags](#). Example: { "Operations": { "CostCenter": "42" } }

**Returns**

The defined\_tags of this Run.

**Return type**

dict(str, dict(str, object))

**delete()** → *DataFlowRun*

Cancel and delete a Data Flow run if it is not yet terminated. Will be executed asynchronously.

**Returns**

The dataflow run instance.

**Return type**

self

**classmethod deserialize**(data: dict, to\_cls: Optional[str] = None)

Deserialize data

**Parameters**

- **data** (dict) – A dictionary containing the data to be deserialized.
- **to\_cls** (str) – The name of the OCI model class to be initialized using the data. The OCI model class must be from the same OCI service of the OCI client (self.client). Defaults to None, the parent OCI model class name will be used if current class is inherited from an OCI model. If parent OCI model class is not found or not from the same OCI service, the data will be returned as is.

**property display\_name**

Gets the display\_name of this Run. A user-friendly name. This name is not necessarily unique.

**Returns**

The display\_name of this Run.

**Return type**

str

**property driver\_shape**

**[Required]** Gets the driver\_shape of this Run. The VM shape for the driver. Sets the driver cores and memory.

**Returns**

The driver\_shape of this Run.

**Return type**

str

**property driver\_shape\_config**

Gets the driver\_shape\_config of this Run.

**Returns**

The driver\_shape\_config of this Run.

**Return type**

oci.data\_flow.models.ShapeConfig

**property execute**

Gets the execute of this Run. The input used for spark-submit command. For more details see <https://spark.apache.org/docs/latest/submitting-applications.html#launching-applications-with-spark-submit>. Supported options include --class, --file, --jars, --conf, --py-files, and main application file with arguments. Example: --jars oci://path/to/a.jar,oci://path/to/b.jar --files

oci://path/to/a.json,oci://path/to/b.csv --py-files oci://path/to/a.py,oci://path/to/b.py --conf spark.sql.crossJoin.enabled=true --class org.apache.spark.examples.SparkPi oci://path/to/main.jar 10 Note: If execute is specified together with applicationId, className, configuration, fileUri, language, arguments, parameters during application create/update, or run create/submit, Data Flow service will use derived information from execute input only.

**Returns**

The execute of this Run.

**Return type**

str

**property executor\_shape**

**[Required]** Gets the executor\_shape of this Run. The VM shape for the executors. Sets the executor cores and memory.

**Returns**

The executor\_shape of this Run.

**Return type**

str

**property executor\_shape\_config**

Gets the executor\_shape\_config of this Run.

**Returns**

The executor\_shape\_config of this Run.

**Return type**

oci.data\_flow.models.ShapeConfig

**property file\_uri**

**[Required]** Gets the file\_uri of this Run. An Oracle Cloud Infrastructure URI of the file containing the application to execute. See <https://docs.cloud.oracle.com/iaas/Content/API/SDKDocs/hdfsconnector.htm#uriformat>.

**Returns**

The file\_uri of this Run.

**Return type**

str

**static flatten(data: dict) → dict**

Flattens a nested dictionary.

**Parameters**

**data** (A nested dictionary) –

**Returns**

The flattened dictionary.

**Return type**

dict

**property freeform\_tags**

Gets the freeform\_tags of this Run. Free-form tags for this resource. Each tag is a simple key-value pair with no predefined name, type, or namespace. For more information, see [Resource Tags](#). Example: {"Department": "Finance"}

**Returns**

The freeform\_tags of this Run.

**Return type**

dict(str, str)

**classmethod from\_dict**(data)

Initialize an instance from a dictionary.

**Parameters**

**data** (dict) – A dictionary containing the properties to initialize the class.

**classmethod from\_oci\_model**(oci\_instance)

Initialize an instance from an instance of OCI model.

**Parameters**

**oci\_instance** – An instance of an OCI model.

**classmethod from\_ocid**(ocid: str)

Initializes an object from OCID

**Parameters**

**ocid** (str) – The OCID of the object

**property id**

[Required] Gets the id of this Run. The ID of a run.

**Returns**

The id of this Run.

**Return type**

str

**property idle\_timeout\_in\_minutes**

Gets the idle\_timeout\_in\_minutes of this Run. The timeout value in minutes used to manage Runs. A Run would be stopped after inactivity for this amount of time period. Note: This parameter is currently only applicable for Runs of type *SESSION*. Default value is 2880 minutes (2 days)

**Returns**

The idle\_timeout\_in\_minutes of this Run.

**Return type**

int

**classmethod init\_client**(\*\*kwargs) → DataFlowClient

Initializes the OCI client specified in the “client” keyword argument Sub-class should override this method and call cls.\_init\_client(client=OCI\_CLIENT)

**Parameters**

**\*\*kwargs** – Additional keyword arguments for initializing the OCI client.

**Return type**

An instance of OCI client.

**kwargs** = None

**property language**

[Required] Gets the language of this Run. The Spark language.

Allowed values for this property are: “SCALA”, “JAVA”, “PYTHON”, “SQL”, ‘UNKNOWN\_ENUM\_VALUE’. Any unrecognized values returned by a service will be mapped to ‘UNKNOWN\_ENUM\_VALUE’.

**Returns**

The language of this Run.

**Return type**

str

**property lifecycle\_details**

Gets the lifecycle\_details of this Run. The detailed messages about the lifecycle state.

**Returns**

The lifecycle\_details of this Run.

**Return type**

str

**property lifecycle\_state**

**[Required]** Gets the lifecycle\_state of this Run. The current state of this run.

Allowed values for this property are: “ACCEPTED”, “IN\_PROGRESS”, “CANCELING”, “CANCELED”, “FAILED”, “SUCCEEDED”, “STOPPING”, “STOPPED”, ‘UNKNOWN\_ENUM\_VALUE’. Any unrecognized values returned by a service will be mapped to ‘UNKNOWN\_ENUM\_VALUE’.

**Returns**

The lifecycle\_state of this Run.

**Return type**

str

**classmethod list\_resource**(*compartment\_id: Optional[str] = None, limit: int = 0, \*\*kwargs*) → list

Generic method to list OCI resources

**Parameters**

- **compartment\_id** (*str*) – Compartment ID of the OCI resources. Defaults to None. If compartment\_id is not specified, the value of NB\_SESSION\_COMPARTMENT\_OCID in environment variable will be used.
- **limit** (*int*) – The maximum number of items to return. Defaults to 0, All items will be returned
- **\*\*kwargs** – Additional keyword arguments to filter the resource. The kwargs are passed into OCI API.

**Returns**

A list of OCI resources

**Return type**

list

**Raises**

**NotImplementedError** – List method is not supported or implemented.

**load\_properties\_from\_env()**

Loads properties from the environment

**property logs:** *DataFlowLogs*

Show logs from a run. There are three types of logs: application log, driver log and executor log, each with stdout and stderr separately. To access each type of logs, >>> dfr.logs.application.stdout >>> dfr.logs.driver.stderr

**Returns**

an instance of DataFlowLogs

**Return type***DataFlowLogs***property logs\_bucket\_uri**

Gets the logs\_bucket\_uri of this Run. An Oracle Cloud Infrastructure URI of the bucket where the Spark job logs are to be uploaded. See <https://docs.cloud.oracle.com/iaas/Content/API/SDKDocs/hdfsconnector.htm#uriformat>.

**Returns**

The logs\_bucket\_uri of this Run.

**Return type**

str

**property max\_duration\_in\_minutes**

Gets the max\_duration\_in\_minutes of this Run. The maximum duration in minutes for which an Application should run. Data Flow Run would be terminated once it reaches this duration from the time it transitions to *IN\_PROGRESS* state.

**Returns**

The max\_duration\_in\_minutes of this Run.

**Return type**

int

**property metastore\_id**

Gets the metastore\_id of this Run. The OCID of OCI Hive Metastore.

**Returns**

The metastore\_id of this Run.

**Return type**

str

**property name: str**

Gets the name of the object.

**property num\_executors**

**[Required]** Gets the num\_executors of this Run. The number of executor VMs requested.

**Returns**

The num\_executors of this Run.

**Return type**

int

**property opc\_request\_id**

Gets the opc\_request\_id of this Run. Unique Oracle assigned identifier for the request. If you need to contact Oracle about a particular request, please provide the request ID.

**Returns**

The opc\_request\_id of this Run.

**Return type**

str

**property owner\_principal\_id**

Gets the owner\_principal\_id of this Run. The OCID of the user who created the resource.

**Returns**

The owner\_principal\_id of this Run.



**Return type**

str

**property owner\_user\_name**

Gets the owner\_user\_name of this Run. The username of the user who created the resource. If the username of the owner does not exist, *null* will be returned and the caller should refer to the ownerPrincipalId value instead.

**Returns**

The owner\_user\_name of this Run.

**Return type**

str

**property parameters**

Gets the parameters of this Run. An array of name/value pairs used to fill placeholders found in properties like *Application.arguments*. The name must be a string of one or more word characters (a-z, A-Z, 0-9, \_). The value can be a string of 0 or more characters of any kind. Example: [ { name: "iterations", value: "10"}, { name: "input\_file", value: "mydata.xml" }, { name: "variable\_x", value: "\${x}" } ]

**Returns**

The parameters of this Run.

**Return type**

list[oci.data\_flow.models.ApplicationParameter]

**property private\_endpoint\_dns\_zones**

Gets the private\_endpoint\_dns\_zones of this Run. An array of DNS zone names. Example: [ "app.examplecorp.com", "app.examplecorp2.com" ]

**Returns**

The private\_endpoint\_dns\_zones of this Run.

**Return type**

list[str]

**property private\_endpoint\_id**

Gets the private\_endpoint\_id of this Run. The OCID of a private endpoint.

**Returns**

The private\_endpoint\_id of this Run.

**Return type**

str

**property private\_endpoint\_max\_host\_count**

Gets the private\_endpoint\_max\_host\_count of this Run. The maximum number of hosts to be accessed through the private endpoint. This value is used to calculate the relevant CIDR block and should be a multiple of 256. If the value is not a multiple of 256, it is rounded up to the next multiple of 256. For example, 300 is rounded up to 512.

**Returns**

The private\_endpoint\_max\_host\_count of this Run.

**Return type**

int

**property private\_endpoint\_nsg\_ids**

Gets the private\_endpoint\_nsg\_ids of this Run. An array of network security group OCIDs.

**Returns**

The private\_endpoint\_nsg\_ids of this Run.

**Return type**

list[str]

**property private\_endpoint\_subnet\_id**

Gets the private\_endpoint\_subnet\_id of this Run. The OCID of a subnet.

**Returns**

The private\_endpoint\_subnet\_id of this Run.

**Return type**

str

**property run\_details\_link: str**

Link to run details page in OCI console

**Returns**

The link to the details page in OCI console.

**Return type**

str

**property run\_duration\_in\_milliseconds**

Gets the run\_duration\_in\_milliseconds of this Run. The duration of the run in milliseconds.

**Returns**

The run\_duration\_in\_milliseconds of this Run.

**Return type**

int

**serialize()**

Serialize the model to a dictionary that is ready to be send to OCI API.

**Returns**

A dictionary that is ready to be send to OCI API.

**Return type**

dict

**signer = None****property spark\_version**

**[Required]** Gets the spark\_version of this Run. The Spark version utilized to run the application.

**Returns**

The spark\_version of this Run.

**Return type**

str

**property status: str**

Show status (lifecycle state) of a run.

**Returns**

status of the run

**Return type**

str

**sync**(*merge\_strategy*: MergeStrategy = MergeStrategy.OVERRIDE)

Refreshes the properties of the object from OCI

**property time\_created**

**[Required]** Gets the time\_created of this Run. The date and time a application was created, expressed in RFC 3339 timestamp format. Example: 2018-04-03T21:10:29.600Z

**Returns**

The time\_created of this Run.

**Return type**

datetime

**property time\_updated**

**[Required]** Gets the time\_updated of this Run. The date and time a application was updated, expressed in RFC 3339 timestamp format. Example: 2018-04-03T21:10:29.600Z

**Returns**

The time\_updated of this Run.

**Return type**

datetime

**to\_dict**(*flatten*: bool = False) → dict

Converts the properties to a dictionary

**Parameters**

**flatten** – (Default value = False)

**to\_oci\_model**(*oci\_model*)

Converts the object into an instance of OCI data model.

**Parameters**

- **oci\_model** (*class or str*) – The OCI model to be converted to. This can be a string of the model name.
- **type\_mapping** (*dict*) – A dictionary mapping the models. Returns: An instance of the oci\_model

**to\_yaml**() → str

Serializes the object into YAML string.

**Returns**

YAML stored in a string.

**Return type**

str

**property total\_o\_cpu**

Gets the total\_o\_cpu of this Run. The total number of oCPU requested by the run.

**Returns**

The total\_o\_cpu of this Run.

**Return type**

int

**property type**

Gets the type of this Run. The Spark application processing type.

Allowed values for this property are: “BATCH”, “STREAMING”, “SESSION”, ‘UNKNOWN\_ENUM\_VALUE’. Any unrecognized values returned by a service will be mapped to ‘UNKNOWN\_ENUM\_VALUE’.

**Returns**

The type of this Run.

**Return type**

str

**type\_mappings** = None

**update\_from\_oci\_model**(oci\_model\_instance, merge\_strategy: MergeStrategy = MergeStrategy.OVERRIDE)

Updates the properties from OCI model with the same properties.

**Parameters**

**oci\_model\_instance** – An instance of OCI model, which should have the same properties of this class.

**wait**(interval: int = 3) → DataFlowRun

Wait for a run to terminate.

**Parameters**

**interval** (int, optional) – interval to wait before probing again

**Returns**

a DataFlowRun instance

**Return type**

DataFlowRun

**property warehouse\_bucket\_uri**

Gets the warehouse\_bucket\_uri of this Run. An Oracle Cloud Infrastructure URI of the bucket to be used as default warehouse directory for BATCH SQL runs. See <https://docs.cloud.oracle.com/iaas/Content/API/SDKDocs/hdfsconnector.htm#uriformat>.

**Returns**

The warehouse\_bucket\_uri of this Run.

**Return type**

str

**watch**(interval: int = 3) → DataFlowRun

This is an alias of *wait()* method. It waits for a run to terminate.

**Parameters**

**interval** (int, optional) – interval to wait before probing again

**Returns**

a DataFlowRun instance

**Return type**

DataFlowRun

**class** ads.jobs.DataFlowRuntime(spec: Optional[Dict] = None, \*\*kwargs)

Bases: *CondaRuntime*

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

**Parameters**

- **spec** (*dict*, *optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

**CONST\_ARCHIVE\_BUCKET** = 'archiveBucket'

**CONST\_ARCHIVE\_URI** = 'archiveUri'

**CONST\_ARGS** = 'args'

**CONST\_CONDA** = 'conda'

**CONST\_CONDA\_AUTH\_TYPE** = 'condaAuthType'

**CONST\_CONDA\_REGION** = 'region'

**CONST\_CONDA\_SLUG** = 'slug'

**CONST\_CONDA\_TYPE** = 'type'

**CONST\_CONDA\_TYPE\_CUSTOM** = 'published'

**CONST\_CONDA\_TYPE\_SERVICE** = 'service'

**CONST\_CONDA\_URI** = 'uri'

**CONST\_CONFIGURATION** = 'configuration'

**CONST\_ENV\_VAR** = 'env'

**CONST\_MAXIMUM\_RUNTIME\_IN\_MINUTES** = 'maximumRuntimeInMinutes'

**CONST\_OVERWRITE** = 'overwrite'

**CONST\_SCRIPT\_BUCKET** = 'scriptBucket'

**CONST\_SCRIPT\_PATH** = 'scriptPathURI'

**CONST\_TAG** = 'freeformTags'

**property archive\_bucket: str**

Bucket to save archive zip

**property archive\_uri**

The Uri of archive zip

**property args: list**

Command line arguments

```
attribute_map = {'archiveUri': 'archive_uri', 'condaAuthType': 'conda_auth_type',
'configuration': 'configuration', 'env': 'env', 'freeformTags': 'freeform_tags',
'overwrite': 'overwrite', 'scriptBucket': 'script_bucket', 'scriptPathURI':
'script_path_uri'}
```

**property conda: dict**

The conda environment specification.

For service conda environment, the specification contains:

- **type**, the type of the conda environment. This is always `service` for service conda environment.

- `slug`, the slug of the conda environment.

For custom conda environment, the specification contains:

- `type`, the type of the conda environment. This is always `published` for custom conda environment.
- `uri`, the uri of the conda environment, e.g. `oci://bucket@namespace/prefix/to/conda`
- `region`, the region of the bucket in which the conda environment is stored. By default, ADS will determine the region based on the authenticated API key or resource principal. This is only needed if your conda environment is stored in a different region.

#### Returns

A dictionary containing the conda environment specifications.

#### Return type

dict

#### **property configuration: dict**

Configuration for Spark

#### **convert(\*\*kwargs)**

#### **property environment\_variables: dict**

Environment variables

#### Returns

The runtime environment variables. The returned dictionary is a copy.

#### Return type

dict

#### **property envs: dict**

Environment variables

#### **property freeform\_tags: dict**

#### **classmethod from\_dict(obj\_dict: dict) → Self**

Initialize the object from a Python dictionary

#### **classmethod from\_json(json\_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, decoder: callable = <class 'json.decoder.JSONDecoder'>, \*\*kwargs) → Self**

Creates an object from JSON string provided or from URI location containing JSON string

#### Parameters

- **json\_string** (*str*, *optional*) – JSON string. Defaults to None.
- **uri** (*str*, *optional*) – URI location of file containing JSON string. Defaults to None.
- **decoder** (*callable*, *optional*) – Custom decoder. Defaults to simple JSON decoder.
- **kwargs** (*dict*) – keyword arguments to be passed into `fspec.open()`. For OCI object storage, this should be `config="path/to/.oci/config"`. For other storage connections consider e.g. `host`, `port`, `username`, `password`, etc.
- **json\_string** – JSON string, by default None
- **uri** – URI location of file containing JSON string, by default None
- **decoder** – Decoder for custom data structures, by default `json.JSONDecoder`

- **kwargs** – keyword arguments to be passed into `fsspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

**Raises**

- **ValueError** – Raised if neither string nor uri is provided
- **ValueError** – Both `json_string` and `uri` are empty, or The input is not a valid JSON.

**Returns**

Returns instance of the class

**Return type**

`cls`

**Returns**

Object initialized from JSON data.

**Return type**

`Type[Self]`

**classmethod from\_string**(*obj\_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, loader: callable = <class 'yaml.loader.SafeLoader'>, \*\*kwargs*) → Self

Initializes an object from YAML/JSON string or URI location containing the YAML/JSON

**Parameters**

- **obj\_string** (*str, optional*) – YAML/JSON string, by default None
- **uri** (*str, optional*) – URI location of file containing YAML/JSON, by default None
- **loader** (*callable, optional*) – Custom YAML loader, by default `yaml.SafeLoader`

**Returns**

Object initialized from the YAML.

**Return type**

`Self`

**classmethod from\_yaml**(*yaml\_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, loader: callable = <class 'yaml.loader.SafeLoader'>, \*\*kwargs*) → Self

Initializes an object from YAML string or URI location containing the YAML

**Parameters**

- **yaml\_string** (*str, optional*) – YAML string, by default None
- **uri** (*str, optional*) – URI location of file containing YAML, by default None
- **loader** (*callable, optional*) – Custom YAML loader, by default `yaml.SafeLoader`

**Returns**

Object initialized from the YAML.

**Return type**

`Self`

**Raises**

- **ValueError** – Raised if neither string nor uri is provided

**get\_spec**(*key: str, default: Optional[Any] = None*) → Any

Gets the value of a specification property

**Parameters**

- **key** (*str*) – The name of the property.

- **default** (*Any*, *optional*) – The default value to be used, if the property does not exist, by default `None`.

**Returns**

The value of the property.

**Return type**

`Any`

**property kind: str**

Kind of the object to be stored in YAML. All runtime implementations will have “runtime” as kind. Sub-class will have different types.

**property maximum\_runtime\_in\_minutes: int**

Maximum runtime in minutes

**property overwrite: str**

Whether to overwrite the existing script in object storage (script bucket).

**property script\_bucket: str**

Bucket to save script

**property script\_uri: str**

The URI of the source code

**set\_spec**(*k: str, v: Any*) → `Self`

Sets a specification property for the object.

**Parameters**

- **k** (*str*) – key, the name of the property.
- **v** (*Any*) – value, the value of the property.

**Returns**

This method returns self to support chaining methods.

**Return type**

`Self`

**to\_dict**() → `dict`

Converts the object to dictionary with kind, type and spec as keys.

**to\_json**(*uri: ~typing.Optional[str] = None, encoder: callable = <class 'json.encoder.JSONEncoder'>, \*\*kwargs*) → `str`

Returns the object serialized as a JSON string

**Parameters**

- **uri** (*str*, *optional*) – URI location to save the JSON string, by default `None`
- **encoder** (*callable*, *optional*) – Encoder for custom data structures, by default `json.JSONEncoder`
- **kwargs** (*dict*) – keyword arguments to be passed into `fsspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

**Returns**

object serialized as a JSON string

**Return type**

`str`



**to\_yaml**(*uri*: *typing.Optional[str]* = None, *dumper*: *callable* = <class 'yaml.dumper.SafeDumper'>, *\*\*kwargs*) → *Optional[str]*

Returns object serialized as a YAML string

#### Parameters

- **uri** (*str*, *optional*) – URI location to save the YAML string, by default None
- **dumper** (*callable*, *optional*) – Custom YAML Dumper, by default `yaml.SafeDumper`
- **kwargs** (*dict*) – keyword arguments to be passed into `fspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

#### Returns

If uri is specified, None will be returned. Otherwise, the yaml content will be returned.

#### Return type

`Union[str, None]`

#### property type: str

The type of the object as showing in YAML

**with\_archive\_bucket**(*bucket*) → *DataFlowRuntime*

Set object storage bucket to save the archive zip, in case archive uri given is local.

#### Parameters

**bucket** (*str*) – name of the bucket

#### Returns

runtime instance itself

#### Return type

*DataFlowRuntime*

**with\_archive\_uri**(*uri*: *str*) → *DataFlowRuntime*

Set archive uri (which is a zip file containing dependencies).

#### Parameters

**uri** (*str*) – uri to the archive zip

#### Returns

runtime instance itself

#### Return type

*DataFlowRuntime*

**with\_argument**(*\*args*, *\*\*kwargs*) → *Self*

Adds command line arguments to the runtime.

This method can be called (chained) multiple times to add various arguments.

#### Parameters

- **args** – Positional arguments. In a single method call, positional arguments are always added before keyword arguments. You can call `with_argument()` to add positional arguments after keyword arguments.
- **kwargs** – Keyword arguments. To add a keyword argument without value, set the value to None.

#### Returns

This method returns self to support chaining methods.

**Return type**

Self

**Raises****ValueError** – Keyword arguments with space in a key.**Examples**

```
>>> runtime = Runtime().with_argument(key1="val1", key2="val2").with_argument(
↳ "pos1")
>>> print(runtime.args)
[--key1, "val1", "--key2", "val2", "pos1"]
```

```
>>> runtime = Runtime()
>>> runtime.with_argument("pos1")
>>> runtime.with_argument(key1="val1", key2="val2.1 val2.2")
>>> runtime.with_argument("pos2")
>>> print(runtime.args)
['pos1', '--key1', 'val1', '--key2', 'val2.1 val2.2', 'pos2']
```

```
>>> runtime = Runtime()
>>> runtime.with_argument("pos1")
>>> runtime.with_argument(key1=None, key2="val2")
>>> runtime.with_argument("pos2")
>>> print(runtime.args)
["pos1", "--key1", "--key2", "val2", "pos2"]
```

**with\_conda**(*conda\_spec: Optional[dict] = None*)

**with\_configuration**(*config: dict*) → *DataFlowRuntime*

Set Configuration for Spark.

**Parameters**

**config** (*dict*) – dictionary of configuration details <https://spark.apache.org/docs/latest/configuration.html#available-properties>. Example: { “spark.app.name”: “My App Name”, “spark.shuffle.io.maxRetries”: “4” }

**Returns**

runtime instance itself

**Return type**

*DataFlowRuntime*

**with\_custom\_conda**(*uri: str, region: Optional[str] = None, auth\_type: Optional[str] = None*)

Specifies the custom conda pack for running the job

**Parameters**

- **uri** (*str*) – The OCI object storage URI for the conda pack, e.g. “oci://your\_bucket@namespace/object\_name.” In the Environment Explorer of an OCI notebook session, this is shown as the “source” of the conda pack.
- **region** (*str, optional*) – The region of the bucket storing the custom conda pack, by default None. If region is not specified, ADS will use the region from your authentication credentials, \* For API Key, config[“region”] is used. \* For Resource Principal, signer.region is used. This is required if the conda pack is stored in a different region.

- **auth\_type** (*str*, (*=*"resource\_principal")) – One of "resource\_principal", "api\_keys", "instance\_principal", etc. Auth mechanism used to read the conda back uri provided.

**Returns**

The runtime instance.

**Return type**

self

**See also:****https**

[//docs.oracle.com/en-us/iaas/data-science/using/conda\\_publishs\\_object.htm](https://docs.oracle.com/en-us/iaas/data-science/using/conda_publishs_object.htm)

**with\_environment\_variable**(*\*\*kwargs*) → Self

Sets environment variables

Environment variables enclosed by `${...}` will be substituted.

- You can use `$$` to escape the substitution.
- Undefined variable enclosed by `${}` will be ignored.
- Double dollar signs `$$` will be substituted by a single one `$`.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**Examples**

```
>>> runtime = (
...     PythonRuntime()
...     .with_environment_variable(
...         HOST="10.0.0.1",
...         PORT="443",
...         URL="http://${HOST}:${PORT}/path/",
...         ESCAPED_URL="http://$$${HOST}$$${PORT}/path/",
...         MISSING_VAR="This is ${UNDEFINED}",
...         VAR_WITH_DOLLAR="$10",
...         DOUBLE_DOLLAR="$$10"
...     )
... )
>>> for k, v in runtime.environment_variables.items():
...     print(f"{k}: {v}")
HOST: 10.0.0.1
PORT: 443
URL: http://10.0.0.1:443/path/
ESCAPED_URL: http://${HOST}:${PORT}/path/
MISSING_VAR: This is ${UNDEFINED}
VAR_WITH_DOLLAR: $10
DOUBLE_DOLLAR: $10
```

**with\_freeform\_tag**(*\*\*kwargs*) → Self

Sets freeform tag

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**with\_maximum\_runtime\_in\_minutes**(*maximum\_runtime\_in\_minutes: int*) → Self

Sets maximum runtime in minutes

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**with\_overwrite**(*overwrite: bool*) → *DataFlowRuntime*

Whether to overwrite the existing script in object storage (script bucket). If the Object Storage bucket already contains a script with the same name, then it will be overwritten with the new one if the *overwrite* flag equal to *True*.

**Parameters**

**overwrite** (*bool*) – Whether to overwrite the existing script in object storage (script bucket).

**Returns**

The DataFlowRuntime instance (self).

**Return type**

*DataFlowRuntime*

**with\_script\_bucket**(*bucket*) → *DataFlowRuntime*

Set object storage bucket to save the script, in case script uri given is local.

**Parameters**

**bucket** (*str*) – name of the bucket

**Returns**

runtime instance itself

**Return type**

*DataFlowRuntime*

**with\_script\_uri**(*path: str*) → *DataFlowRuntime*

Set script uri.

**Parameters**

**path** (*str*) – uri to the script

**Returns**

runtime instance itself

**Return type**

*DataFlowRuntime*

**with\_service\_conda**(*slug: str*)

Specifies the service conda pack for running the job

**Parameters**

**slug** (*str*) – The slug name of the service conda pack

**Returns**

The runtime instance.

**Return type**

self

**class** `ads.jobs.DataScienceJob`(*spec: Optional[Dict] = None, \*\*kwargs*)

Bases: [Infrastructure](#)

Represents the OCI Data Science Job infrastructure.

To configure the infrastructure for a Data Science Job:

```
infrastructure = (
    DataScienceJob()
    # Configure logging for getting the job run outputs.
    .with_log_group_id("<log_group_ocid>")
    # Log resource will be auto-generated if log ID is not specified.
    .with_log_id("<log_ocid>")
    # If you are in an OCI data science notebook session,
    # the following configurations are not required.
    # Configurations from the notebook session will be used as defaults.
    .with_compartment_id("<compartment_ocid>")
    .with_project_id("<project_ocid>")
    .with_subnet_id("<subnet_ocid>")
    .with_shape_name("VM.Standard.E3.Flex")
    # Shape config details are applicable only for the flexible shapes.
    .with_shape_config_details(memory_in_gbs=16, ocpus=1)
    # Minimum/Default block storage size is 50 (GB).
    .with_block_storage_size(50)
)
```

Initializes a data science job infrastructure

**Parameters**

- **spec** (*dict, optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

`CONST_BLOCK_STORAGE = 'blockStorageSize'`

`CONST_COMPARTMENT_ID = 'compartmentId'`

`CONST_DISPLAY_NAME = 'displayName'`

`CONST_JOB_INFRA = 'jobInfrastructureType'`

`CONST_JOB_TYPE = 'jobType'`

`CONST_LOG_GROUP_ID = 'logGroupId'`

`CONST_LOG_ID = 'logId'`

`CONST_MEMORY_IN_GBS = 'memoryInGBs'`

`CONST_OCPUS = 'ocpus'`

```
CONST_PROJECT_ID = 'projectId'

CONST_SHAPE_CONFIG_DETAILS = 'shapeConfigDetails'

CONST_SHAPE_NAME = 'shapeName'

CONST_SUBNET_ID = 'subnetId'

attribute_map = {'blockStorageSize': 'block_storage_size', 'compartmentId':
'compartment_id', 'displayName': 'display_name', 'jobInfrastructureType':
'job_infrastructure_type', 'jobType': 'job_type', 'logGroupId': 'log_group_id',
'logId': 'log_id', 'projectId': 'project_id', 'shapeConfigDetails':
'shape_config_details', 'shapeName': 'shape_name', 'subnetId': 'subnet_id'}
```

**property block\_storage\_size:** int

Block storage size for the job

**build()** → *DataScienceJob*

**property compartment\_id:** Optional[str]

The compartment OCID

**create(runtime, \*\*kwargs)** → *DataScienceJob*

Creates a job with runtime.

**Parameters**

**runtime** (*Runtime*) – An ADS job runtime.

**Returns**

The DataScienceJob instance (self)

**Return type**

*DataScienceJob*

**delete()** → None

Deletes a job

**classmethod fast\_launch\_shapes**(*compartment\_id: Optional[str] = None, \*\*kwargs*) → list

Lists the supported fast launch shapes for running jobs in a compartment.

**Parameters**

**compartment\_id**(*str, optional*) – The compartment ID for running the jobs, by default None. This is optional in a OCI Data Science notebook session. If this is not specified, the compartment ID of the notebook session will be used.

**Returns**

A list of `oci.data_science.models.FastLaunchJobConfigSummary` objects containing the information of the supported shapes.

**Return type**

list

## Examples

To get a list of shape names:

```
shapes = DataScienceJob.fast_launch_shapes(
    compartment_id=os.environ["PROJECT_COMPARTMENT_OCID"]
)
shape_names = [shape.shape_name for shape in shapes]
```

**classmethod** `from_dict(obj_dict: dict) → Self`

Initialize the object from a Python dictionary

**classmethod** `from_dsc_job(dsc_job: DSCJob) → DataScienceJob`

Initialize a DataScienceJob instance from a DSCJob

### Parameters

**dsc\_job** (*DSCJob*) – An instance of DSCJob

### Returns

An instance of DataScienceJob

### Return type

*DataScienceJob*

**classmethod** `from_id(job_id: str) → DataScienceJob`

Gets an existing job using Job OCID

### Parameters

**job\_id** (*str*) – Job OCID

### Returns

An instance of DataScienceJob

### Return type

*DataScienceJob*

**classmethod** `from_json(json_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, decoder: callable = <class 'json.decoder.JSONDecoder'>, **kwargs) → Self`

Creates an object from JSON string provided or from URI location containing JSON string

### Parameters

- **json\_string** (*str*, *optional*) – JSON string. Defaults to None.
- **uri** (*str*, *optional*) – URI location of file containing JSON string. Defaults to None.
- **decoder** (*callable*, *optional*) – Custom decoder. Defaults to simple JSON decoder.
- **kwargs** (*dict*) – keyword arguments to be passed into `jsonspec.open()`. For OCI object storage, this should be `config="path/to/.oci/config"`. For other storage connections consider e.g. host, port, username, password, etc.
- **json\_string** – JSON string, by default None
- **uri** – URI location of file containing JSON string, by default None
- **decoder** – Decoder for custom data structures, by default `json.JSONDecoder`
- **kwargs** – keyword arguments to be passed into `jsonspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

### Raises

- **ValueError** – Raised if neither string nor uri is provided
- **ValueError** – Both json\_string and uri are empty, or The input is not a valid JSON.

**Returns**

Returns instance of the class

**Return type**

cls

**Returns**

Object initialized from JSON data.

**Return type**

Type[Self]

**classmethod from\_string**(obj\_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, loader: callable = <class 'yaml.loader.SafeLoader'>, \*\*kwargs) → Self

Initializes an object from YAML/JSON string or URI location containing the YAML/JSON

**Parameters**

- **obj\_string** (str, optional) – YAML/JSON string, by default None
- **uri** (str, optional) – URI location of file containing YAML/JSON, by default None
- **loader** (callable, optional) – Custom YAML loader, by default yaml.SafeLoader

**Returns**

Object initialized from the YAML.

**Return type**

Self

**classmethod from\_yaml**(yaml\_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, loader: callable = <class 'yaml.loader.SafeLoader'>, \*\*kwargs) → Self

Initializes an object from YAML string or URI location containing the YAML

**Parameters**

- **yaml\_string** (str, optional) – YAML string, by default None
- **uri** (str, optional) – URI location of file containing YAML, by default None
- **loader** (callable, optional) – Custom YAML loader, by default yaml.SafeLoader

**Returns**

Object initialized from the YAML.

**Return type**

Self

**Raises**

**ValueError** – Raised if neither string nor uri is provided

**get\_spec**(key: str, default: Optional[Any] = None) → Any

Gets the value of a specification property

**Parameters**

- **key** (str) – The name of the property.
- **default** (Any, optional) – The default value to be used, if the property does not exist, by default None.



**Returns**

The value of the property.

**Return type**

Any

**classmethod** `instance_shapes`(*compartment\_id*: *Optional[str] = None*, *\*\*kwargs*) → list

Lists the supported shapes for running jobs in a compartment.

**Parameters**

**compartment\_id**(*str*, *optional*) – The compartment ID for running the jobs, by default None. This is optional in a OCI Data Science notebook session. If this is not specified, the compartment ID of the notebook session will be used.

**Returns**

A list of `oci.data_science.models.JobShapeSummary` objects containing the information of the supported shapes.

**Return type**

list

**Examples**

To get a list of shape names:

```
shapes = DataScienceJob.fast_launch_shapes(
    compartment_id=os.environ["PROJECT_COMPARTMENT_OCID"]
)
shape_names = [shape.name for shape in shapes]
```

**property** `job_id`: `Optional[str]`

The OCID of the job

**property** `job_infrastructure_type`: `Optional[str]`

Job infrastructure type

**property** `job_type`: `Optional[str]`

Job type

**property** `kind`: `str`

Kind of the object to be stored in YAML. All runtimes will have “infrastructure” as kind. Subclass will have different types.

**classmethod** `list_jobs`(*compartment\_id*: *Optional[str] = None*, *\*\*kwargs*) → List[[DataScienceJob](#)]

Lists all jobs in a compartment.

**Parameters**

- **compartment\_id**(*str*, *optional*) – The compartment ID for running the jobs, by default None. This is optional in a OCI Data Science notebook session. If this is not specified, the compartment ID of the notebook session will be used.
- **\*\*kwargs** – Keyword arguments to be passed into OCI list\_jobs API for filtering the jobs.

**Returns**

A list of `DataScienceJob` object.

**Return type**

List[[DataScienceJob](#)]

**property log\_group\_id: str**

Log group OCID of the data science job

**Returns**

Log group OCID

**Return type**

str

**property log\_id: str**

Log OCID for the data science job.

**Returns**

Log OCID

**Return type**

str

**property name: str**

Display name of the job

```
payload_attribute_map = {'blockStorageSize':
'job_infrastructure_configuration_details.block_storage_size_in_gbs',
'compartmentId': 'compartment_id', 'displayName': 'display_name',
'jobInfrastructureType':
'job_infrastructure_configuration_details.job_infrastructure_type', 'jobType':
'job_configuration_details.job_type', 'logGroupId':
'job_log_configuration_details.log_group_id', 'logId':
'job_log_configuration_details.log_id', 'projectId': 'project_id',
'shapeConfigDetails':
'job_infrastructure_configuration_details.job_shape_config_details', 'shapeName':
'job_infrastructure_configuration_details.shape_name', 'subnetId':
'job_infrastructure_configuration_details.subnet_id'}
```

**property project\_id: Optional[str]**

Project OCID

**run**(name=None, args=None, env\_var=None, freeform\_tags=None, wait=False) → *DataScienceJobRun*

Runs a job on OCI Data Science job

**Parameters**

- **name** (*str*, *optional*) – The name of the job run, by default None.
- **args** (*str*, *optional*) – Command line arguments for the job run, by default None.
- **env\_var** (*dict*, *optional*) – Environment variable for the job run, by default None
- **freeform\_tags** (*dict*, *optional*) – Freeform tags for the job run, by default None
- **wait** (*bool*, *optional*) – Indicate if this method should wait for the run to finish before it returns, by default False.

**Returns**

A Data Science Job Run instance.

**Return type**

*DataScienceJobRun*

**run\_list**(\*\*kwargs) → List[*DataScienceJobRun*]

Gets a list of job runs.

**Parameters**

**\*\*kwargs** – Keyword arguments for filtering the job runs. These arguments will be passed to OCI API.

**Returns**

A list of job runs.

**Return type**

List[DSCJobRun]

**set\_spec**(*k: str, v: Any*) → Self

Sets a specification property for the object.

**Parameters**

- **k** (*str*) – key, the name of the property.
- **v** (*Any*) – value, the value of the property.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**property shape\_config\_details: Dict**

The details for the job run shape configuration.

**shape\_config\_details\_attribute\_map** = {'memoryInGBs': 'memory\_in\_gbs', 'ocpus': 'ocpus'}

**property shape\_name: Optional[str]**

Shape name

**snake\_to\_camel\_map** = {'block\_storage\_size\_in\_gbs': 'blockStorageSize', 'compartment\_id': 'compartmentId', 'display\_name': 'displayName', 'job\_infrastructure\_type': 'jobInfrastructureType', 'job\_shape\_config\_details': 'shapeConfigDetails', 'job\_type': 'jobType', 'log\_group\_id': 'logGroupId', 'log\_id': 'logId', 'project\_id': 'projectId', 'shape\_name': 'shapeName', 'subnet\_id': 'subnetId'}

**static standardize\_spec**(*spec*)

**property status: Optional[str]**

Status of the job.

**Returns**

Status of the job.

**Return type**

str

**property subnet\_id: str**

Subnet ID

**to\_dict**() → dict

Converts the object to dictionary with kind, type and spec as keys.

**to\_json**(*uri: ~typing.Optional[str] = None, encoder: callable = <class 'json.encoder.JSONEncoder'>, \*\*kwargs*) → str

Returns the object serialized as a JSON string

**Parameters**

- **uri** (*str*, *optional*) – URI location to save the JSON string, by default None
- **encoder** (*callable*, *optional*) – Encoder for custom data structures, by default `json.JSONEncoder`
- **kwargs** (*dict*) – keyword arguments to be passed into `fspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

**Returns**

object serialized as a JSON string

**Return type**

`str`

**to\_yaml** (*uri*: *~typing.Optional[str]* = None, *dumper*: *callable* = `<class 'yaml.dumper.SafeDumper'>`, *\*\*kwargs*) → *Optional[str]*

Returns object serialized as a YAML string

**Parameters**

- **uri** (*str*, *optional*) – URI location to save the YAML string, by default None
- **dumper** (*callable*, *optional*) – Custom YAML Dumper, by default `yaml.SafeDumper`
- **kwargs** (*dict*) – keyword arguments to be passed into `fspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

**Returns**

If uri is specified, None will be returned. Otherwise, the yaml content will be returned.

**Return type**

`Union[str, None]`

**property type: str**

The type of the object as showing in YAML.

This implementation returns the class name with the first letter covered to lower case.

**update** (*runtime*: [Runtime](#))

Updates a job.

**Parameters**

**runtime** – a runtime object

**with\_block\_storage\_size** (*size\_in\_gb*: *int*) → [DataScienceJob](#)

Sets the block storage size in GB

**Parameters**

**size\_in\_gb** (*int*) – Block storage size in GB

**Returns**

The DataScienceJob instance (self)

**Return type**

[DataScienceJob](#)

**with\_compartment\_id** (*compartment\_id*: *str*) → [DataScienceJob](#)

Sets the compartment OCID

**Parameters**

**compartment\_id** (*str*) – The compartment OCID

**Returns**

The DataScienceJob instance (self)

**Return type**

*DataScienceJob*

**with\_job\_infrastructure\_type**(*infrastructure\_type: str*) → *DataScienceJob*

Sets the job infrastructure type

**Parameters**

**infrastructure\_type** (*str*) – Job infrastructure type as string

**Returns**

The DataScienceJob instance (self)

**Return type**

*DataScienceJob*

**with\_job\_type**(*job\_type: str*) → *DataScienceJob*

Sets the job type

**Parameters**

**job\_type** (*str*) – Job type as string

**Returns**

The DataScienceJob instance (self)

**Return type**

*DataScienceJob*

**with\_log\_group\_id**(*log\_group\_id: str*) → *DataScienceJob*

Sets the log group OCID for the data science job. If log group ID is specified but log ID is not, a new log resource will be created automatically for each job run to store the logs.

**Parameters**

**log\_group\_id** (*str*) – Log Group OCID

**Returns**

The DataScienceJob instance (self)

**Return type**

*DataScienceJob*

**with\_log\_id**(*log\_id: str*) → *DataScienceJob*

Sets the log OCID for the data science job. If log ID is specified, setting the log group ID (`with_log_group_id()`) is not strictly needed. ADS will look up the log group ID automatically. However, this may require additional permission, and the look up may not be available for newly created log group. Specifying both log ID (`with_log_id()`) and log group ID (`with_log_group_id()`) can avoid such lookup and speed up the job creation.

**Parameters**

**log\_id** (*str*) – Log resource OCID.

**Returns**

The DataScienceJob instance (self)

**Return type**

*DataScienceJob*

**with\_project\_id**(*project\_id: str*) → *DataScienceJob*

Sets the project OCID

**Parameters**

**project\_id** (*str*) – The project OCID

**Returns**

The DataScienceJob instance (self)

**Return type**

*DataScienceJob*

**with\_shape\_config\_details**(*memory\_in\_gbs: float, ocpus: float, \*\*kwargs: Dict[str, Any]*) → *DataScienceJob*

Sets the details for the job run shape configuration. Specify only when a flex shape is selected. For example *VM.Standard.E3.Flex* allows the *memory\_in\_gbs* and *cpu count* to be specified.

**Parameters**

- **memory\_in\_gbs** (*float*) – The size of the memory in GBs.
- **ocpus** (*float*) – The OCPUs count.
- **kwargs** – Additional keyword arguments.

**Returns**

The DataScienceJob instance (self)

**Return type**

*DataScienceJob*

**with\_shape\_name**(*shape\_name: str*) → *DataScienceJob*

Sets the shape name for running the job

**Parameters**

**shape\_name** (*str*) – Shape name

**Returns**

The DataScienceJob instance (self)

**Return type**

*DataScienceJob*

**with\_subnet\_id**(*subnet\_id: str*) → *DataScienceJob*

Sets the subnet ID

**Parameters**

**subnet\_id** (*str*) – Subnet ID

**Returns**

The DataScienceJob instance (self)

**Return type**

*DataScienceJob*

**class** `ads.jobs.DataScienceJobRun`(*config: Optional[dict] = None, signer: Optional[Signer] = None, client\_kwargs: Optional[dict] = None, \*\*kwargs*)

Bases: *OCIDataScienceMixin*, *JobRun*, *RunInstance*

Represents a Data Science Job run

Initializes a service/resource with OCI client as a property. If *config* or *signer* is specified, it will be used to initialize the OCI client. If neither of them is specified, the client will be initialized with `ads.common.auth.default_signer`. If both of them are specified, both of them will be passed into the OCI client,

and the authentication will be determined by OCI Python SDK.

**Parameters**

- **config** (*dict*, *optional*) – OCI API key config dictionary, by default None.
- **signer** (*oci.signer.Signer*, *optional*) – OCI authentication signer, by default None.
- **client\_kwargs** (*dict*, *optional*) – Additional keyword arguments for initializing the OCI client.

**CONS\_COMPARTMENT\_ID** = 'compartment\_id'

**LIFECYCLE\_STATE\_ACCEPTED** = 'ACCEPTED'

A constant which can be used with the `lifecycle_state` property of a `JobRun`. This constant has a value of "ACCEPTED"

**LIFECYCLE\_STATE\_CANCELED** = 'CANCELED'

A constant which can be used with the `lifecycle_state` property of a `JobRun`. This constant has a value of "CANCELED"

**LIFECYCLE\_STATE\_CANCELING** = 'CANCELING'

A constant which can be used with the `lifecycle_state` property of a `JobRun`. This constant has a value of "CANCELING"

**LIFECYCLE\_STATE\_DELETED** = 'DELETED'

A constant which can be used with the `lifecycle_state` property of a `JobRun`. This constant has a value of "DELETED"

**LIFECYCLE\_STATE\_FAILED** = 'FAILED'

A constant which can be used with the `lifecycle_state` property of a `JobRun`. This constant has a value of "FAILED"

**LIFECYCLE\_STATE\_IN\_PROGRESS** = 'IN\_PROGRESS'

A constant which can be used with the `lifecycle_state` property of a `JobRun`. This constant has a value of "IN\_PROGRESS"

**LIFECYCLE\_STATE\_NEEDS\_ATTENTION** = 'NEEDS\_ATTENTION'

A constant which can be used with the `lifecycle_state` property of a `JobRun`. This constant has a value of "NEEDS\_ATTENTION"

**LIFECYCLE\_STATE\_SUCCEEDED** = 'SUCCEEDED'

A constant which can be used with the `lifecycle_state` property of a `JobRun`. This constant has a value of "SUCCEEDED"

**OCI\_MODEL\_PATTERN** = 'oci.[^.] + \\.models[\\...]\*?'

**TERMINAL\_STATES** = ['SUCCEEDED', 'FAILED', 'CANCELED', 'DELETED']

**property auth:** dict

The ADS authentication config used to initialize the client. This auth has the same format as those obtained by calling functions in `ads.common.auth`. The config is a dict containing the following key-value pairs: `config`: The config contains the config loaded from the configuration loaded from `oci_config`. `signer`: The signer contains the signer object created from the api keys. `client_kwargs`: `client_kwargs` contains the `client_kwargs` that was passed in as input parameter.

**cancel()** → [\*DataScienceJobRun\*](#)

Cancels a job run This method will wait for the job run to be canceled before returning.

**Returns**

The job run instance.

**Return type**

self

**static** **check\_compartment\_id**(*compartment\_id: Optional[str]*) → str**Checks if a compartment ID has value and**

return the value from NB\_SESSION\_COMPARTMENT\_OCID environment variable if it is not specified.

**Parameters****compartment\_id** (*str*) – Compartment OCID or None**Returns**

str: Compartment OCID

**Return type**

type

**Raises**

**ValueError** – *compartment\_id* is not specified and NB\_SESSION\_COMPARTMENT\_OCID environment variable is not set

**property** **client**: **DataScienceClient**

OCI client

**property** **client\_composite**: **DataScienceClientCompositeOperations****property** **compartment\_id**

**[Required]** Gets the *compartment\_id* of this JobRun. The **OCID** of the compartment where you want to create the job.

**Returns**The *compartment\_id* of this JobRun.**Return type**

str

**config** = None**create**() → *DataScienceJobRun*

Creates a job run

**classmethod** **create\_instance**(\*args, \*\*kwargs)

Creates an instance using the same authentication as the class or an existing instance. If this method is called by a class, the default ADS authentication method will be used. If this method is called by an instance, the authentication method set in the instance will be used.

**property** **created\_by**

**[Required]** Gets the *created\_by* of this JobRun. The **OCID** of the user who created the job run.

**Returns**The *created\_by* of this JobRun.**Return type**

str

**property** **defined\_tags**

Gets the *defined\_tags* of this JobRun. Defined tags for this resource. Each key is predefined and scoped to a namespace. See **Resource Tags**. Example: {"Operations": {"CostCenter": "42"}}



**Returns**

The `defined_tags` of this `JobRun`.

**Return type**

`dict(str, dict(str, object))`

**delete()**

Deletes the resource

**classmethod deserialize**(*data: dict, to\_cls: Optional[str] = None*)

Deserialize data

**Parameters**

- **data** (*dict*) – A dictionary containing the data to be deserialized.
- **to\_cls** (*str*) – The name of the OCI model class to be initialized using the data. The OCI model class must be from the same OCI service of the OCI client (`self.client`). Defaults to `None`, the parent OCI model class name will be used if current class is inherited from an OCI model. If parent OCI model class is not found or not from the same OCI service, the data will be returned as is.

**property display\_name**

Gets the `display_name` of this `JobRun`. A user-friendly display name for the resource.

**Returns**

The `display_name` of this `JobRun`.

**Return type**

`str`

**download**(*to\_dir*)

Downloads files from job run output URI to local.

**Parameters**

**to\_dir** (*str*) – Local directory to which the files will be downloaded to.

**Returns**

The job run instance (`self`)

**Return type**

*`DataScienceJobRun`*

**static flatten**(*data: dict*) → `dict`

Flattens a nested dictionary.

**Parameters**

**data** (*A nested dictionary*) –

**Returns**

The flattened dictionary.

**Return type**

`dict`

**property freeform\_tags**

Gets the `freeform_tags` of this `JobRun`. Free-form tags for this resource. Each tag is a simple key-value pair with no predefined name, type, or namespace. See [Resource Tags](#). Example: `{“Department”: “Finance”}`

**Returns**

The `freeform_tags` of this `JobRun`.

**Return type**

dict(str, str)

**classmethod from\_dict**(*data*)

Initialize an instance from a dictionary.

**Parameters**

**data** (*dict*) – A dictionary containing the properties to initialize the class.

**classmethod from\_oci\_model**(*oci\_instance*)

Initialize an instance from an instance of OCI model.

**Parameters**

**oci\_instance** – An instance of an OCI model.

**classmethod from\_ocid**(*ocid: str*)

Initializes an object from OCID

**Parameters**

**ocid** (*str*) – The OCID of the object

**property id**

[Required] Gets the id of this JobRun. The [OCID](#) of the job run.

**Returns**

The id of this JobRun.

**Return type**

str

**classmethod init\_client**(*\*\*kwargs*) → DataScienceClient

Initializes the OCI client specified in the “client” keyword argument Sub-class should override this method and call cls.\_init\_client(client=OCI\_CLIENT)

**Parameters**

**\*\*kwargs** – Additional keyword arguments for initializing the OCI client.

**Return type**

An instance of OCI client.

**property job**

The job instance of this run.

**Returns**

An ADS Job instance

**Return type**

*Job*

**property job\_configuration\_override\_details**

[Required] Gets the job\_configuration\_override\_details of this JobRun.

**Returns**

The job\_configuration\_override\_details of this JobRun.

**Return type**

oci.data\_science.models.JobConfigurationDetails

**property job\_id**

[Required] Gets the job\_id of this JobRun. The [OCID](#) of the job run.

**Returns**

The `job_id` of this `JobRun`.

**Return type**

`str`

**property `job_infrastructure_configuration_details`**

**[Required]** Gets the `job_infrastructure_configuration_details` of this `JobRun`.

**Returns**

The `job_infrastructure_configuration_details` of this `JobRun`.

**Return type**

`oci.data_science.models.JobInfrastructureConfigurationDetails`

**property `job_log_configuration_override_details`**

Gets the `job_log_configuration_override_details` of this `JobRun`.

**Returns**

The `job_log_configuration_override_details` of this `JobRun`.

**Return type**

`oci.data_science.models.JobLogConfigurationDetails`

**kwargs = None**

**property `lifecycle_details`**

Gets the `lifecycle_details` of this `JobRun`. Details of the state of the job run.

**Returns**

The `lifecycle_details` of this `JobRun`.

**Return type**

`str`

**property `lifecycle_state`**

**[Required]** Gets the `lifecycle_state` of this `JobRun`. The state of the job run.

Allowed values for this property are: “ACCEPTED”, “IN\_PROGRESS”, “FAILED”, “SUCCEEDED”, “CANCELING”, “CANCELED”, “DELETED”, “NEEDS\_ATTENTION”, ‘UNKNOWN\_ENUM\_VALUE’. Any unrecognized values returned by a service will be mapped to ‘UNKNOWN\_ENUM\_VALUE’.

**Returns**

The `lifecycle_state` of this `JobRun`.

**Return type**

`str`

**classmethod `list_resource`**(*compartment\_id: Optional[str] = None, limit: int = 0, \*\*kwargs*) → list

Generic method to list OCI resources

**Parameters**

- **`compartment_id`** (*str*) – Compartment ID of the OCI resources. Defaults to None. If `compartment_id` is not specified, the value of `NB_SESSION_COMPARTMENT_OCID` in environment variable will be used.
- **`limit`** (*int*) – The maximum number of items to return. Defaults to 0, All items will be returned
- **`**kwargs`** – Additional keyword arguments to filter the resource. The kwargs are passed into OCI API.

**Returns**

A list of OCI resources

**Return type**

list

**Raises**

**NotImplementedError** – List method is not supported or implemented.

**load\_properties\_from\_env()**

Loads properties from the environment

**property log\_details**

Gets the log\_details of this JobRun.

**Returns**

The log\_details of this JobRun.

**Return type**

oci.data\_science.models.JobRunLogDetails

**property log\_group\_id: str**

The log group ID from OCI logging service containing the logs from the job run.

**property log\_id: str**

The log ID from OCI logging service containing the logs from the job run.

**property logging: *OCILog***

The OCILog object containing the logs from the job run

**logs(limit: Optional[int] = None) → list**

Gets the logs of the job run.

**Parameters**

**limit** (*int*, *optional*) – Limit the number of logs to be returned. Defaults to None. All logs will be returned.

**Returns**

A list of log records. Each log record is a dictionary with the following keys: id, time, message.

**Return type**

list

**property name: str**

Gets the name of the object.

**property project\_id**

**[Required]** Gets the project\_id of this JobRun. The *OCID* of the project to associate the job with.

**Returns**

The project\_id of this JobRun.

**Return type**

str

**property run\_details\_link: str**

Link to run details page in OCI console

**Returns**

The link to the details page in OCI console.

**Return type**

str

**serialize()**

Serialize the model to a dictionary that is ready to be send to OCI API.

**Returns**

A dictionary that is ready to be send to OCI API.

**Return type**

dict

**signer = None**

**property status: str**

Lifecycle status

**Returns**

Status in a string.

**Return type**

str

**sync**(*merge\_strategy*: [MergeStrategy](#) = *MergeStrategy.OVERRIDE*)

Refreshes the properties of the object from OCI

**property time\_accepted**

**[Required]** Gets the time\_accepted of this JobRun. The date and time the job run was accepted in the timestamp format defined by [RFC3339](#).

**Returns**

The time\_accepted of this JobRun.

**Return type**

datetime

**property time\_finished**

Gets the time\_finished of this JobRun. The date and time the job run request was finished in the timestamp format defined by [RFC3339](#).

**Returns**

The time\_finished of this JobRun.

**Return type**

datetime

**property time\_started**

Gets the time\_started of this JobRun. The date and time the job run request was started in the timestamp format defined by [RFC3339](#).

**Returns**

The time\_started of this JobRun.

**Return type**

datetime

**to\_dict**(*flatten*: *bool* = *False*) → dict

Converts the properties to a dictionary

**Parameters**

**flatten** – (Default value = False)

**to\_oci\_model**(*oci\_model*)

Converts the object into an instance of OCI data model.

**Parameters**

- **oci\_model** (*class or str*) – The OCI model to be converted to. This can be a string of the model name.
- **type\_mapping** (*dict*) – A dictionary mapping the models. Returns: An instance of the `oci_model`

**to\_yaml**() → *str*

Serializes the object into YAML string.

**Returns**

YAML stored in a string.

**Return type**

*str*

**type\_mappings** = *None*

**update\_from\_oci\_model**(*oci\_model\_instance*, *merge\_strategy*: `MergeStrategy` = `MergeStrategy.OVERRIDE`)

Updates the properties from OCI model with the same properties.

**Parameters**

**oci\_model\_instance** – An instance of OCI model, which should have the same properties of this class.

**watch**(*interval*: *float* = 3, *wait*: *float* = 90) → `DataScienceJobRun`

Watches the job run until it finishes. Before the job start running, this method will output the job run status. Once the job start running, the logs will be streamed until the job is success, failed or cancelled.

**Parameters**

- **interval** (*float*) – Time interval in seconds between each request to update the logs. Defaults to 3 (seconds).
- **wait** (*float*) – Time in seconds to keep updating the logs after the job run finished. It may take some time for logs to appear in OCI logging service after the job run is finished. Defaults to 90 (seconds).

**class** `ads.jobs.GitPythonRuntime`(*spec*: *Optional[Dict]* = *None*, *\*\*kwargs*)

Bases: `CondaRuntime`, `_PythonRuntimeMixin`

Represents a job runtime with source code from git repository

Example:

```
runtime = (  
    GitPythonRuntime()  
    .with_environment_variable(GREETINGS="Welcome to OCI Data Science")  
    # Specify the service conda environment by slug name.  
    .with_service_conda("pytorch19_p37_gpu_v1")  
    # Specify the git repository  
    # Optionally, you can specify the branch or commit  
    .with_source("https://github.com/pytorch/tutorials.git")  
    # Entrypoint is a relative path from the root of the git repo.  
    .with_entrypoint("beginner_source/examples_nn/polynomial_nn.py")  
)
```

(continues on next page)

(continued from previous page)

```

    # Copy files in "beginner_source/examples_nn" to object storage after job
    ↪ finishes.
    .with_output(
        output_dir="beginner_source/examples_nn",
        output_uri="oci://bucket_name@namespace/path/to/dir"
    )
)

```

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

#### Parameters

- **spec** (*dict*, *optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

```

CONST_ARGS = 'args'
CONST_BRANCH = 'branch'
CONST_COMMIT = 'commit'
CONST_CONDA = 'conda'
CONST_CONDA_REGION = 'region'
CONST_CONDA_SLUG = 'slug'
CONST_CONDA_TYPE = 'type'
CONST_CONDA_TYPE_CUSTOM = 'published'
CONST_CONDA_TYPE_SERVICE = 'service'
CONST_CONDA_URI = 'uri'
CONST_ENTRYPOINT = 'entrypoint'
CONST_ENTRY_FUNCTION = 'entryFunction'
CONST_ENV_VAR = 'env'
CONST_GIT_SSH_SECRET_ID = 'gitSecretId'
CONST_GIT_URL = 'url'
CONST_MAXIMUM_RUNTIME_IN_MINUTES = 'maximumRuntimeInMinutes'
CONST_OUTPUT_DIR = 'outputDir'
CONST_OUTPUT_URI = 'outputUri'
CONST_PYTHON_PATH = 'pythonPath'
CONST_SKIP_METADATA = 'skipMetadataUpdate'
CONST_TAG = 'freeformTags'

```

**CONST\_WORKING\_DIR** = 'workingDir'

**property args:** list

Command line arguments

```
attribute_map = {'branch': 'branch', 'commit': 'commit', 'conda': 'conda',
'entryFunction': 'entry_function', 'entrypoint': 'entrypoint', 'env': 'env',
'freeformTags': 'freeform_tags', 'gitSecretId': 'git_secret_id', 'outputDir':
'output_dir', 'outputUri': 'output_uri', 'pythonPath': 'python_path',
'skipMetadataUpdate': 'skip_metadata_update', 'url': 'url', 'workingDir':
'working_dir'}
```

**property branch:** str

Git branch name.

**property commit:** str

Git commit ID (SHA1 hash)

**property conda:** dict

The conda environment specification.

For service conda environment, the specification contains:

- **type**, the type of the conda environment. This is always **service** for service conda environment.
- **slug**, the slug of the conda environment.

For custom conda environment, the specification contains:

- **type**, the type of the conda environment. This is always **published** for custom conda environment.
- **uri**, the uri of the conda environment, e.g. `oci://bucket@namespace/prefix/to/conda`
- **region**, the region of the bucket in which the conda environment is stored. By default, ADS will determine the region based on the authenticated API key or resource principal. This is only needed if your conda environment is stored in a different region.

#### Returns

A dictionary containing the conda environment specifications.

#### Return type

dict

**property entry\_function:** str

The name of the entry function in the entry script

**property entry\_script:** str

The path of the entry script

**property environment\_variables:** dict

Environment variables

#### Returns

The runtime environment variables. The returned dictionary is a copy.

#### Return type

dict

**property envs:** dict

Environment variables



**property** `freeform_tags: dict`

**classmethod** `from_dict(obj_dict: dict) → Self`

Initialize the object from a Python dictionary

**classmethod** `from_json(json_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, decoder: callable = <class 'json.decoder.JSONDecoder'>, **kwargs) → Self`

Creates an object from JSON string provided or from URI location containing JSON string

#### Parameters

- **json\_string** (*str*, *optional*) – JSON string. Defaults to None.
- **uri** (*str*, *optional*) – URI location of file containing JSON string. Defaults to None.
- **decoder** (*callable*, *optional*) – Custom decoder. Defaults to simple JSON decoder.
- **kwargs** (*dict*) – keyword arguments to be passed into `fspec.open()`. For OCI object storage, this should be `config="path/to/.oci/config"`. For other storage connections consider e.g. `host`, `port`, `username`, `password`, etc.
- **json\_string** – JSON string, by default None
- **uri** – URI location of file containing JSON string, by default None
- **decoder** – Decoder for custom data structures, by default `json.JSONDecoder`
- **kwargs** – keyword arguments to be passed into `fspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

#### Raises

- **ValueError** – Raised if neither string nor uri is provided
- **ValueError** – Both `json_string` and `uri` are empty, or The input is not a valid JSON.

#### Returns

Returns instance of the class

#### Return type

`cls`

#### Returns

Object initialized from JSON data.

#### Return type

`Type[Self]`

**classmethod** `from_string(obj_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, loader: callable = <class 'yaml.loader.SafeLoader'>, **kwargs) → Self`

Initializes an object from YAML/JSON string or URI location containing the YAML/JSON

#### Parameters

- **obj\_string** (*str*, *optional*) – YAML/JSON string, by default None
- **uri** (*str*, *optional*) – URI location of file containing YAML/JSON, by default None
- **loader** (*callable*, *optional*) – Custom YAML loader, by default `yaml.SafeLoader`

#### Returns

Object initialized from the YAML.

#### Return type

`Self`

**classmethod from\_yaml**(yaml\_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, loader: callable = <class 'yaml.loader.SafeLoader'>, \*\*kwargs) → Self

Initializes an object from YAML string or URI location containing the YAML

**Parameters**

- **yaml\_string** (*str*, *optional*) – YAML string, by default None
- **uri** (*str*, *optional*) – URI location of file containing YAML, by default None
- **loader** (*callable*, *optional*) – Custom YAML loader, by default yaml.SafeLoader

**Returns**

Object initialized from the YAML.

**Return type**

Self

**Raises**

**ValueError** – Raised if neither string nor uri is provided

**get\_spec**(key: str, default: Optional[Any] = None) → Any

Gets the value of a specification property

**Parameters**

- **key** (*str*) – The name of the property.
- **default** (*Any*, *optional*) – The default value to be used, if the property does not exist, by default None.

**Returns**

The value of the property.

**Return type**

Any

**property kind: str**

Kind of the object to be stored in YAML. All runtime implementations will have “runtime” as kind. Sub-class will have different types.

**property maximum\_runtime\_in\_minutes: int**

Maximum runtime in minutes

**property output\_dir: str**

Directory in the Job run container for saving output files generated in the job

**property output\_uri: str**

OCI object storage URI prefix for saving output files generated in the job

**property python\_path**

Additional python paths for running the source code.

**set\_spec**(k: str, v: Any) → Self

Sets a specification property for the object.

**Parameters**

- **k** (*str*) – key, the name of the property.
- **v** (*Any*) – value, the value of the property.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**property skip\_metadata\_update**

Indicate if the metadata update should be skipped after the job run

By default, the job run metadata will be updated with the following freeform tags: \* repo: The URL of the Git repository \* commit: The Git commit ID \* module: The entry script/module \* method: The entry function/method \* outputs. The prefix of the output files in object storage.

This update step also requires resource principals to have the permission to update the job run.

**Returns**

True if the metadata update will be skipped. Otherwise False.

**Return type**

bool

**property ssh\_secret\_ocid: str**

The OCID of the OCI Vault secret storing the Git SSH key.

**to\_dict()** → dict

Converts the object to dictionary with kind, type and spec as keys.

**to\_json**(uri: ~typing.Optional[str] = None, encoder: callable = <class 'json.encoder.JSONEncoder'>, \*\*kwargs) → str

Returns the object serialized as a JSON string

**Parameters**

- **uri** (str, optional) – URI location to save the JSON string, by default None
- **encoder** (callable, optional) – Encoder for custom data structures, by default json.JSONEncoder
- **kwargs** (dict) – keyword arguments to be passed into fsspec.open(). For OCI object storage, this can be config="path/to/.oci/config".

**Returns**

object serialized as a JSON string

**Return type**

str

**to\_yaml**(uri: ~typing.Optional[str] = None, dumper: callable = <class 'yaml.dumper.SafeDumper'>, \*\*kwargs) → Optional[str]

Returns object serialized as a YAML string

**Parameters**

- **uri** (str, optional) – URI location to save the YAML string, by default None
- **dumper** (callable, optional) – Custom YAML Dumper, by default yaml.SafeDumper
- **kwargs** (dict) – keyword arguments to be passed into fsspec.open(). For OCI object storage, this can be config="path/to/.oci/config".

**Returns**

If uri is specified, None will be returned. Otherwise, the yaml content will be returned.

**Return type**

Union[str, None]

**property type: str**

The type of the object as showing in YAML

**property url: str**

URL of the Git repository.

**with\_argument(\*args, \*\*kwargs) → Self**

Adds command line arguments to the runtime.

This method can be called (chained) multiple times to add various arguments.

**Parameters**

- **args** – Positional arguments. In a single method call, positional arguments are always added before keyword arguments. You can call `with_argument()` to add positional arguments after keyword arguments.
- **kwargs** – Keyword arguments. To add a keyword argument without value, set the value to `None`.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**Raises**

**ValueError** – Keyword arguments with space in a key.

**Examples**

```
>>> runtime = Runtime().with_argument(key1="val1", key2="val2").with_argument(
↳ "pos1")
>>> print(runtime.args)
[--key1, "val1", "--key2", "val2", "pos1"]
```

```
>>> runtime = Runtime()
>>> runtime.with_argument("pos1")
>>> runtime.with_argument(key1="val1", key2="val2.1 val2.2")
>>> runtime.with_argument("pos2")
>>> print(runtime.args)
['pos1', '--key1', 'val1', '--key2', 'val2.1 val2.2', 'pos2']
```

```
>>> runtime = Runtime()
>>> runtime.with_argument("pos1")
>>> runtime.with_argument(key1=None, key2="val2")
>>> runtime.with_argument("pos2")
>>> print(runtime.args)
["pos1", "--key1", "--key2", "val2", "pos2"]
```

**with\_custom\_conda(uri: str, region: Optional[str] = None)**

Specifies the custom conda pack for running the job Make sure you have configured the IAM policy for the job run to access the conda environment.

**Parameters**

- **uri** (*str*) – The OCI object storage URI for the conda pack, e.g. “oci://your\_bucket@namespace/object\_name.” In the Environment Explorer of an OCI notebook session, this is shown as the “source” of the conda pack.
- **region** (*str*, *optional*) – The region of the bucket storing the custom conda pack, by default None. If region is not specified, ADS will use the region from your authentication credentials:
  - For API Key, config[“region”] is used.
  - For Resource Principal, signer.region is used.

This is required if the conda pack is stored in a different region.

#### Returns

The runtime instance.

#### Return type

self

#### See also:

#### https

[//docs.oracle.com/en-us/iaas/data-science/using/conda\\_publishs\\_object.htm](https://docs.oracle.com/en-us/iaas/data-science/using/conda_publishs_object.htm)

**with\_entrpoint**(*path: str, func: Optional[str] = None*)

Specifies the entrpoint for the job. The entrpoint can be a script or a function in a script.

#### Parameters

- **script** (*str*) – The relative path for the script/module starting the job.
- **func** (*str*, *optional*) – The function name in the script for starting the job, by default None. If this is not specified, the script will be run with python command in a subprocess.

#### Returns

The runtime instance.

#### Return type

self

**with\_environment\_variable**(*\*\*kwargs*) → Self

Sets environment variables

Environment variables enclosed by \${...} will be substituted.

- You can use \$\$ to escape the substitution.
- Undefined variable enclosed by \${} will be ignored.
- Double dollar signs \$\$ will be substituted by a single one \$.

#### Returns

This method returns self to support chaining methods.

#### Return type

Self

## Examples

```
>>> runtime = (
...     PythonRuntime()
...     .with_environment_variable(
...         HOST="10.0.0.1",
...         PORT="443",
...         URL="http://${HOST}:${PORT}/path/",
...         ESCAPED_URL="http://${HOST}:${PORT}/path/",
...         MISSING_VAR="This is ${UNDEFINED}",
...         VAR_WITH_DOLLAR="$10",
...         DOUBLE_DOLLAR="$$10"
...     )
... )
>>> for k, v in runtime.environment_variables.items():
...     print(f"{k}: {v}")
HOST: 10.0.0.1
PORT: 443
URL: http://10.0.0.1:443/path/
ESCAPED_URL: http://${HOST}:${PORT}/path/
MISSING_VAR: This is ${UNDEFINED}
VAR_WITH_DOLLAR: $10
DOUBLE_DOLLAR: $$10
```

**with\_freeform\_tag**(*\*\*kwargs*) → Self

Sets freeform tag

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**with\_maximum\_runtime\_in\_minutes**(*maximum\_runtime\_in\_minutes: int*) → Self

Sets maximum runtime in minutes

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**with\_output**(*output\_dir: str, output\_uri: str*)

Specifies the outputs of the job. The output files in *output\_dir* will be copied to remote *output\_uri* when the job is finished.

**Parameters**

- **output\_dir** (*str*) – Path to the output directory in the job run. This path should be a relative path from the working directory. The source code should write all outputs into this directory.
- **output\_uri** (*str*) – The OCI object storage URI prefix for saving the output files. For example, `oci://bucket_name@namespace/path/to/directory`

**Returns**

The runtime instance.

**Return type**

Self

**with\_python\_path**(\*python\_paths)

Specifies additional python paths for running the source code.

**Parameters****\*python\_paths** – Additional python path(s) for running the source code. Each path should be a relative path from the working directory.**Returns**

The runtime instance.

**Return type**

self

**with\_service\_conda**(slug: str)

Specifies the service conda pack for running the job

**Parameters****slug** (str) – The slug name of the service conda pack**Returns**

The runtime instance.

**Return type**

self

**with\_source**(url: str, branch: Optional[str] = None, commit: Optional[str] = None, secret\_ocid: Optional[str] = None)

Specifies the Git repository and branch/commit for the job source code.

**Parameters**

- **url** (str) – URL of the Git repository.
- **branch** (str, optional) – Git branch name, by default None, the default branch will be used.
- **commit** (str, optional) – Git commit ID (SHA1 hash), by default None, the most recent commit will be used.
- **secret\_ocid** (str) – The secret OCID storing the SSH key content for checking out the Git repository.

**Returns**

The runtime instance.

**Return type**

self

**with\_working\_dir**(working\_dir: str)

Specifies the working directory in the job run. By default, the working directory will be the directory containing the user code (job artifact directory). This can be changed by specifying a relative path to the job artifact directory.

**Parameters****working\_dir** (str) – The path of the working directory. This can be a relative path from the job artifact directory.**Returns**

The runtime instance.

**Return type**

self

**property working\_dir: str**

The working directory for the job run.

**class** `ads.jobs.Job`(*name: Optional[str] = None, infrastructure=None, runtime=None*)Bases: *Builder*

Represents a Job defined by infrastructure and runtime.

**Examples**

Here is an example for creating and running a job:

```
from ads.jobs import Job, DataScienceJob, PythonRuntime

# Define an OCI Data Science job to run a python script
job = (
    Job(name="<job_name>")
    .with_infrastructure(
        DataScienceJob()
        # Configure logging for getting the job run outputs.
        .with_log_group_id("<log_group_ocid>")
        # Log resource will be auto-generated if log ID is not specified.
        .with_log_id("<log_ocid>")
        # If you are in an OCI data science notebook session,
        # the following configurations are not required.
        # Configurations from the notebook session will be used as defaults.
        .with_compartment_id("<compartment_ocid>")
        .with_project_id("<project_ocid>")
        .with_subnet_id("<subnet_ocid>")
        .with_shape_name("VM.Standard.E3.Flex")
        # Shape config details are applicable only for the flexible shapes.
        .with_shape_config_details(memory_in_gbs=16, ocpus=1)
        # Minimum/Default block storage size is 50 (GB).
        .with_block_storage_size(50)
    )
    .with_runtime(
        PythonRuntime()
        # Specify the service conda environment by slug name.
        .with_service_conda("pytorch110_p38_cpu_v1")
        # The job artifact can be a single Python script, a directory or a zip file.
        .with_source("local/path/to/code_dir")
        # Environment variable
        .with_environment_variable(NAME="Welcome to OCI Data Science.")
        # Command line argument, arg1 --key arg2
        .with_argument("arg1", key="arg2")
        # Set the working directory
        # When using a directory as source, the default working dir is the parent_
        ↪ of code_dir.
        # Working dir should be a relative path beginning from the source directory_
        ↪ (code_dir)
        .with_working_dir("code_dir")
    )
)
```

(continues on next page)



(continued from previous page)

```

    # The entrypoint is applicable only to directory or zip file as source
    # The entrypoint should be a path relative to the working dir.
    # Here my_script.py is a file in the code_dir/my_package directory
    .with_entrypoint("my_package/my_script.py")
    # Add an additional Python path, relative to the working dir (code_dir/
    → other_packages).
    .with_python_path("other_packages")
    # Copy files in "code_dir/output" to object storage after job finishes.
    .with_output("output", "oci://bucket_name@namespace/path/to/dir")
)
)
# Create and Run the job
run = job.create().run()
# Stream the job run outputs
run.watch()

```

If you are in an OCI notebook session and you would like to use the same infrastructure configurations, the infrastructure configuration can be simplified. Here is another example of creating and running a jupyter notebook as a job:

```

from ads.jobs import Job, DataScienceJob, NotebookRuntime

# Define an OCI Data Science job to run a jupyter Python notebook
job = (
    Job(name="<job_name>")
    .with_infrastructure(
        # The same configurations as the OCI notebook session will be used.
        DataScienceJob()
        .with_log_group_id("<log_group_ocid>")
        .with_log_id("<log_ocid>")
    )
    .with_runtime(
        NotebookRuntime()
        .with_notebook("path/to/notebook.ipynb")
        .with_service_conda(tensorflow28_p38_cpu_v1")
        # Saves the notebook with outputs to OCI object storage.
        .with_output("oci://bucket_name@namespace/path/to/dir")
    )
).create()
# Run and monitor the job
run = job.run().watch()
# Download the notebook and outputs to local directory
run.download(to_dir="path/to/local/dir/")

```

See also:

**https**

[//docs.oracle.com/en-us/iaas/tools/ads-sdk/latest/user\\_guide/jobs/index.html](https://docs.oracle.com/en-us/iaas/tools/ads-sdk/latest/user_guide/jobs/index.html)

Initializes a job.

**The infrastructure and runtime can be configured when initializing the job,**  
or by calling `with_infrastructure()` and `with_runtime()`.

The infrastructure should be a subclass of ADS job Infrastructure, e.g., `DataScienceJob`, `DataFlow`. The runtime should be a subclass of ADS job Runtime, e.g., `PythonRuntime`, `NotebookRuntime`.

**Parameters**

- **name** (*str*, *optional*) – The name of the job, by default `None`. If it is `None`, a default name may be generated by the infrastructure, depending on the implementation of the infrastructure. For OCI data science job, the default name contains the job artifact name and a timestamp. If no artifact, a randomly generated easy to remember name with timestamp will be generated, like `'strange-spider-2022-08-17-23:55.02'`.
- **infrastructure** (*Infrastructure*, *optional*) – Job infrastructure, by default `None`
- **runtime** (*Runtime*, *optional*) – Job runtime, by default `None`.

**attribute\_map** = {}

**build()** → *Job*

Load default values from the environment for the job infrastructure.

**create**(\*\**kwargs*) → *Job*

Creates the job on the infrastructure.

**Returns**

The job instance (self)

**Return type**

*Job*

**static dataflow\_job**(*compartment\_id*: *Optional[str]* = *None*, \*\**kwargs*) → List[*Job*]

List data flow jobs under a given compartment.

**Parameters**

- **compartment\_id** (*str*) – compartment id
- **kwargs** – additional keyword arguments

**Returns**

list of Job instances

**Return type**

List[*Job*]

**static datascience\_job**(*compartment\_id*: *Optional[str]* = *None*, \*\**kwargs*) → List[*DataScienceJob*]

Lists the existing data science jobs in the compartment.

**Parameters**

**compartment\_id** (*str*) – The compartment ID for listing the jobs. This is optional if running in an OCI notebook session. The jobs in the same compartment of the notebook session will be returned.

**Returns**

A list of Job objects.

**Return type**

list

**delete()** → `None`

Deletes the job from the infrastructure.

**download**(*to\_dir: str, output\_uri=None, \*\*storage\_options*)

Downloads files from remote output URI to local.

**Parameters**

- **to\_dir** (*str*) – Local directory to which the files will be downloaded to.
- **output\_uri** ((*str, optional*). *Default is None.*) – The remote URI from which the files will be downloaded. Defaults to None. If output\_uri is not specified, this method will try to get the output\_uri from the runtime.
- **storage\_options** – Extra keyword arguments for particular storage connection. This method uses fsspec to download the files from remote URI. storage\_options will to be passed into fsspec.open\_files().

**Returns**

The job instance (self)

**Return type**

*Job*

**Raises**

**AttributeError** – The output\_uri is not specified and the runtime is not configured with output\_uri.

**static from\_dataflow\_job**(*job\_id: str*) → *Job*

Create a Data Flow job given a job id.

**Parameters**

**job\_id** (*str*) – id of the job

**Returns**

a Job instance

**Return type**

*Job*

**static from\_datascience\_job**(*job\_id*) → *Job*

Loads a data science job from OCI.

**Parameters**

**job\_id** (*str*) – OCID of an existing data science job.

**Returns**

A job instance.

**Return type**

*Job*

**classmethod from\_dict**(*config: dict*) → *Job*

Initializes a job from a dictionary containing the configurations.

**Parameters**

**config** (*dict*) – A dictionary containing the infrastructure and runtime specifications.

**Returns**

A job instance

**Return type**

*Job*

**Raises**

**NotImplementedError** – If the type of the infrastructure or runtime is not supported.

**classmethod from\_json**(*json\_string*: ~typing.Optional[str] = None, *uri*: ~typing.Optional[str] = None, *decoder*: callable = <class 'json.decoder.JSONDecoder'>, *\*\*kwargs*) → Self

Creates an object from JSON string provided or from URI location containing JSON string

**Parameters**

- **json\_string** (*str*, *optional*) – JSON string. Defaults to None.
- **uri** (*str*, *optional*) – URI location of file containing JSON string. Defaults to None.
- **decoder** (*callable*, *optional*) – Custom decoder. Defaults to simple JSON decoder.
- **kwargs** (*dict*) – keyword arguments to be passed into fsspec.open(). For OCI object storage, this should be config="path/to/.oci/config". For other storage connections consider e.g. host, port, username, password, etc.
- **json\_string** – JSON string, by default None
- **uri** – URI location of file containing JSON string, by default None
- **decoder** – Decoder for custom data structures, by default json.JSONDecoder
- **kwargs** – keyword arguments to be passed into fsspec.open(). For OCI object storage, this can be config="path/to/.oci/config".

**Raises**

- **ValueError** – Raised if neither string nor uri is provided
- **ValueError** – Both json\_string and uri are empty, or The input is not a valid JSON.

**Returns**

Returns instance of the class

**Return type**

cls

**Returns**

Object initialized from JSON data.

**Return type**

Type[Self]

**classmethod from\_string**(*obj\_string*: ~typing.Optional[str] = None, *uri*: ~typing.Optional[str] = None, *loader*: callable = <class 'yaml.loader.SafeLoader'>, *\*\*kwargs*) → Self

Initializes an object from YAML/JSON string or URI location containing the YAML/JSON

**Parameters**

- **obj\_string** (*str*, *optional*) – YAML/JSON string, by default None
- **uri** (*str*, *optional*) – URI location of file containing YAML/JSON, by default None
- **loader** (*callable*, *optional*) – Custom YAML loader, by default yaml.SafeLoader

**Returns**

Object initialized from the YAML.

**Return type**

Self

**classmethod from\_yaml**(*yaml\_string*: ~typing.Optional[str] = None, *uri*: ~typing.Optional[str] = None, *loader*: callable = <class 'yaml.loader.SafeLoader'>, *\*\*kwargs*) → Self

Initializes an object from YAML string or URI location containing the YAML

**Parameters**

- **yaml\_string** (*str*, *optional*) – YAML string, by default None
- **uri** (*str*, *optional*) – URI location of file containing YAML, by default None
- **loader** (*callable*, *optional*) – Custom YAML loader, by default `yaml.SafeLoader`

**Returns**

Object initialized from the YAML.

**Return type**

Self

**Raises**

**ValueError** – Raised if neither string nor uri is provided

**get\_spec**(*key: str*, *default: Optional[Any] = None*) → Any

Gets the value of a specification property

**Parameters**

- **key** (*str*) – The name of the property.
- **default** (*Any*, *optional*) – The default value to be used, if the property does not exist, by default None.

**Returns**

The value of the property.

**Return type**

Any

**property id: str**

The ID of the job. For jobs running on OCI, this is the OCID.

**Returns**

ID of the job.

**Return type**

str

**property infrastructure: Union[[DataScienceJob](#), [DataFlow](#)]**

The job infrastructure.

**Returns**

Job infrastructure.

**Return type**

*Infrastructure*

**property kind: str**

The kind of the object as showing in YAML.

**Returns**

“job”

**Return type**

str

**property name: str**

The name of the job. For jobs running on OCI, this is the display name.

**Returns**

The name of the job.

**Return type**

str

**run**(*name=None, args=None, env\_var=None, freeform\_tags=None, wait=False*) →

Union[[DataScienceJobRun](#), [DataFlowRun](#)]

Runs the job.

**Parameters**

- **name** (*str, optional*) – Name of the job run, by default None. The infrastructure handles the naming of the job run. For data science job, if a name is not provided, a default name will be generated containing the job name and the timestamp of the run. If no artifact, a randomly generated easy to remember name with timestamp will be generated, like ‘strange-spider-2022-08-17-23:55.02’.
- **args** (*str, optional*) – Command line arguments for the job run, by default None. This will override the configurations on the job. If this is None, the args from the job configuration will be used.
- **env\_var** (*dict, optional*) – Additional environment variables for the job run, by default None
- **freeform\_tags** (*dict, optional*) – Freeform tags for the job run, by default None
- **wait** (*bool, optional*) – Indicate if this method call should wait for the job run. By default False, this method returns as soon as the job run is created. If this is set to True, this method will stream the job logs and wait until it finishes, similar to *job.run().watch()*.

**Returns**

A job run instance, depending on the infrastructure.

**Return type**

Job Run Instance

**Examples**

To run a job and override the configurations:

```
job_run = job.run(
    name="<my_job_run_name>",
    args="new_arg --new_key new_val",
    env_var={"new_env": "new_val"},
    freeform_tags={"new_tag": "new_tag_val"}
)
```

**run\_list**(*\*\*kwargs*) → list

Gets a list of runs of the job.

**Returns**

A list of job run instances, the actual object type depends on the infrastructure.

**Return type**

list

**property runtime:** [Runtime](#)

The job runtime.

**Returns**

The job runtime

**Return type**

*Runtime*

**set\_spec**(*k*: str, *v*: Any) → Self

Sets a specification property for the object.

**Parameters**

- **k** (*str*) – key, the name of the property.
- **v** (*Any*) – value, the value of the property.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**status**() → str

Status of the job

**Returns**

Status of the job

**Return type**

str

**to\_dict**() → dict

Serialize the job specifications to a dictionary.

**Returns**

A dictionary containing job specifications.

**Return type**

dict

**to\_json**(*uri*: ~typing.Optional[str] = None, *encoder*: callable = <class 'json.encoder.JSONEncoder'>, \*\**kwargs*) → str

Returns the object serialized as a JSON string

**Parameters**

- **uri** (*str*, *optional*) – URI location to save the JSON string, by default None
- **encoder** (*callable*, *optional*) – Encoder for custom data structures, by default json.JSONEncoder
- **kwargs** (*dict*) – keyword arguments to be passed into fsspec.open(). For OCI object storage, this can be config="path/to/.oci/config".

**Returns**

object serialized as a JSON string

**Return type**

str

**to\_yaml**(*uri*: ~typing.Optional[str] = None, *dumper*: callable = <class 'yaml.dumper.SafeDumper'>, \*\**kwargs*) → Optional[str]

Returns object serialized as a YAML string

**Parameters**

- **uri** (*str*, *optional*) – URI location to save the YAML string, by default None
- **dumper** (*callable*, *optional*) – Custom YAML Dumper, by default `yaml.SafeDumper`
- **kwargs** (*dict*) – keyword arguments to be passed into `fsspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

**Returns**

If uri is specified, None will be returned. Otherwise, the yaml content will be returned.

**Return type**

`Union[str, None]`

**property type: str**

The type of the object as showing in YAML.

This implementation returns the class name with the first letter converted to lower case.

**with\_infrastructure**(*infrastructure*) → *Job*

Sets the infrastructure for the job.

**Parameters**

**infrastructure** (*Infrastructure*) – Job infrastructure.

**Returns**

The job instance (self)

**Return type**

*Job*

**with\_name**(*name: str*) → *Job*

Sets the job name.

**Parameters**

**name** (*str*) – Job name.

**Returns**

The job instance (self)

**Return type**

*Job*

**with\_runtime**(*runtime*) → *Job*

Sets the runtime for the job.

**Parameters**

**runtime** (*Runtime*) – Job runtime.

**Returns**

The job instance (self)

**Return type**

*Job*

**class** `ads.jobs.NotebookRuntime`(*spec: Optional[Dict] = None*, *\*\*kwargs*)

Bases: *CondaRuntime*

Represents a job runtime with Jupyter notebook

To run a job with a single Jupyter notebook, you can define the run time as:



```
runtime = (
    NotebookRuntime()
    .with_notebook(
        path="https://raw.githubusercontent.com/tensorflow/docs/master/site/en/
→tutorials/customization/basics.ipynb",
        encoding='utf-8'
    )
    .with_service_conda("tensorflow28_p38_cpu_v1")
    .with_environment_variable(GREETINGS="Welcome to OCI Data Science")
    .with_exclude_tag(["ignore", "remove"])
    .with_output("oci://bucket_name@namespace/path/to/dir")
)
```

Note that the notebook path can be local or remote path supported by fsspec, including OCI object storage path like `oci://bucket@namespace/path/to/notebook`

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

#### Parameters

- **spec** (*dict*, *optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

CONST\_ARGS = 'args'

CONST\_CONDA = 'conda'

CONST\_CONDA\_REGION = 'region'

CONST\_CONDA\_SLUG = 'slug'

CONST\_CONDA\_TYPE = 'type'

CONST\_CONDA\_TYPE\_CUSTOM = 'published'

CONST\_CONDA\_TYPE\_SERVICE = 'service'

CONST\_CONDA\_URI = 'uri'

CONST\_ENTRYPOINT = 'entrypoint'

CONST\_ENV\_VAR = 'env'

CONST\_EXCLUDE\_TAG = 'excludeTags'

CONST\_MAXIMUM\_RUNTIME\_IN\_MINUTES = 'maximumRuntimeInMinutes'

CONST\_NOTEBOOK\_ENCODING = 'notebookEncoding'

CONST\_NOTEBOOK\_PATH = 'notebookPathURI'

CONST\_OUTPUT\_URI = 'outputUri'

CONST\_OUTPUT\_URI\_ALT = 'outputURI'

CONST\_SOURCE = 'source'

**CONST\_TAG = 'freeformTags'**

**property args: list**

Command line arguments

**attribute\_map = {'conda': 'conda', 'entrypoint': 'entrypoint', 'env': 'env', 'excludeTags': 'exclude\_tags', 'freeformTags': 'freeform\_tags', 'notebookEncoding': 'notebook\_encoding', 'notebookPathURI': 'notebook\_path\_uri', 'outputUri': 'output\_uri', 'source': 'source'}**

**property conda: dict**

The conda environment specification.

For service conda environment, the specification contains:

- **type**, the type of the conda environment. This is always **service** for service conda environment.
- **slug**, the slug of the conda environment.

For custom conda environment, the specification contains:

- **type**, the type of the conda environment. This is always **published** for custom conda environment.
- **uri**, the uri of the conda environment, e.g. `oci://bucket@namespace/prefix/to/conda`
- **region**, the region of the bucket in which the conda environment is stored. By default, ADS will determine the region based on the authenticated API key or resource principal. This is only needed if your conda environment is stored in a different region.

#### Returns

A dictionary containing the conda environment specifications.

#### Return type

dict

**property environment\_variables: dict**

Environment variables

#### Returns

The runtime environment variables. The returned dictionary is a copy.

#### Return type

dict

**property envs: dict**

Environment variables

**property exclude\_tag: list**

A list of cell tags indicating cells to be excluded from the job

**property freeform\_tags: dict**

**classmethod from\_dict(obj\_dict: dict) → Self**

Initialize the object from a Python dictionary

**classmethod from\_json(json\_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, decoder: callable = <class 'json.decoder.JSONDecoder'>, \*\*kwargs) → Self**

Creates an object from JSON string provided or from URI location containing JSON string

#### Parameters

- **json\_string** (*str*, *optional*) – JSON string. Defaults to None.
- **uri** (*str*, *optional*) – URI location of file containing JSON string. Defaults to None.
- **decoder** (*callable*, *optional*) – Custom decoder. Defaults to simple JSON decoder.
- **kwargs** (*dict*) – keyword arguments to be passed into `fsspec.open()`. For OCI object storage, this should be `config="path/to/.oci/config"`. For other storage connections consider e.g. `host`, `port`, `username`, `password`, etc.
- **json\_string** – JSON string, by default None
- **uri** – URI location of file containing JSON string, by default None
- **decoder** – Decoder for custom data structures, by default `json.JSONDecoder`
- **kwargs** – keyword arguments to be passed into `fsspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

**Raises**

- **ValueError** – Raised if neither string nor uri is provided
- **ValueError** – Both `json_string` and `uri` are empty, or The input is not a valid JSON.

**Returns**

Returns instance of the class

**Return type**

`cls`

**Returns**

Object initialized from JSON data.

**Return type**

`Type[Self]`

**classmethod from\_string** (*obj\_string*: `~typing.Optional[str] = None`, *uri*: `~typing.Optional[str] = None`, *loader*: *callable* = `<class 'yaml.loader.SafeLoader'>`, *\*\*kwargs*) → `Self`

Initializes an object from YAML/JSON string or URI location containing the YAML/JSON

**Parameters**

- **obj\_string** (*str*, *optional*) – YAML/JSON string, by default None
- **uri** (*str*, *optional*) – URI location of file containing YAML/JSON, by default None
- **loader** (*callable*, *optional*) – Custom YAML loader, by default `yaml.SafeLoader`

**Returns**

Object initialized from the YAML.

**Return type**

`Self`

**classmethod from\_yaml** (*yaml\_string*: `~typing.Optional[str] = None`, *uri*: `~typing.Optional[str] = None`, *loader*: *callable* = `<class 'yaml.loader.SafeLoader'>`, *\*\*kwargs*) → `Self`

Initializes an object from YAML string or URI location containing the YAML

**Parameters**

- **yaml\_string** (*str*, *optional*) – YAML string, by default None
- **uri** (*str*, *optional*) – URI location of file containing YAML, by default None
- **loader** (*callable*, *optional*) – Custom YAML loader, by default `yaml.SafeLoader`

**Returns**

Object initialized from the YAML.

**Return type**

Self

**Raises**

**ValueError** – Raised if neither string nor uri is provided

**get\_spec**(*key: str, default: Optional[Any] = None*) → Any

Gets the value of a specification property

**Parameters**

- **key** (*str*) – The name of the property.
- **default** (*Any, optional*) – The default value to be used, if the property does not exist, by default None.

**Returns**

The value of the property.

**Return type**

Any

**property kind: str**

Kind of the object to be stored in YAML. All runtime implementations will have “runtime” as kind. Sub-class will have different types.

**property maximum\_runtime\_in\_minutes: int**

Maximum runtime in minutes

**property notebook: str**

The path of the notebook relative to the source.

**property notebook\_encoding: str**

The encoding of the notebook

**property notebook\_uri: str**

The URI of the notebook

**property output\_uri: list**

URI for storing the output notebook and files

**set\_spec**(*k: str, v: Any*) → Self

Sets a specification property for the object.

**Parameters**

- **k** (*str*) – key, the name of the property.
- **v** (*Any*) – value, the value of the property.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**property source: str**

The source code location.

**to\_dict()** → dict

Converts the object to dictionary with kind, type and spec as keys.

**to\_json**(*uri*: ~typing.Optional[str] = None, *encoder*: callable = <class 'json.encoder.JSONEncoder'>, \*\**kwargs*) → str

Returns the object serialized as a JSON string

#### Parameters

- **uri** (*str*, *optional*) – URI location to save the JSON string, by default None
- **encoder** (*callable*, *optional*) – Encoder for custom data structures, by default json.JSONEncoder
- **kwargs** (*dict*) – keyword arguments to be passed into fsspec.open(). For OCI object storage, this can be config="path/to/.oci/config".

#### Returns

object serialized as a JSON string

#### Return type

str

**to\_yaml**(*uri*: ~typing.Optional[str] = None, *dumper*: callable = <class 'yaml.dumper.SafeDumper'>, \*\**kwargs*) → Optional[str]

Returns object serialized as a YAML string

#### Parameters

- **uri** (*str*, *optional*) – URI location to save the YAML string, by default None
- **dumper** (*callable*, *optional*) – Custom YAML Dumper, by default yaml.SafeDumper
- **kwargs** (*dict*) – keyword arguments to be passed into fsspec.open(). For OCI object storage, this can be config="path/to/.oci/config".

#### Returns

If uri is specified, None will be returned. Otherwise, the yaml content will be returned.

#### Return type

Union[str, None]

#### property type: str

The type of the object as showing in YAML

**with\_argument**(\**args*, \*\**kwargs*) → Self

Adds command line arguments to the runtime.

This method can be called (chained) multiple times to add various arguments.

#### Parameters

- **args** – Positional arguments. In a single method call, positional arguments are always added before keyword arguments. You can call with\_argument() to add positional arguments after keyword arguments.
- **kwargs** – Keyword arguments. To add a keyword argument without value, set the value to None.

#### Returns

This method returns self to support chaining methods.

#### Return type

Self

**Raises**

**ValueError** – Keyword arguments with space in a key.

**Examples**

```
>>> runtime = Runtime().with_argument(key1="val1", key2="val2").with_argument(
    ↪ "pos1")
>>> print(runtime.args)
[--key1, "val1", "--key2", "val2", "pos1"]
```

```
>>> runtime = Runtime()
>>> runtime.with_argument("pos1")
>>> runtime.with_argument(key1="val1", key2="val2.1 val2.2")
>>> runtime.with_argument("pos2")
>>> print(runtime.args)
['pos1', '--key1', 'val1', '--key2', 'val2.1 val2.2', 'pos2']
```

```
>>> runtime = Runtime()
>>> runtime.with_argument("pos1")
>>> runtime.with_argument(key1=None, key2="val2")
>>> runtime.with_argument("pos2")
>>> print(runtime.args)
["pos1", "--key1", "--key2", "val2", "pos2"]
```

**with\_custom\_conda**(*uri: str, region: Optional[str] = None*)

Specifies the custom conda pack for running the job. Make sure you have configured the IAM policy for the job run to access the conda environment.

**Parameters**

- **uri** (*str*) – The OCI object storage URI for the conda pack, e.g. “oci://your\_bucket@namespace/object\_name.” In the Environment Explorer of an OCI notebook session, this is shown as the “source” of the conda pack.
- **region** (*str, optional*) – The region of the bucket storing the custom conda pack, by default None. If region is not specified, ADS will use the region from your authentication credentials:

- For API Key, config[“region”] is used.
- For Resource Principal, signer.region is used.

This is required if the conda pack is stored in a different region.

**Returns**

The runtime instance.

**Return type**

self

**See also:****https**

[//docs.oracle.com/en-us/iaas/data-science/using/conda\\_publishs\\_object.htm](https://docs.oracle.com/en-us/iaas/data-science/using/conda_publishs_object.htm)

**with\_environment\_variable**(\*\*kwargs) → Self

Sets environment variables

Environment variables enclosed by `${...}` will be substituted.

- You can use `$$` to escape the substitution.
- Undefined variable enclosed by `${}` will be ignored.
- Double dollar signs `$$` will be substituted by a single one `$`.

#### Returns

This method returns self to support chaining methods.

#### Return type

Self

### Examples

```
>>> runtime = (
...     PythonRuntime()
...     .with_environment_variable(
...         HOST="10.0.0.1",
...         PORT="443",
...         URL="http://${HOST}:${PORT}/path/",
...         ESCAPED_URL="http://$$${HOST}:${$PORT}/path/",
...         MISSING_VAR="This is ${UNDEFINED}",
...         VAR_WITH_DOLLAR="$10",
...         DOUBLE_DOLLAR="$$10"
...     )
... )
>>> for k, v in runtime.environment_variables.items():
...     print(f"{k}: {v}")
HOST: 10.0.0.1
PORT: 443
URL: http://10.0.0.1:443/path/
ESCAPED_URL: http://${HOST}:${PORT}/path/
MISSING_VAR: This is ${UNDEFINED}
VAR_WITH_DOLLAR: $10
DOUBLE_DOLLAR: $10
```

**with\_exclude\_tag**(\*tags) → *NotebookRuntime*

Specifies the cell tags in the notebook to exclude cells from the job script.

#### Parameters

**\*tags** (*list*) – A list of tags (strings).

#### Returns

The runtime instance.

#### Return type

self

**with\_freeform\_tag**(\*\*kwargs) → Self

Sets freeform tag

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**with\_maximum\_runtime\_in\_minutes**(*maximum\_runtime\_in\_minutes: int*) → Self

Sets maximum runtime in minutes

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**with\_notebook**(*path: str, encoding='utf-8'*) → *NotebookRuntime*

Specifies the notebook to be run as a job. Use this method if you would like to run a single notebook. Use `with_source()` method if you would like to run a notebook with additional dependency files.

**Parameters**

- **path** (*str*) – The path of the Jupyter notebook
- **encoding** (*str*) – The encoding for opening the notebook. Defaults to utf-8.

**Returns**

The runtime instance.

**Return type**

self

**with\_output**(*output\_uri: str*) → *NotebookRuntime*

Specifies the output URI for storing the output notebook and files. All files in the directory containing the notebook will be saved.

**Parameters**

**output\_uri** (*str*) – URI for a directory storing the output notebook and files. For example, `oci://bucket@namespace/path/to/dir`

**Returns**

The runtime instance.

**Return type**

self

**with\_service\_conda**(*slug: str*)

Specifies the service conda pack for running the job

**Parameters**

**slug** (*str*) – The slug name of the service conda pack

**Returns**

The runtime instance.

**Return type**

self

**with\_source**(*uri: str, notebook: str, encoding='utf-8'*)

Specify source code directory containing the notebook and dependencies for the job. Use this method if you would like to run a notebook with additional dependency files. Use the `with_notebook()` method if you would like to run a single notebook.



In the following example, local folder “path/to/source” contains the notebook and dependencies, The local path of the notebook is “path/to/source/relative/path/to/notebook.ipynb”:

```
runtime.with_source(uri="path/to/source", notebook="relative/path/to/notebook.
↳ipynb")
```

#### Parameters

- **uri** (*str*) – URI of the source code directory. This can be local or on OCI object storage.
- **notebook** (*str*) – The relative path of the notebook from the source URI.
- **encoding** (*str*) – The encoding for opening the notebook. Defaults to utf-8.

#### Returns

The runtime instance.

#### Return type

Self

```
class ads.jobs.PythonRuntime(spec: Optional[Dict] = None, **kwargs)
```

Bases: *ScriptRuntime*, *\_PythonRuntimeMixin*

Represents a job runtime using ADS driver script to run Python code

Example:

```
runtime = (
    PythonRuntime()
    # Specify the service conda environment by slug name.
    .with_service_conda("pytorch110_p38_cpu_v1")
    # The job artifact can be a single Python script, a directory or a zip file.
    .with_source("local/path/to/code_dir")
    # Environment variable
    .with_environment_variable(NAME="Welcome to OCI Data Science.")
    # Command line argument, arg1 --key arg2
    .with_argument("arg1", key="arg2")
    # Set the working directory
    # When using a directory as source, the default working dir is the parent of
    ↳code_dir.
    # Working dir should be a relative path beginning from the source directory.
    ↳(code_dir)
    .with_working_dir("code_dir")
    # The entrypoint is applicable only to directory or zip file as source
    # The entrypoint should be a path relative to the working dir.
    # Here my_script.py is a file in the code_dir/my_package directory
    .with_entrypoint("my_package/my_script.py")
    # Add an additional Python path, relative to the working dir (code_dir/other_
    ↳packages).
    .with_python_path("other_packages")
    # Copy files in "code_dir/output" to object storage after job finishes.
    .with_output("output", "oci://bucket_name@namespace/path/to/dir")
)
```

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

#### Parameters

- **spec** (*dict*, *optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

**CONST\_ARGS** = 'args'

**CONST\_CONDA** = 'conda'

**CONST\_CONDA\_REGION** = 'region'

**CONST\_CONDA\_SLUG** = 'slug'

**CONST\_CONDA\_TYPE** = 'type'

**CONST\_CONDA\_TYPE\_CUSTOM** = 'published'

**CONST\_CONDA\_TYPE\_SERVICE** = 'service'

**CONST\_CONDA\_URI** = 'uri'

**CONST\_ENTRYPOINT** = 'entrypoint'

**CONST\_ENTRY\_FUNCTION** = 'entryFunction'

**CONST\_ENV\_VAR** = 'env'

**CONST\_MAXIMUM\_RUNTIME\_IN\_MINUTES** = 'maximumRuntimeInMinutes'

**CONST\_OUTPUT\_DIR** = 'outputDir'

**CONST\_OUTPUT\_URI** = 'outputUri'

**CONST\_PYTHON\_PATH** = 'pythonPath'

**CONST\_SCRIPT\_PATH** = 'scriptPathURI'

**CONST\_TAG** = 'freeformTags'

**CONST\_WORKING\_DIR** = 'workingDir'

**property args:** list

Command line arguments

```
attribute_map = {'conda': 'conda', 'entryFunction': 'entry_function', 'entrypoint':  
'entrypoint', 'env': 'env', 'freeformTags': 'freeform_tags', 'outputDir':  
'output_dir', 'outputUri': 'output_uri', 'pythonPath': 'python_path',  
'scriptPathURI': 'script_path_uri', 'workingDir': 'working_dir'}
```

**property conda:** dict

The conda environment specification.

For service conda environment, the specification contains:

- **type**, the type of the conda environment. This is always **service** for service conda environment.
- **slug**, the slug of the conda environment.

For custom conda environment, the specification contains:

- **type**, the type of the conda environment. This is always **published** for custom conda environment.
- **uri**, the uri of the conda environment, e.g. `oci://bucket@namespace/prefix/to/conda`

- **region**, the region of the bucket in which the conda environment is stored. By default, ADS will determine the region based on the authenticated API key or resource principal. This is only needed if your conda environment is stored in a different region.

**Returns**

A dictionary containing the conda environment specifications.

**Return type**

dict

**property entry\_function: str**

The name of the entry function in the entry script

**property entry\_script: str**

The path of the entry script

**property entrypoint: str**

The relative path of the script to be set as entrypoint when source is a zip/tar/directory.

**property environment\_variables: dict**

Environment variables

**Returns**

The runtime environment variables. The returned dictionary is a copy.

**Return type**

dict

**property envs: dict**

Environment variables

**property freeform\_tags: dict****classmethod from\_dict(obj\_dict: dict) → Self**

Initialize the object from a Python dictionary

**classmethod from\_json(json\_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, decoder: callable = <class 'json.decoder.JSONDecoder'>, \*\*kwargs) → Self**

Creates an object from JSON string provided or from URI location containing JSON string

**Parameters**

- **json\_string** (*str*, *optional*) – JSON string. Defaults to None.
- **uri** (*str*, *optional*) – URI location of file containing JSON string. Defaults to None.
- **decoder** (*callable*, *optional*) – Custom decoder. Defaults to simple JSON decoder.
- **kwargs** (*dict*) – keyword arguments to be passed into fsspec.open(). For OCI object storage, this should be config="path/to/.oci/config". For other storage connections consider e.g. host, port, username, password, etc.
- **json\_string** – JSON string, by default None
- **uri** – URI location of file containing JSON string, by default None
- **decoder** – Decoder for custom data structures, by default json.JSONDecoder
- **kwargs** – keyword arguments to be passed into fsspec.open(). For OCI object storage, this can be config="path/to/.oci/config".

**Raises**

- **ValueError** – Raised if neither string nor uri is provided
- **ValueError** – Both json\_string and uri are empty, or The input is not a valid JSON.

**Returns**

Returns instance of the class

**Return type**

cls

**Returns**

Object initialized from JSON data.

**Return type**

Type[Self]

**classmethod from\_string**(obj\_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, loader: callable = <class 'yaml.loader.SafeLoader'>, \*\*kwargs) → Self

Initializes an object from YAML/JSON string or URI location containing the YAML/JSON

**Parameters**

- **obj\_string** (str, optional) – YAML/JSON string, by default None
- **uri** (str, optional) – URI location of file containing YAML/JSON, by default None
- **loader** (callable, optional) – Custom YAML loader, by default yaml.SafeLoader

**Returns**

Object initialized from the YAML.

**Return type**

Self

**classmethod from\_yaml**(yaml\_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, loader: callable = <class 'yaml.loader.SafeLoader'>, \*\*kwargs) → Self

Initializes an object from YAML string or URI location containing the YAML

**Parameters**

- **yaml\_string** (str, optional) – YAML string, by default None
- **uri** (str, optional) – URI location of file containing YAML, by default None
- **loader** (callable, optional) – Custom YAML loader, by default yaml.SafeLoader

**Returns**

Object initialized from the YAML.

**Return type**

Self

**Raises**

**ValueError** – Raised if neither string nor uri is provided

**get\_spec**(key: str, default: Optional[Any] = None) → Any

Gets the value of a specification property

**Parameters**

- **key** (str) – The name of the property.
- **default** (Any, optional) – The default value to be used, if the property does not exist, by default None.

**Returns**

The value of the property.

**Return type**

Any

**property kind: str**

Kind of the object to be stored in YAML. All runtime implementations will have “runtime” as kind. Sub-class will have different types.

**property maximum\_runtime\_in\_minutes: int**

Maximum runtime in minutes

**property output\_dir: str**

Directory in the Job run container for saving output files generated in the job

**property output\_uri: str**

OCI object storage URI prefix for saving output files generated in the job

**property python\_path**

Additional python paths for running the source code.

**property script\_uri: str**

The URI of the source code

**set\_spec(k: str, v: Any) → Self**

Sets a specification property for the object.

**Parameters**

- **k** (*str*) – key, the name of the property.
- **v** (*Any*) – value, the value of the property.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**property source\_uri: str**

The URI of the source code

**to\_dict() → dict**

Converts the object to dictionary with kind, type and spec as keys.

**to\_json(uri: ~typing.Optional[str] = None, encoder: callable = <class 'json.encoder.JSONEncoder'>, \*\*kwargs) → str**

Returns the object serialized as a JSON string

**Parameters**

- **uri** (*str*, *optional*) – URI location to save the JSON string, by default None
- **encoder** (*callable*, *optional*) – Encoder for custom data structures, by default `json.JSONEncoder`
- **kwargs** (*dict*) – keyword arguments to be passed into `fspec.open()`. For OCI object storage, this can be `config="path/to/.oci/config"`.

**Returns**

object serialized as a JSON string

**Return type**

str

**to\_yaml** (*uri*: ~typing.Optional[str] = None, *dumper*: callable = <class 'yaml.dumper.SafeDumper'>, *\*\*kwargs*) → Optional[str]

Returns object serialized as a YAML string

**Parameters**

- **uri** (*str*, *optional*) – URI location to save the YAML string, by default None
- **dumper** (*callable*, *optional*) – Custom YAML Dumper, by default yaml.SafeDumper
- **kwargs** (*dict*) – keyword arguments to be passed into fsspec.open(). For OCI object storage, this can be config="path/to/.oci/config".

**Returns**

If uri is specified, None will be returned. Otherwise, the yaml content will be returned.

**Return type**

Union[str, None]

**property type: str**

The type of the object as showing in YAML

**with\_argument** (*\*args*, *\*\*kwargs*) → Self

Adds command line arguments to the runtime.

This method can be called (chained) multiple times to add various arguments.

**Parameters**

- **args** – Positional arguments. In a single method call, positional arguments are always added before keyword arguments. You can call with\_argument() to add positional arguments after keyword arguments.
- **kwargs** – Keyword arguments. To add a keyword argument without value, set the value to None.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**Raises**

**ValueError** – Keyword arguments with space in a key.

**Examples**

```
>>> runtime = Runtime().with_argument(key1="val1", key2="val2").with_argument(
↳ "pos1")
>>> print(runtime.args)
["--key1", "val1", "--key2", "val2", "pos1"]
```

```
>>> runtime = Runtime()
>>> runtime.with_argument("pos1")
>>> runtime.with_argument(key1="val1", key2="val2.1 val2.2")
>>> runtime.with_argument("pos2")
```

(continues on next page)

(continued from previous page)

```
>>> print(runtime.args)
['pos1', '--key1', 'val1', '--key2', 'val2.1 val2.2', 'pos2']
```

```
>>> runtime = Runtime()
>>> runtime.with_argument("pos1")
>>> runtime.with_argument(key1=None, key2="val2")
>>> runtime.with_argument("pos2")
>>> print(runtime.args)
["pos1", "--key1", "--key2", "val2", "pos2"]
```

**with\_custom\_conda**(*uri*: str, *region*: Optional[str] = None)

Specifies the custom conda pack for running the job. Make sure you have configured the IAM policy for the job run to access the conda environment.

#### Parameters

- **uri** (str) – The OCI object storage URI for the conda pack, e.g. “oci://your\_bucket@namespace/object\_name.” In the Environment Explorer of an OCI notebook session, this is shown as the “source” of the conda pack.
- **region** (str, optional) – The region of the bucket storing the custom conda pack, by default None. If region is not specified, ADS will use the region from your authentication credentials:
  - For API Key, config[“region”] is used.
  - For Resource Principal, signer.region is used.

This is required if the conda pack is stored in a different region.

#### Returns

The runtime instance.

#### Return type

self

#### See also:

#### https

[//docs.oracle.com/en-us/iaas/data-science/using/conda\\_publishs\\_object.htm](https://docs.oracle.com/en-us/iaas/data-science/using/conda_publishs_object.htm)

**with\_entrypoint**(*entrypoint*: str)

Specify the entrypoint for the job

#### Parameters

**entrypoint** (str) – The relative path of the script to be set as entrypoint when source is a zip/tar/directory.

#### Returns

The runtime instance.

#### Return type

self

**with\_environment\_variable**(\*\**kwargs*) → Self

Sets environment variables

Environment variables enclosed by \${...} will be substituted.

- You can use \$\$ to escape the substitution.
- Undefined variable enclosed by \${} will be ignored.
- Double dollar signs \$\$ will be substituted by a single one \$.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**Examples**

```
>>> runtime = (  
...     PythonRuntime()  
...     .with_environment_variable(  
...         HOST="10.0.0.1",  
...         PORT="443",  
...         URL="http://${HOST}:${PORT}/path/",  
...         ESCAPED_URL="http://${HOST}:${PORT}/path/",  
...         MISSING_VAR="This is ${UNDEFINED}",  
...         VAR_WITH_DOLLAR="$10",  
...         DOUBLE_DOLLAR="$$10"  
...     )  
... )  
>>> for k, v in runtime.environment_variables.items():  
...     print(f"{k}: {v}")  
HOST: 10.0.0.1  
PORT: 443  
URL: http://10.0.0.1:443/path/  
ESCAPED_URL: http://${HOST}:${PORT}/path/  
MISSING_VAR: This is ${UNDEFINED}  
VAR_WITH_DOLLAR: $10  
DOUBLE_DOLLAR: $10
```

**with\_freeform\_tag**(\*\*kwargs) → Self

Sets freeform tag

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**with\_maximum\_runtime\_in\_minutes**(maximum\_runtime\_in\_minutes: int) → Self

Sets maximum runtime in minutes

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**with\_output**(output\_dir: str, output\_uri: str)

Specifies the outputs of the job. The output files in output\_dir will be copied to remote output\_uri when the job is finished.



**Parameters**

- **output\_dir** (*str*) – Path to the output directory in the job run. This path should be a relative path from the working directory. The source code should write all outputs into this directory.
- **output\_uri** (*str*) – The OCI object storage URI prefix for saving the output files. For example, `oci://bucket_name@namespace/path/to/directory`

**Returns**

The runtime instance.

**Return type**

Self

**with\_python\_path(\*python\_paths)**

Specifies additional python paths for running the source code.

**Parameters**

**\*python\_paths** – Additional python path(s) for running the source code. Each path should be a relative path from the working directory.

**Returns**

The runtime instance.

**Return type**

self

**with\_script(uri: str)**

Specifies the source code script for the job

**Parameters**

**uri** (*str*) – URI to the source code script, which can be any URI supported by fsspec, including <http://>, <https://> and OCI object storage. For example: `oci://your_bucket@your_namespace/path/to/script.py`

**Returns**

The runtime instance.

**Return type**

self

**with\_service\_conda(slug: str)**

Specifies the service conda pack for running the job

**Parameters**

**slug** (*str*) – The slug name of the service conda pack

**Returns**

The runtime instance.

**Return type**

self

**with\_source(uri: str, entrypoint: Optional[str] = None)**

Specifies the source code for the job

**Parameters**

- **uri** (*str*) – URI to the source code, which can be a (.py/.sh) script, a zip/tar file or directory containing the scripts/modules. If the source code is a single file, URI can be any URI supported by fsspec, including <http://>, <https://> and OCI object storage. For example:

oci://your\_bucket@your\_namespace/path/to/script.py URI can also be a folder or a zip file containing the source code. In that case, `entrypoint` is required.

- **`entrypoint`** (*str*, *optional*) – The relative path of the script to be set as `entrypoint` when source is a zip/tar/directory. By default `None`. This is not needed when the source is a single script.

**Returns**

The runtime instance.

**Return type**

`self`

**`with_working_dir`**(*working\_dir: str*)

Specifies the working directory in the job run. By default, the working directory will be the directory containing the user code (job artifact directory). This can be changed by specifying a relative path to the job artifact directory.

**Parameters**

**`working_dir`** (*str*) – The path of the working directory. This can be a relative path from the job artifact directory.

**Returns**

The runtime instance.

**Return type**

`self`

**property `working_dir: str`**

The working directory for the job run.

**`class ads.jobs.ScriptRuntime`**(*spec: Optional[Dict] = None, \*\*kwargs*)

Bases: [`CondaRuntime`](#)

Represents job runtime with scripts and conda pack.

This runtime is designed to define job artifacts and configurations supported by OCI Data Science Jobs natively. It can be used with any script types that is supported by the OCI Data Science Jobs, including shell scripts and python scripts.

To run a script with all dependencies contained in a local folder:

```
runtime = (
    ScriptRuntime()
    # Specify the service conda environment by slug name.
    .with_service_conda("pytorch110_p38_cpu_v1")
    # The job artifact can be a single Python script, a directory or a zip file.
    .with_source("local/path/to/code_dir")
    # Environment variable
    .with_environment_variable(NAME="Welcome to OCI Data Science.")
    # Command line argument
    .with_argument("100 linux \"hi there\"")
    # The entrypoint is applicable only to directory or zip file as source
    # The entrypoint should be a path relative to the working dir.
    # Here my_script.sh is a file in the code_dir/my_package directory
    .with_entrypoint("my_package/my_script.sh")
)
```

## References

<https://docs.oracle.com/en-us/iaas/data-science/using/jobs-artifact.htm>

To initialize the object, user can either pass in the specification as a dictionary or through keyword arguments.

### Parameters

- **spec** (*dict*, *optional*) – Object specification, by default None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.

**CONST\_ARGS** = 'args'

**CONST\_CONDA** = 'conda'

**CONST\_CONDA\_REGION** = 'region'

**CONST\_CONDA\_SLUG** = 'slug'

**CONST\_CONDA\_TYPE** = 'type'

**CONST\_CONDA\_TYPE\_CUSTOM** = 'published'

**CONST\_CONDA\_TYPE\_SERVICE** = 'service'

**CONST\_CONDA\_URI** = 'uri'

**CONST\_ENTRYPOINT** = 'entrypoint'

**CONST\_ENV\_VAR** = 'env'

**CONST\_MAXIMUM\_RUNTIME\_IN\_MINUTES** = 'maximumRuntimeInMinutes'

**CONST\_SCRIPT\_PATH** = 'scriptPathURI'

**CONST\_TAG** = 'freeformTags'

**property args:** list

Command line arguments

**attribute\_map** = {'conda': 'conda', 'entrypoint': 'entrypoint', 'env': 'env', 'freeformTags': 'freeform\_tags', 'scriptPathURI': 'script\_path\_uri'}

**property conda:** dict

The conda environment specification.

For service conda environment, the specification contains:

- **type**, the type of the conda environment. This is always **service** for service conda environment.
- **slug**, the slug of the conda environment.

For custom conda environment, the specification contains:

- **type**, the type of the conda environment. This is always **published** for custom conda environment.
- **uri**, the uri of the conda environment, e.g. `oci://bucket@namespace/prefix/to/conda`
- **region**, the region of the bucket in which the conda environment is stored. By default, ADS will determine the region based on the authenticated API key or resource principal. This is only needed if your conda environment is stored in a different region.

**Returns**

A dictionary containing the conda environment specifications.

**Return type**

dict

**property entrypoint: str**

The relative path of the script to be set as entrypoint when source is a zip/tar/directory.

**property environment\_variables: dict**

Environment variables

**Returns**

The runtime environment variables. The returned dictionary is a copy.

**Return type**

dict

**property envs: dict**

Environment variables

**property freeform\_tags: dict****classmethod from\_dict(obj\_dict: dict) → Self**

Initialize the object from a Python dictionary

**classmethod from\_json(json\_string: ~typing.Optional[str] = None, uri: ~typing.Optional[str] = None, decoder: callable = <class 'json.decoder.JSONDecoder'>, \*\*kwargs) → Self**

Creates an object from JSON string provided or from URI location containing JSON string

**Parameters**

- **json\_string** (*str*, *optional*) – JSON string. Defaults to None.
- **uri** (*str*, *optional*) – URI location of file containing JSON string. Defaults to None.
- **decoder** (*callable*, *optional*) – Custom decoder. Defaults to simple JSON decoder.
- **kwargs** (*dict*) – keyword arguments to be passed into fsspec.open(). For OCI object storage, this should be config="path/to/.oci/config". For other storage connections consider e.g. host, port, username, password, etc.
- **json\_string** – JSON string, by default None
- **uri** – URI location of file containing JSON string, by default None
- **decoder** – Decoder for custom data structures, by default json.JSONDecoder
- **kwargs** – keyword arguments to be passed into fsspec.open(). For OCI object storage, this can be config="path/to/.oci/config".

**Raises**

- **ValueError** – Raised if neither string nor uri is provided
- **ValueError** – Both json\_string and uri are empty, or The input is not a valid JSON.

**Returns**

Returns instance of the class

**Return type**

cls

**Returns**

Object initialized from JSON data.

**Return type**

Type[Self]

**classmethod from\_string**(*obj\_string*: ~typing.Optional[str] = None, *uri*: ~typing.Optional[str] = None, *loader*: callable = <class 'yaml.loader.SafeLoader'>, \*\*kwargs) → Self

Initializes an object from YAML/JSON string or URI location containing the YAML/JSON

**Parameters**

- **obj\_string** (*str*, *optional*) – YAML/JSON string, by default None
- **uri** (*str*, *optional*) – URI location of file containing YAML/JSON, by default None
- **loader** (*callable*, *optional*) – Custom YAML loader, by default yaml.SafeLoader

**Returns**

Object initialized from the YAML.

**Return type**

Self

**classmethod from\_yaml**(*yaml\_string*: ~typing.Optional[str] = None, *uri*: ~typing.Optional[str] = None, *loader*: callable = <class 'yaml.loader.SafeLoader'>, \*\*kwargs) → Self

Initializes an object from YAML string or URI location containing the YAML

**Parameters**

- **yaml\_string** (*str*, *optional*) – YAML string, by default None
- **uri** (*str*, *optional*) – URI location of file containing YAML, by default None
- **loader** (*callable*, *optional*) – Custom YAML loader, by default yaml.SafeLoader

**Returns**

Object initialized from the YAML.

**Return type**

Self

**Raises**

**ValueError** – Raised if neither string nor uri is provided

**get\_spec**(*key*: str, *default*: Optional[Any] = None) → Any

Gets the value of a specification property

**Parameters**

- **key** (*str*) – The name of the property.
- **default** (*Any*, *optional*) – The default value to be used, if the property does not exist, by default None.

**Returns**

The value of the property.

**Return type**

Any

**property kind: str**

Kind of the object to be stored in YAML. All runtime implementations will have “runtime” as kind. Sub-class will have different types.

**property maximum\_runtime\_in\_minutes: int**

Maximum runtime in minutes

**property script\_uri: str**

The URI of the source code

**set\_spec**(*k: str, v: Any*) → Self

Sets a specification property for the object.

**Parameters**

- **k** (*str*) – key, the name of the property.
- **v** (*Any*) – value, the value of the property.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**property source\_uri: str**

The URI of the source code

**to\_dict**() → dict

Converts the object to dictionary with kind, type and spec as keys.

**to\_json**(*uri: ~typing.Optional[str] = None, encoder: callable = <class 'json.encoder.JSONEncoder'>, \*\*kwargs*) → str

Returns the object serialized as a JSON string

**Parameters**

- **uri** (*str, optional*) – URI location to save the JSON string, by default None
- **encoder** (*callable, optional*) – Encoder for custom data structures, by default json.JSONEncoder
- **kwargs** (*dict*) – keyword arguments to be passed into fsspec.open(). For OCI object storage, this can be config="path/to/.oci/config".

**Returns**

object serialized as a JSON string

**Return type**

str

**to\_yaml**(*uri: ~typing.Optional[str] = None, dumper: callable = <class 'yaml.dumper.SafeDumper'>, \*\*kwargs*) → Optional[str]

Returns object serialized as a YAML string

**Parameters**

- **uri** (*str, optional*) – URI location to save the YAML string, by default None
- **dumper** (*callable, optional*) – Custom YAML Dumper, by default yaml.SafeDumper
- **kwargs** (*dict*) – keyword arguments to be passed into fsspec.open(). For OCI object storage, this can be config="path/to/.oci/config".

**Returns**

If uri is specified, None will be returned. Otherwise, the yaml content will be returned.

**Return type**

Union[str, None]

**property type: str**

The type of the object as showing in YAML

**with\_argument(\*args, \*\*kwargs) → Self**

Adds command line arguments to the runtime.

This method can be called (chained) multiple times to add various arguments.

**Parameters**

- **args** – Positional arguments. In a single method call, positional arguments are always added before keyword arguments. You can call `with_argument()` to add positional arguments after keyword arguments.
- **kwargs** – Keyword arguments. To add a keyword argument without value, set the value to `None`.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self

**Raises****ValueError** – Keyword arguments with space in a key.**Examples**

```
>>> runtime = Runtime().with_argument(key1="val1", key2="val2").with_argument(
↪ "pos1")
>>> print(runtime.args)
['--key1', 'val1', '--key2', 'val2', 'pos1']
```

```
>>> runtime = Runtime()
>>> runtime.with_argument("pos1")
>>> runtime.with_argument(key1="val1", key2="val2.1 val2.2")
>>> runtime.with_argument("pos2")
>>> print(runtime.args)
['pos1', '--key1', 'val1', '--key2', 'val2.1 val2.2', 'pos2']
```

```
>>> runtime = Runtime()
>>> runtime.with_argument("pos1")
>>> runtime.with_argument(key1=None, key2="val2")
>>> runtime.with_argument("pos2")
>>> print(runtime.args)
['pos1', '--key1', '--key2', 'val2', 'pos2']
```

**with\_custom\_conda(uri: str, region: Optional[str] = None)**

Specifies the custom conda pack for running the job Make sure you have configured the IAM policy for the job run to access the conda environment.

**Parameters**

- **uri** (*str*) – The OCI object storage URI for the conda pack, e.g. “oci://your\_bucket@namespace/object\_name.” In the Environment Explorer of an OCI notebook session, this is shown as the “source” of the conda pack.
- **region** (*str*, *optional*) – The region of the bucket storing the custom conda pack, by default None. If region is not specified, ADS will use the region from your authentication credentials:
  - For API Key, config[“region”] is used.
  - For Resource Principal, signer.region is used.

This is required if the conda pack is stored in a different region.

**Returns**

The runtime instance.

**Return type**

self

**See also:****https**

[//docs.oracle.com/en-us/iaas/data-science/using/conda\\_publishs\\_object.htm](https://docs.oracle.com/en-us/iaas/data-science/using/conda_publishs_object.htm)

**with\_entrypoint**(*entrypoint: str*)

Specify the entrypoint for the job

**Parameters**

**entrypoint** (*str*) – The relative path of the script to be set as entrypoint when source is a zip/tar/directory.

**Returns**

The runtime instance.

**Return type**

self

**with\_environment\_variable**(*\*\*kwargs*) → Self

Sets environment variables

Environment variables enclosed by \${...} will be substituted.

- You can use \$\$ to escape the substitution.
- Undefined variable enclosed by \${} will be ignored.
- Double dollar signs \$\$ will be substituted by a single one \$.

**Returns**

This method returns self to support chaining methods.

**Return type**

Self



## Examples

```
>>> runtime = (
...     PythonRuntime()
...     .with_environment_variable(
...         HOST="10.0.0.1",
...         PORT="443",
...         URL="http://${HOST}:${PORT}/path/",
...         ESCAPED_URL="http://${HOST}:${PORT}/path/",
...         MISSING_VAR="This is ${UNDEFINED}",
...         VAR_WITH_DOLLAR="$10",
...         DOUBLE_DOLLAR="$$10"
...     )
... )
>>> for k, v in runtime.environment_variables.items():
...     print(f"{k}: {v}")
HOST: 10.0.0.1
PORT: 443
URL: http://10.0.0.1:443/path/
ESCAPED_URL: http://${HOST}:${PORT}/path/
MISSING_VAR: This is ${UNDEFINED}
VAR_WITH_DOLLAR: $10
DOUBLE_DOLLAR: $$10
```

**with\_freeform\_tag**(\*\*kwargs) → Self

Sets freeform tag

### Returns

This method returns self to support chaining methods.

### Return type

Self

**with\_maximum\_runtime\_in\_minutes**(maximum\_runtime\_in\_minutes: int) → Self

Sets maximum runtime in minutes

### Returns

This method returns self to support chaining methods.

### Return type

Self

**with\_script**(uri: str)

Specifies the source code script for the job

### Parameters

**uri** (str) – URI to the source code script, which can be any URI supported by fsspec, including <http://>, <https://> and OCI object storage. For example: `oci://your_bucket@your_namespace/path/to/script.py`

### Returns

The runtime instance.

### Return type

self

**with\_service\_conda**(slug: str)

Specifies the service conda pack for running the job

**Parameters**

**slug** (*str*) – The slug name of the service conda pack

**Returns**

The runtime instance.

**Return type**

self

**with\_source**(*uri: str, entrypoint: Optional[str] = None*)

Specifies the source code for the job

**Parameters**

- **uri** (*str*) – URI to the source code, which can be a (.py/.sh) script, a zip/tar file or directory containing the scripts/modules. If the source code is a single file, URI can be any URI supported by fsspec, including <http://>, <https://> and OCI object storage. For example: `oci://your_bucket@your_namespace/path/to/script.py`. URI can also be a folder or a zip file containing the source code. In that case, `entrypoint` is required.
- **entrypoint** (*str, optional*) – The relative path of the script to be set as entrypoint when source is a zip/tar/directory. By default `None`. This is not needed when the source is a single script.

**Returns**

The runtime instance.

**Return type**

self

### 18.1.1.15 ads.model package

#### 18.1.1.15.1 Subpackages

#### ads.model.common package

#### Submodules

#### ads.model.common.utils module

`ads.model.common.utils.fetch_manifest_from_conda_location(env_location: str)`

Convenience method to fetch the manifest file from a conda environment.

**Parameters**

**env\_location** (*str*) – Absolute path to the environment.

`ads.model.common.utils.zip_artifact(artifact_dir: str) → str`

Prepares model artifacts ZIP archive.

**Parameters**

**artifact\_dir** (*str*) – Path to the model artifact.

**Returns**

Path to the model artifact ZIP archive file.

**Return type**

str

## Module contents

### ads.model.deployment package

#### Subpackages

### ads.model.deployment.common package

#### Submodules

### ads.model.deployment.common.progress\_bar module

**class** ads.model.deployment.common.progress\_bar.DummyProgressBar(\*args, \*\*kwargs)

Bases: [ProgressBar](#)

DummyProgressBar represents a progress bar for non-notebook environments. It inherits from the abstract class ProgressBar. It allows use of the same contextlib enter and exit methods

**update**(\*args, \*\*kwargs)

**class** ads.model.deployment.common.progress\_bar.ProgressBar

Bases: object

ProgressBar is an abstract class for creating progress bars.

**\_\_enter\_\_**()

runtime context entry method

**update**(description)

abstract method for update

**\_\_exit\_\_**(exc\_type, exc\_val, exc\_tb)

runtime context exit method

**abstract update**(description)

**class** ads.model.deployment.common.progress\_bar.TqdmProgressBar(max\_progress=100,  
description='Running',  
verbose=False)

Bases: [ProgressBar](#)

TqdmProgressBar represents a progress bar for notebooks. It inherits from the abstract class ProgressBar

**max\_progress**(int)

The maximum value for the progress bar

**decription**(str)

The progres bar's description

**progress\_bar**(tqdm\_notebook)

Notebook widget

**verbose**(bool)

verbosity flag

**\_\_enter\_\_()**

runtime context entry method

**\_\_init\_\_**(*max\_progress, description, verbose*)

init method for class

**update**(*description=None*)

updates progress bar

**\_\_exit\_\_**(*exc\_type, exc\_val, exc\_tb*)

runtime context exit method

Class initialization function

**Parameters**

- **max\_progress** (*int, optional*) – the maximum progress bar value (defaults to 100)
- **description** (*str, optional*) – the progress bar description (defaults to “Running”)
- **verbose** (*bool, optional*) – verbosity flag (defaults to False)

**update**(*description=None*)

update updates the progress bar

**Parameters**

**description** (*str, optional*) – progress bar description

**Returns**

Nothing

## ads.model.deployment.common.utils module

Utilities used by the model deployment package

**class** ads.model.deployment.common.utils.**OCIClientManager**(*config=None*)

Bases: object

OCIClientManager is a helper class used for accessing DataScienceClient and DataScienceCompositeClient objects

**ds\_client** - class attribute for data science client

**ds\_composite\_client** - class attribute for data science composite client

**default\_compartment\_id()**

Determines the default compartment OCID This method finds the compartment OCID from (in priority order): an environment variable, an API key config or a resource principal signer.

**Parameters**

**config** (*dict, optional*) – The model deployment config, which contains the following keys: auth: Authentication method, must be either “resource\_principal” or “api\_key”. If auth is not specified:

1. api\_key will be used if available.
2. If api\_key is not available, resource\_principal will be used.

oci\_config\_file: OCI API key config file location. Defaults to “~/oci/config”

oci\_config\_profile: OCI API key config profile name. Defaults to “DEFAULT”

**Returns**

The compartment OCID if found. Otherwise None.

**Return type**

str or None

**prepare\_artifact**(*model\_uri: str, properties: Dict*) → str

Prepare model artifact. Returns model ocid.

**Parameters**

- **model\_uri** (*str*) – uri to model files, can be local or in cloud storage
- **properties** (*dict*) – dictionary of properties that are needed for creating a model.
- **ds\_client** (*DataScienceClient*) – OCI DataScienceClient

**Returns**

model ocid

**Return type**

str

**class** ads.model.deployment.common.utils.**State**(*value*)

Bases: Enum

An enumeration.

**ACTIVE** = 1

**CREATING** = 2

**DELETED** = 3

**DELETING** = 4

**FAILED** = 5

**INACTIVE** = 6

**UNKNOWN** = 8

**UPDATING** = 7

ads.model.deployment.common.utils.**get\_logger**()

ads.model.deployment.common.utils.**is\_notebook**()

is\_notebook returns True if the environment is a Jupyter notebook and False otherwise

**Parameters**

**None** –

**Returns**

True if Jupyter notebook; False otherwise

**Return type**

bool

**Raises**

**NameError** – If retrieving the shell name from get\_ipython() throws an error

`ads.model.deployment.common.utils.seconds_since(t)`

`seconds_since` returns the seconds since *t*. *t* is assumed to be a time in epoch seconds since `time.time()` returns the current time in epoch seconds.

**Parameters**

*t* (*int*) –

**Returns**

*int*: the number of seconds since *t*

`ads.model.deployment.common.utils.send_request(data, endpoint: str, dry_run: bool = False,  
is_json_payload: bool = False, header: dict = {},  
**kwargs)`

Sends the data to the predict endpoint.

**Parameters**

- **data** (*bytes* or *Json serializable*) – data need to be sent to the endpoint.
- **endpoint** (*str*) – The model HTTP endpoint.
- **dry\_run** (*bool*, *optional*) – Defaults to *False*.
- **is\_json\_payload** (*bool*, *optional*) – Indicate whether to send data with a *application/json* MIME TYPE. Defaults to *False*.
- **header** (*dict*, *optional*) – A dictionary of HTTP headers to send to the specified url. Defaults to {}.

**Returns**

A JSON representative of a `requests.Response` object.

`ads.model.deployment.common.utils.set_log_level(level='INFO')`

`set_log_level` sets the logger level

**Parameters**

**level** (*str*, *optional*) – The logger level. Defaults to “INFO”

**Returns**

Nothing

## Module contents

### Submodules

#### `ads.model.deployment.model_deployer` module

APIs to interact with Oracle’s Model Deployment service.

There are three main classes: `ModelDeployment`, `ModelDeploymentDetails`, `ModelDeployer`.

One creates a `ModelDeployment` and deploys it under the umbrella of the `ModelDeployer` class. This way multiple `ModelDeployments` can be unified with one `ModelDeployer`. The `ModelDeployer` class also serves as the interface to all the deployments. `ModelDeploymentDetails` holds information about the particular details of a particular deployment, such as how many instances, etc. In this way multiple, independent `ModelDeployments` with the same details can be created using the `ModelDeployer` class.

## Examples

```
>>> from model_deploy.model_deployer import ModelDeployer, ModelDeploymentDetails
>>> deployer = ModelDeployer("model_dep_conf.yaml")
>>> deployment_properties = ModelDeploymentProperties(
...     'ocidl1.datasciencemodel.ocn.reg.abcdefghijklmnopqrstuvwxyz')
...     .with_prop('display_name', "My model display name")
...     .with_prop("project_id", project_id)
...     .with_prop("compartment_id", compartment_id)
...     .with_instance_configuration(
...         config={"INSTANCE_SHAPE": "VM.Standard.E3.Flex",
...                 "INSTANCE_COUNT": "1",
...                 "bandwidth_mbps": 10,
...                 "memory_in_gbs": 10,
...                 "ocpus": 2}
...     ).build()
>>> deployment_info = deployer.deploy(deployment_properties,
...     max_wait_time=600, poll_interval=15)
>>> print(deployment_info.model_deployment_id)
>>> print(deployment_info.workflow_req_id)
>>> print(deployment_info.url)
>>> deployer.list_deployments() # Optionally pass in a status
```

**class** `ads.model.deployment.model_deployer.ModelDeployer`(*config*: *Optional*[dict] = None, *ds\_client*: *Optional*[DataScienceClient] = None)

Bases: object

ModelDeployer is the class responsible for deploying the ModelDeployment

### **config**

ADS auth dictionary for OCI authentication.

### **Type**

dict

### **ds\_client**

data science client

### **Type**

DataScienceClient

### **ds\_composite\_client**

composite data science client

### **Type**

DataScienceCompositeClient

### **deploy**(*model\_deployment\_details*, *\\*\*kwargs*)

Deploy the model specified by *model\_deployment\_details*.

### **get\_model\_deployment**(*model\_deployment\_id*: str)

Get the ModelDeployment specified by *model\_deployment\_id*.

### **get\_model\_deployment\_state**(*model\_deployment\_id*)

Get the state of the current deployment specified by id.

**delete**(*model\_deployment\_id*, *\*\*kwargs*)

Remove the model deployment specified by the id or Model Deployment Object

**list\_deployments**(*status*)

lists the model deployments associated with current compartment and data science client

**show\_deployments**(*status*)

shows the deployments filtered by *status* in a Dataframe

Initializes model deployer.

#### Parameters

**config**(*dict*, *optional*) –

**ADS auth dictionary for OCI authentication.**

This can be generated by calling `ads.common.auth.api_keys()` or `ads.common.auth.resource_principal()`. If this is `None`, `ads.common.default_signer(client_kwargs)` will be used.

**ds\_client**: `oci.data_science.data_science_client.DataScienceClient`

The Oracle DataScience client.

**delete**(*model\_deployment\_id*, *wait\_for\_completion*: *bool* = *True*, *max\_wait\_time*: *int* = *1200*, *poll\_interval*: *int* = *10*) → *ModelDeployment*

Deletes the model deployment specified by OCID.

#### Parameters

- **model\_deployment\_id** (*str*) – Model deployment OCID.
- **wait\_for\_completion** (*bool*) – Wait for deletion to complete. Defaults to `True`.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 600). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 60).

#### Return type

A *ModelDeployment* instance that was deleted

**deploy**(*properties*: *Optional*[*Union*[*ModelDeploymentProperties*, *Dict*]] = *None*, *wait\_for\_completion*: *bool* = *True*, *max\_wait\_time*: *int* = *1200*, *poll\_interval*: *int* = *10*, *\*\*kwargs*) → *ModelDeployment*

Deploys a model.

#### Parameters

- **properties** (*ModelDeploymentProperties* or *dict*) – Properties to deploy the model. Properties can be `None` when *kwargs* are used for specifying properties.
- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to complete before proceeding. Optional, defaults to `True`.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds. Optional, defaults to 1200. Negative value implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds. Optional, defaults to 30.
- **kwargs** – Keyword arguments for initializing *ModelDeploymentProperties*. See *ModelDeploymentProperties()* for details.

#### Returns

A *ModelDeployment* instance.



**Return type***ModelDeployment*

**deploy\_from\_model\_uri**(*model\_uri*: str, *properties*: Optional[Union[*ModelDeploymentProperties*, Dict]] = None, *wait\_for\_completion*: bool = True, *max\_wait\_time*: int = 1200, *poll\_interval*: int = 10, *\*\*kwargs*) → *ModelDeployment*

Deploys a model.

**Parameters**

- **model\_uri** (str) – uri to model files, can be local or in cloud storage
- **properties** (*ModelDeploymentProperties* or dict) – Properties to deploy the model. Properties can be None when kwargs are used for specifying properties.
- **wait\_for\_completion** (bool) – Flag set for whether to wait for deployment to complete before proceeding. Defaults to True
- **max\_wait\_time** (int) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (int) – Poll interval in seconds (Defaults to 30).
- **kwargs** – Keyword arguments for initializing *ModelDeploymentProperties*

**Returns**

A *ModelDeployment* instance

**Return type***ModelDeployment*

**get\_model\_deployment**(*model\_deployment\_id*: str) → *ModelDeployment*

Gets a *ModelDeployment* by OCID.

**Parameters**

**model\_deployment\_id** (str) – Model deployment OCID

**Returns**

A *ModelDeployment* instance

**Return type***ModelDeployment*

**get\_model\_deployment\_state**(*model\_deployment\_id*: str) → *State*

Gets the state of a deployment specified by OCID

**Parameters**

**model\_deployment\_id** (str) – Model deployment OCID

**Returns**

The state of the deployment

**Return type**

str

**list\_deployments**(*status*=None, *compartment\_id*=None, *\*\*kwargs*) → list

Lists the model deployments associated with current compartment and data science client

**Parameters**

- **status** (str) – Status of deployment. Defaults to None.

- **compartment\_id** (*str*) – Target compartment to list deployments from. Defaults to the compartment set in the environment variable “NB\_SESSION\_COMPARTMENT\_OCID”. If “NB\_SESSION\_COMPARTMENT\_OCID” is not set, the root compartment ID will be used. An `ValueError` will be raised if root compartment ID cannot be determined.
- **kwargs** – The values are passed to `oci.data_science.DataScienceClient.list_model_deployments`.

**Returns**

A list of `ModelDeployment` objects.

**Return type**

list

**Raises**

**ValueError** – If `compartment_id` is not specified and cannot be determined from the environment.

**show\_deployments** (*status=None, compartment\_id=None*) → `DataFrame`

Returns the model deployments associated with current compartment and data science client as a `Dataframe` that can be easily visualized

**Parameters**

- **status** (*str*) – Status of deployment. Defaults to `None`.
- **compartment\_id** (*str*) – Target compartment to list deployments from. Defaults to the compartment set in the environment variable “NB\_SESSION\_COMPARTMENT\_OCID”. If “NB\_SESSION\_COMPARTMENT\_OCID” is not set, the root compartment ID will be used. An `ValueError` will be raised if root compartment ID cannot be determined.

**Returns**

`pandas DataFrame` containing information about the `ModelDeployments`

**Return type**

`DataFrame`

**Raises**

**ValueError** – If `compartment_id` is not specified and cannot be determined from the environment.

**update** (*model\_deployment\_id: str, properties: Optional[ModelDeploymentProperties] = None, wait\_for\_completion: bool = True, max\_wait\_time: int = 1200, poll\_interval: int = 10, \*\*kwargs*) → `ModelDeployment`

Updates an existing model deployment.

**Parameters**

- **model\_deployment\_id** (*str*) – Model deployment OCID.
- **properties** (`ModelDeploymentProperties`) – An instance of `ModelDeploymentProperties` or dict to initialize the `ModelDeploymentProperties`. Defaults to `None`.
- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to complete before proceeding. Defaults to `True`.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200).
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 30).
- **kwargs** – Keyword arguments for initializing `ModelDeploymentProperties`.

**Returns**

A ModelDeployment instance

**Return type***ModelDeployment***ads.model.deployment.model\_deployment module****exception** ads.model.deployment.model\_deployment.LogNotConfiguredError

Bases: Exception

**class** ads.model.deployment.model\_deployment.ModelDeployment(*properties: Optional[Union[ModelDeploymentProperties, Dict]] = None, config: Optional[Dict] = None, model\_deployment\_id: Optional[str] = None, model\_deployment\_url: str = "", spec: Optional[Dict] = None, \*\*kwargs*)

Bases: *Builder*

A class used to represent a Model Deployment.

**config**

Deployment configuration parameters

**Type**

(dict)

**properties**

ModelDeploymentProperties object

**Type***(ModelDeploymentProperties)***workflow\_state\_progress**

Workflow request id

**Type**

(str)

**workflow\_steps**

The number of steps in the workflow

**Type**

(int)

**dsc\_model\_deployment**

The OCIDataScienceModelDeployment instance.

**Type***(OCIDataScienceModelDeployment)***state**

Returns the deployment state of the current Model Deployment object

**Type***(State)*

**created\_by**

The user that creates the model deployment

**Type**

(str)

**lifecycle\_state**

Model deployment lifecycle state

**Type**

(str)

**lifecycle\_details**

Model deployment lifecycle details

**Type**

(str)

**time\_created**

The time when the model deployment is created

**Type**

(datetime)

**display\_name**

Model deployment display name

**Type**

(str)

**description**

Model deployment description

**Type**

(str)

**freeform\_tags**

Model deployment freeform tags

**Type**

(dict)

**defined\_tags**

Model deployment defined tags

**Type**

(dict)

**runtime**

Model deployment runtime

**Type**

(ModelDeploymentRuntime)

**infrastructure**

Model deployment infrastructure

**Type**

(ModelDeploymentInfrastructure)

**deploy**(*wait\_for\_completion*, *\\*\*kwargs*)  
 Deploy the current Model Deployment object

**delete**(*wait\_for\_completion*, *\\*\*kwargs*)  
 Deletes the current Model Deployment object

**update**(*wait\_for\_completion*, *\\*\*kwargs*)  
 Updates a model deployment

**activate**(*wait\_for\_completion*, *max\_wait\_time*, *poll\_interval*)  
 Activates a model deployment

**deactivate**(*wait\_for\_completion*, *max\_wait\_time*, *poll\_interval*)  
 Deactivates a model deployment

**list**(*status*, *compartment\_id*, *project\_id*, *\\*\*kwargs*)  
 List model deployment within given compartment and project.

**with\_display\_name**(*display\_name*)  
 Sets model deployment display name

**with\_description**(*description*)  
 Sets model deployment description

**with\_freeform\_tags**(*freeform\_tags*)  
 Sets model deployment freeform tags

**with\_defined\_tags**(*defined\_tags*)  
 Sets model deployment defined tags

**with\_runtime**(*self*, *runtime*)  
 Sets model deployment runtime

**with\_infrastructure**(*self*, *infrastructure*)  
 Sets model deployment infrastructure

**from\_dict**(*obj\_dict*)  
 Deserializes model deployment instance from dict

**from\_id**(*id*)  
 Loads model deployment instance from ocid

**sync**()  
 Updates the model deployment instance from backend

## Examples

```
Build model deployment from builder apis: >>> ds_model_deployment = (ModelDeployment() ...
.with_display_name("TestModelDeployment") ... .with_description("Testing the test model deploy-
ment") ... .with_freeform_tags(tag1="val1", tag2="val2") ... .with_infrastructure( ... (ModelDeploy-
mentInfrastructure() ... .with_project_id(<project_id>) ... .with_compartment_id(<compartment_id>)
... .with_shape_name("VM.Standard.E4.Flex") ... .with_shape_config_details( ... ocpus=1, ... mem-
ory_in_gbs=16 ... ) ... .with_replica(1) ... .with_bandwidth_mbps(10) ... .with_web_concurrency(10)
... .with_access_log( ... log_group_id=<log_group_id>, ... log_id=<log_id> ... ) ...
.with_predict_log( ... log_group_id=<log_group_id>, ... log_id=<log_id> ... )) ... )
... .with_runtime( ... (ModelDeploymentContainerRuntime() ... .with_image(<image>) ...
.with_image_digest(<image_digest>) ... .with_entrypoint(<entrypoint>) ... .with_server_port(<server_port>)
```

```
...         .with_health_check_port(<health_check_port>) ...         .with_env({"key": "value"})
...         .with_deployment_mode("HTTPS_ONLY") ...         .with_model_uri(<model_uri>)) ...
) ... ) >>> ds_model_deployment.deploy() >>> ds_model_deployment.status >>>
ds_model_deployment.with_display_name("new name").update() >>> ds_model_deployment.deactivate()
>>> ds_model_deployment.sync() >>> ds_model_deployment.list(status="ACTIVE") >>>
ds_model_deployment.delete()
```

```
Build model deployment from yaml >>> ds_model_deployment = ModelDeploy-
ment.from_yaml(uri=<path_to_yaml>)
```

Initializes a `ModelDeployment` object.

#### Parameters

- **properties** `((Union[ModelDeploymentProperties, Dict], optional)). Defaults to None.` – Object containing deployment properties. The properties can be *None* when *kwargs* are used for specifying properties.
- **config** `((Dict, optional). Defaults to None.)` – ADS auth dictionary for OCI authentication. This can be generated by calling `ads.common.auth.api_keys()` or `ads.common.auth.resource_principal()`. If this is *None* then the `ads.common.default_signer(client_kwargs)` will be used.
- **model\_deployment\_id** `((str, optional). Defaults to None.)` – Model deployment OCID.
- **model\_deployment\_url** `((str, optional). Defaults to empty string.)` – Model deployment url.
- **spec** `((dict, optional). Defaults to None.)` – Model deployment spec.
- **kwargs** – Keyword arguments for initializing *ModelDeploymentProperties* or *ModelDeployment*.

`CONST_CREATED_BY = 'createdBy'`

`CONST_DEFINED_TAG = 'definedTags'`

`CONST_DESCRIPTION = 'description'`

`CONST_DISPLAY_NAME = 'displayName'`

`CONST_FREEFORM_TAG = 'freeformTags'`

`CONST_ID = 'id'`

`CONST_INFRASTRUCTURE = 'infrastructure'`

`CONST_LIFECYCLE_DETAILS = 'lifecycleDetails'`

`CONST_LIFECYCLE_STATE = 'lifecycleState'`

`CONST_MODEL_DEPLOYMENT_URL = 'modelDeploymentUrl'`

`CONST_RUNTIME = 'runtime'`

`CONST_TIME_CREATED = 'timeCreated'`

**property** `access_log: OCILog`

Gets the model deployment access logs object.

#### Returns

The `OCILog` object containing the access logs.

**Return type***OCILog***activate**(*wait\_for\_completion: bool = True, max\_wait\_time: int = 1200, poll\_interval: int = 10*) →*ModelDeployment*

Activates a model deployment

**Parameters**

- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to be activated before proceeding. Defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).

**Returns**

The instance of ModelDeployment.

**Return type***ModelDeployment*

```
attribute_map = {'createdBy': 'created_by', 'definedTags': 'defined_tags',
'description': 'description', 'displayName': 'display_name', 'freeformTags':
'freeform_tags', 'id': 'id', 'infrastructure': 'infrastructure', 'lifecycleDetails':
'lifecycle_details', 'lifecycleState': 'lifecycle_state', 'modelDeploymentUrl':
'model_deployment_url', 'runtime': 'runtime', 'timeCreated': 'time_created'}
```

**property created\_by: str**

The user that creates the model deployment.

**Returns**

The user that creates the model deployment.

**Return type**

str

**deactivate**(*wait\_for\_completion: bool = True, max\_wait\_time: int = 1200, poll\_interval: int = 10*) →*ModelDeployment*

Deactivates a model deployment

**Parameters**

- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to be deactivated before proceeding. Defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).

**Returns**

The instance of ModelDeployment.

**Return type***ModelDeployment***property defined\_tags: Dict**

Model deployment defined tags.

**Returns**

Model deployment defined tags.

**Return type**

Dict

**delete**(*wait\_for\_completion: bool = True, max\_wait\_time: int = 1200, poll\_interval: int = 10*)

Deletes the ModelDeployment

**Parameters**

- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to be deleted before proceeding. Defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).

**Returns**

The instance of ModelDeployment.

**Return type***ModelDeployment***deploy**(*wait\_for\_completion: bool = True, max\_wait\_time: int = 1200, poll\_interval: int = 10*)

Deploys the current ModelDeployment object

**Parameters**

- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to be deployed before proceeding. Defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).

**Returns**

The instance of ModelDeployment.

**Return type***ModelDeployment***Raises***ModelDeploymentFailedError* – If model deployment fails to deploy**property description: str**

Model deployment description.

**Returns**

Model deployment description.

**Return type**

str

**property display\_name: str**

Model deployment display name.

**Returns**

Model deployment display name.

**Return type**

str



**property freeform\_tags: Dict**

Model deployment freeform tags.

**Returns**

Model deployment freeform tags.

**Return type**

Dict

**classmethod from\_dict(obj\_dict: Dict) → ModelDeployment**

Loads model deployment instance from a dictionary of configurations.

**Parameters**

**obj\_dict** (Dict) – A dictionary of configurations.

**Returns**

The model deployment instance.

**Return type**

*ModelDeployment*

**classmethod from\_id(id: str) → ModelDeployment**

Loads the model deployment instance from ocid.

**Parameters**

**id** (str) – The ocid of model deployment.

**Returns**

The ModelDeployment instance (self).

**Return type**

*ModelDeployment*

**property infrastructure: ModelDeploymentInfrastructure**

Model deployment infrastructure.

**Returns**

Model deployment infrastructure.

**Return type**

ModelDeploymentInfrastructure

**initialize\_spec\_attributes = ['display\_name', 'description', 'freeform\_tags', 'defined\_tags', 'infrastructure', 'runtime']**

**property kind: str**

The kind of the object as showing in YAML.

**Returns**

deployment

**Return type**

str

**property lifecycle\_details: str**

Model deployment lifecycle details.

**Returns**

Model deployment lifecycle details.

**Return type**

str

**property lifecycle\_state: str**

Model deployment lifecycle state.

**Returns**

Model deployment lifecycle state.

**Return type**

str

**classmethod list**(*status: Optional[str] = None, compartment\_id: Optional[str] = None, project\_id: Optional[str] = None, \*\*kwargs*) → List[*ModelDeployment*]

Lists the model deployments associated with current compartment id and status

**Parameters**

- **status** (*str*) – Status of deployment. Defaults to None. Allowed values: *ACTIVE*, *CREATING*, *DELETED*, *DELETING*, *FAILED*, *INACTIVE* and *UPDATING*.
- **compartment\_id** (*str*) – Target compartment to list deployments from. Defaults to the compartment set in the environment variable “NB\_SESSION\_COMPARTMENT\_OCID”. If “NB\_SESSION\_COMPARTMENT\_OCID” is not set, the root compartment ID will be used. An ValueError will be raised if root compartment ID cannot be determined.
- **project\_id** (*str*) – Target project to list deployments from. Defaults to the project id in the environment variable “PROJECT\_OCID”.
- **kwargs** – The values are passed to `oci.data_science.DataScienceClient.list_model_deployments`.

**Returns**

A list of *ModelDeployment* objects.

**Return type**

list

**classmethod list\_df**(*status: Optional[str] = None, compartment\_id: Optional[str] = None, project\_id: Optional[str] = None*) → DataFrame

**Returns the model deployments associated with current compartment and status**

as a DataFrame that can be easily visualized

**Parameters**

- **status** (*str*) – Status of deployment. Defaults to None. Allowed values: *ACTIVE*, *CREATING*, *DELETED*, *DELETING*, *FAILED*, *INACTIVE* and *UPDATING*.
- **compartment\_id** (*str*) – Target compartment to list deployments from. Defaults to the compartment set in the environment variable “NB\_SESSION\_COMPARTMENT\_OCID”. If “NB\_SESSION\_COMPARTMENT\_OCID” is not set, the root compartment ID will be used. An ValueError will be raised if root compartment ID cannot be determined.
- **project\_id** (*str*) – Target project to list deployments from. Defaults to the project id in the environment variable “PROJECT\_OCID”.

**Returns**

pandas DataFrame containing information about the *ModelDeployments*

**Return type**

DataFrame

**logs**(*log\_type: Optional[str] = None*) → *ConsolidatedLog*

Gets the access or predict logs.

**Parameters**

**log\_type** ((*str, optional*). Defaults to *None*.) – The log type. Can be “access”, “predict” or *None*.

**Returns**

The ConsolidatedLog object containing the logs.

**Return type**

*ConsolidatedLog*

**property model\_deployment\_id: str**

The model deployment ocid.

**Returns**

The model deployment ocid.

**Return type**

str

**model\_input\_serializer** = <ads.model.serde.model\_input.JsonModelInputSERDE object>

**predict**(*json\_input=None, data: ~typing.Any = None, serializer: ads.model.ModelInputSerializer = <ads.model.serde.model\_input.JsonModelInputSERDE object>, auto\_serialize\_data: bool = False, \*\*kwargs*) → dict

Returns prediction of input data run against the model deployment endpoint.

## Examples

```
>>> import numpy as np
>>> from ads.model import ModelInputSerializer
>>> class MySerializer(ModelInputSerializer):
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
>>> model_deployment = ModelDeployment.from_id(<model_deployment_id>)
>>> prediction = model_deployment.predict(
...     data=np.array([1, 2, 3]),
...     serializer=MySerializer(),
...     auto_serialize_data=True,
... )['prediction']
```

**Parameters**

- **json\_input** (*Json serializable*) – JSON payload for the prediction.
- **data** (*Any*) – Data for the prediction.
- **serializer** (*ads.model.ModelInputSerializer*) – Defaults to *ads.model.JsonModelInputSerializer*.
- **auto\_serialize\_data** (*bool*) – Defaults to *False*. Indicate whether to auto serialize input data using *serializer*. If *auto\_serialize\_data=False*, *data* required to be bytes or json serializable and *json\_input* required to be json serializable. If *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.

- **kwargs** –

**content\_type: str**

Used to indicate the media type of the resource. By default, it will be *application/octet-stream* for bytes input and *application/json* otherwise. The content-type header will be set to this value when calling the model deployment endpoint.

**Returns**

Prediction results.

**Return type**

dict

**property predict\_log: *OCILog***

Gets the model deployment predict logs object.

**Returns**

The OCILog object containing the predict logs.

**Return type**

*OCILog*

**property runtime: *ModelDeploymentRuntime***

Model deployment runtime.

**Returns**

Model deployment runtime.

**Return type**

*ModelDeploymentRuntime*

**show\_logs**(*time\_start: Optional[datetime] = None, time\_end: Optional[datetime] = None, limit: int = 100, log\_type: Optional[str] = None*)

Shows deployment logs as a pandas dataframe.

**Parameters**

- **time\_start** (*(datetime.datetime, optional). Defaults to None.*) – Starting date and time in RFC3339 format for retrieving logs. Defaults to None. Logs will be retrieved 14 days from now.
- **time\_end** (*(datetime.datetime, optional). Defaults to None.*) – Ending date and time in RFC3339 format for retrieving logs. Defaults to None. Logs will be retrieved until now.
- **limit** (*(int, optional). Defaults to 100.*) – The maximum number of items to return.
- **log\_type** (*(str, optional). Defaults to None.*) – The log type. Can be “access”, “predict” or None.

**Return type**

A pandas DataFrame containing logs.

**property state: *State***

Returns the deployment state of the current Model Deployment object

**property status: *State***

Returns the deployment state of the current Model Deployment object

**sync()** → *ModelDeployment*

Updates the model deployment instance from backend.

**Returns**

The ModelDeployment instance (self).

**Return type**

*ModelDeployment*

**property time\_created:** <module 'datetime' from  
'/home/docs/.pyenv/versions/3.7.9/lib/python3.7/datetime.py'>

The time when the model deployment is created.

**Returns**

The time when the model deployment is created.

**Return type**

datetime

**to\_dict()** → Dict

Serializes model deployment to a dictionary.

**Returns**

The model deployment serialized as a dictionary.

**Return type**

dict

**property type:** str

The type of the object as showing in YAML.

**Returns**

deployment

**Return type**

str

**update**(*properties: Optional[Union[ModelDeploymentProperties, dict]] = None, wait\_for\_completion: bool = True, max\_wait\_time: int = 1200, poll\_interval: int = 10, \*\*kwargs*)

Updates a model deployment

You can update *model\_deployment\_configuration\_details* and change *instance\_shape* and *model\_id* when the model deployment is in the *ACTIVE* lifecycle state. The *bandwidth\_mbps* or *instance\_count* can only be updated while the model deployment is in the *INACTIVE* state. Changes to the *bandwidth\_mbps* or *instance\_count* will take effect the next time the *ActivateModelDeployment* action is invoked on the model deployment resource.

**Parameters**

- **properties** (*ModelDeploymentProperties* or *dict*) – The properties for updating the deployment.
- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to be updated before proceeding. Defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).
- **kwargs** – dict

**Returns**

The instance of ModelDeployment.

**Return type**

*ModelDeployment*

**property url: str**

Model deployment url.

**Returns**

Model deployment url.

**Return type**

str

**watch**(log\_type: str = 'access', time\_start: <module 'datetime' from  
'/home/docs/.pyenv/versions/3.7.9/lib/python3.7/datetime.py'> = None, interval: int = 3, log\_filter: str  
= None) → *ModelDeployment*

Streams the access and/or predict logs of model deployment.

**Parameters**

- **log\_type** (str, optional) – The log type. Can be *access*, *predict* or None. Defaults to *access*.
- **time\_start** (datetime.datetime, optional) – Starting time for the log query. Defaults to None.
- **interval** (int, optional) – The time interval between sending each request to pull logs from OCI logging service. Defaults to 3.
- **log\_filter** (str, optional) – Expression for filtering the logs. This will be the WHERE clause of the query. Defaults to None.

**Returns**

The instance of ModelDeployment.

**Return type**

*ModelDeployment*

**with\_defined\_tags**(\*\*kwargs) → *ModelDeployment*

Sets the defined tags of model deployment.

**Parameters**

**kwargs** – The defined tags of model deployment.

**Returns**

The ModelDeployment instance (self).

**Return type**

*ModelDeployment*

**with\_description**(description: str) → *ModelDeployment*

Sets the description of model deployment.

**Parameters**

**description** (str) – The description of model deployment.

**Returns**

The ModelDeployment instance (self).

**Return type**

*ModelDeployment*

**with\_display\_name**(*display\_name: str*) → *ModelDeployment*

Sets the name of model deployment.

**Parameters**

**display\_name** (*str*) – The name of model deployment.

**Returns**

The ModelDeployment instance (self).

**Return type**

*ModelDeployment*

**with\_freeform\_tags**(\*\**kwargs*) → *ModelDeployment*

Sets the freeform tags of model deployment.

**Parameters**

**kwargs** – The freeform tags of model deployment.

**Returns**

The ModelDeployment instance (self).

**Return type**

*ModelDeployment*

**with\_infrastructure**(*infrastructure: ModelDeploymentInfrastructure*) → *ModelDeployment*

Sets the infrastructure of model deployment.

**Parameters**

**infrastructure** (*ModelDeploymentInfrastructure*) – The infrastructure of model deployment.

**Returns**

The ModelDeployment instance (self).

**Return type**

*ModelDeployment*

**with\_runtime**(*runtime: ModelDeploymentRuntime*) → *ModelDeployment*

Sets the runtime of model deployment.

**Parameters**

**runtime** (*ModelDeploymentRuntime*) – The runtime of model deployment.

**Returns**

The ModelDeployment instance (self).

**Return type**

*ModelDeployment*

**exception** `ads.model.deployment.model_deployment.ModelDeploymentFailedError`

Bases: Exception

**class** `ads.model.deployment.model_deployment.ModelDeploymentLogType`

Bases: object

**ACCESS** = 'access'

**PREDICT** = 'predict'

**class** `ads.model.deployment.model_deployment.ModelDeploymentMode`

Bases: object

```
HTTPS = 'HTTPS_ONLY'

STREAM = 'STREAM_ONLY'
```

## ads.model.deployment.model\_deployment\_properties module

```
class ads.model.deployment.model_deployment_properties.ModelDeploymentProperties(model_id:
    Optional[str]
    = None,
    model_uri:
    Optional[str]
    = None,
    oci_model_deployment:
    Optional[Union[ModelDeploymentCreate-
    ModelDe-
    ployment-
    Details,
    Update-
    ModelDe-
    ployment-
    Details,
    Dict]] =
    None,
    config:
    Optional[dict]
    = None,
    **kwargs)
```

Bases: [\*OCIDataScienceMixin\*](#), [\*ModelDeployment\*](#)

Represents the details for a model deployment

### swagger\_types

The property names and the corresponding types of OCI ModelDeployment model.

**Type**  
dict

### model\_id

The model artifact OCID in model catalog.

**Type**  
str

### model\_uri

uri to model files, can be local or in cloud storage.

**Type**  
str

### with\_prop(property\_name, value)

Set the model deployment details *property\_name* attribute to *value*



**with\_instance\_configuration**(*config*)

Set the configuration of VM instance.

**with\_access\_log**(*log\_group\_id*, *log\_id*)

Config the access log with OCI logging service

**with\_predict\_log**(*log\_group\_id*, *log\_id*)

Config the predict log with OCI logging service

**build**()

Return an instance of `CreateModelDeploymentDetails` for creating the deployment.

Initialize a `ModelDeploymentProperties` object by specifying one of the followings:

#### Parameters

- **model\_id** ((*str*, *optional*). Defaults to *None*.) – Model Artifact OCID. The `model_id` must be specified either explicitly or as an attribute of the OCI object.
- **model\_uri** ((*str*, *optional*). Defaults to *None*.) – Uri to model files, can be local or in cloud storage.
- **oci\_model\_deployment** ((*Union*[`ModelDeployment`, `CreateModelDeploymentDetails`, `UpdateModelDeploymentDetails`, `Dict`], *optional*). Defaults to *None*.) – An OCI model or Dict containing model deployment details. The OCI model can be an instance of either `ModelDeployment`, `CreateModelDeploymentDetails` or `UpdateModelConfigurationDetails`.
- **config** ((*Dict*, *optional*). Defaults to *None*.) – ADS auth dictionary for OCI authentication. This can be generated by calling `ads.common.auth.api_keys()` or `ads.common.auth.resource_principal()`. If this is *None*, `ads.common.default_signer(client_kwargs)` will be used.
- **kwargs** – Users can also initialize the object by using keyword arguments. The following keyword arguments are supported by `oci.data_science.models.data_science_models.ModelDeployment`:
  - *display\_name*,
  - *description*,
  - *project\_id*,
  - *compartment\_id*,
  - *model\_deployment\_configuration\_details*,
  - *category\_log\_details*,
  - *freeform\_tags*,
  - *defined\_tags*.

If `display_name` is not specified, a randomly generated easy to remember name will be generated, like 'strange-spider-2022-08-17-23:55.02'.

`ModelDeploymentProperties` also supports the following additional keyword arguments:

- *instance\_shape*,
- *instance\_count*,
- *bandwidth\_mbps*,
- *access\_log\_group\_id*,

- *access\_log\_id*,
- *predict\_log\_group\_id*,
- *predict\_log\_id*,
- *memory\_in\_gbs*,
- *ocpus*.

These additional arguments will be saved into appropriate properties in the OCI model.

**Raises**

**ValueError** – *model\_id* is None AND not specified in `oci_model_deployment.model_deployment_configuration_details.model_configuration_details`.

**build()** → `CreateModelDeploymentDetails`

Converts the deployment properties to OCI `CreateModelDeploymentDetails` object. Converts a model URI into a model OCID if user passed in a URI.

**Returns**

A `CreateModelDeploymentDetails` instance ready for OCI API.

**Return type**

`CreateModelDeploymentDetails`

**sub\_properties** = ['instance\_shape', 'instance\_count', 'bandwidth\_mbps', 'access\_log\_group\_id', 'access\_log\_id', 'predict\_log\_group\_id', 'predict\_log\_id', 'memory\_in\_gbs', 'ocpus']

**to\_oci\_model**(*oci\_model*)

Convert properties into an OCI data model

**Parameters**

**oci\_model** (*class*) – The class of OCI data model, e.g., `oci.data_science_models.CreateModelDeploymentDetails`

**to\_update\_deployment()** → `UpdateModelDeploymentDetails`

Converts the deployment properties to OCI `UpdateModelDeploymentDetails` object.

**Returns**

An `UpdateModelDeploymentDetails` instance ready for OCI API.

**Return type**

`CreateModelDeploymentDetails`

**with\_access\_log**(*log\_group\_id: str, log\_id: str*)

Adds access log config

**Parameters**

- **group\_id** (*str*) – Log group ID of OCI logging service
- **log\_id** (*str*) – Log ID of OCI logging service

**Returns**

self

**Return type**

*ModelDeploymentProperties*

**with\_category\_log**(*log\_type: str, group\_id: str, log\_id: str*)

Adds category log configuration

**Parameters**

- **log\_type** (*str*) – The type of logging to be configured. Must be “access” or “predict”
- **group\_id** (*str*) – Log group ID of OCI logging service
- **log\_id** (*str*) – Log ID of OCI logging service

**Returns**

self

**Return type**

*ModelDeploymentProperties*

**Raises**

**ValueError** – When log\_type is invalid

**with\_instance\_configuration**(*config*)

with\_instance\_configuration creates a ModelDeploymentDetails object with a specific config

**Parameters**

**config** (*dict*) – dictionary containing instance configuration about the deployment. The following keys are supported:

- instance\_shape: str,
- instance\_count: int,
- bandwidth\_mbps: int,
- memory\_in\_gbs: float,
- ocpus: float

The instance\_shape and instance\_count are required when creating a new deployment. They are optional when updating an existing deployment.

**Returns**

self

**Return type**

*ModelDeploymentProperties*

**with\_logging\_configuration**(*access\_log\_group\_id: str, access\_log\_id: str, predict\_log\_group\_id: Optional[str] = None, predict\_log\_id: Optional[str] = None*)

Adds OCI logging configurations for OCI logging service

**Parameters**

- **access\_log\_group\_id** (*str*) – Log group ID of OCI logging service for access log
- **access\_log\_id** (*str*) – Log ID of OCI logging service for access log
- **predict\_log\_group\_id** (*str*) – Log group ID of OCI logging service for predict log
- **predict\_log\_id** (*str*) – Log ID of OCI logging service for predict log

**Returns**

self

**Return type**

*ModelDeploymentProperties*

**with\_predict\_log**(*log\_group\_id: str, log\_id: str*)

Adds predict log config

**Parameters**

- **group\_id** (*str*) – Log group ID of OCI logging service
- **log\_id** (*str*) – Log ID of OCI logging service

**Returns**

self

**Return type**

*ModelDeploymentProperties*

**with\_prop**(*property\_name: str, value: Any*)

Sets model deployment's *property\_name* attribute to *value*

**Parameters**

- **property\_name** (*str*) – Name of a model deployment property.
- **value** – New value for property attribute.

**Returns**

self

**Return type**

*ModelDeploymentProperties*

## Module contents

### ads.model.extractor package

#### Submodules

#### ads.model.extractor.keras\_extractor module

**class** ads.model.extractor.keras\_extractor.**KerasExtractor**(*model*)

Bases: *ModelInfoExtractor*

Class that extract model metadata from keras models.

**model**

The model to extract metadata from.

**Type**

object

**estimator**

The estimator to extract metadata from.

**Type**

object

**property algorithm**

Extracts the algorithm of the model.

**Returns**

The algorithm of the model.

**Return type**  
object

**property framework**

Extracts the framework of the model.

**Returns**  
The framework of the model.

**Return type**  
str

**property hyperparameter**

Extracts the hyperparameters of the model.

**Returns**  
The hyperparameters of the model.

**Return type**  
dict

**property version**

Extracts the framework version of the model.

**Returns**  
The framework version of the model.

**Return type**  
str

**ads.model.extractor.lightgbm\_extractor module**

**class** ads.model.extractor.lightgbm\_extractor.LightgbmExtractor(*model*)

Bases: *ModelInfoExtractor*

Class that extract model metadata from lightgbm models.

**model**

The model to extract metadata from.

**Type**  
object

**estimator**

The estimator to extract metadata from.

**Type**  
object

**framework**(*self*) → str

Returns the framework of the model.

**algorithm**(*self*) → object

Returns the algorithm of the model.

**version**(*self*) → str

Returns the version of framework of the model.

**hyperparameter**(*self*) → dict

Returns the hyperparameter of the model.

**property algorithm**

Extracts the algorithm of the model.

**Returns**

The algorithm of the model.

**Return type**

object

**property framework**

Extracts the framework of the model.

**Returns**

The framework of the model.

**Return type**

str

**property hyperparameter**

Extracts the hyperparameters of the model.

**Returns**

The hyperparameters of the model.

**Return type**

dict

**property version**

Extracts the framework version of the model.

**Returns**

The framework version of the model.

**Return type**

str

## **ads.model.extractor.model\_info\_extractor module**

**class** ads.model.extractor.model\_info\_extractor.**ModelInfoExtractor**

Bases: ABC

The base abstract class to extract model metadata.

**framework**(*self*) → str

Returns the framework of the model.

**algorithm**(*self*) → object

Returns the algorithm of the model.

**version**(*self*) → str

Returns the version of framework of the model.

**hyperparameter**(*self*) → dict

Returns the hyperparameter of the model.

**info**(*self*) → dict

Returns the model taxonomy metadata information.

**abstract algorithm**()

The abstract method to extracts the algorithm of the model.

**Returns**

The algorithm of the model.

**Return type**

object

**abstract framework**()

The abstract method to extracts the framework of the model.

**Returns**

The framework of the model.

**Return type**

str

**abstract hyperparameter**()

The abstract method to extracts the hyperparameters of the model.

**Returns**

The hyperparameter of the model.

**Return type**

dict

**info**()

Extracts the taxonomy metadata of the model.

**Returns**

The taxonomy metadata of the model.

**Return type**

dict

**abstract version**()

The abstract method to extracts the framework version of the model.

**Returns**

The framework version of the model.

**Return type**

str

`ads.model.extractor.model_info_extractor.normalize_hyperparameter`(*data: Dict*) → dict

Converts all the fields to string to make sure it's json serializable.

**Parameters**

**data** ([Dict]) – The hyperparameter returned by the model.

**Returns**

Normalized (json serializable) dictionary.

**Return type**

Dict

**ads.model.extractor.model\_info\_extractor\_factory module****class** ads.model.extractor.model\_info\_extractor\_factory.**ModelInfoExtractorFactory**

Bases: object

Class that extract Model Taxonomy Metadata for all supported frameworks.

**static** **extract\_info**(*model*)

Extracts model taxonomy metadata.

**Parameters****model** ([ADS model, sklearn, xgboost, lightgbm, keras, oracle\_automl]) –  
The model object**Returns**

A dictionary with keys of Framework, FrameworkVersion, Algorithm, Hyperparameters of the model

**Return type***ModelTaxonomyMetadata***Examples**

```
>>> from ads.common.model_info_extractor_factory import ModelInfoExtractorFactory
>>> metadata_taxonomy = ModelInfoExtractorFactory.extract_info(model)
```

**ads.model.extractor.pytorch\_extractor module****class** ads.model.extractor.pytorch\_extractor.**PyTorchExtractor**(*model*)Bases: *ModelInfoExtractor*

Class that extract model metadata from pytorch models.

**model**

The model to extract metadata from.

**Type**

object

**estimator**

The estimator to extract metadata from.

**Type**

object

**framework**(*self*) → str

Returns the framework of the model.

**algorithm**(*self*) → object

Returns the algorithm of the model.

**version**(*self*) → str

Returns the version of framework of the model.



**hyperparameter**(*self*) → dict

Returns the hyperparameter of the model.

**property algorithm**

Extracts the algorithm of the model.

**Returns**

The algorithm of the model.

**Return type**

object

**property framework**

Extracts the framework of the model.

**Returns**

The framework of the model.

**Return type**

str

**property hyperparameter**

Extracts the hyperparameters of the model.

**Returns**

The hyperparameters of the model.

**Return type**

dict

**property version**

Extracts the framework version of the model.

**Returns**

The framework version of the model.

**Return type**

str

**class** ads.model.extractor.pytorch\_extractor.**PytorchExtractor**(*model*)

Bases: [PyTorchExtractor](#)

## ads.model.extractor.sklearn\_extractor module

**class** ads.model.extractor.sklearn\_extractor.**SklearnExtractor**(*model*)

Bases: [ModelInfoExtractor](#)

Class that extract model metadata from sklearn models.

**model**

The model to extract metadata from.

**Type**

object

**estimator**

The estimator to extract metadata from.

**Type**

object

**framework**(*self*) → str

Returns the framework of the model.

**algorithm**(*self*) → object

Returns the algorithm of the model.

**version**(*self*) → str

Returns the version of framework of the model.

**hyperparameter**(*self*) → dict

Returns the hyperparameter of the model.

**property algorithm**

Extracts the algorithm of the model.

**Returns**

The algorithm of the model.

**Return type**

object

**property framework**

Extracts the framework of the model.

**Returns**

The framework of the model.

**Return type**

str

**property hyperparameter**

Extracts the hyperparameters of the model.

**Returns**

The hyperparameters of the model.

**Return type**

dict

**property version**

Extracts the framework version of the model.

**Returns**

The framework version of the model.

**Return type**

str

## ads.model.extractor.spark\_extractor module

**class** ads.model.extractor.spark\_extractor.**SparkExtractor**(*model*)

Bases: [\*ModelInfoExtractor\*](#)

Class that extract model metadata from pyspark models.

**model**

The model to extract metadata from.

**Type**

object

**estimator**

The estimator to extract metadata from.

**Type**

object

**framework**(*self*) → str

Returns the framework of the model.

**algorithm**(*self*) → object

Returns the algorithm of the model.

**version**(*self*) → str

Returns the version of framework of the model.

**hyperparameter**(*self*) → dict

Returns the hyperparameter of the model.

**property algorithm**

Extracts the algorithm of the model.

**Returns**

The algorithm of the model.

**Return type**

object

**property framework**

Extracts the framework of the model.

**Returns**

The framework of the model.

**Return type**

str

**property hyperparameter**

Extracts the hyperparameters of the model.

**Returns**

The hyperparameters of the model

**Return type**

dict

**property version**

Extracts the framework version of the model.

**Returns**

The framework version of the model.

**Return type**

str

**ads.model.extractor.tensorflow\_extractor module**

**class** ads.model.extractor.tensorflow\_extractor.**TensorflowExtractor**(*model*)

Bases: [\*ModelInfoExtractor\*](#)

Class that extract model metadata from tensorflow models.

**model**

The model to extract metadata from.

**Type**

object

**estimator**

The estimator to extract metadata from.

**Type**

object

**framework**(*self*) → str

Returns the framework of the model.

**algorithm**(*self*) → object

Returns the algorithm of the model.

**version**(*self*) → str

Returns the version of framework of the model.

**hyperparameter**(*self*) → dict

Returns the hyperparameter of the model.

**property algorithm**

Extracts the algorithm of the model.

**Returns**

The algorithm of the model.

**Return type**

object

**property framework**

Extracts the framework of the model.

**Returns**

The framework of the model.

**Return type**

str

**property hyperparameter**

Extracts the hyperparameters of the model.

**Returns**

The hyperparameters of the model.

**Return type**

dict

**property version**

Extracts the framework version of the model.

**Returns**

The framework version of the model.

**Return type**

str

**ads.model.extractor.xgboost\_extractor module**

**class** ads.model.extractor.xgboost\_extractor.XgboostExtractor(*model*)

Bases: *ModelInfoExtractor*

Class that extract model metadata from xgboost models.

**model**

The model to extract metadata from.

**Type**

object

**estimator**

The estimator to extract metadata from.

**Type**

object

**framework**(*self*) → str

Returns the framework of the model.

**algorithm**(*self*) → object

Returns the algorithm of the model.

**version**(*self*) → str

Returns the version of framework of the model.

**hyperparameter**(*self*) → dict

Returns the hyperparameter of the model.

**property algorithm**

Extracts the algorithm of the model.

**Returns**

The algorithm of the model.

**Return type**

object

**property framework**

Extracts the framework of the model.

**Returns**

The framework of the model.

**Return type**

str

**property hyperparameter**

Extracts the hyperparameters of the model.

**Returns**

The hyperparameters of the model.

**Return type**

dict

**property version**

Extracts the framework version of the model.

**Returns**

The framework version of the model.

**Return type**

str

**Module contents****ads.model.framework package****Submodules****ads.model.framework.huggingface\_model module**

```
class ads.model.framework.huggingface_model.HuggingFacePipelineModel(estimator: Callable,  
                                                                    artifact_dir: Optional[str]  
                                                                    = None, properties: Op-  
                                                                    tional[ModelProperties] =  
                                                                    None, auth: Dict = None,  
                                                                    model_save_serializer:  
                                                                    Optional[SERDE] =  
                                                                    'huggingface',  
                                                                    model_input_serializer:  
                                                                    Optional[SERDE] =  
                                                                    'cloudpickle', **kwargs)
```

Bases: [\*FrameworkSpecificModel\*](#)

HuggingFacePipelineModel class for estimators from HuggingFace framework.

**algorithm**

The algorithm of the model.

**Type**

str

**artifact\_dir**

Artifact directory to store the files needed for deployment.

**Type**

str

**auth**

Default authentication is set using the `ads.set_auth` API. To override the default, use the

`ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create an authentication signer to instantiate an IdentityClient object.

**Type**  
Dict

#### **estimator**

A trained HuggingFace Pipeline using transformers.

**Type**  
Callable

#### **framework**

“transformers”, the framework name of the model.

**Type**  
str

#### **hyperparameter**

The hyperparameters of the estimator.

**Type**  
dict

#### **metadata\_custom**

The model custom metadata.

**Type**  
*ModelCustomMetadata*

#### **metadata\_provenance**

The model provenance metadata.

**Type**  
*ModelProvenanceMetadata*

#### **metadata\_taxonomy**

The model taxonomy metadata.

**Type**  
*ModelTaxonomyMetadata*

#### **model\_artifact**

This is built by calling prepare.

**Type**  
*ModelArtifact*

#### **model\_deployment**

A ModelDeployment instance.

**Type**  
*ModelDeployment*

#### **model\_file\_name**

Name of the serialized model.

**Type**  
str

**model\_id**

The model ID.

**Type**

str

**properties**

ModelProperties object required to save and deploy model.

**Type**

*ModelProperties*

**runtime\_info**

A RuntimeInfo instance.

**Type**

*RuntimeInfo*

**schema\_input**

Schema describes the structure of the input data.

**Type**

*Schema*

**schema\_output**

Schema describes the structure of the output data.

**Type**

*Schema*

**serialize**

Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under artifact\_dir and update the score.py manually.

**Type**

bool

**version**

The framework version of the model.

**Type**

str

**delete\_deployment(...)**

Deletes the current model deployment.

**deploy(..., \\*\*kwargs)**

Deploys a model.

**from\_model\_artifact(uri, model\_file\_name, artifact\_dir, ..., \\*\*kwargs)**

Loads model from the specified folder, or zip/tar archive.

**from\_model\_catalog(model\_id, model\_file\_name, artifact\_dir, ..., \\*\*kwargs)**

Loads model from model catalog.

**introspect(...)**

Runs model introspection.

**predict(data, ...)**

Returns prediction of input data run against the model deployment endpoint.



**prepare**(..., \\*\*kwargs)

Prepare and save the `score.py`, serialized model and `runtime.yaml` file.

**reload**(...)

Reloads the model artifact files: `score.py` and the `runtime.yaml`.

**save**(..., \\*\*kwargs)

Saves model artifacts to the model catalog.

**summary\_status**(...)

Gets a summary table of the current status.

**verify**(data, ...)

Tests if deployment works in local environment.

## Examples

```
>>> # Image Classification
>>> from transformers import pipeline
>>> import tempfile
>>> import PIL.Image
>>> import ads
>>> import requests
>>> import cloudpickle
>>> ## Download image data
>>> image_url = "https://huggingface.co/datasets/huggingface/documentation-images/
↳ resolve/main/pipeline-cat-chonk.jpeg"
>>> image = PIL.Image.open(requests.get(image_url, stream=True).raw)
>>> image_bytes = cloudpickle.dumps(image) # convert image to bytes
>>> ## Download a pretrained model
>>> vision_classifier = pipeline(model="google/vit-base-patch16-224")
>>> preds = vision_classifier(images=image)
>>> ## Initiate a HuggingFacePipelineModel instance
>>> vision_model = HuggingFacePipelineModel(vision_classifier, artifact_
↳ dir=tempfile.mkdtemp())
>>> ## Prepare
>>> vision_model.prepare(inference_conda_env="pytorch110_p38_cpu_v1", force_
↳ overwrite=True)
>>> ## Verify
>>> vision_model.verify(image)
>>> vision_model.verify(image_bytes)
>>> ## Save
>>> vision_model.save()
>>> ## Deploy
>>> log_group_id = "<log_group_id>"
>>> log_id = "<log_id>"
>>> vision_model.deploy(deployment_bandwidth_mbps=1000,
...                      wait_for_completion=False,
...                      deployment_log_group_id = log_group_id,
...                      deployment_access_log_id = log_id,
...                      deployment_predict_log_id = log_id)
>>> ## Predict from endpoint
>>> vision_model.predict(image)
```

(continues on next page)

(continued from previous page)

```
>>> vision_model.predict(image_bytes)
>>> ### Invoke the model
>>> auth = ads.common.auth.default_signer()['signer']
>>> endpoint = vision_model.model_deployment.url + "/predict"
>>> headers = {"Content-Type": "application/octet-stream"}
>>> requests.post(endpoint, data=image_bytes, auth=auth, headers=headers).json()
```

## Examples

```
>>> # Image Segmentation
>>> from transformers import pipeline
>>> import tempfile
>>> import PIL.Image
>>> import ads
>>> import requests
>>> import cloudpickle
>>> ## Download image data
>>> image_url = "https://huggingface.co/datasets/huggingface/documentation-images/
↳ resolve/main/pipeline-cat-chonk.jpeg"
>>> image = PIL.Image.open(requests.get(image_url, stream=True).raw)
>>> image_bytes = cloudpickle.dumps(image) # convert image to bytes
>>> ## Download pretrained model
>>> segmenter = pipeline(task="image-segmentation")
>>> preds = segmenter(image)
>>> ## Initiate a HuggingFacePipelineModel instance
>>> segmentation_model = HuggingFacePipelineModel(segmenter, artifact_dir=tempfile.
↳ mkdtemp())
>>> ## Prepare
>>> conda = "oci://bucket@namespace/path/to/conda/pack"
>>> python_version = "3.8"
>>> segmentation_model.prepare(inference_conda_env=conda, inference_python_version=
↳ python_version, force_overwrite=True)
>>> ## Verify
>>> segmentation_model.verify(data=image)
>>> segmentation_model.verify(data=image_bytes)
>>> ## Save
>>> segmentation_model.save()
>>> log_group_id = "<log_group_id>"
>>> log_id = "<log_id>"
>>> ## Deploy
>>> segmentation_model.deploy(deployment_bandwidth_mbps=1000,
                             wait_for_completion=False,
                             deployment_log_group_id = log_group_id,
                             deployment_access_log_id = log_id,
                             deployment_predict_log_id = log_id)
>>> ## Predict from endpoint
>>> segmentation_model.predict(image)
>>> segmentation_model.predict(image_bytes)
>>> ## Invoke the model
>>> auth = ads.common.auth.default_signer()['signer']
```

```
>>> endpoint = segmentation_model.model_deployment.url + "/predict"
>>> headers = {"Content-Type": "application/octet-stream"}
>>> requests.post(endpoint, data=image_bytes, auth=auth, headers=headers).json()
```

## Examples

```
>>> # Zero Shot Image Classification
>>> from transformers import pipeline
>>> import tempfile
>>> import PIL.Image
>>> import ads
>>> import requests
>>> import cloudpickle
>>> ## Download the image data
>>> image_url = "https://huggingface.co/datasets/Narsil/image_dummy/raw/main/
↳parrots.png"
>>> image = PIL.Image.open(requests.get(image_link, stream=True).raw)
>>> image_bytes = cloudpickle.dumps(image)
>>> ## Download a pretrained model
>>> classifier = pipeline(model="openai/clip-vit-large-patch14")
>>> classifier(
    images=image,
    candidate_labels=["animals", "humans", "landscape"],
)
>>> ## Initiate a HuggingFacePipelineModel instance
>>> zero_shot_image_classification_model = HuggingFacePipelineModel(classifier,
↳artifact_dir=tempfile.mkdtemp())
>>> conda = "oci://bucket@namespace/path/to/conda/pack"
>>> python_version = "3.8"
>>> ## Prepare
>>> zero_shot_image_classification_model.prepare(inference_conda_env=conda,
↳inference_python_version = python_version, force_overwrite=True)
>>> data = {"images": image, "candidate_labels": ["animals", "humans", "landscape"]}
>>> body = cloudpickle.dumps(data) # convert image to bytes
>>> ## Verify
>>> zero_shot_image_classification_model.verify(data=data)
>>> zero_shot_image_classification_model.verify(data=body)
>>> ## Save
>>> zero_shot_image_classification_model.save()
>>> ## Deploy
>>> log_group_id = "<log_group_id>"
>>> log_id = "<log_id>"
>>> zero_shot_image_classification_model.deploy(deployment_bandwidth_mbps=1000,
    wait_for_completion=False,
    deployment_log_group_id = log_group_id,
    deployment_access_log_id = log_id,
    deployment_predict_log_id = log_id)
>>> ## Predict from endpoint
>>> zero_shot_image_classification_model.predict(image)
>>> zero_shot_image_classification_model.predict(body)
>>> ### Invoke the model
```

(continues on next page)

(continued from previous page)

```
>>> auth = ads.common.auth.default_signer()['signer']
>>> endpoint = zero_shot_image_classification_model.model_deployment.url + "/predict
↪"
>>> headers = {"Content-Type": "application/octet-stream"}
>>> requests.post(endpoint, data=body, auth=auth, headers=headers).json()
```

Initiates a `HuggingFacePipelineModel` instance.

#### Parameters

- **estimator** (*Callable*) – HuggingFacePipeline Model
- **artifact\_dir** (*str*) – Directory for generate artifact.
- **properties** ((*ModelProperties*, *optional*). Defaults to *None*.) – ModelProperties object required to save and deploy model. For more details, check [https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model\\_properties](https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model_properties).
- **auth** ((*Dict*, *optional*). Defaults to *None*.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **model\_save\_serializer** ((*SERDE* or *str*, *optional*). Defaults to *None*.) – Instance of `ads.model.SERDE`. Used for serialize/deserialize model.
- **model\_input\_serializer** ((*SERDE*, *optional*). Defaults to *None*.) – Instance of `ads.model.SERDE`. Used for serialize/deserialize data.

#### Returns

HuggingFacePipelineModel instance.

#### Return type

*HuggingFacePipelineModel*

#### Examples

```
>>> from transformers import pipeline
>>> import tempfile
>>> import PIL.Image
>>> import ads
>>> import requests
>>> import cloudpickle
>>> ## download the image
>>> image_url = "https://huggingface.co/datasets/Narsil/image_dummy/raw/main/
↪parrots.png"
>>> image = PIL.Image.open(requests.get(image_url, stream=True).raw)
>>> image_bytes = cloudpickle.dumps(image)
>>> ## download the pretrained model
>>> classifier = pipeline(model="openai/clip-vit-large-patch14")
>>> classifier(
    images=image,
    candidate_labels=["animals", "humans", "landscape"],
)
```

(continues on next page)

(continued from previous page)

```

>>> ## Initiate a HuggingFacePipelineModel instance
>>> zero_shot_image_classification_model = HuggingFacePipelineModel(classifier,
↳ artifact_dir=empfile.mkdtemp())
>>> ## Prepare a model artifact
>>> conda = "oci://bucket@namespace/path/to/conda/pack"
>>> python_version = "3.8"
>>> zero_shot_image_classification_model.prepare(inference_conda_env=conda,
↳ inference_python_version = python_version, force_overwrite=True)
>>> ## Test data
>>> data = {"images": image, "candidate_labels": ["animals", "humans", "landscape"]}
>>> body = cloudpickle.dumps(data) # convert image to bytes
>>> ## Verify
>>> zero_shot_image_classification_model.verify(data=data)
>>> zero_shot_image_classification_model.verify(data=body)
>>> ## Save
>>> zero_shot_image_classification_model.save()
>>> ## Deploy
>>> log_group_id = "<log_group_id>"
>>> log_id = "<log_id>"
>>> zero_shot_image_classification_model.deploy(deployment_bandwidth_mbps=100,
        wait_for_completion=False,
        deployment_log_group_id = log_group_id,
        deployment_access_log_id = log_id,
        deployment_predict_log_id = log_id)
>>> zero_shot_image_classification_model.predict(image)
>>> zero_shot_image_classification_model.predict(body)
>>> ### Invoke the model by sending bytes
>>> auth = ads.common.auth.default_signer()['signer']
>>> endpoint = zero_shot_image_classification_model.model_deployment.url + "/predict
↳ "
>>> headers = {"Content-Type": "application/octet-stream"}
>>> requests.post(endpoint, data=body, auth=auth, headers=headers).json()

```

**classmethod delete**(*model\_id: Optional[str] = None, delete\_associated\_model\_deployment: Optional[bool] = False, delete\_model\_artifact: Optional[bool] = False, artifact\_dir: Optional[str] = None, \*\*kwargs: Dict*) → None

Deletes a model from Model Catalog.

#### Parameters

- **model\_id** ((*str*, optional). Defaults to *None*.) – The model OCID to be deleted. If the method called on instance level, then *self.model\_id* will be used.
- **delete\_associated\_model\_deployment** ((*bool*, optional). Defaults to *False*.) – Whether associated model deployments need to be deleted or not.
- **delete\_model\_artifact** ((*bool*, optional). Defaults to *False*.) – Whether associated model artifacts need to be deleted or not.
- **artifact\_dir** ((*str*, optional). Defaults to *None*) – The local path to the model artifacts folder. If the method called on instance level, the *self.artifact\_dir* will be used by default.

#### Return type

None

**Raises**

**ValueError** – If *model\_id* not provided.

**delete\_deployment**(*wait\_for\_completion: bool = True*) → None

Deletes the current deployment.

**Parameters**

**wait\_for\_completion** ((*bool*, optional). Defaults to *True*.) – Whether to wait till completion.

**Return type**

None

**Raises**

**ValueError** – if there is not deployment attached yet.:

**deploy**(*wait\_for\_completion: Optional[bool] = True, display\_name: Optional[str] = None, description: Optional[str] = None, deployment\_instance\_shape: Optional[str] = None, deployment\_instance\_count: Optional[int] = None, deployment\_bandwidth\_mbps: Optional[int] = None, deployment\_log\_group\_id: Optional[str] = None, deployment\_access\_log\_id: Optional[str] = None, deployment\_predict\_log\_id: Optional[str] = None, deployment\_memory\_in\_gbs: Optional[float] = None, deployment\_ocpus: Optional[float] = None, deployment\_image: Optional[str] = None, \*\*kwargs: Dict*) → *ModelDeployment*

Deploys a model. The model needs to be saved to the model catalog at first. You can deploy the model on either conda or container runtime. The customized runtime allows you to bring your own service container. To deploy model on container runtime, make sure to build the container and push it to OCIR. For more information, see <https://docs.oracle.com/en-us/iaas/data-science/using/mod-dep-byoc.htm>.

**Example**

```
# This is an example to deploy model on container runtime >>> model = Generic-
Model(estimator=estimator, artifact_dir=tempfile.mkdtemp()) >>> model.summary_status() >>>
model.prepare( ... model_file_name="toy_model.pkl", ... ignore_conda_error=True, # set ig-
nore_conda_error=True for container runtime ... force_overwrite=True ... ) >>> model.verify() >>>
model.save() >>> model.deploy( ... deployment_image="iad.ocir.io/<namespace>/<image>:<tag>",
... entrypoint=["python", "/opt/ds/model/deployed_model/api.py"], ... server_port=5000, ...
health_check_port=5000, ... environment_variables={"key":"value"} ... )
```

**Parameters**

- **wait\_for\_completion** ((*bool*, optional). Defaults to *True*.) – Flag set for whether to wait for deployment to complete before proceeding.
- **display\_name** ((*str*, optional). Defaults to *None*.) – The name of the model. If a *display\_name* is not provided in *kwargs*, a randomly generated easy to remember name with timestamp will be generated, like ‘strange-spider-2022-08-17-23:55:02’.
- **description** ((*str*, optional). Defaults to *None*.) – The description of the model.
- **deployment\_instance\_shape** ((*str*, optional). Default to *VM.Standard2.1*.) – The shape of the instance used for deployment.
- **deployment\_instance\_count** ((*int*, optional). Defaults to *1*.) – The number of instance used for deployment.
- **deployment\_bandwidth\_mbps** ((*int*, optional). Defaults to *10*.) – The bandwidth limit on the load balancer in Mbps.

- **deployment\_memory\_in\_gbs** *((float, optional). Defaults to None.)* – Specifies the size of the memory of the model deployment instance in GBs.
- **deployment\_ocpus** *((float, optional). Defaults to None.)* – Specifies the ocpu count of the model deployment instance.
- **deployment\_log\_group\_id** *((str, optional). Defaults to None.)* – The oci logging group id. The access log and predict log share the same log group.
- **deployment\_access\_log\_id** *((str, optional). Defaults to None.)* – The access log OCID for the access logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_predict\_log\_id** *((str, optional). Defaults to None.)* – The predict log OCID for the predict logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_image** *((str, optional). Defaults to None.)* – The OCIR path of docker container image. Required for deploying model on container runtime.
- **kwargs** –

**project\_id: (str, optional).**

Project OCID. If not specified, the value will be taken from the environment variables.

**compartment\_id**

*[(str, optional).]* Compartment OCID. If not specified, the value will be taken from the environment variables.

**max\_wait\_time**

*[(int, optional). Defaults to 1200 seconds.]* Maximum amount of time to wait in seconds. Negative implies infinite wait time.

**poll\_interval**

*[(int, optional). Defaults to 10 seconds.]* Poll interval in seconds.

**freeform\_tags: (Dict[str, str], optional). Defaults to None.**

Freeform tags of the model deployment.

**defined\_tags: (Dict[str, dict[str, object]], optional). Defaults to None.**

Defined tags of the model deployment.

**image\_digest: (str, optional). Defaults to None.**

The digest of docker container image.

**cmd: (List, optional). Defaults to empty.**

The command line arguments for running docker container image.

**entrypoint: (List, optional). Defaults to empty.**

The entrypoint for running docker container image.

**server\_port: (int, optional). Defaults to 8080.**

The server port for docker container image.

**health\_check\_port: (int, optional). Defaults to 8080.**

The health check port for docker container image.

**deployment\_mode: (str, optional). Defaults to HTTPS\_ONLY.**

The deployment mode. Allowed values are: HTTPS\_ONLY and STREAM\_ONLY.

**input\_stream\_ids: (List, optional). Defaults to empty.**

The input stream ids. Required for STREAM\_ONLY mode.

**output\_stream\_ids:** (List, optional). Defaults to empty.

The output stream ids. Required for STREAM\_ONLY mode.

**environment\_variables:** (Dict, optional). Defaults to empty.

The environment variables for model deployment.

Also can be any keyword argument for initializing the  
*ads.model.deployment.ModelDeploymentProperties*. See

*ads.model.deployment.ModelDeploymentProperties()* for details.

#### Returns

The ModelDeployment instance.

#### Return type

*ModelDeployment*

#### Raises

**ValueError** – If *model\_id* is not specified.



```

evaluate(X: Union[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]], _SupportsArray[dtype],
Sequence[_SupportsArray[dtype]], Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
y: Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]], _SupportsArray[dtype],
Sequence[_SupportsArray[dtype]], Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
y_pred: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
= None, y_score: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
= None, X_train: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
= None, y_train: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
= None, classes: Optional[List] = None, positive_class: Optional[str] = None, legend_labels:
Optional[dict] = None, perfect: bool = True, filename: Optional[str] = None, use_case_type:
Optional[str] = None)

```

Creates an ads evaluation report.

### Parameters

- **X (DataFrame-like)** – The data used to make a prediction. Can be set to None if *y\_preds* is given. (And *y\_scores* for more thorough analysis).

- **y** (*array-like*) – The true values corresponding to the input data
- **y\_pred** (*array-like, optional*) – The predictions from each model in the same order as the models
- **y\_score** (*array-like, optional*) – The predict\_proba from each model in the same order as the models
- **X\_train** (*DataFrame-like, optional*) – The data used to train the model
- **y\_train** (*array-like, optional*) – The true values corresponding to the input training data
- **classes** (*List or None, optional*) – A List of the possible labels for y, when evaluating a classification use case
- **positive\_class** (*str or int, optional*) – The class to report metrics for binary dataset. If the target classes is True or False, positive\_class will be set to True by default. If the dataset is multiclass or multilabel, this will be ignored.
- **legend\_labels** (*dict, optional*) – List of legend labels. Defaults to *None*. If legend\_labels not specified class names will be used for plots.
- **use\_case\_type** (*str, optional*) – The type of problem this model is solving. This can be set during *prepare()*. Examples: “binary\_classification”, “regression”, “multinomial\_classification” Full list of supported types can be found here: *ads.common.model\_metadata.UseCaseType*
- **filename** (*str, optional*) – If filename is given, the html report will be saved to the location specified.

## Examples

```
>>> import tempfile
>>> from ads.evaluations.evaluator import Evaluator
>>> from sklearn.tree import DecisionTreeClassifier
>>> from sklearn.datasets import make_classification
>>> from sklearn.model_selection import train_test_split
>>> from ads.model.framework.sklearn_model import SklearnModel
>>> from ads.common.model_metadata import UseCaseType
>>>
>>> X, y = make_classification(n_samples=1000)
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.3)
>>> est = DecisionTreeClassifier().fit(X_train, y_train)
>>> model = SklearnModel(estimator=est, artifact_dir=tempfile.mkdtemp())
>>> model.prepare(
>>>     inference_conda_env="generalml_p38_cpu_v1",
>>>     training_conda_env="generalml_p38_cpu_v1",
>>>     X_sample=X_test,
>>>     y_sample=y_test,
>>>     use_case_type=UseCaseType.BINARY_CLASSIFICATION,
>>> )
>>> model.evaluate(X_test, y_test, filename="report.html")
```

```
classmethod from_id(ocid: str, model_file_name: Optional[str] = None, artifact_dir: Optional[str] =  
None, auth: Optional[Dict] = None, force_overwrite: Optional[bool] = False,  
properties: Optional[Union[ModelProperties, Dict]] = None, bucket_uri:  
Optional[str] = None, remove_existing_artifact: Optional[bool] = True,  
ignore_conda_error: Optional[bool] = False, **kwargs) → Self
```

Loads model from model OCID or model deployment OCID.

#### Parameters

- **ocid** (*str*) – The model OCID or model deployment OCID.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((*str*, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((*ModelProperties*, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **kwargs** –

#### **compartment\_id**

[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

#### **timeout**

[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

#### Returns

An instance of GenericModel class.

#### Return type

Self

```
classmethod from_model_artifact(uri: str, model_file_name: Optional[str] = None, artifact_dir:  
Optional[str] = None, auth: Optional[Dict] = None,  
force_overwrite: Optional[bool] = False, properties:  
Optional[ModelProperties] = None, ignore_conda_error:  
Optional[bool] = False, **kwargs: dict) → Self
```

Loads model from a folder, or zip/tar archive.

#### Parameters

- **uri** (*str*) – The folder path, ZIP file path, or TAR file path. It could contain a serialized model(required) as well as any files needed for deployment including: serialized model,

runtime.yaml, score.py and etc. The content of the folder will be copied to the *artifact\_dir* folder.

- **model\_file\_name** ((str, optional). Defaults to *None*.) – The serialized model file name. Will be extracted from artifacts if not provided.
- **artifact\_dir** ((str, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((ModelProperties, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **ignore\_conda\_error** ((bool, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.

#### Returns

An instance of *GenericModel* class.

#### Return type

Self

#### Raises

**ValueError** – If *model\_file\_name* not provided.

```
classmethod from_model_catalog(model_id: str, model_file_name: Optional[str] = None, artifact_dir:
    Optional[str] = None, auth: Optional[Dict] = None, force_overwrite:
    Optional[bool] = False, properties:
    Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] =
    True, ignore_conda_error: Optional[bool] = False, **kwargs) →
    Self
```

Loads model from model catalog.

#### Parameters

- **model\_id** (str) – The model OCID.
- **model\_file\_name** ((str, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((str, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((ModelProperties, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.

- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**compartment\_id**

[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

**timeout**

[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

**region: (str, optional). Defaults to *None*.**

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**Returns**

An instance of *GenericModel* class.

**Return type**

Self

```
classmethod from_model_deployment(model_deployment_id: str, model_file_name: Optional[str] =
    None, artifact_dir: Optional[str] = None, auth: Optional[Dict] =
    None, force_overwrite: Optional[bool] = False, properties:
    Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] =
    True, ignore_conda_error: Optional[bool] = False, **kwargs) →
    Self
```

Loads model from model deployment.

**Parameters**

- **model\_deployment\_id** (*str*) – The model deployment OCID.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((*str*, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((*ModelProperties*, optional). Defaults to *None*.) – *ModelProperties* object required to save and deploy model.

- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –
  - compartment\_id**  
[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.
  - timeout**  
[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.
  - region: (str, optional). Defaults to None.**  
The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**Returns**

An instance of GenericModel class.

**Return type**

Self

**get\_data\_serializer()**

Gets data serializer.

**Returns**

**object**

**Return type**

ads.model.Serializer object.

**get\_model\_serializer()**

Gets model serializer.

**introspect()** → DataFrame

Conducts introspection.

**Returns**

A pandas DataFrame which contains the introspection results.

**Return type**

pandas.DataFrame

**property metadata\_custom**

**property metadata\_provenance**

**property metadata\_taxonomy**

**property model\_deployment\_id**

**property model\_id**

**model\_input\_serializer\_type**

alias of ModelInputSerializerType

**model\_save\_serializer\_type**

alias of HuggingFaceSerializerType

**populate\_metadata**(*use\_case\_type*: Optional[str] = None, *data\_sample*: Optional[ADSDData] = None, *X\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *y\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *training\_script\_path*: Optional[str] = None, *training\_id*: Optional[str] = None, *ignore\_pending\_changes*: bool = True, *max\_col\_num*: int = 2000, *ignore\_conda\_error*: bool = False)

Populates input schema and output schema. If the schema exceeds the limit of 32kb, save as json files to the artifact directory.

**Parameters**

- **use\_case\_type**((str, optional). Defaults to None.) – The use case type of the model.
- **data\_sample**((ADSDData, optional). Defaults to None.) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path**(str. Defaults to None.) – Training script path.
- **training\_id**((str, optional). Defaults to None.) – The training model OCID.
- **ignore\_pending\_changes** (bool. Defaults to False.) – Ignore the pending changes in git.
- **max\_col\_num** ((int, optional). Defaults to utils.DATA\_SCHEMA\_MAX\_COL\_NUM.) – The maximum number of columns allowed in auto generated schema.

**Returns**

Nothing.

**Return type**

None

**populate\_schema**(*data\_sample*: Optional[ADSDData] = None, *X\_sample*: Optional[Union[List, Tuple, DataFrame, Series, ndarray]] = None, *y\_sample*: Optional[Union[List, Tuple, DataFrame, Series, ndarray]] = None, *max\_col\_num*: int = 2000)

Populate input and output schemas. If the schema exceeds the limit of 32kb, save as json files to the artifact dir.

**Parameters**

- **data\_sample**(ADSDData) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample**(Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]) – A sample of input data that will be used to generate the input schema.

- **y\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*) – A sample of output data that will be used to generate the output schema.
- **max\_col\_num** (*((int, optional). Defaults to utils.DATA\_SCHEMA\_MAX\_COL\_NUM.)*) – The maximum number of columns allowed in auto generated schema.

**predict** (*data: Optional[Any] = None, auto\_serialize\_data: bool = True, \*\*kwargs*) → Dict[str, Any]

Returns prediction of input data run against the model deployment endpoint.

## Examples

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.predict(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.predict(
...     image="oci://<bucket>@<tenancy>/myimage.png",
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

## Parameters

- **data** (*Any*) – Data for the prediction for onnx models, for local serialization method, data can be the data types that each framework support.
- **auto\_serialize\_data** (*bool.*) – Whether to auto serialize input data. Defaults to *False* for *GenericModel*, and *True* for other frameworks. *data* required to be json serializable if *auto\_serialize\_data=False*. If *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.
- **kwargs** – *content\_type*: str, used to indicate the media type of the resource. *image*: PIL.Image Object or uri for the image.

A valid string path for image file can be local path, http(s), oci, s3, gs.

### storage\_options: dict

Passed to *fsspec.open* for a particular storage connection. Please see *fsspec* (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.

## Returns

Dictionary with the predicted values.

## Return type

Dict[str, Any]

## Raises

- **NotActiveDeploymentError** – If model deployment process was not started or not finished yet.
- **ValueError** – If *data* is empty or not JSON serializable.



**prepare**(*inference\_conda\_env*: Optional[str] = None, *inference\_python\_version*: Optional[str] = None, *training\_conda\_env*: Optional[str] = None, *training\_python\_version*: Optional[str] = None, *model\_file\_name*: Optional[str] = None, *as\_onnx*: bool = False, *initial\_types*: Optional[List[Tuple]] = None, *force\_overwrite*: bool = False, *namespace*: str = 'id19sferra6z', *use\_case\_type*: Optional[str] = None, *X\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *y\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *training\_script\_path*: Optional[str] = None, *training\_id*: Optional[str] = None, *ignore\_pending\_changes*: bool = True, *max\_col\_num*: int = 2000, *ignore\_conda\_error*: bool = False, *\*\*kwargs*: Dict) → *GenericModel*

Prepare and save the score.py, serialized model and runtime.yaml file.

### Parameters

- **inference\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **inference\_python\_version** ((str, optional). Defaults to None.) – Python version which will be used in deployment.
- **training\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack. If *training\_conda\_env* is not provided, *training\_conda\_env* will use the same value of *training\_conda\_env*.
- **training\_python\_version** ((str, optional). Defaults to None.) – Python version used during training.
- **model\_file\_name** ((str, optional). Defaults to None.) – Name of the serialized model. Will be auto generated if not provided.
- **as\_onnx** ((bool, optional). Defaults to False.) – Whether to serialize as onnx model.
- **initial\_types** ((list[Tuple], optional).) – Defaults to None. Only used for SklearnModel, LightGBMModel and XGBoostModel. Each element is a tuple of a variable name and a type. Check this link [http://onnx.ai/sklearn-onnx/api\\_summary.html#id2](http://onnx.ai/sklearn-onnx/api_summary.html#id2) for more explanation and examples for *initial\_types*.
- **force\_overwrite** ((bool, optional). Defaults to False.) – Whether to overwrite existing files.
- **namespace** ((str, optional).) – Namespace of region. This is used for identifying which region the service pack is from when you pass a slug to *inference\_conda\_env* and *training\_conda\_env*.
- **use\_case\_type** (str) – The use case type of the model. Use it through *UseCaseType* class or string provided in *UseCaseType*. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with *UseCaseType* class to see all supported types.
- **X\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (str. Defaults to None.) – Training script path.

- **training\_id** ((*str*, *optional*). Defaults to value from environment variables.) – The training OCID for model. Can be notebook session or job OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – whether to ignore the pending changes in the git.
- **max\_col\_num** ((*int*, *optional*). Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – Do not generate the input schema if the input has more than this number of features(columns).
- **ignore\_conda\_error** ((*bool*, *optional*). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**impute\_values: (dict, optional).**

The dictionary where the key is the column index(or names is accepted for pandas dataframe) and the value is the impute value for the corresponding column.

#### Raises

- **FileExistsError** – If files already exist but *force\_overwrite* is *False*.
- **ValueError** – If *inference\_python\_version* is not provided, but also cannot be found through manifest file.

#### Returns

An instance of *GenericModel* class.

#### Return type

*GenericModel*

**prepare\_save\_deploy**(*inference\_conda\_env: Optional[str] = None, inference\_python\_version: Optional[str] = None, training\_conda\_env: Optional[str] = None, training\_python\_version: Optional[str] = None, model\_file\_name: Optional[str] = None, as\_onnx: bool = False, initial\_types: Optional[List[Tuple]] = None, force\_overwrite: bool = False, namespace: str = 'id19sfcr6z', use\_case\_type: Optional[str] = None, X\_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, y\_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, training\_script\_path: Optional[str] = None, training\_id: Optional[str] = None, ignore\_pending\_changes: bool = True, max\_col\_num: int = 2000, ignore\_conda\_error: bool = False, model\_display\_name: Optional[str] = None, model\_description: Optional[str] = None, model\_freeform\_tags: Optional[dict] = None, model\_defined\_tags: Optional[dict] = None, ignore\_introspection: Optional[bool] = False, wait\_for\_completion: Optional[bool] = True, deployment\_display\_name: Optional[str] = None, deployment\_description: Optional[str] = None, deployment\_instance\_shape: Optional[str] = None, deployment\_instance\_count: Optional[int] = None, deployment\_bandwidth\_mbps: Optional[int] = None, deployment\_log\_group\_id: Optional[str] = None, deployment\_access\_log\_id: Optional[str] = None, deployment\_predict\_log\_id: Optional[str] = None, deployment\_memory\_in\_gbs: Optional[float] = None, deployment\_ocpus: Optional[float] = None, deployment\_image: Optional[str] = None, bucket\_uri: Optional[str] = None, overwrite\_existing\_artifact: Optional[bool] = True, remove\_existing\_artifact: Optional[bool] = True, model\_version\_set: Optional[Union[str, ModelVersionSet]] = None, version\_label: Optional[str] = None, \*\*kwargs: Dict) → *ModelDeployment**

Shortcut for prepare, save and deploy steps.

#### Parameters

- **inference\_conda\_env** ((*str*, optional). Defaults to *None*.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **inference\_python\_version** ((*str*, optional). Defaults to *None*.) – Python version which will be used in deployment.
- **training\_conda\_env** ((*str*, optional). Defaults to *None*.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack. If *training\_conda\_env* is not provided, *training\_conda\_env* will use the same value of *training\_conda\_env*.
- **training\_python\_version** ((*str*, optional). Defaults to *None*.) – Python version used during training.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – Name of the serialized model.
- **as\_onnx** ((*bool*, optional). Defaults to *False*.) – Whether to serialize as onnx model.
- **initial\_types** ((*list*[*Tuple*], optional).) – Defaults to *None*. Only used for SklearnModel, LightGBMModel and XGBoostModel. Each element is a tuple of a variable name and a type. Check this link [http://onnx.ai/sklearn-onnx/api\\_summary.html#id2](http://onnx.ai/sklearn-onnx/api_summary.html#id2) for more explanation and examples for *initial\_types*.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files.
- **namespace** ((*str*, optional).) – Namespace of region. This is used for identifying which region the service pack is from when you pass a slug to *inference\_conda\_env* and *training\_conda\_env*.
- **use\_case\_type** (*str*) – The use case type of the model. Use it through *UseCaseType* class or string provided in *UseCaseType*. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with *UseCaseType* class to see all supported types.
- **X\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (*str*. Defaults to *None*.) – Training script path.
- **training\_id** ((*str*, optional). Defaults to value from environment variables.) – The training OCID for model. Can be notebook session or job OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – whether to ignore the pending changes in the git.
- **max\_col\_num** ((*int*, optional). Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – Do not generate the input schema if the input has more than this number of features(columns).
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.

- **model\_display\_name** *((str, optional). Defaults to None.)* – The name of the model. If a model\_display\_name is not provided in kwargs, a randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55.02'.
- **model\_description** *((str, optional). Defaults to None.)* – The description of the model.
- **model\_freeform\_tags** *(Dict(str, str), Defaults to None.)* – Freeform tags for the model.
- **model\_defined\_tags** *((Dict(str, dict(str, object)), optional). Defaults to None.)* – Defined tags for the model.
- **ignore\_introspection** *((bool, optional). Defaults to None.)* – Determine whether to ignore the result of model introspection or not. If set to True, the save will ignore all model introspection errors.
- **wait\_for\_completion** *((bool, optional). Defaults to True.)* – Flag set for whether to wait for deployment to complete before proceeding.
- **deployment\_display\_name** *((str, optional). Defaults to None.)* – The name of the model deployment. If a deployment\_display\_name is not provided in kwargs, a randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55.02'.
- **description** *((str, optional). Defaults to None.)* – The description of the model.
- **deployment\_instance\_shape** *((str, optional). Default to VM.Standard2.1.)* – The shape of the instance used for deployment.
- **deployment\_instance\_count** *((int, optional). Defaults to 1.)* – The number of instance used for deployment.
- **deployment\_bandwidth\_mbps** *((int, optional). Defaults to 10.)* – The bandwidth limit on the load balancer in Mbps.
- **deployment\_log\_group\_id** *((str, optional). Defaults to None.)* – The oci logging group id. The access log and predict log share the same log group.
- **deployment\_access\_log\_id** *((str, optional). Defaults to None.)* – The access log OCID for the access logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_predict\_log\_id** *((str, optional). Defaults to None.)* – The predict log OCID for the predict logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_memory\_in\_gbs** *((float, optional). Defaults to None.)* – Specifies the size of the memory of the model deployment instance in GBs.
- **deployment\_ocpus** *((float, optional). Defaults to None.)* – Specifies the ocpu count of the model deployment instance.
- **deployment\_image** *((str, optional). Defaults to None.)* – The OCIR path of docker container image. Required for deploying model on container runtime.
- **bucket\_uri** *((str, optional). Defaults to None.)* – The OCI Object Storage URI where model artifacts will be copied to. The bucket\_uri is only necessary for downloading large artifacts with size is greater than 2GB. Example: `oci://<bucket_name>@<namespace>/prefix/`.

- **overwrite\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **model\_version\_set** ((*Union[str, ModelVersionSet]*, optional). Defaults to *None*.) – The Model version set OCID, or name, or *ModelVersionSet* instance.
- **version\_label** ((*str*, optional). Defaults to *None*.) – The model version label.
- **kwargs** –

**impute\_values: (dict, optional).**

The dictionary where the key is the column index(or names is accepted for pandas dataframe) and the value is the impute value for the corresponding column.

**project\_id: (str, optional).**

Project OCID. If not specified, the value will be taken either from the environment variables or model properties.

**compartment\_id**

[(*str*, optional).] Compartment OCID. If not specified, the value will be taken either from the environment variables or model properties.

**image\_digest: (str, optional). Defaults to None.**

The digest of docker container image.

**cmd: (List, optional). Defaults to empty.**

The command line arguments for running docker container image.

**entrypoint: (List, optional). Defaults to empty.**

The entrypoint for running docker container image.

**server\_port: (int, optional). Defaults to 8080.**

The server port for docker container image.

**health\_check\_port: (int, optional). Defaults to 8080.**

The health check port for docker container image.

**deployment\_mode: (str, optional). Defaults to HTTPS\_ONLY.**

The deployment mode. Allowed values are: HTTPS\_ONLY and STREAM\_ONLY.

**input\_stream\_ids: (List, optional). Defaults to empty.**

The input stream ids. Required for STREAM\_ONLY mode.

**output\_stream\_ids: (List, optional). Defaults to empty.**

The output stream ids. Required for STREAM\_ONLY mode.

**environment\_variables: (Dict, optional). Defaults to empty.**

The environment variables for model deployment.

**timeout: (int, optional). Defaults to 10 seconds.**

The connection timeout in seconds for the client.

**max\_wait\_time**

[(int, optional). Defaults to 1200 seconds.] Maximum amount of time to wait in seconds. Negative implies infinite wait time.

**poll\_interval**

[(int, optional). Defaults to 10 seconds.] Poll interval in seconds.

**freeform\_tags:** (Dict[str, str], optional). Defaults to None.

Freeform tags of the model deployment.

**defined\_tags:** (Dict[str, dict[str, object]], optional). Defaults to None.

Defined tags of the model deployment.

**region:** (str, optional). Defaults to None.

The destination Object Storage bucket region. By default the value will be extracted from the `OCI_REGION_METADATA` environment variables.

Also can be any keyword argument for initializing the `ads.model.deployment.ModelDeploymentProperties`. See

`ads.model.deployment.ModelDeploymentProperties()` for details.

#### Returns

The ModelDeployment instance.

#### Return type

[\*ModelDeployment\*](#)

#### Raises

- **FileExistsError** – If files already exist but *force\_overwrite* is False.
- **ValueError** – If *inference\_python\_version* is not provided, but also cannot be found through manifest file.

**reload()** → [\*GenericModel\*](#)

Reloads the model artifact files: *score.py* and the *runtime.yaml*.

#### Returns

An instance of GenericModel class.

#### Return type

[\*GenericModel\*](#)

**reload\_runtime\_info()** → None

Reloads the model artifact file: *runtime.yaml*.

#### Returns

Nothing.

#### Return type

None

**restart\_deployment**(*max\_wait\_time: int = 1200, poll\_interval: int = 10*) → [\*ModelDeployment\*](#)

Restarts the current deployment.

#### Parameters

- **max\_wait\_time** ((int, optional). Defaults to 1200 seconds.) – Maximum amount of time to wait for activate or deactivate in seconds. Total amount of time to wait for restart deployment is twice as the value. Negative implies infinite wait time.
- **poll\_interval** ((int, optional). Defaults to 10 seconds.) – Poll interval in seconds.

#### Returns

The ModelDeployment instance.

#### Return type

[\*ModelDeployment\*](#)

**save**(*display\_name*: Optional[str] = None, *description*: Optional[str] = None, *freeform\_tags*: Optional[dict] = None, *defined\_tags*: Optional[dict] = None, *ignore\_introspection*: Optional[bool] = False, *bucket\_uri*: Optional[str] = None, *overwrite\_existing\_artifact*: Optional[bool] = True, *remove\_existing\_artifact*: Optional[bool] = True, *model\_version\_set*: Optional[Union[str, ModelVersionSet]] = None, *version\_label*: Optional[str] = None, *\*\*kwargs*) → str

Saves model artifacts to the model catalog.

#### Parameters

- **display\_name** ((str, optional). Defaults to None.) – The name of the model. If a display\_name is not provided in kwargs, randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55:02'.
- **description** ((str, optional). Defaults to None.) – The description of the model.
- **freeform\_tags** (Dict(str, str), Defaults to None.) – Freeform tags for the model.
- **defined\_tags** ((Dict(str, dict(str, object)), optional). Defaults to None.) – Defined tags for the model.
- **ignore\_introspection** ((bool, optional). Defaults to None.) – Determine whether to ignore the result of model introspection or not. If set to True, the save will ignore all model introspection errors.
- **bucket\_uri** ((str, optional). Defaults to None.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for uploading large artifacts which size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **overwrite\_existing\_artifact** ((bool, optional). Defaults to True.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((bool, optional). Defaults to True.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **model\_version\_set** ((Union[str, ModelVersionSet], optional). Defaults to None.) – The model version set OCID, or model version set name, or *ModelVersionSet* instance.
- **version\_label** ((str, optional). Defaults to None.) – The model version label.
- **kwargs** –

**project\_id**: (str, optional).

Project OCID. If not specified, the value will be taken either from the environment variables or model properties.

**compartment\_id**

[(str, optional).] Compartment OCID. If not specified, the value will be taken either from the environment variables or model properties.

**region**: (str, optional). Defaults to None.

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**timeout**: (int, optional). Defaults to 10 seconds.

The connection timeout in seconds for the client.

Also can be any attribute that *oci.data\_science.models.Model* accepts.



**Raises**

**`RuntimeInfoInconsistencyError`** – When `.runtime_info` is not synched with `runtime.yaml` file.

**Returns**

The model id.

**Return type**

str

**property** `schema_input`

**property** `schema_output`

**`serialize_model`**(*as\_onnx: bool = False, force\_overwrite: bool = False, X\_sample: Optional[Union[Dict, str, List, Image]] = None, \*\*kwargs*) → None

Serialize and save HuggingFace model using model specific method.

**Parameters**

- **`as_onnx`** ((*bool*, *optional*). Defaults to *False*.) – If set as True, convert into ONNX model.
- **`force_overwrite`** ((*bool*, *optional*). Defaults to *False*.) – If set as True, overwrite serialized model if exists.
- **`X_sample`** (*Union[Dict, str, List, PIL.Image.Image]*. Defaults to *None*.) – A sample of input data that will be used to generate input schema and detect onnx\_args.

**Returns**

Nothing.

**Return type**

None

**`set_model_input_serializer`**(*model\_input\_serializer: Union[str, SERDE]*)

Registers serializer used for serializing data passed in `verify/predict`.

**Examples**

```
>>> generic_model.set_model_input_serializer(GenericModel.model_input_
↳serializer_type.CLOUDPICKLE)
```

```
>>> # Register serializer by passing the name of it.
>>> generic_model.set_model_input_serializer("cloudpickle")
```

```
>>> # Example of creating customized model input serializer and registering it.
>>> from ads.model import SERDE
>>> from ads.model.generic_model import GenericModel
```

```
>>> class MySERDE(SERDE):
...     def __init__(self):
...         super().__init__()
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
```

(continues on next page)



(continued from previous page)

```
...     def deserialize(self, data):
...         deserialized_data = 2
...         return deserialized_data
```

```
>>> class Toy:
...     def predict(self, x):
...         return x ** 2
```

```
>>> generic_model = GenericModel(
...     estimator=Toy(),
...     artifact_dir=tempfile.mkdtemp(),
...     model_input_serializer=MySERDE()
... )
```

```
>>> # Or register the serializer after creating model instance.
>>> generic_model.set_model_input_serializer(MySERDE())
```

**Parameters**

**model\_input\_serializer** ((str, or `ads.model.SERDE`)) – name of the serializer, or instance of SERDE.

**set\_model\_save\_serializer**(*model\_save\_serializer: Union[str, SERDE]*)

Registers serializer used for saving model.

**Examples**

```
>>> generic_model.set_model_save_serializer(GenericModel.model_save_serializer_
↳ type.CLOUDPICKLE)
```

```
>>> # Register serializer by passing the name of it.
>>> generic_model.set_model_save_serializer("cloudpickle")
```

```
>>> # Example of creating customized model save serializer and registering it.
>>> from ads.model import SERDE
>>> from ads.model.generic_model import GenericModel
```

```
>>> class MySERDE(SERDE):
...     def __init__(self):
...         super().__init__()
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
...     def deserialize(self, data):
...         deserialized_data = 2
...         return deserialized_data
```

```
>>> class Toy:
...     def predict(self, x):
...         return x ** 2
```

```
>>> generic_model = GenericModel(  
...     estimator=Toy(),  
...     artifact_dir=tempfile.mkdtemp(),  
...     model_save_serializer=MySERDE()  
... )
```

```
>>> # Or register the serializer after creating model instance.  
>>> generic_model.set_model_save_serializer(MySERDE())
```

**Parameters**

**model\_save\_serializer** (([ads.model.SERDE](#) or *str*)) – name of the serializer or instance of SERDE.

**summary\_status()** → [DataFrame](#)

A summary table of the current status.

**Returns**

The summary stable of the current status.

**Return type**

[pd.DataFrame](#)

**update(\*\*kwargs)** → [GenericModel](#)

Updates model metadata in the Model Catalog. Updates only metadata information. The model artifacts are immutable and cannot be updated.

**Parameters**

**kwargs** –

**display\_name:** (*str*, optional). Defaults to *None*.

The name of the model.

**description:** (*str*, optional). Defaults to *None*.

The description of the model.

**freeform\_tags**

[*Dict*(*str*, *str*), Defaults to *None*.] Freeform tags for the model.

**defined\_tags**

[(*Dict*(*str*, *dict*(*str*, *object*)), optional). Defaults to *None*.] Defined tags for the model.

**version\_label:** (*str*, optional). Defaults to *None*.

The model version label.

Additional kwargs arguments. Can be any attribute that *oci.data\_science.models.Model* accepts.

**Returns**

An instance of *GenericModel* (self).

**Return type**

[GenericModel](#)

**Raises**

**ValueError** – if model not saved to the Model Catalog.

**classmethod update\_deployment**(*model\_deployment\_id: Optional[str] = None, properties: Optional[Union[[ModelDeploymentProperties](#), dict]] = None, wait\_for\_completion: bool = True, max\_wait\_time: int = 1200, poll\_interval: int = 10, \*\*kwargs*) → [ModelDeployment](#)

Updates a model deployment.

You can update *model\_deployment\_configuration\_details* and change *instance\_shape* and *model\_id* when the model deployment is in the *ACTIVE* lifecycle state. The *bandwidth\_mbps* or *instance\_count* can only be updated while the model deployment is in the *INACTIVE* state. Changes to the *bandwidth\_mbps* or *instance\_count* will take effect the next time the *ActivateModelDeployment* action is invoked on the model deployment resource.

## Examples

```
>>> # Update access log id, freeform tags and description for the model_
    ↪ deployment
>>> model.update_deployment(
>>>     properties=ModelDeploymentProperties(
>>>         access_log_id=<log_ocid>,
>>>         description="Description for Custom Model",
>>>         freeform_tags={"key": "value"},
>>>     )
>>> )
```

## Parameters

- **model\_deployment\_id** (*str.*) – The model deployment OCID. Defaults to None. If the method called on instance level, then *self.model\_deployment.model\_deployment\_id* will be used.
- **properties** (*ModelDeploymentProperties* or *dict*) – The properties for updating the deployment.
- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to complete before proceeding. Defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).
- **kwargs** –

**auth:** (*Dict*, *optional*). Defaults to *None*.

The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.

## Returns

An instance of *ModelDeployment* class.

## Return type

*ModelDeployment*

**upload\_artifact** (*uri: str, auth: Optional[Dict] = None, force\_overwrite: Optional[bool] = False*) → *None*

Uploads model artifacts to the provided *uri*. The artifacts will be zipped before uploading.

## Parameters

- **uri** (*str*) – The destination location for the model artifacts, which can be a local path or OCI object storage URI. Examples: `>>> upload_artifact(uri="/some/local/folder/") >>> upload_artifact(uri="oci://bucket@namespace/prefix/")`
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and `kwargs` required to instantiate `IdentityClient` object.
- **force\_overwrite** (*bool*) – Overwrite `target_dir` if exists.

**verify**(*data: Optional[Any] = None, reload\_artifacts: bool = True, auto\_serialize\_data: bool = True, \*\*kwargs*) → *Dict[str, Any]*

Test if deployment works in local environment.

## Examples

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.verify(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.verify(
...     image="oci://<bucket>@<tenancy>/myimage.png",
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

## Parameters

- **data** (*Any*) – Data used to test if deployment works in local environment.
- **reload\_artifacts** (*bool*. Defaults to *True*.) – Whether to reload artifacts or not.
- **auto\_serialize\_data** (*bool*.) – Whether to auto serialize input data. Defaults to *False* for `GenericModel`, and *True* for other frameworks. *data* required to be json serializable if `auto_serialize_data=False`. if `auto_serialize_data` set to *True*, data will be serialized before sending to model deployment endpoint.
- **kwargs** – `content_type`: *str*, used to indicate the media type of the resource. `image`: `PIL.Image` Object or `uri` for the image.

A valid string path for image file can be local path, `http(s)`, `oci`, `s3`, `gs`.

### storage\_options: dict

Passed to `fsspec.open` for a particular storage connection. Please see `fsspec` (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.

## Returns

A dictionary which contains prediction results.

## Return type

*Dict*

**ads.model.framework.lightgbm\_model module**

```
class ads.model.framework.lightgbm_model.LightGBMModel(estimator: Callable, artifact_dir:
    Optional[str] = None, properties:
    Optional[ModelProperties] = None, auth:
    Optional[Dict] = None,
    model_save_serializer: Optional[SERDE] =
    None, model_input_serializer:
    Optional[SERDE] = None, **kwargs)
```

Bases: [FrameworkSpecificModel](#)

LightGBMModel class for estimators from Lightgbm framework.

**algorithm**

The algorithm of the model.

**Type**  
str

**artifact\_dir**

Artifact directory to store the files needed for deployment.

**Type**  
str

**auth**

Default authentication is set using the `ads.set_auth` API. To override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create an authentication signer to instantiate an IdentityClient object.

**Type**  
Dict

**estimator**

A trained lightgbm estimator/model using Lightgbm.

**Type**  
Callable

**framework**

“lightgbm”, the framework name of the model.

**Type**  
str

**hyperparameter**

The hyperparameters of the estimator.

**Type**  
dict

**metadata\_custom**

The model custom metadata.

**Type**  
[ModelCustomMetadata](#)

**metadata\_provenance**

The model provenance metadata.

**Type***ModelProvenanceMetadata***metadata\_taxonomy**

The model taxonomy metadata.

**Type***ModelTaxonomyMetadata***model\_artifact**

This is built by calling prepare.

**Type***ModelArtifact***model\_deployment**

A ModelDeployment instance.

**Type***ModelDeployment***model\_file\_name**

Name of the serialized model.

**Type**

str

**model\_id**

The model ID.

**Type**

str

**properties**

ModelProperties object required to save and deploy model. For more details, check [https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model\\_properties](https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model_properties).

**Type***ModelProperties***runtime\_info**

A RuntimeInfo instance.

**Type***RuntimeInfo***schema\_input**

Schema describes the structure of the input data.

**Type***Schema***schema\_output**

Schema describes the structure of the output data.

**Type***Schema***serialize**

Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under artifact\_dir and update the score.py manually.

**Type**  
bool

### **version**

The framework version of the model.

**Type**  
str

### **delete\_deployment(...)**

Deletes the current model deployment.

### **deploy(..., \\*\*kwargs)**

Deploys a model.

### **from\_model\_artifact(uri, model\_file\_name, artifact\_dir, ..., \\*\*kwargs)**

Loads model from the specified folder, or zip/tar archive.

### **from\_model\_catalog(model\_id, model\_file\_name, artifact\_dir, ..., \\*\*kwargs)**

Loads model from model catalog.

### **introspect(...)**

Runs model introspection.

### **predict(data, ...)**

Returns prediction of input data run against the model deployment endpoint.

### **prepare(..., \\*\*kwargs)**

Prepare and save the score.py, serialized model and runtime.yaml file.

### **reload(...)**

Reloads the model artifact files: *score.py* and the *runtime.yaml*.

### **save(..., \\*\*kwargs)**

Saves model artifacts to the model catalog.

### **summary\_status(...)**

Gets a summary table of the current status.

### **verify(data, ...)**

Tests if deployment works in local environment.

## **Examples**

```
>>> import lightgbm as lgb
>>> import tempfile
>>> from sklearn.model_selection import train_test_split
>>> from sklearn.datasets import load_iris
>>> from ads.model.framework.lightgbm_model import LightGBMModel
```

```
>>> iris = load_iris()
>>> X, y = iris.data, iris.target
```

```
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)
>>> train = lgb.Dataset(X_train, label=y_train)
>>> param = {
...     'objective': 'multiclass', 'num_class': 3,
... }
>>> lightgbm_estimator = lgb.train(param, train)
```

```
>>> lightgbm_model = LightGBMModel(estimator=lightgbm_estimator,
... artifact_dir=tempfile.mkdtemp())
```

```
>>> lightgbm_model.prepare(inference_conda_env="generalml_p37_cpu_v1", force_
↳ overwrite=True)
>>> lightgbm_model.reload()
>>> lightgbm_model.verify(X_test)
>>> lightgbm_model.save()
>>> model_deployment = lightgbm_model.deploy(wait_for_completion=False)
>>> lightgbm_model.predict(X_test)
```

Initiates a LightGBMModel instance. This class wraps the Lightgbm model as estimator. It's primary purpose is to hold the trained model and do serialization.

#### Parameters

- **estimator** – any model object generated by Lightgbm framework
- **artifact\_dir** (*str*) – Directory for generate artifact.
- **properties** (*(ModelProperties, optional). Defaults to None.*) – ModelProperties object required to save and deploy model.
- **auth** (*(Dict, optional). Defaults to None.*) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **model\_save\_serializer** (*(SERDE or str, optional). Defaults to None.*) – Instance of *ads.model.SERDE*. Used for serialize/deserialize model.
- **model\_input\_serializer** (*(SERDE, optional). Defaults to None.*) – Instance of *ads.model.SERDE*. Used for serialize/deserialize data.

#### Returns

LightGBMModel instance.

#### Return type

*LightGBMModel*

#### Raises

**TypeError** – If the input model is not a Lightgbm model or not supported for serialization.:



## Examples

```
>>> import lightgbm as lgb
>>> import tempfile
>>> from sklearn.model_selection import train_test_split
>>> from sklearn.datasets import load_iris
>>> from ads.model.framework.lightgbm_model import LightGBMModel
>>> iris = load_iris()
>>> X, y = iris.data, iris.target
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)
>>> train = lgb.Dataset(X_train, label=y_train)
>>> param = {
...     'objective': 'multiclass', 'num_class': 3,
... }
>>> lightgbm_estimator = lgb.train(param, train)
>>> lightgbm_model = LightGBMModel(estimator=lightgbm_estimator, artifact_
    ↪dir=tempfile.mkdtemp())
>>> lightgbm_model.prepare(inference_conda_env="generalml_p37_cpu_v1")
>>> lightgbm_model.verify(X_test)
>>> lightgbm_model.save()
>>> model_deployment = lightgbm_model.deploy()
>>> lightgbm_model.predict(X_test)
>>> lightgbm_model.delete_deployment()
```

**classmethod delete**(*model\_id*: Optional[str] = None, *delete\_associated\_model\_deployment*: Optional[bool] = False, *delete\_model\_artifact*: Optional[bool] = False, *artifact\_dir*: Optional[str] = None, *\*\*kwargs*: Dict) → None

Deletes a model from Model Catalog.

### Parameters

- **model\_id** ((str, optional). Defaults to None.) – The model OCID to be deleted. If the method called on instance level, then *self.model\_id* will be used.
- **delete\_associated\_model\_deployment** ((bool, optional). Defaults to *False*.) – Whether associated model deployments need to be deleted or not.
- **delete\_model\_artifact** ((bool, optional). Defaults to *False*.) – Whether associated model artifacts need to be deleted or not.
- **artifact\_dir** ((str, optional). Defaults to *None*) – The local path to the model artifacts folder. If the method called on instance level, the *self.artifact\_dir* will be used by default.

### Return type

None

### Raises

**ValueError** – If *model\_id* not provided.

**delete\_deployment**(*wait\_for\_completion*: bool = True) → None

Deletes the current deployment.

### Parameters

- **wait\_for\_completion** ((bool, optional). Defaults to *True*.) – Whether to wait till completion.

### Return type

None

**Raises**

**ValueError** – if there is not deployment attached yet.:

**deploy**(*wait\_for\_completion: Optional[bool] = True, display\_name: Optional[str] = None, description: Optional[str] = None, deployment\_instance\_shape: Optional[str] = None, deployment\_instance\_count: Optional[int] = None, deployment\_bandwidth\_mbps: Optional[int] = None, deployment\_log\_group\_id: Optional[str] = None, deployment\_access\_log\_id: Optional[str] = None, deployment\_predict\_log\_id: Optional[str] = None, deployment\_memory\_in\_gbs: Optional[float] = None, deployment\_ocpus: Optional[float] = None, deployment\_image: Optional[str] = None, \*\*kwargs: Dict*) → *ModelDeployment*

Deploys a model. The model needs to be saved to the model catalog at first. You can deploy the model on either conda or container runtime. The customized runtime allows you to bring your own service container. To deploy model on container runtime, make sure to build the container and push it to OCIR. For more information, see <https://docs.oracle.com/en-us/iaas/data-science/using/mod-dep-byoc.htm>.

**Example**

```
# This is an example to deploy model on container runtime >>> model = Generic-
Model(estimator=estimator, artifact_dir=tempfile.mkdtemp()) >>> model.summary_status() >>>
model.prepare( ... model_file_name="toy_model.pkl", ... ignore_conda_error=True, # set ig-
nore_conda_error=True for container runtime ... force_overwrite=True ... ) >>> model.verify() >>>
model.save() >>> model.deploy( ... deployment_image="iad.ocir.io/<namespace>/<image>:<tag>",
... entrypoint=["python", "/opt/ds/model/deployed_model/api.py"], ... server_port=5000, ...
health_check_port=5000, ... environment_variables={"key":"value"} ... )
```

**Parameters**

- **wait\_for\_completion** ((*bool*, *optional*). Defaults to *True*.) – Flag set for whether to wait for deployment to complete before proceeding.
- **display\_name** ((*str*, *optional*). Defaults to *None*.) – The name of the model. If a display\_name is not provided in kwargs, a randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55:02'.
- **description** ((*str*, *optional*). Defaults to *None*.) – The description of the model.
- **deployment\_instance\_shape** ((*str*, *optional*). Default to *VM.Standard2.1*.) – The shape of the instance used for deployment.
- **deployment\_instance\_count** ((*int*, *optional*). Defaults to *1*.) – The number of instance used for deployment.
- **deployment\_bandwidth\_mbps** ((*int*, *optional*). Defaults to *10*.) – The bandwidth limit on the load balancer in Mbps.
- **deployment\_memory\_in\_gbs** ((*float*, *optional*). Defaults to *None*.) – Specifies the size of the memory of the model deployment instance in GBs.
- **deployment\_ocpus** ((*float*, *optional*). Defaults to *None*.) – Specifies the ocpu count of the model deployment instance.
- **deployment\_log\_group\_id** ((*str*, *optional*). Defaults to *None*.) – The oci logging group id. The access log and predict log share the same log group.
- **deployment\_access\_log\_id** ((*str*, *optional*). Defaults to *None*.) – The access log OCID for the access logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)

- **deployment\_predict\_log\_id** ((*str*, *optional*). Defaults to *None*.) – The predict log OCID for the predict logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)

- **deployment\_image** ((*str*, *optional*). Defaults to *None*.) – The OCIR path of docker container image. Required for deploying model on container runtime.

- **kwargs** –

**project\_id:** (*str*, *optional*).

Project OCID. If not specified, the value will be taken from the environment variables.

**compartment\_id**

[(*str*, *optional*).] Compartment OCID. If not specified, the value will be taken from the environment variables.

**max\_wait\_time**

[(*int*, *optional*). Defaults to 1200 seconds.] Maximum amount of time to wait in seconds. Negative implies infinite wait time.

**poll\_interval**

[(*int*, *optional*). Defaults to 10 seconds.] Poll interval in seconds.

**freeform\_tags:** (*Dict*[*str*, *str*], *optional*). Defaults to *None*.

Freeform tags of the model deployment.

**defined\_tags:** (*Dict*[*str*, *dict*[*str*, *object*]], *optional*). Defaults to *None*.

Defined tags of the model deployment.

**image\_digest:** (*str*, *optional*). Defaults to *None*.

The digest of docker container image.

**cmd:** (*List*, *optional*). Defaults to *empty*.

The command line arguments for running docker container image.

**entrypoint:** (*List*, *optional*). Defaults to *empty*.

The entrypoint for running docker container image.

**server\_port:** (*int*, *optional*). Defaults to 8080.

The server port for docker container image.

**health\_check\_port:** (*int*, *optional*). Defaults to 8080.

The health check port for docker container image.

**deployment\_mode:** (*str*, *optional*). Defaults to *HTTPS\_ONLY*.

The deployment mode. Allowed values are: *HTTPS\_ONLY* and *STREAM\_ONLY*.

**input\_stream\_ids:** (*List*, *optional*). Defaults to *empty*.

The input stream ids. Required for *STREAM\_ONLY* mode.

**output\_stream\_ids:** (*List*, *optional*). Defaults to *empty*.

The output stream ids. Required for *STREAM\_ONLY* mode.

**environment\_variables:** (*Dict*, *optional*). Defaults to *empty*.

The environment variables for model deployment.

Also can be any keyword argument for initializing the *ads.model.deployment.ModelDeploymentProperties*. See *ads.model.deployment.ModelDeploymentProperties()* for details.

## Returns

The *ModelDeployment* instance.

**Return type***ModelDeployment***Raises****ValueError** – If *model\_id* is not specified.

```
evaluate(X: Union[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]], _SupportsArray[dtype],
Sequence[_SupportsArray[dtype]], Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
y: Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]], _SupportsArray[dtype],
Sequence[_SupportsArray[dtype]], Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
y_pred: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]]
= None, y_score: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]]
= None, X_train: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]]
= None, y_train: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]]
= None, classes: Optional[List] = None, positive_class: Optional[str] = None, legend_labels:
Optional[dict] = None, perfect: bool = True, filename: Optional[str] = None, use_case_type:
Optional[str] = None)
```

Creates an ads evaluation report.

### Parameters

- **X** (*DataFrame-like*) – The data used to make a prediction. Can be set to None if *y\_preds* is given. (And *y\_scores* for more thorough analysis).
- **y** (*array-like*) – The true values corresponding to the input data
- **y\_pred** (*array-like, optional*) – The predictions from each model in the same order as the models
- **y\_score** (*array-like, optional*) – The predict\_proba from each model in the same order as the models
- **X\_train** (*DataFrame-like, optional*) – The data used to train the model
- **y\_train** (*array-like, optional*) – The true values corresponding to the input training data
- **classes** (*List or None, optional*) – A List of the possible labels for y, when evaluating a classification use case
- **positive\_class** (*str or int, optional*) – The class to report metrics for binary dataset. If the target classes is True or False, positive\_class will be set to True by default. If the dataset is multiclass or multilabel, this will be ignored.
- **legend\_labels** (*dict, optional*) – List of legend labels. Defaults to *None*. If legend\_labels not specified class names will be used for plots.
- **use\_case\_type** (*str, optional*) – The type of problem this model is solving. This can be set during *prepare()*. Examples: “binary\_classification”, “regression”, “multinomial\_classification” Full list of supported types can be found here: *ads.common.model\_metadata.UseCaseType*
- **filename** (*str, optional*) – If filename is given, the html report will be saved to the location specified.

### Examples

```
>>> import tempfile
>>> from ads.evaluations.evaluator import Evaluator
>>> from sklearn.tree import DecisionTreeClassifier
>>> from sklearn.datasets import make_classification
>>> from sklearn.model_selection import train_test_split
>>> from ads.model.framework.sklearn_model import SklearnModel
>>> from ads.common.model_metadata import UseCaseType
>>>
>>> X, y = make_classification(n_samples=1000)
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.3)
>>> est = DecisionTreeClassifier().fit(X_train, y_train)
>>> model = SklearnModel(estimator=est, artifact_dir=tempfile.mkdtemp())
>>> model.prepare(
    inference_conda_env="generalml_p38_cpu_v1",
    training_conda_env="generalml_p38_cpu_v1",
    X_sample=X_test,
    y_sample=y_test,
    use_case_type=UseCaseType.BINARY_CLASSIFICATION,
```

(continues on next page)

(continued from previous page)

```
)
>>> model.evaluate(X_test, y_test, filename="report.html")
```

```
classmethod from_id(ocid: str, model_file_name: Optional[str] = None, artifact_dir: Optional[str] =
    None, auth: Optional[Dict] = None, force_overwrite: Optional[bool] = False,
    properties: Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] = True,
    ignore_conda_error: Optional[bool] = False, **kwargs) → Self
```

Loads model from model OCID or model deployment OCID.

#### Parameters

- **ocid** (*str*) – The model OCID or model deployment OCID.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((*str*, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((*ModelProperties*, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **kwargs** –

#### **compartment\_id**

[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

#### **timeout**

[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

#### Returns

An instance of GenericModel class.

#### Return type

Self

```
classmethod from_model_artifact(uri: str, model_file_name: Optional[str] = None, artifact_dir:
    Optional[str] = None, auth: Optional[Dict] = None,
    force_overwrite: Optional[bool] = False, properties:
    Optional[ModelProperties] = None, ignore_conda_error:
    Optional[bool] = False, **kwargs: dict) → Self
```

Loads model from a folder, or zip/tar archive.

**Parameters**

- **uri** (*str*) – The folder path, ZIP file path, or TAR file path. It could contain a serialized model(required) as well as any files needed for deployment including: serialized model, runtime.yaml, score.py and etc. The content of the folder will be copied to the *artifact\_dir* folder.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The serialized model file name. Will be extracted from artifacts if not provided.
- **artifact\_dir** ((*str*, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((*ModelProperties*, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.

**Returns**

An instance of *GenericModel* class.

**Return type**

Self

**Raises**

**ValueError** – If *model\_file\_name* not provided.

```
classmethod from_model_catalog(model_id: str, model_file_name: Optional[str] = None, artifact_dir:
    Optional[str] = None, auth: Optional[Dict] = None, force_overwrite:
    Optional[bool] = False, properties:
    Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] =
    True, ignore_conda_error: Optional[bool] = False, **kwargs) →
    Self
```

Loads model from model catalog.

**Parameters**

- **model\_id** (*str*) – The model OCID.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((*str*, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.



- **properties** (([ModelProperties](#), optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **bucket\_uri** ((str, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **ignore\_conda\_error** ((bool, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.

- **kwargs** –

- compartment\_id**

- [(str, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

- timeout**

- [(int, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

- region: (str, optional). Defaults to *None*.**

- The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

### Returns

An instance of `GenericModel` class.

### Return type

Self

```
classmethod from_model_deployment(model_deployment_id: str, model_file_name: Optional[str] =
    None, artifact_dir: Optional[str] = None, auth: Optional[Dict] =
    None, force_overwrite: Optional[bool] = False, properties:
    Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] =
    True, ignore_conda_error: Optional[bool] = False, **kwargs) →
    Self
```

Loads model from model deployment.

### Parameters

- **model\_deployment\_id** (str) – The model deployment OCID.
- **model\_file\_name** ((str, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((str, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate `IdentityClient` object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** (([ModelProperties](#), optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.



- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**compartment\_id**

[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

**timeout**

[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

**region: (str, optional). Defaults to *None*.**

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**Returns**

An instance of *GenericModel* class.

**Return type**

*Self*

**get\_data\_serializer()**

Gets data serializer.

**Returns**

*object*

**Return type**

*ads.model.Serializer* object.

**get\_model\_serializer()**

Gets model serializer.

**introspect()** → *DataFrame*

Conducts introspection.

**Returns**

A pandas *DataFrame* which contains the introspection results.

**Return type**

*pandas.DataFrame*

**property metadata\_custom**

**property metadata\_provenance**

**property metadata\_taxonomy**

**property model\_deployment\_id**

**property model\_id**

**model\_input\_serializer\_type**

alias of `ModelInputSerializerType`

**model\_save\_serializer\_type**

alias of `LightGBMModelSerializerType`

**populate\_metadata**(*use\_case\_type*: *Optional*[*str*] = *None*, *data\_sample*: *Optional*[`ADSDData`] = *None*,  
*X\_sample*: *Optional*[*Union*[*list*, *tuple*, *DataFrame*, *Series*, *ndarray*]] = *None*,  
*y\_sample*: *Optional*[*Union*[*list*, *tuple*, *DataFrame*, *Series*, *ndarray*]] = *None*,  
*training\_script\_path*: *Optional*[*str*] = *None*, *training\_id*: *Optional*[*str*] = *None*,  
*ignore\_pending\_changes*: *bool* = *True*, *max\_col\_num*: *int* = 2000,  
*ignore\_conda\_error*: *bool* = *False*)

Populates input schema and output schema. If the schema exceeds the limit of 32kb, save as json files to the artifact directory.

**Parameters**

- **use\_case\_type** (*(str, optional). Defaults to None.*) – The use case type of the model.
- **data\_sample** (*(ADSDData, optional). Defaults to None.*) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.*) – A sample of input data that will be used to generate input schema.
- **y\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.*) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (*str. Defaults to None.*) – Training script path.
- **training\_id** (*(str, optional). Defaults to None.*) – The training model OCID.
- **ignore\_pending\_changes** (*bool. Defaults to False.*) – Ignore the pending changes in git.
- **max\_col\_num** (*((int, optional). Defaults to utils.DATA\_SCHEMA\_MAX\_COL\_NUM.)*) – The maximum number of columns allowed in auto generated schema.

**Returns**

Nothing.

**Return type**

None

**populate\_schema**(*data\_sample*: *Optional*[`ADSDData`] = *None*, *X\_sample*: *Optional*[*Union*[*List*, *Tuple*,  
*DataFrame*, *Series*, *ndarray*]] = *None*, *y\_sample*: *Optional*[*Union*[*List*, *Tuple*,  
*DataFrame*, *Series*, *ndarray*]] = *None*, *max\_col\_num*: *int* = 2000)

Populate input and output schemas. If the schema exceeds the limit of 32kb, save as json files to the artifact dir.

**Parameters**

- **data\_sample** (`ADSDData`) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*) – A sample of input data that will be used to generate the input schema.

- **y\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*) – A sample of output data that will be used to generate the output schema.
- **max\_col\_num** (*((int, optional). Defaults to utils.DATA\_SCHEMA\_MAX\_COL\_NUM.)*) – The maximum number of columns allowed in auto generated schema.

**predict** (*data: Optional[Any] = None, auto\_serialize\_data: bool = True, \*\*kwargs*) → Dict[str, Any]

Returns prediction of input data run against the model deployment endpoint.

## Examples

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.predict(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.predict(
...     image="oci://<bucket>@<tenancy>/myimage.png",
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

## Parameters

- **data** (*Any*) – Data for the prediction for onnx models, for local serialization method, data can be the data types that each framework support.
- **auto\_serialize\_data** (*bool.*) – Whether to auto serialize input data. Defaults to *False* for GenericModel, and *True* for other frameworks. *data* required to be json serializable if *auto\_serialize\_data=False*. If *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.
- **kwargs** – *content\_type*: str, used to indicate the media type of the resource. *image*: PIL.Image Object or uri for the image.

A valid string path for image file can be local path, http(s), oci, s3, gs.

### storage\_options: dict

Passed to *fsspec.open* for a particular storage connection. Please see *fsspec* (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.

## Returns

Dictionary with the predicted values.

## Return type

Dict[str, Any]

## Raises

- **NotActiveDeploymentError** – If model deployment process was not started or not finished yet.
- **ValueError** – If *data* is empty or not JSON serializable.

```
prepare(inference_conda_env: Optional[str] = None, inference_python_version: Optional[str] = None,
        training_conda_env: Optional[str] = None, training_python_version: Optional[str] = None,
        model_file_name: Optional[str] = None, as_onnx: bool = False, initial_types:
        Optional[List[Tuple]] = None, force_overwrite: bool = False, namespace: str = 'id19sferra6z',
        use_case_type: Optional[str] = None, X_sample: Optional[Union[list, tuple, DataFrame, Series,
        ndarray]] = None, y_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None,
        training_script_path: Optional[str] = None, training_id: Optional[str] = None,
        ignore_pending_changes: bool = True, max_col_num: int = 2000, ignore_conda_error: bool =
        False, **kwargs: Dict) → GenericModel
```

Prepare and save the score.py, serialized model and runtime.yaml file.

#### Parameters

- **inference\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **inference\_python\_version** ((str, optional). Defaults to None.) – Python version which will be used in deployment.
- **training\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack. If *training\_conda\_env* is not provided, *training\_conda\_env* will use the same value of *training\_conda\_env*.
- **training\_python\_version** ((str, optional). Defaults to None.) – Python version used during training.
- **model\_file\_name** ((str, optional). Defaults to None.) – Name of the serialized model. Will be auto generated if not provided.
- **as\_onnx** ((bool, optional). Defaults to False.) – Whether to serialize as onnx model.
- **initial\_types** ((list[Tuple], optional).) – Defaults to None. Only used for SklearnModel, LightGBMModel and XGBoostModel. Each element is a tuple of a variable name and a type. Check this link [http://onnx.ai/sklearn-onnx/api\\_summary.html#id2](http://onnx.ai/sklearn-onnx/api_summary.html#id2) for more explanation and examples for *initial\_types*.
- **force\_overwrite** ((bool, optional). Defaults to False.) – Whether to overwrite existing files.
- **namespace** ((str, optional).) – Namespace of region. This is used for identifying which region the service pack is from when you pass a slug to *inference\_conda\_env* and *training\_conda\_env*.
- **use\_case\_type** (str) – The use case type of the model. Use it through *UseCaseType* class or string provided in *UseCaseType*. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with *UseCaseType* class to see all supported types.
- **X\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (str. Defaults to None.) – Training script path.

- **training\_id** ((*str*, *optional*). Defaults to value from environment variables.) – The training OCID for model. Can be notebook session or job OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – whether to ignore the pending changes in the git.
- **max\_col\_num** ((*int*, *optional*). Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – Do not generate the input schema if the input has more than this number of features(columns).
- **ignore\_conda\_error** ((*bool*, *optional*). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**impute\_values: (dict, optional).**

The dictionary where the key is the column index(or names is accepted for pandas dataframe) and the value is the impute value for the corresponding column.

**Raises**

- **FileExistsError** – If files already exist but *force\_overwrite* is *False*.
- **ValueError** – If *inference\_python\_version* is not provided, but also cannot be found through manifest file.

**Returns**

An instance of *GenericModel* class.

**Return type**

*GenericModel*

**prepare\_save\_deploy**(*inference\_conda\_env: Optional[str] = None, inference\_python\_version: Optional[str] = None, training\_conda\_env: Optional[str] = None, training\_python\_version: Optional[str] = None, model\_file\_name: Optional[str] = None, as\_onnx: bool = False, initial\_types: Optional[List[Tuple]] = None, force\_overwrite: bool = False, namespace: str = 'id19sfcr6z', use\_case\_type: Optional[str] = None, X\_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, y\_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, training\_script\_path: Optional[str] = None, training\_id: Optional[str] = None, ignore\_pending\_changes: bool = True, max\_col\_num: int = 2000, ignore\_conda\_error: bool = False, model\_display\_name: Optional[str] = None, model\_description: Optional[str] = None, model\_freeform\_tags: Optional[dict] = None, model\_defined\_tags: Optional[dict] = None, ignore\_introspection: Optional[bool] = False, wait\_for\_completion: Optional[bool] = True, deployment\_display\_name: Optional[str] = None, deployment\_description: Optional[str] = None, deployment\_instance\_shape: Optional[str] = None, deployment\_instance\_count: Optional[int] = None, deployment\_bandwidth\_mbps: Optional[int] = None, deployment\_log\_group\_id: Optional[str] = None, deployment\_access\_log\_id: Optional[str] = None, deployment\_predict\_log\_id: Optional[str] = None, deployment\_memory\_in\_gbs: Optional[float] = None, deployment\_ocpus: Optional[float] = None, deployment\_image: Optional[str] = None, bucket\_uri: Optional[str] = None, overwrite\_existing\_artifact: Optional[bool] = True, remove\_existing\_artifact: Optional[bool] = True, model\_version\_set: Optional[Union[str, ModelVersionSet]] = None, version\_label: Optional[str] = None, \*\*kwargs: Dict) → *ModelDeployment**

Shortcut for prepare, save and deploy steps.

**Parameters**

- **inference\_conda\_env** ((*str*, optional). Defaults to *None*.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **inference\_python\_version** ((*str*, optional). Defaults to *None*.) – Python version which will be used in deployment.
- **training\_conda\_env** ((*str*, optional). Defaults to *None*.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack. If *training\_conda\_env* is not provided, *training\_conda\_env* will use the same value of *training\_conda\_env*.
- **training\_python\_version** ((*str*, optional). Defaults to *None*.) – Python version used during training.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – Name of the serialized model.
- **as\_onnx** ((*bool*, optional). Defaults to *False*.) – Whether to serialize as onnx model.
- **initial\_types** ((*list*[*Tuple*], optional).) – Defaults to *None*. Only used for SklearnModel, LightGBMModel and XGBoostModel. Each element is a tuple of a variable name and a type. Check this link [http://onnx.ai/sklearn-onnx/api\\_summary.html#id2](http://onnx.ai/sklearn-onnx/api_summary.html#id2) for more explanation and examples for *initial\_types*.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files.
- **namespace** ((*str*, optional).) – Namespace of region. This is used for identifying which region the service pack is from when you pass a slug to *inference\_conda\_env* and *training\_conda\_env*.
- **use\_case\_type** (*str*) – The use case type of the model. Use it through *UseCaseType* class or string provided in *UseCaseType*. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with *UseCaseType* class to see all supported types.
- **X\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (*str*. Defaults to *None*.) – Training script path.
- **training\_id** ((*str*, optional). Defaults to value from environment variables.) – The training OCID for model. Can be notebook session or job OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – whether to ignore the pending changes in the git.
- **max\_col\_num** ((*int*, optional). Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – Do not generate the input schema if the input has more than this number of features(columns).
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.

- **model\_display\_name**((*str*, optional). Defaults to None.) – The name of the model. If a `model_display_name` is not provided in `kwargs`, a randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55.02'.
- **model\_description**((*str*, optional). Defaults to None.) – The description of the model.
- **model\_freeform\_tags** (*Dict(str, str)*, Defaults to None.) – Freeform tags for the model.
- **model\_defined\_tags** ((*Dict(str, dict(str, object))*, optional). Defaults to None.) – Defined tags for the model.
- **ignore\_introspection** ((*bool*, optional). Defaults to None.) – Determine whether to ignore the result of model introspection or not. If set to True, the save will ignore all model introspection errors.
- **wait\_for\_completion** ((*bool*, optional). Defaults to True.) – Flag set for whether to wait for deployment to complete before proceeding.
- **deployment\_display\_name**((*str*, optional). Defaults to None.) – The name of the model deployment. If a `deployment_display_name` is not provided in `kwargs`, a randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55.02'.
- **description** ((*str*, optional). Defaults to None.) – The description of the model.
- **deployment\_instance\_shape** ((*str*, optional). Default to *VM.Standard2.1*.) – The shape of the instance used for deployment.
- **deployment\_instance\_count** ((*int*, optional). Defaults to 1.) – The number of instance used for deployment.
- **deployment\_bandwidth\_mbps** ((*int*, optional). Defaults to 10.) – The bandwidth limit on the load balancer in Mbps.
- **deployment\_log\_group\_id** ((*str*, optional). Defaults to None.) – The oci logging group id. The access log and predict log share the same log group.
- **deployment\_access\_log\_id** ((*str*, optional). Defaults to None.) – The access log OCID for the access logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_predict\_log\_id** ((*str*, optional). Defaults to None.) – The predict log OCID for the predict logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_memory\_in\_gbs** ((*float*, optional). Defaults to None.) – Specifies the size of the memory of the model deployment instance in GBs.
- **deployment\_ocpus** ((*float*, optional). Defaults to None.) – Specifies the ocpu count of the model deployment instance.
- **deployment\_image** ((*str*, optional). Defaults to None.) – The OCIR path of docker container image. Required for deploying model on container runtime.
- **bucket\_uri** ((*str*, optional). Defaults to None.) – The OCI Object Storage URI where model artifacts will be copied to. The `bucket_uri` is only necessary for downloading large artifacts with size is greater than 2GB. Example: `oci://<bucket_name>@<namespace>/prefix/`.

- **overwrite\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **model\_version\_set** ((*Union[str, ModelVersionSet]*, optional). Defaults to *None*.) – The Model version set OCID, or name, or *ModelVersionSet* instance.
- **version\_label** ((*str*, optional). Defaults to *None*.) – The model version label.
- **kwargs** –

**impute\_values: (dict, optional).**

The dictionary where the key is the column index(or names is accepted for pandas dataframe) and the value is the impute value for the corresponding column.

**project\_id: (str, optional).**

Project OCID. If not specified, the value will be taken either from the environment variables or model properties.

**compartment\_id**

[(*str*, optional).] Compartment OCID. If not specified, the value will be taken either from the environment variables or model properties.

**image\_digest: (str, optional). Defaults to None.**

The digest of docker container image.

**cmd: (List, optional). Defaults to empty.**

The command line arguments for running docker container image.

**entrypoint: (List, optional). Defaults to empty.**

The entrypoint for running docker container image.

**server\_port: (int, optional). Defaults to 8080.**

The server port for docker container image.

**health\_check\_port: (int, optional). Defaults to 8080.**

The health check port for docker container image.

**deployment\_mode: (str, optional). Defaults to HTTPS\_ONLY.**

The deployment mode. Allowed values are: HTTPS\_ONLY and STREAM\_ONLY.

**input\_stream\_ids: (List, optional). Defaults to empty.**

The input stream ids. Required for STREAM\_ONLY mode.

**output\_stream\_ids: (List, optional). Defaults to empty.**

The output stream ids. Required for STREAM\_ONLY mode.

**environment\_variables: (Dict, optional). Defaults to empty.**

The environment variables for model deployment.

**timeout: (int, optional). Defaults to 10 seconds.**

The connection timeout in seconds for the client.

**max\_wait\_time**

[(int, optional). Defaults to 1200 seconds.] Maximum amount of time to wait in seconds. Negative implies infinite wait time.

**poll\_interval**

[(int, optional). Defaults to 10 seconds.] Poll interval in seconds.



**freeform\_tags:** (`Dict[str, str]`, optional). Defaults to `None`.

Freeform tags of the model deployment.

**defined\_tags:** (`Dict[str, dict[str, object]]`, optional). Defaults to `None`.

Defined tags of the model deployment.

**region:** (`str`, optional). Defaults to `None`.

The destination Object Storage bucket region. By default the value will be extracted from the `OCI_REGION_METADATA` environment variables.

Also can be any keyword argument for initializing the `ads.model.deployment.ModelDeploymentProperties`. See `ads.model.deployment.ModelDeploymentProperties()` for details.

#### Returns

The `ModelDeployment` instance.

#### Return type

`ModelDeployment`

#### Raises

- **FileExistsError** – If files already exist but `force_overwrite` is `False`.
- **ValueError** – If `inference_python_version` is not provided, but also cannot be found through manifest file.

**reload()** → `GenericModel`

Reloads the model artifact files: `score.py` and the `runtime.yaml`.

#### Returns

An instance of `GenericModel` class.

#### Return type

`GenericModel`

**reload\_runtime\_info()** → `None`

Reloads the model artifact file: `runtime.yaml`.

#### Returns

Nothing.

#### Return type

`None`

**restart\_deployment**(`max_wait_time: int = 1200`, `poll_interval: int = 10`) → `ModelDeployment`

Restarts the current deployment.

#### Parameters

- **max\_wait\_time** (`(int, optional)`. Defaults to `1200` seconds.) – Maximum amount of time to wait for activate or deactivate in seconds. Total amount of time to wait for restart deployment is twice as the value. Negative implies infinite wait time.
- **poll\_interval** (`(int, optional)`. Defaults to `10` seconds.) – Poll interval in seconds.

#### Returns

The `ModelDeployment` instance.

#### Return type

`ModelDeployment`

```
save(display_name: Optional[str] = None, description: Optional[str] = None, freeform_tags: Optional[dict]
    = None, defined_tags: Optional[dict] = None, ignore_introspection: Optional[bool] = False,
    bucket_uri: Optional[str] = None, overwrite_existing_artifact: Optional[bool] = True,
    remove_existing_artifact: Optional[bool] = True, model_version_set: Optional[Union[str,
    ModelVersionSet]] = None, version_label: Optional[str] = None, **kwargs) → str
```

Saves model artifacts to the model catalog.

#### Parameters

- **display\_name** ((str, optional). Defaults to None.) – The name of the model. If a display\_name is not provided in kwargs, randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55:02'.
- **description** ((str, optional). Defaults to None.) – The description of the model.
- **freeform\_tags** (Dict(str, str), Defaults to None.) – Freeform tags for the model.
- **defined\_tags** ((Dict(str, dict(str, object)), optional). Defaults to None.) – Defined tags for the model.
- **ignore\_introspection** ((bool, optional). Defaults to None.) – Determine whether to ignore the result of model introspection or not. If set to True, the save will ignore all model introspection errors.
- **bucket\_uri** ((str, optional). Defaults to None.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for uploading large artifacts which size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **overwrite\_existing\_artifact** ((bool, optional). Defaults to True.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((bool, optional). Defaults to True.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **model\_version\_set** ((Union[str, ModelVersionSet], optional). Defaults to None.) – The model version set OCID, or model version set name, or *ModelVersionSet* instance.
- **version\_label** ((str, optional). Defaults to None.) – The model version label.
- **kwargs** –

**project\_id:** (str, optional).

Project OCID. If not specified, the value will be taken either from the environment variables or model properties.

**compartment\_id**

[(str, optional).] Compartment OCID. If not specified, the value will be taken either from the environment variables or model properties.

**region:** (str, optional). Defaults to None.

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**timeout:** (int, optional). Defaults to 10 seconds.

The connection timeout in seconds for the client.

Also can be any attribute that *oci.data\_science.models.Model* accepts.

**Raises**

**`RuntimeInfoInconsistencyError`** – When `.runtime_info` is not synched with `runtime.yaml` file.

**Returns**

The model id.

**Return type**

str

**property** `schema_input`

**property** `schema_output`

**`serialize_model`**(*as\_onnx: bool = False, initial\_types: Optional[List[Tuple]] = None, force\_overwrite: bool = False, X\_sample: Optional[Union[Dict, str, List, Tuple, ndarray, Series, DataFrame]] = None, \*\*kwargs: Dict*)

Serialize and save Lightgbm model.

**Parameters**

- **`as_onnx`** ((boolean, optional). Defaults to False.) – If set as True, provide *initial\_types* or *X\_sample* to convert into ONNX.
- **`initial_types`** ((List[Tuple], optional). Defaults to None.) – Each element is a tuple of a variable name and a type.
- **`force_overwrite`** ((boolean, optional). Defaults to False.) – If set as True, overwrite serialized model if exists.
- **`X_sample`** (Union[Dict, str, List, np.ndarray, pd.core.series.Series, pd.core.frame.DataFrame,]. Defaults to None.) – Contains model inputs such that `model(X_sample)` is a valid invocation of the model. Used to generate *initial\_types*.

**Returns**

Nothing.

**Return type**

None

**`set_model_input_serializer`**(*model\_input\_serializer: Union[str, SERDE]*)

Registers serializer used for serializing data passed in verify/predict.

**Examples**

```
>>> generic_model.set_model_input_serializer(GenericModel.model_input_
↳serializer_type.CLOUDPICKLE)
```

```
>>> # Register serializer by passing the name of it.
>>> generic_model.set_model_input_serializer("cloudpickle")
```

```
>>> # Example of creating customized model input serializer and registering it.
>>> from ads.model import SERDE
>>> from ads.model.generic_model import GenericModel
```

```
>>> class MySERDE(SERDE):
...     def __init__(self):
...         super().__init__()
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
...     def deserialize(self, data):
...         deserialized_data = 2
...         return deserialized_data
```

```
>>> class Toy:
...     def predict(self, x):
...         return x ** 2
```

```
>>> generic_model = GenericModel(
...     estimator=Toy(),
...     artifact_dir=tempfile.mkdtemp(),
...     model_input_serializer=MySERDE()
... )
```

```
>>> # Or register the serializer after creating model instance.
>>> generic_model.set_model_input_serializer(MySERDE())
```

#### Parameters

**model\_input\_serializer** ((*str*, or `ads.model.SERDE`)) – name of the serializer, or instance of SERDE.

**set\_model\_save\_serializer**(*model\_save\_serializer: Union[str, SERDE]*)

Registers serializer used for saving model.

#### Examples

```
>>> generic_model.set_model_save_serializer(GenericModel.model_save_serializer_
↳ type.CLOUDPICKLE)
```

```
>>> # Register serializer by passing the name of it.
>>> generic_model.set_model_save_serializer("cloudpickle")
```

```
>>> # Example of creating customized model save serializer and registering it.
>>> from ads.model import SERDE
>>> from ads.model.generic_model import GenericModel
```

```
>>> class MySERDE(SERDE):
...     def __init__(self):
...         super().__init__()
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
...     def deserialize(self, data):
```

(continues on next page)

(continued from previous page)

```
...     deserialized_data = 2
...     return deserialized_data
```

```
>>> class Toy:
...     def predict(self, x):
...         return x ** 2
```

```
>>> generic_model = GenericModel(
...     estimator=Toy(),
...     artifact_dir=tempfile.mkdtemp(),
...     model_save_serializer=MySERDE()
... )
```

```
>>> # Or register the serializer after creating model instance.
>>> generic_model.set_model_save_serializer(MySERDE())
```

**Parameters**

**model\_save\_serializer** ((`ads.model.SERDE` or `str`)) – name of the serializer or instance of SERDE.

**summary\_status()** → `DataFrame`

A summary table of the current status.

**Returns**

The summary stable of the current status.

**Return type**

`pd.DataFrame`

**update(\*\*kwargs)** → *GenericModel*

Updates model metadata in the Model Catalog. Updates only metadata information. The model artifacts are immutable and cannot be updated.

**Parameters**

**kwargs** –

**display\_name:** (`str`, optional). Defaults to `None`.

The name of the model.

**description:** (`str`, optional). Defaults to `None`.

The description of the model.

**freeform\_tags**

[`Dict(str, str)`, Defaults to `None`.] Freeform tags for the model.

**defined\_tags**

[(`Dict(str, dict(str, object))`), optional]. Defaults to `None`.] Defined tags for the model.

**version\_label:** (`str`, optional). Defaults to `None`.

The model version label.

Additional kwargs arguments. Can be any attribute that *oci.data\_science.models.Model* accepts.

**Returns**

An instance of *GenericModel* (self).

**Return type***GenericModel***Raises****ValueError** – if model not saved to the Model Catalog.

**classmethod** `update_deployment(model_deployment_id: Optional[str] = None, properties: Optional[Union[ModelDeploymentProperties, dict]] = None, wait_for_completion: bool = True, max_wait_time: int = 1200, poll_interval: int = 10, **kwargs) → ModelDeployment`

Updates a model deployment.

You can update *model\_deployment\_configuration\_details* and change *instance\_shape* and *model\_id* when the model deployment is in the *ACTIVE* lifecycle state. The *bandwidth\_mbps* or *instance\_count* can only be updated while the model deployment is in the *INACTIVE* state. Changes to the *bandwidth\_mbps* or *instance\_count* will take effect the next time the *ActivateModelDeployment* action is invoked on the model deployment resource.

**Examples**

```
>>> # Update access log id, freeform tags and description for the model_
↳ deployment
>>> model.update_deployment(
>>>     properties=ModelDeploymentProperties(
>>>         access_log_id=<log_ocid>,
>>>         description="Description for Custom Model",
>>>         freeform_tags={"key": "value"},
>>>     )
>>> )
```

**Parameters**

- **model\_deployment\_id** (*str.*) – The model deployment OCID. Defaults to None. If the method called on instance level, then *self.model\_deployment.model\_deployment\_id* will be used.
- **properties** (*ModelDeploymentProperties* or *dict*) – The properties for updating the deployment.
- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to complete before proceeding. Defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).
- **kwargs** –

**auth:** (*Dict*, optional). Defaults to *None*.

The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.

**Returns**

An instance of *ModelDeployment* class.

**Return type***ModelDeployment***upload\_artifact**(*uri*: str, *auth*: Optional[Dict] = None, *force\_overwrite*: Optional[bool] = False) → NoneUploads model artifacts to the provided *uri*. The artifacts will be zipped before uploading.**Parameters**

- **uri** (str) – The destination location for the model artifacts, which can be a local path or OCI object storage URI. Examples: `>>> upload_artifact(uri="/some/local/folder/") >>> upload_artifact(uri="oci://bucket@namespace/prefix/")`
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** (bool) – Overwrite target\_dir if exists.

**verify**(*data*: Optional[Any] = None, *reload\_artifacts*: bool = True, *auto\_serialize\_data*: bool = True, *\*\*kwargs*) → Dict[str, Any]

Test if deployment works in local environment.

**Examples**

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.verify(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.verify(
...     image="oci://<bucket>@<tenancy>/myimage.png",
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

**Parameters**

- **data** (Any) – Data used to test if deployment works in local environment.
- **reload\_artifacts** (bool. Defaults to *True*.) – Whether to reload artifacts or not.
- **auto\_serialize\_data** (bool.) – Whether to auto serialize input data. Defaults to *False* for GenericModel, and *True* for other frameworks. *data* required to be json serializable if *auto\_serialize\_data=False*. if *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.
- **kwargs** – content\_type: str, used to indicate the media type of the resource. image: PIL.Image Object or uri for the image.

A valid string path for image file can be local path, http(s), oci, s3, gs.

**storage\_options: dict**Passed to *fsspec.open* for a particular storage connection. Please see *fsspec* (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.**Returns**

A dictionary which contains prediction results.

**Return type**

Dict

**ads.model.framework.pytorch\_model module**

```
class ads.model.framework.pytorch_model.PyTorchModel(estimator: callable, artifact_dir: Optional[str]
                                                    = None, properties:
                                                    Optional[ModelProperties] = None, auth: Dict
                                                    = None, model_save_serializer:
                                                    Optional[SERDE] = 'torch',
                                                    model_input_serializer: Optional[SERDE] =
                                                    None, **kwargs)
```

Bases: [FrameworkSpecificModel](#)

PyTorchModel class for estimators from Pytorch framework.

**algorithm**

The algorithm of the model.

**Type**

str

**artifact\_dir**

Artifact directory to store the files needed for deployment.

**Type**

str

**auth**

Default authentication is set using the `ads.set_auth` API. To override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create an authentication signer to instantiate an IdentityClient object.

**Type**

Dict

**estimator**

A trained pytorch estimator/model using Pytorch.

**Type**

Callable

**framework**

“pytorch”, the framework name of the model.

**Type**

str

**hyperparameter**

The hyperparameters of the estimator.

**Type**

dict

**metadata\_custom**

The model custom metadata.

**Type**[ModelCustomMetadata](#)



**metadata\_provenance**

The model provenance metadata.

**Type**

*ModelProvenanceMetadata*

**metadata\_taxonomy**

The model taxonomy metadata.

**Type**

*ModelTaxonomyMetadata*

**model\_artifact**

This is built by calling prepare.

**Type**

*ModelArtifact*

**model\_deployment**

A ModelDeployment instance.

**Type**

*ModelDeployment*

**model\_file\_name**

Name of the serialized model.

**Type**

str

**model\_id**

The model ID.

**Type**

str

**properties**

ModelProperties object required to save and deploy model. For more details, check [https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model\\_properties](https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model_properties).

**Type**

*ModelProperties*

**runtime\_info**

A RuntimeInfo instance.

**Type**

*RuntimeInfo*

**schema\_input**

Schema describes the structure of the input data.

**Type**

*Schema*

**schema\_output**

Schema describes the structure of the output data.

**Type**

*Schema*

**serialize**

Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under `artifact_dir` and update the `score.py` manually.

**Type**

bool

**version**

The framework version of the model.

**Type**

str

**delete\_deployment(...)**

Deletes the current model deployment.

**deploy(..., *\*\*kwargs*)**

Deploys a model.

**from\_model\_artifact(uri, model\_file\_name, artifact\_dir, ..., *\*\*kwargs*)**

Loads model from the specified folder, or zip/tar archive.

**from\_model\_catalog(model\_id, model\_file\_name, artifact\_dir, ..., *\*\*kwargs*)**

Loads model from model catalog.

**introspect(...)**

Runs model introspection.

**predict(data, ...)**

Returns prediction of input data run against the model deployment endpoint.

**prepare(..., *\*\*kwargs*)**

Prepare and save the `score.py`, serialized model and `runtime.yaml` file.

**reload(...)**

Reloads the model artifact files: `score.py` and the `runtime.yaml`.

**save(..., *\*\*kwargs*)**

Saves model artifacts to the model catalog.

**summary\_status(...)**

Gets a summary table of the current status.

**verify(data, ...)**

Tests if deployment works in local environment.

**Examples**

```
>>> torch_model = PyTorchModel(estimator=torch_estimator,  
... artifact_dir=tmp_model_dir)  
>>> inference_conda_env = "generalml_p37_cpu_v1"
```

```
>>> torch_model.prepare(inference_conda_env=inference_conda_env, force_  
↳ overwrite=True)  
>>> torch_model.reload()  
>>> torch_model.verify(...)
```

(continues on next page)

(continued from previous page)

```
>>> torch_model.save()
>>> model_deployment = torch_model.deploy(wait_for_completion=False)
>>> torch_model.predict(...)
```

Initiates a PyTorchModel instance.

#### Parameters

- **estimator** (*callable*) – Any model object generated by pytorch framework
- **artifact\_dir** (*str*) – artifact directory to store the files needed for deployment.
- **properties** ((*ModelProperties*, *optional*). Defaults to *None*.) – ModelProperties object required to save and deploy model.
- **auth** ((*Dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **model\_save\_serializer** ((*SERDE* or *str*, *optional*). Defaults to *None*.) – Instance of *ads.model.SERDE*. Used for serialize/deserialize model.
- **model\_input\_serializer** ((*SERDE*, *optional*). Defaults to *None*.) – Instance of *ads.model.SERDE*. Used for serialize/deserialize data.

#### Returns

PyTorchModel instance.

#### Return type

*PyTorchModel*

**classmethod delete**(*model\_id: Optional[str] = None, delete\_associated\_model\_deployment: Optional[bool] = False, delete\_model\_artifact: Optional[bool] = False, artifact\_dir: Optional[str] = None, \*\*kwargs: Dict*) → *None*

Deletes a model from Model Catalog.

#### Parameters

- **model\_id** ((*str*, *optional*). Defaults to *None*.) – The model OCID to be deleted. If the method called on instance level, then *self.model\_id* will be used.
- **delete\_associated\_model\_deployment** ((*bool*, *optional*). Defaults to *False*.) – Whether associated model deployments need to be deleted or not.
- **delete\_model\_artifact** ((*bool*, *optional*). Defaults to *False*.) – Whether associated model artifacts need to be deleted or not.
- **artifact\_dir** ((*str*, *optional*). Defaults to *None*) – The local path to the model artifacts folder. If the method called on instance level, the *self.artifact\_dir* will be used by default.

#### Return type

*None*

#### Raises

**ValueError** – If *model\_id* not provided.

**delete\_deployment**(*wait\_for\_completion: bool = True*) → *None*

Deletes the current deployment.

**Parameters**

**wait\_for\_completion** ((bool, optional). Defaults to *True*.) – Whether to wait till completion.

**Return type**

None

**Raises**

**ValueError** – if there is not deployment attached yet.:

**deploy**(*wait\_for\_completion: Optional[bool] = True, display\_name: Optional[str] = None, description: Optional[str] = None, deployment\_instance\_shape: Optional[str] = None, deployment\_instance\_count: Optional[int] = None, deployment\_bandwidth\_mbps: Optional[int] = None, deployment\_log\_group\_id: Optional[str] = None, deployment\_access\_log\_id: Optional[str] = None, deployment\_predict\_log\_id: Optional[str] = None, deployment\_memory\_in\_gbs: Optional[float] = None, deployment\_ocpus: Optional[float] = None, deployment\_image: Optional[str] = None, \*\*kwargs: Dict*) → *ModelDeployment*

Deploys a model. The model needs to be saved to the model catalog at first. You can deploy the model on either conda or container runtime. The customized runtime allows you to bring your own service container. To deploy model on container runtime, make sure to build the container and push it to OCIR. For more information, see <https://docs.oracle.com/en-us/iaas/data-science/using/mod-dep-byoc.htm>.

**Example**

```
# This is an example to deploy model on container runtime >>> model = Generic-
Model(estimator=estimator, artifact_dir=tempfile.mkdtemp()) >>> model.summary_status() >>>
model.prepare( ... model_file_name="toy_model.pkl", ... ignore_conda_error=True, # set ig-
nore_conda_error=True for container runtime ... force_overwrite=True ... ) >>> model.verify() >>>
model.save() >>> model.deploy( ... deployment_image="iad.ocir.io/<namespace>/<image>:<tag>",
... entrypoint=["python", "/opt/ds/model/deployed_model/api.py"], ... server_port=5000, ...
health_check_port=5000, ... environment_variables={"key":"value"} ... )
```

**Parameters**

- **wait\_for\_completion** ((bool, optional). Defaults to *True*.) – Flag set for whether to wait for deployment to complete before proceeding.
- **display\_name** ((str, optional). Defaults to *None*.) – The name of the model. If a display\_name is not provided in kwargs, a randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55.02'.
- **description** ((str, optional). Defaults to *None*.) – The description of the model.
- **deployment\_instance\_shape** ((str, optional). Default to *VM.Standard2.1*.) – The shape of the instance used for deployment.
- **deployment\_instance\_count** ((int, optional). Defaults to *1*.) – The number of instance used for deployment.
- **deployment\_bandwidth\_mbps** ((int, optional). Defaults to *10*.) – The bandwidth limit on the load balancer in Mbps.
- **deployment\_memory\_in\_gbs** ((float, optional). Defaults to *None*.) – Specifies the size of the memory of the model deployment instance in GBs.
- **deployment\_ocpus** ((float, optional). Defaults to *None*.) – Specifies the ocpu count of the model deployment instance.

- **deployment\_log\_group\_id** ((*str*, optional). Defaults to None.) – The oci logging group id. The access log and predict log share the same log group.
- **deployment\_access\_log\_id** ((*str*, optional). Defaults to None.) – The access log OCID for the access logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_predict\_log\_id** ((*str*, optional). Defaults to None.) – The predict log OCID for the predict logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_image** ((*str*, optional). Defaults to None.) – The OCIR path of docker container image. Required for deploying model on container runtime.
- **kwargs** –

**project\_id: (str, optional).**

Project OCID. If not specified, the value will be taken from the environment variables.

**compartment\_id**

[(*str*, optional).] Compartment OCID. If not specified, the value will be taken from the environment variables.

**max\_wait\_time**

[(*int*, optional). Defaults to 1200 seconds.] Maximum amount of time to wait in seconds. Negative implies infinite wait time.

**poll\_interval**

[(*int*, optional). Defaults to 10 seconds.] Poll interval in seconds.

**freeform\_tags: (Dict[str, str], optional). Defaults to None.**

Freeform tags of the model deployment.

**defined\_tags: (Dict[str, dict[str, object]], optional). Defaults to None.**

Defined tags of the model deployment.

**image\_digest: (str, optional). Defaults to None.**

The digest of docker container image.

**cmd: (List, optional). Defaults to empty.**

The command line arguments for running docker container image.

**entrypoint: (List, optional). Defaults to empty.**

The entrypoint for running docker container image.

**server\_port: (int, optional). Defaults to 8080.**

The server port for docker container image.

**health\_check\_port: (int, optional). Defaults to 8080.**

The health check port for docker container image.

**deployment\_mode: (str, optional). Defaults to HTTPS\_ONLY.**

The deployment mode. Allowed values are: HTTPS\_ONLY and STREAM\_ONLY.

**input\_stream\_ids: (List, optional). Defaults to empty.**

The input stream ids. Required for STREAM\_ONLY mode.

**output\_stream\_ids: (List, optional). Defaults to empty.**

The output stream ids. Required for STREAM\_ONLY mode.

**environment\_variables: (Dict, optional). Defaults to empty.**

The environment variables for model deployment.

Also can be any keyword argument for initializing the  
*ads.model.deployment.ModelDeploymentProperties*. See  
*ads.model.deployment.ModelDeploymentProperties()* for details.

**Returns**

The ModelDeployment instance.

**Return type**

*ModelDeployment*

**Raises**

**ValueError** – If *model\_id* is not specified.

```

evaluate(X: Union[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]], _SupportsArray[dtype],
Sequence[_SupportsArray[dtype]], Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
y: Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]], _SupportsArray[dtype],
Sequence[_SupportsArray[dtype]], Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
y_pred: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
= None, y_score: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
= None, X_train: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
= None, y_train: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
= None, classes: Optional[List] = None, positive_class: Optional[str] = None, legend_labels:
Optional[dict] = None, perfect: bool = True, filename: Optional[str] = None, use_case_type:
Optional[str] = None)

```

Creates an ads evaluation report.

### Parameters

- **X (DataFrame-like)** – The data used to make a prediction. Can be set to None if *y\_preds* is given. (And *y\_scores* for more thorough analysis).

- **y** (*array-like*) – The true values corresponding to the input data
- **y\_pred** (*array-like, optional*) – The predictions from each model in the same order as the models
- **y\_score** (*array-like, optional*) – The predict\_proba from each model in the same order as the models
- **X\_train** (*DataFrame-like, optional*) – The data used to train the model
- **y\_train** (*array-like, optional*) – The true values corresponding to the input training data
- **classes** (*List or None, optional*) – A List of the possible labels for y, when evaluating a classification use case
- **positive\_class** (*str or int, optional*) – The class to report metrics for binary dataset. If the target classes is True or False, positive\_class will be set to True by default. If the dataset is multiclass or multilabel, this will be ignored.
- **legend\_labels** (*dict, optional*) – List of legend labels. Defaults to *None*. If legend\_labels not specified class names will be used for plots.
- **use\_case\_type** (*str, optional*) – The type of problem this model is solving. This can be set during *prepare()*. Examples: “binary\_classification”, “regression”, “multinomial\_classification” Full list of supported types can be found here: *ads.common.model\_metadata.UseCaseType*
- **filename** (*str, optional*) – If filename is given, the html report will be saved to the location specified.

## Examples

```
>>> import tempfile
>>> from ads.evaluations.evaluator import Evaluator
>>> from sklearn.tree import DecisionTreeClassifier
>>> from sklearn.datasets import make_classification
>>> from sklearn.model_selection import train_test_split
>>> from ads.model.framework.sklearn_model import SklearnModel
>>> from ads.common.model_metadata import UseCaseType
>>>
>>> X, y = make_classification(n_samples=1000)
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.3)
>>> est = DecisionTreeClassifier().fit(X_train, y_train)
>>> model = SklearnModel(estimator=est, artifact_dir=tempfile.mkdtemp())
>>> model.prepare(
>>>     inference_conda_env="generalml_p38_cpu_v1",
>>>     training_conda_env="generalml_p38_cpu_v1",
>>>     X_sample=X_test,
>>>     y_sample=y_test,
>>>     use_case_type=UseCaseType.BINARY_CLASSIFICATION,
>>> )
>>> model.evaluate(X_test, y_test, filename="report.html")
```



```
classmethod from_id(ocid: str, model_file_name: Optional[str] = None, artifact_dir: Optional[str] =
    None, auth: Optional[Dict] = None, force_overwrite: Optional[bool] = False,
    properties: Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] = True,
    ignore_conda_error: Optional[bool] = False, **kwargs) → Self
```

Loads model from model OCID or model deployment OCID.

#### Parameters

- **ocid** (str) – The model OCID or model deployment OCID.
- **model\_file\_name** ((str, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((str, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((ModelProperties, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **bucket\_uri** ((str, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **kwargs** –

#### **compartment\_id**

[(str, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

#### **timeout**

[(int, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

#### Returns

An instance of GenericModel class.

#### Return type

Self

```
classmethod from_model_artifact(uri: str, model_file_name: Optional[str] = None, artifact_dir:
    Optional[str] = None, auth: Optional[Dict] = None,
    force_overwrite: Optional[bool] = False, properties:
    Optional[ModelProperties] = None, ignore_conda_error:
    Optional[bool] = False, **kwargs: dict) → Self
```

Loads model from a folder, or zip/tar archive.

#### Parameters

- **uri** (str) – The folder path, ZIP file path, or TAR file path. It could contain a serialized model(required) as well as any files needed for deployment including: serialized model,

runtime.yaml, score.py and etc. The content of the folder will be copied to the *artifact\_dir* folder.

- **model\_file\_name** ((str, optional). Defaults to *None*.) – The serialized model file name. Will be extracted from artifacts if not provided.
- **artifact\_dir** ((str, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((ModelProperties, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **ignore\_conda\_error** ((bool, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.

#### Returns

An instance of *GenericModel* class.

#### Return type

Self

#### Raises

**ValueError** – If *model\_file\_name* not provided.

```
classmethod from_model_catalog(model_id: str, model_file_name: Optional[str] = None, artifact_dir:
    Optional[str] = None, auth: Optional[Dict] = None, force_overwrite:
    Optional[bool] = False, properties:
    Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] =
    True, ignore_conda_error: Optional[bool] = False, **kwargs) →
    Self
```

Loads model from model catalog.

#### Parameters

- **model\_id** (str) – The model OCID.
- **model\_file\_name** ((str, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((str, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((ModelProperties, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.

- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**compartment\_id**

((*str*, optional)) Compartment OCID. If not specified, the value will be taken from the environment variables.

**timeout**

((*int*, optional). Defaults to 10 seconds.) The connection timeout in seconds for the client.

**region: (str, optional). Defaults to *None*.**

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**Returns**

An instance of *GenericModel* class.

**Return type**

*Self*

```
classmethod from_model_deployment(model_deployment_id: str, model_file_name: Optional[str] =
    None, artifact_dir: Optional[str] = None, auth: Optional[Dict] =
    None, force_overwrite: Optional[bool] = False, properties:
    Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] =
    True, ignore_conda_error: Optional[bool] = False, **kwargs) →
    Self
```

Loads model from model deployment.

**Parameters**

- **model\_deployment\_id** (*str*) – The model deployment OCID.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((*str*, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((*ModelProperties*, optional). Defaults to *None*.) – *ModelProperties* object required to save and deploy model.

- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –
  - compartment\_id**  
[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.
  - timeout**  
[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.
  - region: (str, optional). Defaults to None.**  
The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**Returns**

An instance of GenericModel class.

**Return type**

Self

**get\_data\_serializer()**

Gets data serializer.

**Returns**

object

**Return type**

ads.model.Serializer object.

**get\_model\_serializer()**

Gets model serializer.

**introspect()** → DataFrame

Conducts introspection.

**Returns**

A pandas DataFrame which contains the introspection results.

**Return type**

pandas.DataFrame

**property metadata\_custom**

**property metadata\_provenance**

**property metadata\_taxonomy**

**property model\_deployment\_id**

**property model\_id**

**model\_input\_serializer\_type**

alias of ModelInputSerializerType

**model\_save\_serializer\_type**

alias of PyTorchModelSerializerType

**populate\_metadata**(*use\_case\_type*: Optional[str] = None, *data\_sample*: Optional[ADSDData] = None, *X\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *y\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *training\_script\_path*: Optional[str] = None, *training\_id*: Optional[str] = None, *ignore\_pending\_changes*: bool = True, *max\_col\_num*: int = 2000, *ignore\_conda\_error*: bool = False)

Populates input schema and output schema. If the schema exceeds the limit of 32kb, save as json files to the artifact directory.

**Parameters**

- **use\_case\_type**((str, optional). Defaults to None.) – The use case type of the model.
- **data\_sample**((ADSDData, optional). Defaults to None.) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path**(str. Defaults to None.) – Training script path.
- **training\_id**((str, optional). Defaults to None.) – The training model OCID.
- **ignore\_pending\_changes** (bool. Defaults to False.) – Ignore the pending changes in git.
- **max\_col\_num** ((int, optional). Defaults to utils.DATA\_SCHEMA\_MAX\_COL\_NUM.) – The maximum number of columns allowed in auto generated schema.

**Returns**

Nothing.

**Return type**

None

**populate\_schema**(*data\_sample*: Optional[ADSDData] = None, *X\_sample*: Optional[Union[List, Tuple, DataFrame, Series, ndarray]] = None, *y\_sample*: Optional[Union[List, Tuple, DataFrame, Series, ndarray]] = None, *max\_col\_num*: int = 2000)

Populate input and output schemas. If the schema exceeds the limit of 32kb, save as json files to the artifact dir.

**Parameters**

- **data\_sample**(ADSDData) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample**(Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]) – A sample of input data that will be used to generate the input schema.

- **y\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*) – A sample of output data that will be used to generate the output schema.
- **max\_col\_num** (*((int, optional). Defaults to utils.DATA\_SCHEMA\_MAX\_COL\_NUM.)*) – The maximum number of columns allowed in auto generated schema.

**predict** (*data: Optional[Any] = None, auto\_serialize\_data: bool = True, \*\*kwargs*) → Dict[str, Any]

Returns prediction of input data run against the model deployment endpoint.

## Examples

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.predict(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.predict(
...     image="oci://<bucket>@<tenancy>/myimage.png",
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

## Parameters

- **data** (*Any*) – Data for the prediction for onnx models, for local serialization method, data can be the data types that each framework support.
- **auto\_serialize\_data** (*bool.*) – Whether to auto serialize input data. Defaults to *False* for GenericModel, and *True* for other frameworks. *data* required to be json serializable if *auto\_serialize\_data=False*. If *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.
- **kwargs** – *content\_type*: str, used to indicate the media type of the resource. *image*: PIL.Image Object or uri for the image.

A valid string path for image file can be local path, http(s), oci, s3, gs.

### storage\_options: dict

Passed to *fsspec.open* for a particular storage connection. Please see *fsspec* (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.

## Returns

Dictionary with the predicted values.

## Return type

Dict[str, Any]

## Raises

- **NotActiveDeploymentError** – If model deployment process was not started or not finished yet.
- **ValueError** – If *data* is empty or not JSON serializable.

**prepare**(*inference\_conda\_env*: Optional[str] = None, *inference\_python\_version*: Optional[str] = None, *training\_conda\_env*: Optional[str] = None, *training\_python\_version*: Optional[str] = None, *model\_file\_name*: Optional[str] = None, *as\_onnx*: bool = False, *initial\_types*: Optional[List[Tuple]] = None, *force\_overwrite*: bool = False, *namespace*: str = 'id19sferra6z', *use\_case\_type*: Optional[str] = None, *X\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *y\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *training\_script\_path*: Optional[str] = None, *training\_id*: Optional[str] = None, *ignore\_pending\_changes*: bool = True, *max\_col\_num*: int = 2000, *ignore\_conda\_error*: bool = False, *\*\*kwargs*: Dict) → *GenericModel*

Prepare and save the score.py, serialized model and runtime.yaml file.

### Parameters

- **inference\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **inference\_python\_version** ((str, optional). Defaults to None.) – Python version which will be used in deployment.
- **training\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack. If *training\_conda\_env* is not provided, *training\_conda\_env* will use the same value of *inference\_conda\_env*.
- **training\_python\_version** ((str, optional). Defaults to None.) – Python version used during training.
- **model\_file\_name** ((str, optional). Defaults to None.) – Name of the serialized model. Will be auto generated if not provided.
- **as\_onnx** ((bool, optional). Defaults to False.) – Whether to serialize as onnx model.
- **initial\_types** ((list[Tuple], optional).) – Defaults to None. Only used for SklearnModel, LightGBMModel and XGBoostModel. Each element is a tuple of a variable name and a type. Check this link [http://onnx.ai/sklearn-onnx/api\\_summary.html#id2](http://onnx.ai/sklearn-onnx/api_summary.html#id2) for more explanation and examples for *initial\_types*.
- **force\_overwrite** ((bool, optional). Defaults to False.) – Whether to overwrite existing files.
- **namespace** ((str, optional).) – Namespace of region. This is used for identifying which region the service pack is from when you pass a slug to *inference\_conda\_env* and *training\_conda\_env*.
- **use\_case\_type** (str) – The use case type of the model. Use it through *UseCaseType* class or string provided in *UseCaseType*. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with *UseCaseType* class to see all supported types.
- **X\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (str. Defaults to None.) – Training script path.

- **training\_id** ((*str*, *optional*). Defaults to value from environment variables.) – The training OCID for model. Can be notebook session or job OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – whether to ignore the pending changes in the git.
- **max\_col\_num** ((*int*, *optional*). Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – Do not generate the input schema if the input has more than this number of features(columns).
- **ignore\_conda\_error** ((*bool*, *optional*). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**impute\_values: (dict, optional).**

The dictionary where the key is the column index(or names is accepted for pandas dataframe) and the value is the impute value for the corresponding column.

#### Raises

- **FileExistsError** – If files already exist but *force\_overwrite* is *False*.
- **ValueError** – If *inference\_python\_version* is not provided, but also cannot be found through manifest file.

#### Returns

An instance of *GenericModel* class.

#### Return type

*GenericModel*

**prepare\_save\_deploy**(*inference\_conda\_env: Optional[str] = None, inference\_python\_version: Optional[str] = None, training\_conda\_env: Optional[str] = None, training\_python\_version: Optional[str] = None, model\_file\_name: Optional[str] = None, as\_onnx: bool = False, initial\_types: Optional[List[Tuple]] = None, force\_overwrite: bool = False, namespace: str = 'id19sfcr6z', use\_case\_type: Optional[str] = None, X\_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, y\_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, training\_script\_path: Optional[str] = None, training\_id: Optional[str] = None, ignore\_pending\_changes: bool = True, max\_col\_num: int = 2000, ignore\_conda\_error: bool = False, model\_display\_name: Optional[str] = None, model\_description: Optional[str] = None, model\_freeform\_tags: Optional[dict] = None, model\_defined\_tags: Optional[dict] = None, ignore\_introspection: Optional[bool] = False, wait\_for\_completion: Optional[bool] = True, deployment\_display\_name: Optional[str] = None, deployment\_description: Optional[str] = None, deployment\_instance\_shape: Optional[str] = None, deployment\_instance\_count: Optional[int] = None, deployment\_bandwidth\_mbps: Optional[int] = None, deployment\_log\_group\_id: Optional[str] = None, deployment\_access\_log\_id: Optional[str] = None, deployment\_predict\_log\_id: Optional[str] = None, deployment\_memory\_in\_gbs: Optional[float] = None, deployment\_ocpus: Optional[float] = None, deployment\_image: Optional[str] = None, bucket\_uri: Optional[str] = None, overwrite\_existing\_artifact: Optional[bool] = True, remove\_existing\_artifact: Optional[bool] = True, model\_version\_set: Optional[Union[str, ModelVersionSet]] = None, version\_label: Optional[str] = None, \*\*kwargs: Dict) → *ModelDeployment**

Shortcut for prepare, save and deploy steps.

#### Parameters



- **inference\_conda\_env** ((*str*, optional). Defaults to *None*.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **inference\_python\_version** ((*str*, optional). Defaults to *None*.) – Python version which will be used in deployment.
- **training\_conda\_env** ((*str*, optional). Defaults to *None*.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack. If *training\_conda\_env* is not provided, *training\_conda\_env* will use the same value of *training\_conda\_env*.
- **training\_python\_version** ((*str*, optional). Defaults to *None*.) – Python version used during training.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – Name of the serialized model.
- **as\_onnx** ((*bool*, optional). Defaults to *False*.) – Whether to serialize as onnx model.
- **initial\_types** ((*list*[*Tuple*], optional).) – Defaults to *None*. Only used for SklearnModel, LightGBMModel and XGBoostModel. Each element is a tuple of a variable name and a type. Check this link [http://onnx.ai/sklearn-onnx/api\\_summary.html#id2](http://onnx.ai/sklearn-onnx/api_summary.html#id2) for more explanation and examples for *initial\_types*.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files.
- **namespace** ((*str*, optional).) – Namespace of region. This is used for identifying which region the service pack is from when you pass a slug to *inference\_conda\_env* and *training\_conda\_env*.
- **use\_case\_type** (*str*) – The use case type of the model. Use it through *UseCaseType* class or string provided in *UseCaseType*. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with *UseCaseType* class to see all supported types.
- **X\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (*str*. Defaults to *None*.) – Training script path.
- **training\_id** ((*str*, optional). Defaults to value from environment variables.) – The training OCID for model. Can be notebook session or job OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – whether to ignore the pending changes in the git.
- **max\_col\_num** ((*int*, optional). Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – Do not generate the input schema if the input has more than this number of features(columns).
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.

- **model\_display\_name** *((str, optional). Defaults to None.)* – The name of the model. If a `model_display_name` is not provided in `kwargs`, a randomly generated easy to remember name with timestamp will be generated, like `'strange-spider-2022-08-17-23:55.02'`.
- **model\_description** *((str, optional). Defaults to None.)* – The description of the model.
- **model\_freeform\_tags** *(Dict(str, str), Defaults to None.)* – Freeform tags for the model.
- **model\_defined\_tags** *((Dict(str, dict(str, object)), optional). Defaults to None.)* – Defined tags for the model.
- **ignore\_introspection** *((bool, optional). Defaults to None.)* – Determine whether to ignore the result of model introspection or not. If set to `True`, the save will ignore all model introspection errors.
- **wait\_for\_completion** *((bool, optional). Defaults to True.)* – Flag set for whether to wait for deployment to complete before proceeding.
- **deployment\_display\_name** *((str, optional). Defaults to None.)* – The name of the model deployment. If a `deployment_display_name` is not provided in `kwargs`, a randomly generated easy to remember name with timestamp will be generated, like `'strange-spider-2022-08-17-23:55.02'`.
- **description** *((str, optional). Defaults to None.)* – The description of the model.
- **deployment\_instance\_shape** *((str, optional). Default to VM.Standard2.1.)* – The shape of the instance used for deployment.
- **deployment\_instance\_count** *((int, optional). Defaults to 1.)* – The number of instance used for deployment.
- **deployment\_bandwidth\_mbps** *((int, optional). Defaults to 10.)* – The bandwidth limit on the load balancer in Mbps.
- **deployment\_log\_group\_id** *((str, optional). Defaults to None.)* – The oci logging group id. The access log and predict log share the same log group.
- **deployment\_access\_log\_id** *((str, optional). Defaults to None.)* – The access log OCID for the access logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_predict\_log\_id** *((str, optional). Defaults to None.)* – The predict log OCID for the predict logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_memory\_in\_gbs** *((float, optional). Defaults to None.)* – Specifies the size of the memory of the model deployment instance in GBs.
- **deployment\_ocpus** *((float, optional). Defaults to None.)* – Specifies the ocpu count of the model deployment instance.
- **deployment\_image** *((str, optional). Defaults to None.)* – The OCIR path of docker container image. Required for deploying model on container runtime.
- **bucket\_uri** *((str, optional). Defaults to None.)* – The OCI Object Storage URI where model artifacts will be copied to. The `bucket_uri` is only necessary for downloading large artifacts with size is greater than 2GB. Example: `oci://<bucket_name>@<namespace>/prefix/`.

- **overwrite\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **model\_version\_set** ((*Union[str, ModelVersionSet]*, optional). Defaults to *None*.) – The Model version set OCID, or name, or *ModelVersionSet* instance.
- **version\_label** ((*str*, optional). Defaults to *None*.) – The model version label.
- **kwargs** –

**impute\_values: (dict, optional).**

The dictionary where the key is the column index(or names is accepted for pandas dataframe) and the value is the impute value for the corresponding column.

**project\_id: (str, optional).**

Project OCID. If not specified, the value will be taken either from the environment variables or model properties.

**compartment\_id**

[(*str*, optional).] Compartment OCID. If not specified, the value will be taken either from the environment variables or model properties.

**image\_digest: (str, optional). Defaults to None.**

The digest of docker container image.

**cmd: (List, optional). Defaults to empty.**

The command line arguments for running docker container image.

**entrypoint: (List, optional). Defaults to empty.**

The entrypoint for running docker container image.

**server\_port: (int, optional). Defaults to 8080.**

The server port for docker container image.

**health\_check\_port: (int, optional). Defaults to 8080.**

The health check port for docker container image.

**deployment\_mode: (str, optional). Defaults to HTTPS\_ONLY.**

The deployment mode. Allowed values are: HTTPS\_ONLY and STREAM\_ONLY.

**input\_stream\_ids: (List, optional). Defaults to empty.**

The input stream ids. Required for STREAM\_ONLY mode.

**output\_stream\_ids: (List, optional). Defaults to empty.**

The output stream ids. Required for STREAM\_ONLY mode.

**environment\_variables: (Dict, optional). Defaults to empty.**

The environment variables for model deployment.

**timeout: (int, optional). Defaults to 10 seconds.**

The connection timeout in seconds for the client.

**max\_wait\_time**

[(int, optional). Defaults to 1200 seconds.] Maximum amount of time to wait in seconds. Negative implies infinite wait time.

**poll\_interval**

[(int, optional). Defaults to 10 seconds.] Poll interval in seconds.

**freeform\_tags:** (Dict[str, str], optional). Defaults to None.

Freeform tags of the model deployment.

**defined\_tags:** (Dict[str, dict[str, object]], optional). Defaults to None.

Defined tags of the model deployment.

**region:** (str, optional). Defaults to None.

The destination Object Storage bucket region. By default the value will be extracted from the `OCI_REGION_METADATA` environment variables.

Also can be any keyword argument for initializing the `ads.model.deployment.ModelDeploymentProperties`. See

`ads.model.deployment.ModelDeploymentProperties()` for details.

#### Returns

The ModelDeployment instance.

#### Return type

[\*ModelDeployment\*](#)

#### Raises

- **FileExistsError** – If files already exist but `force_overwrite` is False.
- **ValueError** – If `inference_python_version` is not provided, but also cannot be found through manifest file.

**reload()** → [\*GenericModel\*](#)

Reloads the model artifact files: `score.py` and the `runtime.yaml`.

#### Returns

An instance of GenericModel class.

#### Return type

[\*GenericModel\*](#)

**reload\_runtime\_info()** → None

Reloads the model artifact file: `runtime.yaml`.

#### Returns

Nothing.

#### Return type

None

**restart\_deployment**(`max_wait_time: int = 1200, poll_interval: int = 10`) → [\*ModelDeployment\*](#)

Restarts the current deployment.

#### Parameters

- **max\_wait\_time** ((int, optional). Defaults to 1200 seconds.) – Maximum amount of time to wait for activate or deactivate in seconds. Total amount of time to wait for restart deployment is twice as the value. Negative implies infinite wait time.
- **poll\_interval** ((int, optional). Defaults to 10 seconds.) – Poll interval in seconds.

#### Returns

The ModelDeployment instance.

#### Return type

[\*ModelDeployment\*](#)

**save**(*display\_name*: *Optional*[*str*] = *None*, *description*: *Optional*[*str*] = *None*, *freeform\_tags*: *Optional*[*dict*] = *None*, *defined\_tags*: *Optional*[*dict*] = *None*, *ignore\_introspection*: *Optional*[*bool*] = *False*, *bucket\_uri*: *Optional*[*str*] = *None*, *overwrite\_existing\_artifact*: *Optional*[*bool*] = *True*, *remove\_existing\_artifact*: *Optional*[*bool*] = *True*, *model\_version\_set*: *Optional*[*Union*[*str*, *ModelVersionSet*]] = *None*, *version\_label*: *Optional*[*str*] = *None*, *\*\*kwargs*) → *str*

Saves model artifacts to the model catalog.

#### Parameters

- **display\_name** ((*str*, *optional*). Defaults to *None*.) – The name of the model. If a *display\_name* is not provided in *kwargs*, randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55:02'.
  - **description** ((*str*, *optional*). Defaults to *None*.) – The description of the model.
  - **freeform\_tags** (*Dict*(*str*, *str*), Defaults to *None*.) – Freeform tags for the model.
  - **defined\_tags** ((*Dict*(*str*, *dict*(*str*, *object*)), *optional*). Defaults to *None*.) – Defined tags for the model.
  - **ignore\_introspection** ((*bool*, *optional*). Defaults to *None*.) – Determine whether to ignore the result of model introspection or not. If set to *True*, the save will ignore all model introspection errors.
  - **bucket\_uri** ((*str*, *optional*). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for uploading large artifacts which size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
  - **overwrite\_existing\_artifact** ((*bool*, *optional*). Defaults to *True*.) – Overwrite target bucket artifact if exists.
  - **remove\_existing\_artifact** ((*bool*, *optional*). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
  - **model\_version\_set** ((*Union*[*str*, *ModelVersionSet*], *optional*). Defaults to *None*.) – The model version set OCID, or model version set name, or *ModelVersionSet* instance.
  - **version\_label** ((*str*, *optional*). Defaults to *None*.) – The model version label.
  - **kwargs** –
    - project\_id**: (*str*, *optional*).  
Project OCID. If not specified, the value will be taken either from the environment variables or model properties.
    - compartment\_id**  
[(*str*, *optional*).] Compartment OCID. If not specified, the value will be taken either from the environment variables or model properties.
    - region**: (*str*, *optional*). Defaults to *None*.  
The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.
    - timeout**: (*int*, *optional*). Defaults to 10 seconds.  
The connection timeout in seconds for the client.
- Also can be any attribute that *oci.data\_science.models.Model* accepts.

**Raises**

**`RuntimeInfoInconsistencyError`** – When `.runtime_info` is not synched with `runtime.yaml` file.

**Returns**

The model id.

**Return type**

str

**property** `schema_input`

**property** `schema_output`

**`serialize_model`**(*as\_onnx: bool = False, force\_overwrite: bool = False, X\_sample: Optional[Union[Dict, str, List, Tuple, ndarray, Series, DataFrame]] = None, use\_torch\_script: Optional[bool] = None, \*\*kwargs*) → None

Serialize and save Pytorch model using ONNX or model specific method.

**Parameters**

- **`as_onnx`** ((bool, optional). Defaults to False.) – If set as True, convert into ONNX model.
- **`force_overwrite`** ((bool, optional). Defaults to False.) – If set as True, overwrite serialized model if exists.
- **`X_sample`** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of input data that will be used to generate input schema and detect onnx\_args.
- **`use_torch_script`** ((bool, optional). Defaults to None (If the default value has not been changed, it will be set as False).) – If set as True, the model will be serialized as a TorchScript program. Check [https://pytorch.org/tutorials/beginner/saving\\_loading\\_models.html#export-load-model-in-torchscript-format](https://pytorch.org/tutorials/beginner/saving_loading_models.html#export-load-model-in-torchscript-format) for more details. If set as False, it will only save the trained model's learned parameters, and the score.py need to be modified to construct the model class instance first. Check [https://pytorch.org/tutorials/beginner/saving\\_loading\\_models.html#save-load-state-dict-recommended](https://pytorch.org/tutorials/beginner/saving_loading_models.html#save-load-state-dict-recommended) for more details.
- **`**kwargs`** (optional params used to serialize pytorch model to onnx,) –
- **`following`** (including the) – `onnx_args`: (tuple or torch.Tensor), default to None Contains model inputs such that `model(onnx_args)` is a valid invocation of the model. Can be structured either as: 1) ONLY A TUPLE OF ARGUMENTS; 2) A TENSOR; 3) A TUPLE OF ARGUMENTS ENDING WITH A DICTIONARY OF NAMED ARGUMENTS  
`input_names`: (List[str], optional). Names to assign to the input nodes of the graph, in order.  
`output_names`: (List[str], optional). Names to assign to the output nodes of the graph, in order.  
`dynamic_axes`: (dict, optional), default to None. Specify axes of tensors as dynamic (i.e. known only at run-time).

**Returns**

Nothing.

**Return type**

None

**`set_model_input_serializer`**(*model\_input\_serializer: Union[str, SERDE]*)

Registers serializer used for serializing data passed in `verify/predict`.

## Examples

```
>>> generic_model.set_model_input_serializer(GenericModel.model_input_
↳serializer_type.CLOUDPICKLE)
```

```
>>> # Register serializer by passing the name of it.
>>> generic_model.set_model_input_serializer("cloudpickle")
```

```
>>> # Example of creating customized model input serializer and registering it.
>>> from ads.model import SERDE
>>> from ads.model.generic_model import GenericModel
```

```
>>> class MySERDE(SERDE):
...     def __init__(self):
...         super().__init__()
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
...     def deserialize(self, data):
...         deserialized_data = 2
...         return deserialized_data
```

```
>>> class Toy:
...     def predict(self, x):
...         return x ** 2
```

```
>>> generic_model = GenericModel(
...     estimator=Toy(),
...     artifact_dir=tempfile.mkdtemp(),
...     model_input_serializer=MySERDE()
... )
```

```
>>> # Or register the serializer after creating model instance.
>>> generic_model.set_model_input_serializer(MySERDE())
```

### Parameters

**model\_input\_serializer** ((str, or ads.model.SERDE)) – name of the serializer, or instance of SERDE.

**set\_model\_save\_serializer**(model\_save\_serializer: Union[str, SERDE])

Registers serializer used for saving model.

## Examples

```
>>> generic_model.set_model_save_serializer(GenericModel.model_save_serializer_
↳ type.CLOUDPICKLE)
```

```
>>> # Register serializer by passing the name of it.
>>> generic_model.set_model_save_serializer("cloudpickle")
```

```
>>> # Example of creating customized model save serializer and registering it.
>>> from ads.model import SERDE
>>> from ads.model.generic_model import GenericModel
```

```
>>> class MySERDE(SERDE):
...     def __init__(self):
...         super().__init__()
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
...     def deserialize(self, data):
...         deserialized_data = 2
...         return deserialized_data
```

```
>>> class Toy:
...     def predict(self, x):
...         return x ** 2
```

```
>>> generic_model = GenericModel(
...     estimator=Toy(),
...     artifact_dir=tempfile.mkdtemp(),
...     model_save_serializer=MySERDE()
... )
```

```
>>> # Or register the serializer after creating model instance.
>>> generic_model.set_model_save_serializer(MySERDE())
```

### Parameters

**model\_save\_serializer** ((ads.model.SERDE or str)) – name of the serializer or instance of SERDE.

**summary\_status()** → DataFrame

A summary table of the current status.

### Returns

The summary stable of the current status.

### Return type

pd.DataFrame

**update(\*\*kwargs)** → *GenericModel*

Updates model metadata in the Model Catalog. Updates only metadata information. The model artifacts are immutable and cannot be updated.



**Parameters****kwargs** –**display\_name: (str, optional). Defaults to None.**

The name of the model.

**description: (str, optional). Defaults to None.**

The description of the model.

**freeform\_tags**

[Dict(str, str), Defaults to None.] Freeform tags for the model.

**defined\_tags**

[(Dict(str, dict(str, object)), optional). Defaults to None.] Defined tags for the model.

**version\_label: (str, optional). Defaults to None.**

The model version label.

Additional kwargs arguments. Can be any attribute that *oci.data\_science.models.Model* accepts.**Returns**An instance of *GenericModel* (self).**Return type***GenericModel***Raises****ValueError** – if model not saved to the Model Catalog.

**classmethod update\_deployment**(*model\_deployment\_id: Optional[str] = None, properties: Optional[Union[ModelDeploymentProperties, dict]] = None, wait\_for\_completion: bool = True, max\_wait\_time: int = 1200, poll\_interval: int = 10, \*\*kwargs*) → *ModelDeployment*

Updates a model deployment.

You can update *model\_deployment\_configuration\_details* and change *instance\_shape* and *model\_id* when the model deployment is in the *ACTIVE* lifecycle state. The *bandwidth\_mbps* or *instance\_count* can only be updated while the model deployment is in the *INACTIVE* state. Changes to the *bandwidth\_mbps* or *instance\_count* will take effect the next time the *ActivateModelDeployment* action is invoked on the model deployment resource.

**Examples**

```
>>> # Update access log id, freeform tags and description for the model_
↳ deployment
>>> model.update_deployment(
>>>     properties=ModelDeploymentProperties(
>>>         access_log_id=<log_ocid>,
>>>         description="Description for Custom Model",
>>>         freeform_tags={"key": "value"},
>>>     )
>>> )
```

**Parameters**

- **model\_deployment\_id** (*str.*) – The model deployment OCID. Defaults to *None*. If the method called on instance level, then *self.model\_deployment.model\_deployment\_id* will be used.
- **properties** (*ModelDeploymentProperties* or *dict*) – The properties for updating the deployment.
- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to complete before proceeding. Defaults to *True*.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).
- **kwargs** –

**auth:** (*Dict*, optional). Defaults to *None*.

The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.

#### Returns

An instance of *ModelDeployment* class.

#### Return type

*ModelDeployment*

**upload\_artifact**(*uri: str, auth: Optional[Dict] = None, force\_overwrite: Optional[bool] = False*) → *None*

Uploads model artifacts to the provided *uri*. The artifacts will be zipped before uploading.

#### Parameters

- **uri** (*str*) – The destination location for the model artifacts, which can be a local path or OCI object storage URI. Examples: 

```
>>> upload_artifact(uri="/some/local/folder/")
```

```
>>> upload_artifact(uri="oci://bucket@namespace/prefix/")
```
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.
- **force\_overwrite** (*bool*) – Overwrite target\_dir if exists.

**verify**(*data: Optional[Any] = None, reload\_artifacts: bool = True, auto\_serialize\_data: bool = True, \*\*kwargs*) → *Dict[str, Any]*

Test if deployment works in local environment.

#### Examples

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.verify(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.verify(
...     image="oci://<bucket>@<tenancy>/myimage.png",
```

(continues on next page)

(continued from previous page)

```
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

**Parameters**

- **data** (*Any*) – Data used to test if deployment works in local environment.
- **reload\_artifacts** (*bool. Defaults to True.*) – Whether to reload artifacts or not.
- **auto\_serialize\_data** (*bool.*) – Whether to auto serialize input data. Defaults to *False* for *GenericModel*, and *True* for other frameworks. *data* required to be json serializable if *auto\_serialize\_data=False*. if *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.
- **kwargs** – *content\_type*: str, used to indicate the media type of the resource. *image*: PIL.Image Object or uri for the image.

A valid string path for image file can be local path, http(s), oci, s3, gs.

**storage\_options: dict**

Passed to *fsspec.open* for a particular storage connection. Please see *fsspec* (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.

**Returns**

A dictionary which contains prediction results.

**Return type**

Dict

**ads.model.framework.sklearn\_model module**

```
class ads.model.framework.sklearn_model.SklearnModel(estimator: Callable, artifact_dir: Optional[str]
= None, properties:
Optional[ModelProperties] = None, auth:
Optional[Dict] = None, model_save_serializer:
Optional[SERDE] = 'joblib',
model_input_serializer: Optional[SERDE] =
None, **kwargs)
```

Bases: *FrameworkSpecificModel*

SklearnModel class for estimators from sklearn framework.

**algorithm**

The algorithm of the model.

**Type**

str

**artifact\_dir**

Artifact directory to store the files needed for deployment.

**Type**

str

**auth**

Default authentication is set using the `ads.set_auth` API. To override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create an authentication signer to instantiate an IdentityClient object.

**Type**

Dict

**estimator**

A trained sklearn estimator/model using scikit-learn.

**Type**

Callable

**framework**

“scikit-learn”, the framework name of the model.

**Type**

str

**hyperparameter**

The hyperparameters of the estimator.

**Type**

dict

**metadata\_custom**

The model custom metadata.

**Type**

*ModelCustomMetadata*

**metadata\_provenance**

The model provenance metadata.

**Type**

*ModelProvenanceMetadata*

**metadata\_taxonomy**

The model taxonomy metadata.

**Type**

*ModelTaxonomyMetadata*

**model\_artifact**

This is built by calling prepare.

**Type**

*ModelArtifact*

**model\_deployment**

A ModelDeployment instance.

**Type**

*ModelDeployment*

**model\_file\_name**

Name of the serialized model.

**Type**

str

**model\_id**

The model ID.

**Type**

str

**properties**

ModelProperties object required to save and deploy model. For more details, check [https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model\\_properties](https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model_properties).

**Type**

*ModelProperties*

**runtime\_info**

A RuntimeInfo instance.

**Type**

*RuntimeInfo*

**schema\_input**

Schema describes the structure of the input data.

**Type**

*Schema*

**schema\_output**

Schema describes the structure of the output data.

**Type**

*Schema*

**serialize**

Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under artifact\_dir and update the score.py manually.

**Type**

bool

**version**

The framework version of the model.

**Type**

str

**delete\_deployment(...)**

Deletes the current model deployment.

**deploy(..., *\*\*kwargs*)**

Deploys a model.

**from\_model\_artifact(uri, model\_file\_name, artifact\_dir, ..., *\*\*kwargs*)**

Loads model from the specified folder, or zip/tar archive.

**from\_model\_catalog(model\_id, model\_file\_name, artifact\_dir, ..., *\*\*kwargs*)**

Loads model from model catalog.

**introspect(...)**

Runs model introspection.

**predict**(*data*, ...)

Returns prediction of input data run against the model deployment endpoint.

**prepare**(..., *\\*\*kwargs*)

Prepare and save the `score.py`, serialized model and `runtime.yaml` file.

**reload**(...)

Reloads the model artifact files: `score.py` and the `runtime.yaml`.

**save**(..., *\\*\*kwargs*)

Saves model artifacts to the model catalog.

**summary\_status**(...)

Gets a summary table of the current status.

**verify**(*data*, ...)

Tests if deployment works in local environment.

## Examples

```
>>> import tempfile
>>> from sklearn.model_selection import train_test_split
>>> from ads.model.framework.sklearn_model import SklearnModel
>>> from sklearn.linear_model import LogisticRegression
>>> from sklearn.datasets import load_iris
```

```
>>> iris = load_iris()
>>> X, y = iris.data, iris.target
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)
>>> sklearn_estimator = LogisticRegression()
>>> sklearn_estimator.fit(X_train, y_train)
```

```
>>> sklearn_model = SklearnModel(estimator=sklearn_estimator,
... artifact_dir=tmp_model_dir)
```

```
>>> sklearn_model.prepare(inference_conda_env="generalml_p37_cpu_v1", force_
↳ overwrite=True)
>>> sklearn_model.reload()
>>> sklearn_model.verify(X_test)
>>> sklearn_model.save()
>>> model_deployment = sklearn_model.deploy(wait_for_completion=False)
>>> sklearn_model.predict(X_test)
```

Initiates a `SklearnModel` instance.

### Parameters

- **estimator** (*Callable*) – Sklearn Model
- **artifact\_dir** (*str*) – Directory for generate artifact.
- **properties** ((*ModelProperties*, *optional*). Defaults to *None*.) – `ModelProperties` object required to save and deploy model.

- **auth** ((Dict, optional). Defaults to None.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **model\_save\_serializer** ((SERDE or str, optional). Defaults to None.) – Instance of `ads.model.SERDE`. Used for serialize/deserialize model.
- **model\_input\_serializer** ((SERDE, optional). Defaults to None.) – Instance of `ads.model.SERDE`. Used for serialize/deserialize data.

**Returns**

SklearnModel instance.

**Return type**

*SklearnModel*

**Examples**

```
>>> import tempfile
>>> from sklearn.model_selection import train_test_split
>>> from ads.model.framework.sklearn_model import SklearnModel
>>> from sklearn.linear_model import LogisticRegression
>>> from sklearn.datasets import load_iris
```

```
>>> iris = load_iris()
>>> X, y = iris.data, iris.target
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)
>>> sklearn_estimator = LogisticRegression()
>>> sklearn_estimator.fit(X_train, y_train)
```

```
>>> sklearn_model = SklearnModel(estimator=sklearn_estimator, artifact_dir=tempfile.
↳ makedirs())
>>> sklearn_model.prepare(inference_conda_env="dataexpl_p37_cpu_v3")
>>> sklearn_model.verify(X_test)
>>> sklearn_model.save()
>>> model_deployment = sklearn_model.deploy()
>>> sklearn_model.predict(X_test)
>>> sklearn_model.delete_deployment()
```

**classmethod delete**(*model\_id*: Optional[str] = None, *delete\_associated\_model\_deployment*: Optional[bool] = False, *delete\_model\_artifact*: Optional[bool] = False, *artifact\_dir*: Optional[str] = None, *\*\*kwargs*: Dict) → None

Deletes a model from Model Catalog.

**Parameters**

- **model\_id** ((str, optional). Defaults to None.) – The model OCID to be deleted. If the method called on instance level, then `self.model_id` will be used.
- **delete\_associated\_model\_deployment** ((bool, optional). Defaults to False.) – Whether associated model deployments need to be deleted or not.
- **delete\_model\_artifact** ((bool, optional). Defaults to False.) – Whether associated model artifacts need to be deleted or not.

- **artifact\_dir** ((str, optional). Defaults to *None*) – The local path to the model artifacts folder. If the method called on instance level, the *self.artifact\_dir* will be used by default.

**Return type**

None

**Raises**

**ValueError** – If *model\_id* not provided.

**delete\_deployment**(*wait\_for\_completion: bool = True*) → None

Deletes the current deployment.

**Parameters**

**wait\_for\_completion** ((bool, optional). Defaults to *True*.) – Whether to wait till completion.

**Return type**

None

**Raises**

**ValueError** – if there is not deployment attached yet.:

**deploy**(*wait\_for\_completion: Optional[bool] = True, display\_name: Optional[str] = None, description: Optional[str] = None, deployment\_instance\_shape: Optional[str] = None, deployment\_instance\_count: Optional[int] = None, deployment\_bandwidth\_mbps: Optional[int] = None, deployment\_log\_group\_id: Optional[str] = None, deployment\_access\_log\_id: Optional[str] = None, deployment\_predict\_log\_id: Optional[str] = None, deployment\_memory\_in\_gbs: Optional[float] = None, deployment\_ocpus: Optional[float] = None, deployment\_image: Optional[str] = None, \*\*kwargs: Dict*) → *ModelDeployment*

Deploys a model. The model needs to be saved to the model catalog at first. You can deploy the model on either conda or container runtime. The customized runtime allows you to bring your own service container. To deploy model on container runtime, make sure to build the container and push it to OCIR. For more information, see <https://docs.oracle.com/en-us/iaas/data-science/using/mod-dep-byoc.htm>.

## Example

```
# This is an example to deploy model on container runtime >>> model = Generic-
Model(estimator=estimator, artifact_dir=tempfile.mkdtemp()) >>> model.summary_status() >>>
model.prepare( ... model_file_name="toy_model.pkl", ... ignore_conda_error=True, # set ig-
nore_conda_error=True for container runtime ... force_overwrite=True ... ) >>> model.verify() >>>
model.save() >>> model.deploy( ... deployment_image="iad.ocir.io/<namespace>/<image>:<tag>",
... entrypoint=["python", "/opt/ds/model/deployed_model/api.py"], ... server_port=5000, ...
health_check_port=5000, ... environment_variables={"key":"value"} ... )
```

**Parameters**

- **wait\_for\_completion** ((bool, optional). Defaults to *True*.) – Flag set for whether to wait for deployment to complete before proceeding.
- **display\_name** ((str, optional). Defaults to *None*.) – The name of the model. If a display\_name is not provided in kwargs, a randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55:02'.
- **description** ((str, optional). Defaults to *None*.) – The description of the model.
- **deployment\_instance\_shape** ((str, optional). Default to *VM.Standard2.1*.) – The shape of the instance used for deployment.



- **deployment\_instance\_count** *((int, optional). Defaults to 1.)* – The number of instance used for deployment.
- **deployment\_bandwidth\_mbps** *((int, optional). Defaults to 10.)* – The bandwidth limit on the load balancer in Mbps.
- **deployment\_memory\_in\_gbs** *((float, optional). Defaults to None.)* – Specifies the size of the memory of the model deployment instance in GBs.
- **deployment\_ocpus** *((float, optional). Defaults to None.)* – Specifies the ocpu count of the model deployment instance.
- **deployment\_log\_group\_id** *((str, optional). Defaults to None.)* – The oci logging group id. The access log and predict log share the same log group.
- **deployment\_access\_log\_id** *((str, optional). Defaults to None.)* – The access log OCID for the access logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_predict\_log\_id** *((str, optional). Defaults to None.)* – The predict log OCID for the predict logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_image** *((str, optional). Defaults to None.)* – The OCIR path of docker container image. Required for deploying model on container runtime.
- **kwargs** –

**project\_id: (str, optional).**

Project OCID. If not specified, the value will be taken from the environment variables.

**compartment\_id**

*[(str, optional).]* Compartment OCID. If not specified, the value will be taken from the environment variables.

**max\_wait\_time**

*[(int, optional). Defaults to 1200 seconds.]* Maximum amount of time to wait in seconds. Negative implies infinite wait time.

**poll\_interval**

*[(int, optional). Defaults to 10 seconds.]* Poll interval in seconds.

**freeform\_tags: (Dict[str, str], optional). Defaults to None.**

Freeform tags of the model deployment.

**defined\_tags: (Dict[str, dict[str, object]], optional). Defaults to None.**

Defined tags of the model deployment.

**image\_digest: (str, optional). Defaults to None.**

The digest of docker container image.

**cmd: (List, optional). Defaults to empty.**

The command line arguments for running docker container image.

**entrypoint: (List, optional). Defaults to empty.**

The entrypoint for running docker container image.

**server\_port: (int, optional). Defaults to 8080.**

The server port for docker container image.

**health\_check\_port: (int, optional). Defaults to 8080.**

The health check port for docker container image.

**deployment\_mode: (str, optional). Defaults to HTTPS\_ONLY.**

The deployment mode. Allowed values are: HTTPS\_ONLY and STREAM\_ONLY.

**input\_stream\_ids: (List, optional). Defaults to empty.**

The input stream ids. Required for STREAM\_ONLY mode.

**output\_stream\_ids: (List, optional). Defaults to empty.**

The output stream ids. Required for STREAM\_ONLY mode.

**environment\_variables: (Dict, optional). Defaults to empty.**

The environment variables for model deployment.

Also can be any keyword argument for initializing the  
*ads.model.deployment.ModelDeploymentProperties*. See

*ads.model.deployment.ModelDeploymentProperties()* for details.

#### Returns

The ModelDeployment instance.

#### Return type

*ModelDeployment*

#### Raises

**ValueError** – If *model\_id* is not specified.

```
evaluate(X: Union[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]], _SupportsArray[dtype],
Sequence[_SupportsArray[dtype]], Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
y: Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]], _SupportsArray[dtype],
Sequence[_SupportsArray[dtype]], Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
y_pred: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
= None, y_score: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
= None, X_train: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
= None, y_train: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
= None, classes: Optional[List] = None, positive_class: Optional[str] = None, legend_labels:
Optional[dict] = None, perfect: bool = True, filename: Optional[str] = None, use_case_type:
Optional[str] = None)
```

Creates an ads evaluation report.

### Parameters

- **X (DataFrame-like)** – The data used to make a prediction. Can be set to None if *y\_preds* is given. (And *y\_scores* for more thorough analysis).

- **y** (*array-like*) – The true values corresponding to the input data
- **y\_pred** (*array-like, optional*) – The predictions from each model in the same order as the models
- **y\_score** (*array-like, optional*) – The predict\_proba from each model in the same order as the models
- **X\_train** (*DataFrame-like, optional*) – The data used to train the model
- **y\_train** (*array-like, optional*) – The true values corresponding to the input training data
- **classes** (*List or None, optional*) – A List of the possible labels for y, when evaluating a classification use case
- **positive\_class** (*str or int, optional*) – The class to report metrics for binary dataset. If the target classes is True or False, positive\_class will be set to True by default. If the dataset is multiclass or multilabel, this will be ignored.
- **legend\_labels** (*dict, optional*) – List of legend labels. Defaults to *None*. If legend\_labels not specified class names will be used for plots.
- **use\_case\_type** (*str, optional*) – The type of problem this model is solving. This can be set during *prepare()*. Examples: “binary\_classification”, “regression”, “multinomial\_classification” Full list of supported types can be found here: *ads.common.model\_metadata.UseCaseType*
- **filename** (*str, optional*) – If filename is given, the html report will be saved to the location specified.

## Examples

```
>>> import tempfile
>>> from ads.evaluations.evaluator import Evaluator
>>> from sklearn.tree import DecisionTreeClassifier
>>> from sklearn.datasets import make_classification
>>> from sklearn.model_selection import train_test_split
>>> from ads.model.framework.sklearn_model import SklearnModel
>>> from ads.common.model_metadata import UseCaseType
>>>
>>> X, y = make_classification(n_samples=1000)
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.3)
>>> est = DecisionTreeClassifier().fit(X_train, y_train)
>>> model = SklearnModel(estimator=est, artifact_dir=tempfile.mkdtemp())
>>> model.prepare(
>>>     inference_conda_env="generalml_p38_cpu_v1",
>>>     training_conda_env="generalml_p38_cpu_v1",
>>>     X_sample=X_test,
>>>     y_sample=y_test,
>>>     use_case_type=UseCaseType.BINARY_CLASSIFICATION,
>>> )
>>> model.evaluate(X_test, y_test, filename="report.html")
```

```
classmethod from_id(ocid: str, model_file_name: Optional[str] = None, artifact_dir: Optional[str] =  
None, auth: Optional[Dict] = None, force_overwrite: Optional[bool] = False,  
properties: Optional[Union[ModelProperties, Dict]] = None, bucket_uri:  
Optional[str] = None, remove_existing_artifact: Optional[bool] = True,  
ignore_conda_error: Optional[bool] = False, **kwargs) → Self
```

Loads model from model OCID or model deployment OCID.

#### Parameters

- **ocid** (*str*) – The model OCID or model deployment OCID.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((*str*, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((*ModelProperties*, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **kwargs** –

#### **compartment\_id**

[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

#### **timeout**

[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

#### Returns

An instance of GenericModel class.

#### Return type

Self

```
classmethod from_model_artifact(uri: str, model_file_name: Optional[str] = None, artifact_dir:  
Optional[str] = None, auth: Optional[Dict] = None,  
force_overwrite: Optional[bool] = False, properties:  
Optional[ModelProperties] = None, ignore_conda_error:  
Optional[bool] = False, **kwargs: dict) → Self
```

Loads model from a folder, or zip/tar archive.

#### Parameters

- **uri** (*str*) – The folder path, ZIP file path, or TAR file path. It could contain a serialized model(required) as well as any files needed for deployment including: serialized model,

runtime.yaml, score.py and etc. The content of the folder will be copied to the *artifact\_dir* folder.

- **model\_file\_name** ((str, optional). Defaults to *None*.) – The serialized model file name. Will be extracted from artifacts if not provided.
- **artifact\_dir** ((str, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((ModelProperties, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **ignore\_conda\_error** ((bool, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.

#### Returns

An instance of *GenericModel* class.

#### Return type

Self

#### Raises

**ValueError** – If *model\_file\_name* not provided.

```
classmethod from_model_catalog(model_id: str, model_file_name: Optional[str] = None, artifact_dir:
    Optional[str] = None, auth: Optional[Dict] = None, force_overwrite:
    Optional[bool] = False, properties:
    Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] =
    True, ignore_conda_error: Optional[bool] = False, **kwargs) →
    Self
```

Loads model from model catalog.

#### Parameters

- **model\_id** (str) – The model OCID.
- **model\_file\_name** ((str, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((str, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((ModelProperties, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.

- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**compartment\_id**

[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

**timeout**

[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

**region: (str, optional). Defaults to *None*.**

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**Returns**

An instance of *GenericModel* class.

**Return type**

Self

```
classmethod from_model_deployment(model_deployment_id: str, model_file_name: Optional[str] =
    None, artifact_dir: Optional[str] = None, auth: Optional[Dict] =
    None, force_overwrite: Optional[bool] = False, properties:
    Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] =
    True, ignore_conda_error: Optional[bool] = False, **kwargs) →
    Self
```

Loads model from model deployment.

**Parameters**

- **model\_deployment\_id** (*str*) – The model deployment OCID.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((*str*, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((*ModelProperties*, optional). Defaults to *None*.) – *ModelProperties* object required to save and deploy model.

- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –
  - compartment\_id**  
[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.
  - timeout**  
[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.
  - region: (str, optional). Defaults to None.**  
The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**Returns**

An instance of GenericModel class.

**Return type**

Self

**get\_data\_serializer()**

Gets data serializer.

**Returns**

**object**

**Return type**

ads.model.Serializer object.

**get\_model\_serializer()**

Gets model serializer.

**introspect()** → DataFrame

Conducts introspection.

**Returns**

A pandas DataFrame which contains the introspection results.

**Return type**

pandas.DataFrame

**property metadata\_custom**

**property metadata\_provenance**

**property metadata\_taxonomy**

**property model\_deployment\_id**

**property model\_id**



**model\_input\_serializer\_type**

alias of ModelInputSerializerType

**model\_save\_serializer\_type**

alias of SklearnModelSerializerType

**populate\_metadata**(*use\_case\_type*: Optional[str] = None, *data\_sample*: Optional[ADSDData] = None, *X\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *y\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *training\_script\_path*: Optional[str] = None, *training\_id*: Optional[str] = None, *ignore\_pending\_changes*: bool = True, *max\_col\_num*: int = 2000, *ignore\_conda\_error*: bool = False)

Populates input schema and output schema. If the schema exceeds the limit of 32kb, save as json files to the artifact directory.

**Parameters**

- **use\_case\_type**((str, optional). Defaults to None.) – The use case type of the model.
- **data\_sample**((ADSDData, optional). Defaults to None.) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path**(str. Defaults to None.) – Training script path.
- **training\_id**((str, optional). Defaults to None.) – The training model OCID.
- **ignore\_pending\_changes** (bool. Defaults to False.) – Ignore the pending changes in git.
- **max\_col\_num** ((int, optional). Defaults to utils.DATA\_SCHEMA\_MAX\_COL\_NUM.) – The maximum number of columns allowed in auto generated schema.

**Returns**

Nothing.

**Return type**

None

**populate\_schema**(*data\_sample*: Optional[ADSDData] = None, *X\_sample*: Optional[Union[List, Tuple, DataFrame, Series, ndarray]] = None, *y\_sample*: Optional[Union[List, Tuple, DataFrame, Series, ndarray]] = None, *max\_col\_num*: int = 2000)

Populate input and output schemas. If the schema exceeds the limit of 32kb, save as json files to the artifact dir.

**Parameters**

- **data\_sample**(ADSDData) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample**(Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]) – A sample of input data that will be used to generate the input schema.

- **y\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*) – A sample of output data that will be used to generate the output schema.
- **max\_col\_num** (*((int, optional). Defaults to utils.DATA\_SCHEMA\_MAX\_COL\_NUM.)*) – The maximum number of columns allowed in auto generated schema.

**predict** (*data: Optional[Any] = None, auto\_serialize\_data: bool = True, \*\*kwargs*) → Dict[str, Any]

Returns prediction of input data run against the model deployment endpoint.

## Examples

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.predict(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.predict(
...     image="oci://<bucket><tenancy>/myimage.png",
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

## Parameters

- **data** (*Any*) – Data for the prediction for onnx models, for local serialization method, data can be the data types that each framework support.
- **auto\_serialize\_data** (*bool.*) – Whether to auto serialize input data. Defaults to *False* for *GenericModel*, and *True* for other frameworks. *data* required to be json serializable if *auto\_serialize\_data=False*. If *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.
- **kwargs** – *content\_type*: str, used to indicate the media type of the resource. *image*: PIL.Image Object or uri for the image.

A valid string path for image file can be local path, http(s), oci, s3, gs.

### storage\_options: dict

Passed to *fsspec.open* for a particular storage connection. Please see *fsspec* (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.

## Returns

Dictionary with the predicted values.

## Return type

Dict[str, Any]

## Raises

- **NotActiveDeploymentError** – If model deployment process was not started or not finished yet.
- **ValueError** – If *data* is empty or not JSON serializable.

**prepare**(*inference\_conda\_env*: Optional[str] = None, *inference\_python\_version*: Optional[str] = None, *training\_conda\_env*: Optional[str] = None, *training\_python\_version*: Optional[str] = None, *model\_file\_name*: Optional[str] = None, *as\_onnx*: bool = False, *initial\_types*: Optional[List[Tuple]] = None, *force\_overwrite*: bool = False, *namespace*: str = 'id19sferra6z', *use\_case\_type*: Optional[str] = None, *X\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *y\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *training\_script\_path*: Optional[str] = None, *training\_id*: Optional[str] = None, *ignore\_pending\_changes*: bool = True, *max\_col\_num*: int = 2000, *ignore\_conda\_error*: bool = False, *\*\*kwargs*: Dict) → *GenericModel*

Prepare and save the score.py, serialized model and runtime.yaml file.

### Parameters

- **inference\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **inference\_python\_version** ((str, optional). Defaults to None.) – Python version which will be used in deployment.
- **training\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack. If *training\_conda\_env* is not provided, *training\_conda\_env* will use the same value of *inference\_conda\_env*.
- **training\_python\_version** ((str, optional). Defaults to None.) – Python version used during training.
- **model\_file\_name** ((str, optional). Defaults to None.) – Name of the serialized model. Will be auto generated if not provided.
- **as\_onnx** ((bool, optional). Defaults to False.) – Whether to serialize as onnx model.
- **initial\_types** ((list[Tuple], optional).) – Defaults to None. Only used for SklearnModel, LightGBMModel and XGBoostModel. Each element is a tuple of a variable name and a type. Check this link [http://onnx.ai/sklearn-onnx/api\\_summary.html#id2](http://onnx.ai/sklearn-onnx/api_summary.html#id2) for more explanation and examples for *initial\_types*.
- **force\_overwrite** ((bool, optional). Defaults to False.) – Whether to overwrite existing files.
- **namespace** ((str, optional).) – Namespace of region. This is used for identifying which region the service pack is from when you pass a slug to *inference\_conda\_env* and *training\_conda\_env*.
- **use\_case\_type** (str) – The use case type of the model. Use it through *UseCaseType* class or string provided in *UseCaseType*. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with *UseCaseType* class to see all supported types.
- **X\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (str. Defaults to None.) – Training script path.

- **training\_id** ((str, optional). Defaults to value from environment variables.) – The training OCID for model. Can be notebook session or job OCID.
- **ignore\_pending\_changes** (bool. Defaults to False.) – whether to ignore the pending changes in the git.
- **max\_col\_num** ((int, optional). Defaults to `utils.DATA_SCHEMA_MAX_COL_NUM`.) – Do not generate the input schema if the input has more than this number of features(columns).
- **ignore\_conda\_error** ((bool, optional). Defaults to False.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**impute\_values: (dict, optional).**

The dictionary where the key is the column index(or names is accepted for pandas dataframe) and the value is the impute value for the corresponding column.

#### Raises

- **FileExistsError** – If files already exist but *force\_overwrite* is False.
- **ValueError** – If *inference\_python\_version* is not provided, but also cannot be found through manifest file.

#### Returns

An instance of *GenericModel* class.

#### Return type

*GenericModel*

**prepare\_save\_deploy**(*inference\_conda\_env: Optional[str] = None, inference\_python\_version: Optional[str] = None, training\_conda\_env: Optional[str] = None, training\_python\_version: Optional[str] = None, model\_file\_name: Optional[str] = None, as\_onnx: bool = False, initial\_types: Optional[List[Tuple]] = None, force\_overwrite: bool = False, namespace: str = 'id19sfcr6z', use\_case\_type: Optional[str] = None, X\_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, y\_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, training\_script\_path: Optional[str] = None, training\_id: Optional[str] = None, ignore\_pending\_changes: bool = True, max\_col\_num: int = 2000, ignore\_conda\_error: bool = False, model\_display\_name: Optional[str] = None, model\_description: Optional[str] = None, model\_freeform\_tags: Optional[dict] = None, model\_defined\_tags: Optional[dict] = None, ignore\_introspection: Optional[bool] = False, wait\_for\_completion: Optional[bool] = True, deployment\_display\_name: Optional[str] = None, deployment\_description: Optional[str] = None, deployment\_instance\_shape: Optional[str] = None, deployment\_instance\_count: Optional[int] = None, deployment\_bandwidth\_mbps: Optional[int] = None, deployment\_log\_group\_id: Optional[str] = None, deployment\_access\_log\_id: Optional[str] = None, deployment\_predict\_log\_id: Optional[str] = None, deployment\_memory\_in\_gbs: Optional[float] = None, deployment\_ocpus: Optional[float] = None, deployment\_image: Optional[str] = None, bucket\_uri: Optional[str] = None, overwrite\_existing\_artifact: Optional[bool] = True, remove\_existing\_artifact: Optional[bool] = True, model\_version\_set: Optional[Union[str, [ModelVersionSet](#)]] = None, version\_label: Optional[str] = None, \*\*kwargs: Dict*) → [ModelDeployment](#)

Shortcut for prepare, save and deploy steps.

#### Parameters

- **inference\_conda\_env** ((*str*, optional). Defaults to *None*.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **inference\_python\_version** ((*str*, optional). Defaults to *None*.) – Python version which will be used in deployment.
- **training\_conda\_env** ((*str*, optional). Defaults to *None*.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack. If *training\_conda\_env* is not provided, *training\_conda\_env* will use the same value of *training\_conda\_env*.
- **training\_python\_version** ((*str*, optional). Defaults to *None*.) – Python version used during training.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – Name of the serialized model.
- **as\_onnx** ((*bool*, optional). Defaults to *False*.) – Whether to serialize as onnx model.
- **initial\_types** ((*list*[*Tuple*], optional).) – Defaults to *None*. Only used for SklearnModel, LightGBMModel and XGBoostModel. Each element is a tuple of a variable name and a type. Check this link [http://onnx.ai/sklearn-onnx/api\\_summary.html#id2](http://onnx.ai/sklearn-onnx/api_summary.html#id2) for more explanation and examples for *initial\_types*.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files.
- **namespace** ((*str*, optional).) – Namespace of region. This is used for identifying which region the service pack is from when you pass a slug to *inference\_conda\_env* and *training\_conda\_env*.
- **use\_case\_type** (*str*) – The use case type of the model. Use it through *UseCaseType* class or string provided in *UseCaseType*. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with *UseCaseType* class to see all supported types.
- **X\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (*str*. Defaults to *None*.) – Training script path.
- **training\_id** ((*str*, optional). Defaults to value from environment variables.) – The training OCID for model. Can be notebook session or job OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – whether to ignore the pending changes in the git.
- **max\_col\_num** ((*int*, optional). Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – Do not generate the input schema if the input has more than this number of features(columns).
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.

- **model\_display\_name** *((str, optional). Defaults to None.)* – The name of the model. If a `model_display_name` is not provided in `kwargs`, a randomly generated easy to remember name with timestamp will be generated, like `'strange-spider-2022-08-17-23:55.02'`.
- **model\_description** *((str, optional). Defaults to None.)* – The description of the model.
- **model\_freeform\_tags** *(Dict(str, str), Defaults to None.)* – Freeform tags for the model.
- **model\_defined\_tags** *((Dict(str, dict(str, object)), optional). Defaults to None.)* – Defined tags for the model.
- **ignore\_introspection** *((bool, optional). Defaults to None.)* – Determine whether to ignore the result of model introspection or not. If set to `True`, the save will ignore all model introspection errors.
- **wait\_for\_completion** *((bool, optional). Defaults to True.)* – Flag set for whether to wait for deployment to complete before proceeding.
- **deployment\_display\_name** *((str, optional). Defaults to None.)* – The name of the model deployment. If a `deployment_display_name` is not provided in `kwargs`, a randomly generated easy to remember name with timestamp will be generated, like `'strange-spider-2022-08-17-23:55.02'`.
- **description** *((str, optional). Defaults to None.)* – The description of the model.
- **deployment\_instance\_shape** *((str, optional). Default to VM.Standard2.1.)* – The shape of the instance used for deployment.
- **deployment\_instance\_count** *((int, optional). Defaults to 1.)* – The number of instance used for deployment.
- **deployment\_bandwidth\_mbps** *((int, optional). Defaults to 10.)* – The bandwidth limit on the load balancer in Mbps.
- **deployment\_log\_group\_id** *((str, optional). Defaults to None.)* – The oci logging group id. The access log and predict log share the same log group.
- **deployment\_access\_log\_id** *((str, optional). Defaults to None.)* – The access log OCID for the access logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_predict\_log\_id** *((str, optional). Defaults to None.)* – The predict log OCID for the predict logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_memory\_in\_gbs** *((float, optional). Defaults to None.)* – Specifies the size of the memory of the model deployment instance in GBs.
- **deployment\_ocpus** *((float, optional). Defaults to None.)* – Specifies the ocpu count of the model deployment instance.
- **deployment\_image** *((str, optional). Defaults to None.)* – The OCIR path of docker container image. Required for deploying model on container runtime.
- **bucket\_uri** *((str, optional). Defaults to None.)* – The OCI Object Storage URI where model artifacts will be copied to. The `bucket_uri` is only necessary for downloading large artifacts with size is greater than 2GB. Example: `oci://<bucket_name>@<namespace>/prefix/`.

- **overwrite\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **model\_version\_set** ((*Union[str, ModelVersionSet]*, optional). Defaults to *None*.) – The Model version set OCID, or name, or *ModelVersionSet* instance.
- **version\_label** ((*str*, optional). Defaults to *None*.) – The model version label.
- **kwargs** –

**impute\_values: (dict, optional).**

The dictionary where the key is the column index(or names is accepted for pandas dataframe) and the value is the impute value for the corresponding column.

**project\_id: (str, optional).**

Project OCID. If not specified, the value will be taken either from the environment variables or model properties.

**compartment\_id**

[(*str*, optional).] Compartment OCID. If not specified, the value will be taken either from the environment variables or model properties.

**image\_digest: (str, optional). Defaults to None.**

The digest of docker container image.

**cmd: (List, optional). Defaults to empty.**

The command line arguments for running docker container image.

**entrypoint: (List, optional). Defaults to empty.**

The entrypoint for running docker container image.

**server\_port: (int, optional). Defaults to 8080.**

The server port for docker container image.

**health\_check\_port: (int, optional). Defaults to 8080.**

The health check port for docker container image.

**deployment\_mode: (str, optional). Defaults to HTTPS\_ONLY.**

The deployment mode. Allowed values are: HTTPS\_ONLY and STREAM\_ONLY.

**input\_stream\_ids: (List, optional). Defaults to empty.**

The input stream ids. Required for STREAM\_ONLY mode.

**output\_stream\_ids: (List, optional). Defaults to empty.**

The output stream ids. Required for STREAM\_ONLY mode.

**environment\_variables: (Dict, optional). Defaults to empty.**

The environment variables for model deployment.

**timeout: (int, optional). Defaults to 10 seconds.**

The connection timeout in seconds for the client.

**max\_wait\_time**

[(int, optional). Defaults to 1200 seconds.] Maximum amount of time to wait in seconds. Negative implies infinite wait time.

**poll\_interval**

[(int, optional). Defaults to 10 seconds.] Poll interval in seconds.



**freeform\_tags:** (`Dict[str, str]`, optional). Defaults to `None`.

Freeform tags of the model deployment.

**defined\_tags:** (`Dict[str, dict[str, object]]`, optional). Defaults to `None`.

Defined tags of the model deployment.

**region:** (`str`, optional). Defaults to `None`.

The destination Object Storage bucket region. By default the value will be extracted from the `OCI_REGION_METADATA` environment variables.

Also can be any keyword argument for initializing the `ads.model.deployment.ModelDeploymentProperties`. See

`ads.model.deployment.ModelDeploymentProperties()` for details.

#### Returns

The `ModelDeployment` instance.

#### Return type

[`ModelDeployment`](#)

#### Raises

- **FileExistsError** – If files already exist but `force_overwrite` is `False`.
- **ValueError** – If `inference_python_version` is not provided, but also cannot be found through manifest file.

**reload()** → [`GenericModel`](#)

Reloads the model artifact files: `score.py` and the `runtime.yaml`.

#### Returns

An instance of `GenericModel` class.

#### Return type

[`GenericModel`](#)

**reload\_runtime\_info()** → `None`

Reloads the model artifact file: `runtime.yaml`.

#### Returns

Nothing.

#### Return type

`None`

**restart\_deployment**(`max_wait_time: int = 1200`, `poll_interval: int = 10`) → [`ModelDeployment`](#)

Restarts the current deployment.

#### Parameters

- **max\_wait\_time** (`((int, optional). Defaults to 1200 seconds.)`) – Maximum amount of time to wait for activate or deactivate in seconds. Total amount of time to wait for restart deployment is twice as the value. Negative implies infinite wait time.
- **poll\_interval** (`((int, optional). Defaults to 10 seconds.)`) – Poll interval in seconds.

#### Returns

The `ModelDeployment` instance.

#### Return type

[`ModelDeployment`](#)



**save**(*display\_name*: Optional[str] = None, *description*: Optional[str] = None, *freeform\_tags*: Optional[dict] = None, *defined\_tags*: Optional[dict] = None, *ignore\_introspection*: Optional[bool] = False, *bucket\_uri*: Optional[str] = None, *overwrite\_existing\_artifact*: Optional[bool] = True, *remove\_existing\_artifact*: Optional[bool] = True, *model\_version\_set*: Optional[Union[str, ModelVersionSet]] = None, *version\_label*: Optional[str] = None, *\*\*kwargs*) → str

Saves model artifacts to the model catalog.

#### Parameters

- **display\_name** ((str, optional). Defaults to None.) – The name of the model. If a display\_name is not provided in kwargs, randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55:02'.
  - **description** ((str, optional). Defaults to None.) – The description of the model.
  - **freeform\_tags** (Dict(str, str), Defaults to None.) – Freeform tags for the model.
  - **defined\_tags** ((Dict(str, dict(str, object)), optional). Defaults to None.) – Defined tags for the model.
  - **ignore\_introspection** ((bool, optional). Defaults to None.) – Determine whether to ignore the result of model introspection or not. If set to True, the save will ignore all model introspection errors.
  - **bucket\_uri** ((str, optional). Defaults to None.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for uploading large artifacts which size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
  - **overwrite\_existing\_artifact** ((bool, optional). Defaults to True.) – Overwrite target bucket artifact if exists.
  - **remove\_existing\_artifact** ((bool, optional). Defaults to True.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
  - **model\_version\_set** ((Union[str, ModelVersionSet], optional). Defaults to None.) – The model version set OCID, or model version set name, or *ModelVersionSet* instance.
  - **version\_label** ((str, optional). Defaults to None.) – The model version label.
  - **kwargs** –
    - project\_id**: (str, optional).  
Project OCID. If not specified, the value will be taken either from the environment variables or model properties.
    - compartment\_id**  
[(str, optional).] Compartment OCID. If not specified, the value will be taken either from the environment variables or model properties.
    - region**: (str, optional). Defaults to None.  
The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.
    - timeout**: (int, optional). Defaults to 10 seconds.  
The connection timeout in seconds for the client.
- Also can be any attribute that *oci.data\_science.models.Model* accepts.

**Raises**

**`RuntimeInfoInconsistencyError`** – When `.runtime_info` is not synched with `runtime.yaml` file.

**Returns**

The model id.

**Return type**

str

**property** `schema_input`

**property** `schema_output`

**`serialize_model`**(*as\_onnx: Optional[bool] = False, initial\_types: Optional[List[Tuple]] = None, force\_overwrite: Optional[bool] = False, X\_sample: Optional[Union[Dict, str, List, Tuple, ndarray, Series, DataFrame]] = None, \*\*kwargs: Dict*)

Serialize and save scikit-learn model using ONNX or model specific method.

**Parameters**

- **`as_onnx`** ((*bool, optional*). Defaults to *False*.) – If set as *True*, provide *initial\_types* or *X\_sample* to convert into ONNX.
- **`initial_types`** ((*List[Tuple]*, *optional*). Defaults to *None*.) – Each element is a tuple of a variable name and a type.
- **`force_overwrite`** ((*bool, optional*). Defaults to *False*.) – If set as *True*, overwrite serialized model if exists.
- **`X_sample`** (*Union[Dict, str, List, np.ndarray, pd.core.series.Series, pd.core.frame.DataFrame,]*. Defaults to *None*.) – Contains model inputs such that `model(X_sample)` is a valid invocation of the model. Used to generate *initial\_types*.

**Returns**

Nothing.

**Return type**

None

**`set_model_input_serializer`**(*model\_input\_serializer: Union[str, SERDE]*)

Registers serializer used for serializing data passed in `verify/predict`.

**Examples**

```
>>> generic_model.set_model_input_serializer(GenericModel.model_input_
↳serializer_type.CLOUDPICKLE)
```

```
>>> # Register serializer by passing the name of it.
>>> generic_model.set_model_input_serializer("cloudpickle")
```

```
>>> # Example of creating customized model input serializer and registering it.
>>> from ads.model import SERDE
>>> from ads.model.generic_model import GenericModel
```

```
>>> class MySERDE(SERDE):
...     def __init__(self):
...         super().__init__()
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
...     def deserialize(self, data):
...         deserialized_data = 2
...         return deserialized_data
```

```
>>> class Toy:
...     def predict(self, x):
...         return x ** 2
```

```
>>> generic_model = GenericModel(
...     estimator=Toy(),
...     artifact_dir=tempfile.mkdtemp(),
...     model_input_serializer=MySERDE()
... )
```

```
>>> # Or register the serializer after creating model instance.
>>> generic_model.set_model_input_serializer(MySERDE())
```

#### Parameters

**model\_input\_serializer** ((*str*, or `ads.model.SERDE`)) – name of the serializer, or instance of `SERDE`.

**set\_model\_save\_serializer**(*model\_save\_serializer: Union[str, SERDE]*)

Registers serializer used for saving model.

#### Examples

```
>>> generic_model.set_model_save_serializer(GenericModel.model_save_serializer_
↳ type.CLOUDPICKLE)
```

```
>>> # Register serializer by passing the name of it.
>>> generic_model.set_model_save_serializer("cloudpickle")
```

```
>>> # Example of creating customized model save serializer and registering it.
>>> from ads.model import SERDE
>>> from ads.model.generic_model import GenericModel
```

```
>>> class MySERDE(SERDE):
...     def __init__(self):
...         super().__init__()
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
...     def deserialize(self, data):
```

(continues on next page)

(continued from previous page)

```
...     deserialized_data = 2
...     return deserialized_data
```

```
>>> class Toy:
...     def predict(self, x):
...         return x ** 2
```

```
>>> generic_model = GenericModel(
...     estimator=Toy(),
...     artifact_dir=tempfile.mkdtemp(),
...     model_save_serializer=MySERDE()
... )
```

```
>>> # Or register the serializer after creating model instance.
>>> generic_model.set_model_save_serializer(MySERDE())
```

**Parameters**

**model\_save\_serializer** ((`ads.model.SERDE` or *str*)) – name of the serializer or instance of SERDE.

**summary\_status()** → `DataFrame`

A summary table of the current status.

**Returns**

The summary stable of the current status.

**Return type**

`pd.DataFrame`

**update(\*\*kwargs)** → *GenericModel*

Updates model metadata in the Model Catalog. Updates only metadata information. The model artifacts are immutable and cannot be updated.

**Parameters**

**kwargs** –

**display\_name:** (*str*, optional). Defaults to None.

The name of the model.

**description:** (*str*, optional). Defaults to None.

The description of the model.

**freeform\_tags**

[Dict(*str*, *str*), Defaults to None.] Freeform tags for the model.

**defined\_tags**

[(Dict(*str*, dict(*str*, object))), optional]. Defaults to None.] Defined tags for the model.

**version\_label:** (*str*, optional). Defaults to None.

The model version label.

Additional kwargs arguments. Can be any attribute that *oci.data\_science.models.Model* accepts.

**Returns**

An instance of *GenericModel* (self).

**Return type***GenericModel***Raises****ValueError** – if model not saved to the Model Catalog.

**classmethod** `update_deployment(model_deployment_id: Optional[str] = None, properties: Optional[Union[ModelDeploymentProperties, dict]] = None, wait_for_completion: bool = True, max_wait_time: int = 1200, poll_interval: int = 10, **kwargs) → ModelDeployment`

Updates a model deployment.

You can update *model\_deployment\_configuration\_details* and change *instance\_shape* and *model\_id* when the model deployment is in the *ACTIVE* lifecycle state. The *bandwidth\_mbps* or *instance\_count* can only be updated while the model deployment is in the *INACTIVE* state. Changes to the *bandwidth\_mbps* or *instance\_count* will take effect the next time the *ActivateModelDeployment* action is invoked on the model deployment resource.

**Examples**

```
>>> # Update access log id, freeform tags and description for the model_
↳ deployment
>>> model.update_deployment(
>>>     properties=ModelDeploymentProperties(
>>>         access_log_id=<log_ocid>,
>>>         description="Description for Custom Model",
>>>         freeform_tags={"key": "value"},
>>>     )
>>> )
```

**Parameters**

- **model\_deployment\_id** (*str.*) – The model deployment OCID. Defaults to None. If the method called on instance level, then *self.model\_deployment.model\_deployment\_id* will be used.
- **properties** (*ModelDeploymentProperties* or *dict*) – The properties for updating the deployment.
- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to complete before proceeding. Defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).
- **kwargs** –

**auth:** (*Dict*, optional). Defaults to *None*.

The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.

**Returns**

An instance of *ModelDeployment* class.

**Return type***ModelDeployment***upload\_artifact**(*uri: str, auth: Optional[Dict] = None, force\_overwrite: Optional[bool] = False*) → None

Uploads model artifacts to the provided *uri*. The artifacts will be zipped before uploading.

**Parameters**

- **uri** (*str*) – The destination location for the model artifacts, which can be a local path or OCI object storage URI. Examples: `>>> upload_artifact(uri="/some/local/folder/") >>> upload_artifact(uri="oci://bucket@namespace/prefix/")`
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** (*bool*) – Overwrite target\_dir if exists.

**verify**(*data: Optional[Any] = None, reload\_artifacts: bool = True, auto\_serialize\_data: bool = True, \*\*kwargs*) → Dict[str, Any]

Test if deployment works in local environment.

**Examples**

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.verify(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.verify(
...     image="oci://<bucket>@<tenancy>/myimage.png",
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

**Parameters**

- **data** (*Any*) – Data used to test if deployment works in local environment.
- **reload\_artifacts** (*bool*. Defaults to *True*.) – Whether to reload artifacts or not.
- **auto\_serialize\_data** (*bool*.) – Whether to auto serialize input data. Defaults to *False* for GenericModel, and *True* for other frameworks. *data* required to be json serializable if *auto\_serialize\_data=False*. if *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.
- **kwargs** – content\_type: str, used to indicate the media type of the resource. image: PIL.Image Object or uri for the image.

A valid string path for image file can be local path, http(s), oci, s3, gs.

**storage\_options: dict**

Passed to *fsspec.open* for a particular storage connection. Please see *fsspec* (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.

**Returns**

A dictionary which contains prediction results.

**Return type**

Dict

**ads.model.framework.spark\_model module**

```
class ads.model.framework.spark_model.SparkPipelineModel(estimator: Callable, artifact_dir:
    Optional[str] = None, properties:
    Optional[ModelProperties] = None, auth:
    Dict = None, model_save_serializer:
    Optional[SERDE] = 'spark',
    model_input_serializer:
    Optional[SERDE] = 'spark', **kwargs)
```

Bases: *FrameworkSpecificModel*

SparkPipelineModel class for estimators from the pyspark framework.

**algorithm**

The algorithm of the model.

**Type**

str

**artifact\_dir**

Artifact directory to store the files needed for deployment.

**Type**

str

**auth**

Default authentication is set using the *ads.set\_auth* API. To override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create an authentication signer to instantiate an IdentityClient object.

**Type**

Dict

**estimator**

A trained pyspark estimator/model using pyspark.

**Type**

Callable

**framework**

“spark”, the framework name of the model.

**Type**

str

**hyperparameter**

The hyperparameters of the estimator.

**Type**

dict

**metadata\_custom**

The model custom metadata.

**Type***ModelCustomMetadata*

**metadata\_provenance**

The model provenance metadata.

**Type**

*ModelProvenanceMetadata*

**metadata\_taxonomy**

The model taxonomy metadata.

**Type**

*ModelTaxonomyMetadata*

**model\_artifact**

This is built by calling prepare. A ModelDeployment instance.

**Type**

*ModelArtifact*

**model\_file\_name**

Name of the serialized model.

**Type**

str

**model\_id**

The model ID.

**Type**

str

**properties**

ModelProperties object required to save and deploy model. For more details, check [https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model\\_properties](https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model_properties).

**Type**

*ModelProperties*

**runtime\_info**

A RuntimeInfo instance.

**Type**

*RuntimeInfo*

**schema\_input**

Schema describes the structure of the input data.

**Type**

*Schema*

**schema\_output**

Schema describes the structure of the output data.

**Type**

*Schema*

**serialize**

Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under artifact\_dir and update the score.py manually.

**Type**

bool



**version**

The framework version of the model.

**Type**

str

**delete\_deployment(...)**

Deletes the current model deployment.

**deploy(..., \*\*kwargs)**

Deploys a model.

**from\_model\_artifact(uri, model\_file\_name, artifact\_dir, ..., \*\*kwargs)**

Loads model from the specified folder, or zip/tar archive.

**from\_model\_catalog(model\_id, model\_file\_name, artifact\_dir, ..., \*\*kwargs)**

Loads model from model catalog.

**introspect(...)**

Runs model introspection.

**predict(data, ...)**

Returns prediction of input data run against the model deployment endpoint.

**prepare(..., \*\*kwargs)**

Prepare and save the score.py, serialized model and runtime.yaml file.

**reload(...)**

Reloads the model artifact files: *score.py* and the *runtime.yaml*.

**save(..., \*\*kwargs)**

Saves model artifacts to the model catalog.

**summary\_status(...)**

Gets a summary table of the current status.

**verify(data, ...)**

Tests if deployment works in local environment.

**Examples**

```
>>> import tempfile
>>> from ads.model.framework.spark_model import SparkPipelineModel
>>> from pyspark.ml.linalg import Vectors
>>> from pyspark.ml.classification import LogisticRegression

>>> training = spark.createDataFrame([
>>>     (1.0, Vectors.dense([0.0, 1.1, 0.1])),
>>>     (0.0, Vectors.dense([2.0, 1.0, -1.0])),
>>>     (0.0, Vectors.dense([2.0, 1.3, 1.0])),
>>>     (1.0, Vectors.dense([0.0, 1.2, -0.5])), ["label", "features"])
>>> lr_estimator = LogisticRegression(maxIter=10, regParam=0.001)
>>> pipeline = Pipeline(stages=[lr_estimator])
>>> pipeline_model = pipeline.fit(training)
```

```
>>> spark_model = SparkPipelineModel(estimator=pipeline_model, artifact_
↳dir=tempfile.mkdtemp())
>>> spark_model.prepare(inference_conda_env="dataexpl_p37_cpu_v3")
>>> spark_model.verify(training)
>>> spark_model.save()
>>> model_deployment = spark_model.deploy()
>>> spark_model.predict(training)
>>> spark_model.delete_deployment()
```

Initiates a SparkPipelineModel instance.

#### Parameters

- **estimator** (*Callable*) – SparkPipelineModel
- **artifact\_dir** (*str*) – Directory for generate artifact.
- **properties** ((*ModelProperties*, *optional*). *Defaults to None.*) – ModelProperties object required to save and deploy model.
- **auth** ((*Dict*, *optional*). *Defaults to None.*) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **model\_save\_serializer** ((*SERDE* or *str*, *optional*). *Defaults to None.*) – Instance of *ads.model.SERDE*. Used for serialize/deserialize model.
- **model\_input\_serializer** ((*SERDE*, *optional*). *Defaults to ads.model.serde.model\_input.SparkModelInputSERDE.*) – Instance of *ads.model.SERDE*. Used for serialize/deserialize data.

#### Returns

SparkPipelineModel instance.

#### Return type

*SparkPipelineModel*

#### Examples

```
>>> import tempfile
>>> from ads.model.framework.spark_model import SparkPipelineModel
>>> from pyspark.ml.linalg import Vectors
>>> from pyspark.ml.classification import LogisticRegression
>>> from pyspark.ml import Pipeline

>>> training = spark.createDataFrame([
>>>     (1.0, Vectors.dense([0.0, 1.1, 0.1])),
>>>     (0.0, Vectors.dense([2.0, 1.0, -1.0])),
>>>     (0.0, Vectors.dense([2.0, 1.3, 1.0])),
>>>     (1.0, Vectors.dense([0.0, 1.2, -0.5])), ["label", "features"])
>>> lr_estimator = LogisticRegression(maxIter=10, regParam=0.001)
>>> pipeline = Pipeline(stages=[lr_estimator])
>>> pipeline_model = pipeline.fit(training)
```

```
>>> spark_model = SparkPipelineModel(estimator=pipeline_model, artifact_
↳dir=tempfile.mkdtemp())
>>> spark_model.prepare(inference_conda_env="pyspark30_p37_cpu_v5")
>>> spark_model.verify(training)
>>> spark_model.save()
>>> model_deployment = spark_model.deploy()
>>> spark_model.predict(training)
>>> spark_model.delete_deployment()
```

**classmethod delete**(*model\_id*: *Optional[str]* = *None*, *delete\_associated\_model\_deployment*: *Optional[bool]* = *False*, *delete\_model\_artifact*: *Optional[bool]* = *False*, *artifact\_dir*: *Optional[str]* = *None*, *\*\*kwargs*: *Dict*) → *None*

Deletes a model from Model Catalog.

#### Parameters

- **model\_id** ((*str*, optional). Defaults to *None*.) – The model OCID to be deleted. If the method called on instance level, then *self.model\_id* will be used.
- **delete\_associated\_model\_deployment** ((*bool*, optional). Defaults to *False*.) – Whether associated model deployments need to be deleted or not.
- **delete\_model\_artifact** ((*bool*, optional). Defaults to *False*.) – Whether associated model artifacts need to be deleted or not.
- **artifact\_dir** ((*str*, optional). Defaults to *None*) – The local path to the model artifacts folder. If the method called on instance level, the *self.artifact\_dir* will be used by default.

#### Return type

*None*

#### Raises

**ValueError** – If *model\_id* not provided.

**delete\_deployment**(*wait\_for\_completion*: *bool* = *True*) → *None*

Deletes the current deployment.

#### Parameters

**wait\_for\_completion** ((*bool*, optional). Defaults to *True*.) – Whether to wait till completion.

#### Return type

*None*

#### Raises

**ValueError** – if there is not deployment attached yet.:

**deploy**(*wait\_for\_completion*: *Optional[bool]* = *True*, *display\_name*: *Optional[str]* = *None*, *description*: *Optional[str]* = *None*, *deployment\_instance\_shape*: *Optional[str]* = *None*, *deployment\_instance\_count*: *Optional[int]* = *None*, *deployment\_bandwidth\_mbps*: *Optional[int]* = *None*, *deployment\_log\_group\_id*: *Optional[str]* = *None*, *deployment\_access\_log\_id*: *Optional[str]* = *None*, *deployment\_predict\_log\_id*: *Optional[str]* = *None*, *deployment\_memory\_in\_gbs*: *Optional[float]* = *None*, *deployment\_ocpus*: *Optional[float]* = *None*, *deployment\_image*: *Optional[str]* = *None*, *\*\*kwargs*: *Dict*) → *ModelDeployment*

Deploys a model. The model needs to be saved to the model catalog at first. You can deploy the model on either conda or container runtime. The customized runtime allows you to bring your own service container. To deploy model on container runtime, make sure to build the container and push it to OCIR. For more information, see <https://docs.oracle.com/en-us/iaas/data-science/using/mod-dep-byoc.htm>.

## Example

```
# This is an example to deploy model on container runtime >>> model = Generic-
Model(estimator=estimator, artifact_dir=tempfile.mkdtemp()) >>> model.summary_status() >>>
model.prepare( ... model_file_name="toy_model.pkl", ... ignore_conda_error=True, # set ig-
nore_conda_error=True for container runtime ... force_overwrite=True ... ) >>> model.verify() >>>
model.save() >>> model.deploy( ... deployment_image="iad.ocir.io/<namespace>/<image>:<tag>",
... entrypoint=["python", "/opt/ds/model/deployed_model/api.py"], ... server_port=5000, ...
health_check_port=5000, ... environment_variables={"key":"value"} ... )
```

### Parameters

- **wait\_for\_completion** ((*bool*, *optional*). Defaults to *True*.) – Flag set for whether to wait for deployment to complete before proceeding.
- **display\_name** ((*str*, *optional*). Defaults to *None*.) – The name of the model. If a display\_name is not provided in kwargs, a randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55.02'.
- **description** ((*str*, *optional*). Defaults to *None*.) – The description of the model.
- **deployment\_instance\_shape** ((*str*, *optional*). Default to *VM.Standard2.1*.) – The shape of the instance used for deployment.
- **deployment\_instance\_count** ((*int*, *optional*). Defaults to *1*.) – The number of instance used for deployment.
- **deployment\_bandwidth\_mbps** ((*int*, *optional*). Defaults to *10*.) – The bandwidth limit on the load balancer in Mbps.
- **deployment\_memory\_in\_gbs** ((*float*, *optional*). Defaults to *None*.) – Specifies the size of the memory of the model deployment instance in GBs.
- **deployment\_ocpus** ((*float*, *optional*). Defaults to *None*.) – Specifies the ocpu count of the model deployment instance.
- **deployment\_log\_group\_id** ((*str*, *optional*). Defaults to *None*.) – The oci logging group id. The access log and predict log share the same log group.
- **deployment\_access\_log\_id** ((*str*, *optional*). Defaults to *None*.) – The access log OCID for the access logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_predict\_log\_id** ((*str*, *optional*). Defaults to *None*.) – The predict log OCID for the predict logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_image** ((*str*, *optional*). Defaults to *None*.) – The OCIR path of docker container image. Required for deploying model on container runtime.
- **kwargs** –
  - project\_id**: (*str*, *optional*).  
Project OCID. If not specified, the value will be taken from the environment variables.
  - compartment\_id**  
[(*str*, *optional*).] Compartment OCID. If not specified, the value will be taken from the environment variables.

**max\_wait\_time**

[(int, optional). Defaults to 1200 seconds.] Maximum amount of time to wait in seconds.  
Negative implies infinite wait time.

**poll\_interval**

[(int, optional). Defaults to 10 seconds.] Poll interval in seconds.

**freeform\_tags: (Dict[str, str], optional). Defaults to None.**

Freeform tags of the model deployment.

**defined\_tags: (Dict[str, dict[str, object]], optional). Defaults to None.**

Defined tags of the model deployment.

**image\_digest: (str, optional). Defaults to None.**

The digest of docker container image.

**cmd: (List, optional). Defaults to empty.**

The command line arguments for running docker container image.

**entrypoint: (List, optional). Defaults to empty.**

The entrypoint for running docker container image.

**server\_port: (int, optional). Defaults to 8080.**

The server port for docker container image.

**health\_check\_port: (int, optional). Defaults to 8080.**

The health check port for docker container image.

**deployment\_mode: (str, optional). Defaults to HTTPS\_ONLY.**

The deployment mode. Allowed values are: HTTPS\_ONLY and STREAM\_ONLY.

**input\_stream\_ids: (List, optional). Defaults to empty.**

The input stream ids. Required for STREAM\_ONLY mode.

**output\_stream\_ids: (List, optional). Defaults to empty.**

The output stream ids. Required for STREAM\_ONLY mode.

**environment\_variables: (Dict, optional). Defaults to empty.**

The environment variables for model deployment.

Also can be any keyword argument for initializing the  
*ads.model.deployment.ModelDeploymentProperties*. See  
*ads.model.deployment.ModelDeploymentProperties()* for details.

**Returns**

The ModelDeployment instance.

**Return type**

*ModelDeployment*

**Raises**

**ValueError** – If *model\_id* is not specified.

```

evaluate(X: Union[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]], _SupportsArray[dtype],
    Sequence[_SupportsArray[dtype]], Sequence[Sequence[_SupportsArray[dtype]]],
    Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
    Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
    bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
    float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
    bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
    y: Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]], _SupportsArray[dtype],
    Sequence[_SupportsArray[dtype]], Sequence[Sequence[_SupportsArray[dtype]]],
    Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
    Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
    bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
    float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
    bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
    y_pred: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]],
    _SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
    Sequence[Sequence[_SupportsArray[dtype]]],
    Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
    Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
    bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
    float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
    bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]]
    = None, y_score: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]],
    _SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
    Sequence[Sequence[_SupportsArray[dtype]]],
    Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
    Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
    bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
    float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
    bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]]
    = None, X_train: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]],
    _SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
    Sequence[Sequence[_SupportsArray[dtype]]],
    Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
    Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
    bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
    float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
    bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]]
    = None, y_train: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]],
    _SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
    Sequence[Sequence[_SupportsArray[dtype]]],
    Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
    Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
    bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
    float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
    bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]]
    = None, classes: Optional[List] = None, positive_class: Optional[str] = None, legend_labels:
    Optional[dict] = None, perfect: bool = True, filename: Optional[str] = None, use_case_type:
    Optional[str] = None)

```

Creates an ads evaluation report.

### Parameters

- **X (DataFrame-like)** – The data used to make a prediction. Can be set to None if `y_preds` is given. (And `y_scores` for more thorough analysis).

- **y** (*array-like*) – The true values corresponding to the input data
- **y\_pred** (*array-like, optional*) – The predictions from each model in the same order as the models
- **y\_score** (*array-like, optional*) – The predict\_proba from each model in the same order as the models
- **X\_train** (*DataFrame-like, optional*) – The data used to train the model
- **y\_train** (*array-like, optional*) – The true values corresponding to the input training data
- **classes** (*List or None, optional*) – A List of the possible labels for y, when evaluating a classification use case
- **positive\_class** (*str or int, optional*) – The class to report metrics for binary dataset. If the target classes is True or False, positive\_class will be set to True by default. If the dataset is multiclass or multilabel, this will be ignored.
- **legend\_labels** (*dict, optional*) – List of legend labels. Defaults to *None*. If legend\_labels not specified class names will be used for plots.
- **use\_case\_type** (*str, optional*) – The type of problem this model is solving. This can be set during *prepare()*. Examples: “binary\_classification”, “regression”, “multinomial\_classification” Full list of supported types can be found here: *ads.common.model\_metadata.UseCaseType*
- **filename** (*str, optional*) – If filename is given, the html report will be saved to the location specified.

## Examples

```
>>> import tempfile
>>> from ads.evaluations.evaluator import Evaluator
>>> from sklearn.tree import DecisionTreeClassifier
>>> from sklearn.datasets import make_classification
>>> from sklearn.model_selection import train_test_split
>>> from ads.model.framework.sklearn_model import SklearnModel
>>> from ads.common.model_metadata import UseCaseType
>>>
>>> X, y = make_classification(n_samples=1000)
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.3)
>>> est = DecisionTreeClassifier().fit(X_train, y_train)
>>> model = SklearnModel(estimator=est, artifact_dir=tempfile.mkdtemp())
>>> model.prepare(
>>>     inference_conda_env="generalml_p38_cpu_v1",
>>>     training_conda_env="generalml_p38_cpu_v1",
>>>     X_sample=X_test,
>>>     y_sample=y_test,
>>>     use_case_type=UseCaseType.BINARY_CLASSIFICATION,
>>> )
>>> model.evaluate(X_test, y_test, filename="report.html")
```

```
classmethod from_id(ocid: str, model_file_name: Optional[str] = None, artifact_dir: Optional[str] =  
None, auth: Optional[Dict] = None, force_overwrite: Optional[bool] = False,  
properties: Optional[Union[ModelProperties, Dict]] = None, bucket_uri:  
Optional[str] = None, remove_existing_artifact: Optional[bool] = True,  
ignore_conda_error: Optional[bool] = False, **kwargs) → Self
```

Loads model from model OCID or model deployment OCID.

#### Parameters

- **ocid** (*str*) – The model OCID or model deployment OCID.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((*str*, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((*ModelProperties*, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **kwargs** –

#### **compartment\_id**

[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

#### **timeout**

[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

#### Returns

An instance of GenericModel class.

#### Return type

Self

```
classmethod from_model_artifact(uri: str, model_file_name: Optional[str] = None, artifact_dir:  
Optional[str] = None, auth: Optional[Dict] = None,  
force_overwrite: Optional[bool] = False, properties:  
Optional[ModelProperties] = None, ignore_conda_error:  
Optional[bool] = False, **kwargs: dict) → Self
```

Loads model from a folder, or zip/tar archive.

#### Parameters

- **uri** (*str*) – The folder path, ZIP file path, or TAR file path. It could contain a serialized model(required) as well as any files needed for deployment including: serialized model,



runtime.yaml, score.py and etc. The content of the folder will be copied to the *artifact\_dir* folder.

- **model\_file\_name** ((str, optional). Defaults to *None*.) – The serialized model file name. Will be extracted from artifacts if not provided.
- **artifact\_dir** ((str, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((ModelProperties, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **ignore\_conda\_error** ((bool, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.

#### Returns

An instance of *GenericModel* class.

#### Return type

Self

#### Raises

**ValueError** – If *model\_file\_name* not provided.

```
classmethod from_model_catalog(model_id: str, model_file_name: Optional[str] = None, artifact_dir:
    Optional[str] = None, auth: Optional[Dict] = None, force_overwrite:
    Optional[bool] = False, properties:
    Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] =
    True, ignore_conda_error: Optional[bool] = False, **kwargs) →
    Self
```

Loads model from model catalog.

#### Parameters

- **model\_id** (str) – The model OCID.
- **model\_file\_name** ((str, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((str, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((ModelProperties, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.

- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**compartment\_id**

[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

**timeout**

[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

**region: (str, optional). Defaults to None.**

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**Returns**

An instance of *GenericModel* class.

**Return type**

*Self*

```
classmethod from_model_deployment(model_deployment_id: str, model_file_name: Optional[str] =
    None, artifact_dir: Optional[str] = None, auth: Optional[Dict] =
    None, force_overwrite: Optional[bool] = False, properties:
    Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] =
    True, ignore_conda_error: Optional[bool] = False, **kwargs) →
    Self
```

Loads model from model deployment.

**Parameters**

- **model\_deployment\_id** (*str*) – The model deployment OCID.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((*str*, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((*ModelProperties*, optional). Defaults to *None*.) – *ModelProperties* object required to save and deploy model.

- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**compartment\_id**

[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

**timeout**

[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

**region: (str, optional). Defaults to *None*.**

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**Returns**

An instance of *GenericModel* class.

**Return type**

*Self*

**get\_data\_serializer()**

Gets data serializer.

**Returns**

*object*

**Return type**

*ads.model.Serializer* object.

**get\_model\_serializer()**

Gets model serializer.

**introspect()** → *DataFrame*

Conducts introspection.

**Returns**

A pandas *DataFrame* which contains the introspection results.

**Return type**

*pandas.DataFrame*

**property metadata\_custom**

**property metadata\_provenance**

**property metadata\_taxonomy**

**property model\_deployment\_id**

**property model\_id**

**model\_input\_serializer\_type**

alias of SparkModelInputSerializerType

**model\_save\_serializer\_type**

alias of SparkModelSerializerType

**populate\_metadata**(*use\_case\_type*: Optional[str] = None, *data\_sample*: Optional[ADSDData] = None, *X\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *y\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *training\_script\_path*: Optional[str] = None, *training\_id*: Optional[str] = None, *ignore\_pending\_changes*: bool = True, *max\_col\_num*: int = 2000, *ignore\_conda\_error*: bool = False)

Populates input schema and output schema. If the schema exceeds the limit of 32kb, save as json files to the artifact directory.

**Parameters**

- **use\_case\_type** ((str, optional). Defaults to None.) – The use case type of the model.
- **data\_sample** (ADSDData, optional). Defaults to None.) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (str. Defaults to None.) – Training script path.
- **training\_id** ((str, optional). Defaults to None.) – The training model OCID.
- **ignore\_pending\_changes** (bool. Defaults to False.) – Ignore the pending changes in git.
- **max\_col\_num** ((int, optional). Defaults to utils.DATA\_SCHEMA\_MAX\_COL\_NUM.) – The maximum number of columns allowed in auto generated schema.

**Returns**

Nothing.

**Return type**

None

**populate\_schema**(*data\_sample*: Optional[ADSDData] = None, *X\_sample*: Optional[Union[List, Tuple, DataFrame, Series, ndarray]] = None, *y\_sample*: Optional[Union[List, Tuple, DataFrame, Series, ndarray]] = None, *max\_col\_num*: int = 2000)

Populate input and output schemas. If the schema exceeds the limit of 32kb, save as json files to the artifact dir.

**Parameters**

- **data\_sample** (ADSDData) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]) – A sample of input data that will be used to generate the input schema.

- **y\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*) – A sample of output data that will be used to generate the output schema.
- **max\_col\_num** (*((int, optional). Defaults to utils.DATA\_SCHEMA\_MAX\_COL\_NUM.)*) – The maximum number of columns allowed in auto generated schema.

**predict** (*data: Optional[Any] = None, auto\_serialize\_data: bool = True, \*\*kwargs*) → Dict[str, Any]

Returns prediction of input data run against the model deployment endpoint.

## Examples

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.predict(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.predict(
...     image="oci://<bucket>@<tenancy>/myimage.png",
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

## Parameters

- **data** (*Any*) – Data for the prediction for onnx models, for local serialization method, data can be the data types that each framework support.
- **auto\_serialize\_data** (*bool.*) – Whether to auto serialize input data. Defaults to *False* for GenericModel, and *True* for other frameworks. *data* required to be json serializable if *auto\_serialize\_data=False*. If *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.
- **kwargs** – *content\_type*: str, used to indicate the media type of the resource. *image*: PIL.Image Object or uri for the image.

A valid string path for image file can be local path, http(s), oci, s3, gs.

### storage\_options: dict

Passed to *fsspec.open* for a particular storage connection. Please see *fsspec* (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.

## Returns

Dictionary with the predicted values.

## Return type

Dict[str, Any]

## Raises

- **NotActiveDeploymentError** – If model deployment process was not started or not finished yet.
- **ValueError** – If *data* is empty or not JSON serializable.

```
prepare(inference_conda_env: Optional[str] = None, inference_python_version: Optional[str] = None,
        training_conda_env: Optional[str] = None, training_python_version: Optional[str] = None,
        model_file_name: Optional[str] = None, as_onnx: bool = False, initial_types:
        Optional[List[Tuple]] = None, force_overwrite: bool = False, namespace: str = 'id19sferra6z',
        use_case_type: Optional[str] = None, X_sample: Optional[Union[list, tuple, DataFrame, Series,
        ndarray]] = None, y_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None,
        training_script_path: Optional[str] = None, training_id: Optional[str] = None,
        ignore_pending_changes: bool = True, max_col_num: int = 2000, ignore_conda_error: bool =
        False, **kwargs: Dict) → GenericModel
```

Prepare and save the score.py, serialized model and runtime.yaml file.

#### Parameters

- **inference\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **inference\_python\_version** ((str, optional). Defaults to None.) – Python version which will be used in deployment.
- **training\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack. If *training\_conda\_env* is not provided, *training\_conda\_env* will use the same value of *training\_conda\_env*.
- **training\_python\_version** ((str, optional). Defaults to None.) – Python version used during training.
- **model\_file\_name** ((str, optional). Defaults to None.) – Name of the serialized model. Will be auto generated if not provided.
- **as\_onnx** ((bool, optional). Defaults to False.) – Whether to serialize as onnx model.
- **initial\_types** ((list[Tuple], optional).) – Defaults to None. Only used for SklearnModel, LightGBMModel and XGBoostModel. Each element is a tuple of a variable name and a type. Check this link [http://onnx.ai/sklearn-onnx/api\\_summary.html#id2](http://onnx.ai/sklearn-onnx/api_summary.html#id2) for more explanation and examples for *initial\_types*.
- **force\_overwrite** ((bool, optional). Defaults to False.) – Whether to overwrite existing files.
- **namespace** ((str, optional).) – Namespace of region. This is used for identifying which region the service pack is from when you pass a slug to *inference\_conda\_env* and *training\_conda\_env*.
- **use\_case\_type** (str) – The use case type of the model. Use it through *UseCaseType* class or string provided in *UseCaseType*. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with *UseCaseType* class to see all supported types.
- **X\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (str. Defaults to None.) – Training script path.

- **training\_id** ((*str*, *optional*). Defaults to value from environment variables.) – The training OCID for model. Can be notebook session or job OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – whether to ignore the pending changes in the git.
- **max\_col\_num** ((*int*, *optional*). Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – Do not generate the input schema if the input has more than this number of features(columns).
- **ignore\_conda\_error** ((*bool*, *optional*). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**impute\_values: (dict, optional).**

The dictionary where the key is the column index(or names is accepted for pandas dataframe) and the value is the impute value for the corresponding column.

**Raises**

- **FileExistsError** – If files already exist but *force\_overwrite* is *False*.
- **ValueError** – If *inference\_python\_version* is not provided, but also cannot be found through manifest file.

**Returns**

An instance of *GenericModel* class.

**Return type**

*GenericModel*

**prepare\_save\_deploy**(*inference\_conda\_env: Optional[str] = None, inference\_python\_version: Optional[str] = None, training\_conda\_env: Optional[str] = None, training\_python\_version: Optional[str] = None, model\_file\_name: Optional[str] = None, as\_onnx: bool = False, initial\_types: Optional[List[Tuple]] = None, force\_overwrite: bool = False, namespace: str = 'id19sfcr6z', use\_case\_type: Optional[str] = None, X\_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, y\_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, training\_script\_path: Optional[str] = None, training\_id: Optional[str] = None, ignore\_pending\_changes: bool = True, max\_col\_num: int = 2000, ignore\_conda\_error: bool = False, model\_display\_name: Optional[str] = None, model\_description: Optional[str] = None, model\_freeform\_tags: Optional[dict] = None, model\_defined\_tags: Optional[dict] = None, ignore\_introspection: Optional[bool] = False, wait\_for\_completion: Optional[bool] = True, deployment\_display\_name: Optional[str] = None, deployment\_description: Optional[str] = None, deployment\_instance\_shape: Optional[str] = None, deployment\_instance\_count: Optional[int] = None, deployment\_bandwidth\_mbps: Optional[int] = None, deployment\_log\_group\_id: Optional[str] = None, deployment\_access\_log\_id: Optional[str] = None, deployment\_predict\_log\_id: Optional[str] = None, deployment\_memory\_in\_gbs: Optional[float] = None, deployment\_ocpus: Optional[float] = None, deployment\_image: Optional[str] = None, bucket\_uri: Optional[str] = None, overwrite\_existing\_artifact: Optional[bool] = True, remove\_existing\_artifact: Optional[bool] = True, model\_version\_set: Optional[Union[str, ModelVersionSet]] = None, version\_label: Optional[str] = None, \*\*kwargs: Dict) → *ModelDeployment**

Shortcut for prepare, save and deploy steps.

**Parameters**

- **inference\_conda\_env** ((*str*, optional). Defaults to *None*.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **inference\_python\_version** ((*str*, optional). Defaults to *None*.) – Python version which will be used in deployment.
- **training\_conda\_env** ((*str*, optional). Defaults to *None*.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack. If *training\_conda\_env* is not provided, *training\_conda\_env* will use the same value of *training\_conda\_env*.
- **training\_python\_version** ((*str*, optional). Defaults to *None*.) – Python version used during training.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – Name of the serialized model.
- **as\_onnx** ((*bool*, optional). Defaults to *False*.) – Whether to serialize as onnx model.
- **initial\_types** ((*list*[*Tuple*], optional).) – Defaults to *None*. Only used for *SklearnModel*, *LightGBMModel* and *XGBoostModel*. Each element is a tuple of a variable name and a type. Check this link [http://onnx.ai/sklearn-onnx/api\\_summary.html#id2](http://onnx.ai/sklearn-onnx/api_summary.html#id2) for more explanation and examples for *initial\_types*.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files.
- **namespace** ((*str*, optional).) – Namespace of region. This is used for identifying which region the service pack is from when you pass a slug to *inference\_conda\_env* and *training\_conda\_env*.
- **use\_case\_type** (*str*) – The use case type of the model. Use it through *UseCaseType* class or string provided in *UseCaseType*. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with *UseCaseType* class to see all supported types.
- **X\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (*str*. Defaults to *None*.) – Training script path.
- **training\_id** ((*str*, optional). Defaults to value from environment variables.) – The training OCID for model. Can be notebook session or job OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – whether to ignore the pending changes in the git.
- **max\_col\_num** ((*int*, optional). Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – Do not generate the input schema if the input has more than this number of features(columns).
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.



- **model\_display\_name** *((str, optional). Defaults to None.)* – The name of the model. If a `model_display_name` is not provided in `kwargs`, a randomly generated easy to remember name with timestamp will be generated, like `'strange-spider-2022-08-17-23:55.02'`.
- **model\_description** *((str, optional). Defaults to None.)* – The description of the model.
- **model\_freeform\_tags** *(Dict(str, str), Defaults to None.)* – Freeform tags for the model.
- **model\_defined\_tags** *((Dict(str, dict(str, object)), optional). Defaults to None.)* – Defined tags for the model.
- **ignore\_introspection** *((bool, optional). Defaults to None.)* – Determine whether to ignore the result of model introspection or not. If set to `True`, the save will ignore all model introspection errors.
- **wait\_for\_completion** *((bool, optional). Defaults to True.)* – Flag set for whether to wait for deployment to complete before proceeding.
- **deployment\_display\_name** *((str, optional). Defaults to None.)* – The name of the model deployment. If a `deployment_display_name` is not provided in `kwargs`, a randomly generated easy to remember name with timestamp will be generated, like `'strange-spider-2022-08-17-23:55.02'`.
- **description** *((str, optional). Defaults to None.)* – The description of the model.
- **deployment\_instance\_shape** *((str, optional). Default to VM.Standard2.1.)* – The shape of the instance used for deployment.
- **deployment\_instance\_count** *((int, optional). Defaults to 1.)* – The number of instance used for deployment.
- **deployment\_bandwidth\_mbps** *((int, optional). Defaults to 10.)* – The bandwidth limit on the load balancer in Mbps.
- **deployment\_log\_group\_id** *((str, optional). Defaults to None.)* – The oci logging group id. The access log and predict log share the same log group.
- **deployment\_access\_log\_id** *((str, optional). Defaults to None.)* – The access log OCID for the access logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_predict\_log\_id** *((str, optional). Defaults to None.)* – The predict log OCID for the predict logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_memory\_in\_gbs** *((float, optional). Defaults to None.)* – Specifies the size of the memory of the model deployment instance in GBs.
- **deployment\_ocpus** *((float, optional). Defaults to None.)* – Specifies the ocpu count of the model deployment instance.
- **deployment\_image** *((str, optional). Defaults to None.)* – The OCIR path of docker container image. Required for deploying model on container runtime.
- **bucket\_uri** *((str, optional). Defaults to None.)* – The OCI Object Storage URI where model artifacts will be copied to. The `bucket_uri` is only necessary for downloading large artifacts with size is greater than 2GB. Example: `oci://<bucket_name>@<namespace>/prefix/`.

- **overwrite\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **model\_version\_set** ((*Union[str, ModelVersionSet]*, optional). Defaults to *None*.) – The Model version set OCID, or name, or *ModelVersionSet* instance.
- **version\_label** ((*str*, optional). Defaults to *None*.) – The model version label.
- **kwargs** –

**impute\_values: (dict, optional).**

The dictionary where the key is the column index(or names is accepted for pandas dataframe) and the value is the impute value for the corresponding column.

**project\_id: (str, optional).**

Project OCID. If not specified, the value will be taken either from the environment variables or model properties.

**compartment\_id**

[(*str*, optional).] Compartment OCID. If not specified, the value will be taken either from the environment variables or model properties.

**image\_digest: (str, optional). Defaults to None.**

The digest of docker container image.

**cmd: (List, optional). Defaults to empty.**

The command line arguments for running docker container image.

**entrypoint: (List, optional). Defaults to empty.**

The entrypoint for running docker container image.

**server\_port: (int, optional). Defaults to 8080.**

The server port for docker container image.

**health\_check\_port: (int, optional). Defaults to 8080.**

The health check port for docker container image.

**deployment\_mode: (str, optional). Defaults to HTTPS\_ONLY.**

The deployment mode. Allowed values are: HTTPS\_ONLY and STREAM\_ONLY.

**input\_stream\_ids: (List, optional). Defaults to empty.**

The input stream ids. Required for STREAM\_ONLY mode.

**output\_stream\_ids: (List, optional). Defaults to empty.**

The output stream ids. Required for STREAM\_ONLY mode.

**environment\_variables: (Dict, optional). Defaults to empty.**

The environment variables for model deployment.

**timeout: (int, optional). Defaults to 10 seconds.**

The connection timeout in seconds for the client.

**max\_wait\_time**

[(int, optional). Defaults to 1200 seconds.] Maximum amount of time to wait in seconds. Negative implies infinite wait time.

**poll\_interval**

[(int, optional). Defaults to 10 seconds.] Poll interval in seconds.

**freeform\_tags:** (`Dict[str, str]`, optional). Defaults to `None`.

Freeform tags of the model deployment.

**defined\_tags:** (`Dict[str, dict[str, object]]`, optional). Defaults to `None`.

Defined tags of the model deployment.

**region:** (`str`, optional). Defaults to `None`.

The destination Object Storage bucket region. By default the value will be extracted from the `OCI_REGION_METADATA` environment variables.

Also can be any keyword argument for initializing the `ads.model.deployment.ModelDeploymentProperties`. See `ads.model.deployment.ModelDeploymentProperties()` for details.

#### Returns

The `ModelDeployment` instance.

#### Return type

`ModelDeployment`

#### Raises

- **FileExistsError** – If files already exist but `force_overwrite` is `False`.
- **ValueError** – If `inference_python_version` is not provided, but also cannot be found through manifest file.

**reload()** → `GenericModel`

Reloads the model artifact files: `score.py` and the `runtime.yaml`.

#### Returns

An instance of `GenericModel` class.

#### Return type

`GenericModel`

**reload\_runtime\_info()** → `None`

Reloads the model artifact file: `runtime.yaml`.

#### Returns

Nothing.

#### Return type

`None`

**restart\_deployment**(`max_wait_time: int = 1200`, `poll_interval: int = 10`) → `ModelDeployment`

Restarts the current deployment.

#### Parameters

- **max\_wait\_time** (`((int, optional). Defaults to 1200 seconds.)`) – Maximum amount of time to wait for activate or deactivate in seconds. Total amount of time to wait for restart deployment is twice as the value. Negative implies infinite wait time.
- **poll\_interval** (`((int, optional). Defaults to 10 seconds.)`) – Poll interval in seconds.

#### Returns

The `ModelDeployment` instance.

#### Return type

`ModelDeployment`

```
save(display_name: Optional[str] = None, description: Optional[str] = None, freeform_tags: Optional[dict]
    = None, defined_tags: Optional[dict] = None, ignore_introspection: Optional[bool] = False,
    bucket_uri: Optional[str] = None, overwrite_existing_artifact: Optional[bool] = True,
    remove_existing_artifact: Optional[bool] = True, model_version_set: Optional[Union[str,
    ModelVersionSet]] = None, version_label: Optional[str] = None, **kwargs) → str
```

Saves model artifacts to the model catalog.

#### Parameters

- **display\_name** ((str, optional). Defaults to None.) – The name of the model. If a display\_name is not provided in kwargs, randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55:02'.
- **description** ((str, optional). Defaults to None.) – The description of the model.
- **freeform\_tags** (Dict(str, str), Defaults to None.) – Freeform tags for the model.
- **defined\_tags** ((Dict(str, dict(str, object)), optional). Defaults to None.) – Defined tags for the model.
- **ignore\_introspection** ((bool, optional). Defaults to None.) – Determine whether to ignore the result of model introspection or not. If set to True, the save will ignore all model introspection errors.
- **bucket\_uri** ((str, optional). Defaults to None.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for uploading large artifacts which size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **overwrite\_existing\_artifact** ((bool, optional). Defaults to True.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((bool, optional). Defaults to True.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **model\_version\_set** ((Union[str, ModelVersionSet], optional). Defaults to None.) – The model version set OCID, or model version set name, or *ModelVersionSet* instance.
- **version\_label** ((str, optional). Defaults to None.) – The model version label.
- **kwargs** –

**project\_id:** (str, optional).

Project OCID. If not specified, the value will be taken either from the environment variables or model properties.

**compartment\_id**

[(str, optional).] Compartment OCID. If not specified, the value will be taken either from the environment variables or model properties.

**region:** (str, optional). Defaults to None.

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**timeout:** (int, optional). Defaults to 10 seconds.

The connection timeout in seconds for the client.

Also can be any attribute that *oci.data\_science.models.Model* accepts.

**Raises**

**`RuntimeInfoInconsistencyError`** – When `.runtime_info` is not synched with `runtime.yaml` file.

**Returns**

The model id.

**Return type**

str

**property** `schema_input`

**property** `schema_output`

**`serialize_model`**(*as\_onnx: bool = False, X\_sample: Optional[Union[Dict, str, List, ndarray, Series, DataFrame, pyspark.sql.DataFrame, pyspark.pandas.DataFrame]] = None, force\_overwrite: bool = False, \*\*kwargs*) → None

Serialize and save pyspark model using spark serialization.

**Parameters**

**`force_overwrite`** ((bool, optional). Defaults to False.) – If set as True, overwrite serialized model if exists.

**Return type**

None

**`set_model_input_serializer`**(*model\_input\_serializer: Union[str, SERDE]*)

Registers serializer used for serializing data passed in `verify/predict`.

**Examples**

```
>>> generic_model.set_model_input_serializer(GenericModel.model_input_
↳serializer_type.CLOUDPICKLE)
```

```
>>> # Register serializer by passing the name of it.
>>> generic_model.set_model_input_serializer("cloudpickle")
```

```
>>> # Example of creating customized model input serializer and registering it.
>>> from ads.model import SERDE
>>> from ads.model.generic_model import GenericModel
```

```
>>> class MySERDE(SERDE):
...     def __init__(self):
...         super().__init__()
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
...     def deserialize(self, data):
...         deserialized_data = 2
...         return deserialized_data
```

```
>>> class Toy:
...     def predict(self, x):
...         return x ** 2
```

```
>>> generic_model = GenericModel(  
...     estimator=Toy(),  
...     artifact_dir=tempfile.mkdtemp(),  
...     model_input_serializer=MySERDE()  
... )
```

```
>>> # Or register the serializer after creating model instance.  
>>> generic_model.set_model_input_serializer(MySERDE())
```

#### Parameters

**model\_input\_serializer** ((str, or `ads.model.SERDE`)) – name of the serializer, or instance of SERDE.

**set\_model\_save\_serializer**(*model\_save\_serializer: Union[str, SERDE]*)

Registers serializer used for saving model.

#### Examples

```
>>> generic_model.set_model_save_serializer(GenericModel.model_save_serializer_  
↳ type.CLOUDPICKLE)
```

```
>>> # Register serializer by passing the name of it.  
>>> generic_model.set_model_save_serializer("cloudpickle")
```

```
>>> # Example of creating customized model save serializer and registering it.  
>>> from ads.model import SERDE  
>>> from ads.model.generic_model import GenericModel
```

```
>>> class MySERDE(SERDE):  
...     def __init__(self):  
...         super().__init__()  
...     def serialize(self, data):  
...         serialized_data = 1  
...         return serialized_data  
...     def deserialize(self, data):  
...         deserialized_data = 2  
...         return deserialized_data
```

```
>>> class Toy:  
...     def predict(self, x):  
...         return x ** 2
```

```
>>> generic_model = GenericModel(  
...     estimator=Toy(),  
...     artifact_dir=tempfile.mkdtemp(),  
...     model_save_serializer=MySERDE()  
... )
```

```
>>> # Or register the serializer after creating model instance.
>>> generic_model.set_model_save_serializer(MySERDE())
```

**Parameters**

**model\_save\_serializer** ((`ads.model.SERDE` or `str`)) – name of the serializer or instance of SERDE.

**summary\_status()** → `DataFrame`

A summary table of the current status.

**Returns**

The summary stable of the current status.

**Return type**

`pd.DataFrame`

**update(\*\*kwargs)** → *GenericModel*

Updates model metadata in the Model Catalog. Updates only metadata information. The model artifacts are immutable and cannot be updated.

**Parameters**

**kwargs** –

**display\_name:** (`str`, optional). Defaults to `None`.

The name of the model.

**description:** (`str`, optional). Defaults to `None`.

The description of the model.

**freeform\_tags**

[`Dict(str, str)`, Defaults to `None`.] Freeform tags for the model.

**defined\_tags**

[(`Dict(str, dict(str, object))`, optional). Defaults to `None`.] Defined tags for the model.

**version\_label:** (`str`, optional). Defaults to `None`.

The model version label.

Additional kwargs arguments. Can be any attribute that `oci.data_science.models.Model` accepts.

**Returns**

An instance of *GenericModel* (self).

**Return type**

*GenericModel*

**Raises**

**ValueError** – if model not saved to the Model Catalog.

**classmethod update\_deployment**(`model_deployment_id: Optional[str] = None`, `properties: Optional[Union[ModelDeploymentProperties, dict]] = None`, `wait_for_completion: bool = True`, `max_wait_time: int = 1200`, `poll_interval: int = 10`, `**kwargs`) → *ModelDeployment*

Updates a model deployment.

You can update `model_deployment_configuration_details` and change `instance_shape` and `model_id` when the model deployment is in the `ACTIVE` lifecycle state. The `bandwidth_mbps` or `instance_count` can only be updated while the model deployment is in the `INACTIVE` state. Changes to the `bandwidth_mbps` or

*instance\_count* will take effect the next time the *ActivateModelDeployment* action is invoked on the model deployment resource.

## Examples

```
>>> # Update access log id, freeform tags and description for the model_  
↪ deployment  
>>> model.update_deployment(  
>>>     properties=ModelDeploymentProperties(  
>>>         access_log_id=<log_ocid>,  
>>>         description="Description for Custom Model",  
>>>         freeform_tags={"key": "value"},  
>>>     )  
>>> )
```

## Parameters

- **model\_deployment\_id** (*str.*) – The model deployment OCID. Defaults to None. If the method called on instance level, then *self.model\_deployment.model\_deployment\_id* will be used.
- **properties** (*ModelDeploymentProperties* or *dict*) – The properties for updating the deployment.
- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to complete before proceeding. Defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).
- **kwargs** –

**auth:** (*Dict*, optional). Defaults to *None*.

The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.

## Returns

An instance of *ModelDeployment* class.

## Return type

*ModelDeployment*

**upload\_artifact**(*uri: str, auth: Optional[Dict] = None, force\_overwrite: Optional[bool] = False*) → None

Uploads model artifacts to the provided *uri*. The artifacts will be zipped before uploading.

## Parameters

- **uri** (*str*) – The destination location for the model artifacts, which can be a local path or OCI object storage URI. Examples: 

```
>>> upload_artifact(uri="/some/local/folder/") >>>  
upload_artifact(uri="oci://bucket@namespace/prefix/")
```
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys*



or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

- **force\_overwrite** (*bool*) – Overwrite target\_dir if exists.

**verify**(*data: Optional[Any] = None, reload\_artifacts: bool = True, auto\_serialize\_data: bool = True, \*\*kwargs*) → Dict[str, Any]

Test if deployment works in local environment.

## Examples

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.verify(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.verify(
...     image="oci://<bucket>@<tenancy>/myimage.png",
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

## Parameters

- **data** (*Any*) – Data used to test if deployment works in local environment.
- **reload\_artifacts** (*bool. Defaults to True.*) – Whether to reload artifacts or not.
- **auto\_serialize\_data** (*bool.*) – Whether to auto serialize input data. Defaults to *False* for GenericModel, and *True* for other frameworks. *data* required to be json serializable if *auto\_serialize\_data=False*. if *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.
- **kwargs** – *content\_type*: str, used to indicate the media type of the resource. *image*: PIL.Image Object or uri for the image.

A valid string path for image file can be local path, http(s), oci, s3, gs.

### storage\_options: dict

Passed to `fsspec.open` for a particular storage connection. Please see `fsspec` (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.

## Returns

A dictionary which contains prediction results.

## Return type

Dict

**ads.model.framework.tensorflow\_model module**

```
class ads.model.framework.tensorflow_model.TensorFlowModel(estimator: callable, artifact_dir:
    Optional[str] = None, properties:
    Optional[ModelProperties] = None,
    auth: Dict = None,
    model_save_serializer:
    Optional[SERDE] = 'tf',
    model_input_serializer:
    Optional[SERDE] = None, **kwargs)
```

Bases: [\*FrameworkSpecificModel\*](#)

TensorFlowModel class for estimators from Tensorflow framework.

**algorithm**

The algorithm of the model.

**Type**  
str

**artifact\_dir**

Directory for generate artifact.

**Type**  
str

**auth**

Default authentication is set using the `ads.set_auth` API. To override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create an authentication signer to instantiate an IdentityClient object.

**Type**  
Dict

**estimator**

A trained tensorflow estimator/model using Tensorflow.

**Type**  
Callable

**framework**

“tensorflow”, the framework name of the model.

**Type**  
str

**hyperparameter**

The hyperparameters of the estimator.

**Type**  
dict

**metadata\_custom**

The model custom metadata.

**Type**  
[\*ModelCustomMetadata\*](#)

**metadata\_provenance**

The model provenance metadata.

**Type**

*ModelProvenanceMetadata*

**metadata\_taxonomy**

The model taxonomy metadata.

**Type**

*ModelTaxonomyMetadata*

**model\_artifact**

This is built by calling prepare.

**Type**

*ModelArtifact*

**model\_deployment**

A ModelDeployment instance.

**Type**

*ModelDeployment*

**model\_file\_name**

Name of the serialized model.

**Type**

str

**model\_id**

The model ID.

**Type**

str

**properties**

ModelProperties object required to save and deploy model. For more details, check [https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model\\_properties](https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model_properties).

**Type**

*ModelProperties*

**runtime\_info**

A RuntimeInfo instance.

**Type**

*RuntimeInfo*

**schema\_input**

Schema describes the structure of the input data.

**Type**

*Schema*

**schema\_output**

Schema describes the structure of the output data.

**Type**

*Schema*

**serialize**

Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under `artifact_dir` and update the `score.py` manually.

**Type**

bool

**version**

The framework version of the model.

**Type**

str

**delete\_deployment(...)**

Deletes the current model deployment.

**deploy(..., \*\*kwargs)**

Deploys a model.

**from\_model\_artifact(uri, model\_file\_name, artifact\_dir, ..., \*\*kwargs)**

Loads model from the specified folder, or zip/tar archive.

**from\_model\_catalog(model\_id, model\_file\_name, artifact\_dir, ..., \*\*kwargs)**

Loads model from model catalog.

**introspect(...)**

Runs model introspection.

**predict(data, ...)**

Returns prediction of input data run against the model deployment endpoint.

**prepare(..., \*\*kwargs)**

Prepare and save the `score.py`, serialized model and `runtime.yaml` file.

**reload(...)**

Reloads the model artifact files: `score.py` and the `runtime.yaml`.

**save(..., \*\*kwargs)**

Saves model artifacts to the model catalog.

**summary\_status(...)**

Gets a summary table of the current status.

**verify(data, ...)**

Tests if deployment works in local environment.

## Examples

```
>>> from ads.model.framework.tensorflow_model import TensorFlowModel
>>> import tempfile
>>> import tensorflow as tf
```

```
>>> mnist = tf.keras.datasets.mnist
>>> (x_train, y_train), (x_test, y_test) = mnist.load_data()
>>> x_train, x_test = x_train / 255.0, x_test / 255.0
```

```
>>> tf_estimator = tf.keras.models.Sequential(
...     [
...         tf.keras.layers.Flatten(input_shape=(28, 28)),
...         tf.keras.layers.Dense(128, activation="relu"),
...         tf.keras.layers.Dropout(0.2),
...         tf.keras.layers.Dense(10),
...     ]
... )
>>> loss_fn = tf.keras.losses.SparseCategoricalCrossentropy(from_logits=True)
>>> tf_estimator.compile(optimizer="adam", loss=loss_fn, metrics=["accuracy"])
>>> tf_estimator.fit(x_train, y_train, epochs=1)
```

```
>>> tf_model = TensorFlowModel(estimator=tf_estimator,
... artifact_dir=tempfile.mkdtemp())
>>> inference_conda_env = "generalml_p37_cpu_v1"
```

```
>>> tf_model.prepare(inference_conda_env="generalml_p37_cpu_v1", force_
↳ overwrite=True)
>>> tf_model.verify(x_test[:1])
>>> tf_model.save()
>>> model_deployment = tf_model.deploy(wait_for_completion=False)
>>> tf_model.predict(x_test[:1])
```

Initiates a TensorFlowModel instance.

#### Parameters

- **estimator** (*callable*) – Any model object generated by tensorflow framework
- **artifact\_dir** (*str*) – Directory for generate artifact.
- **properties** (*(ModelProperties, optional). Defaults to None.*) – ModelProperties object required to save and deploy model.
- **auth** (*(Dict, optional). Defaults to None.*) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **model\_save\_serializer** (*(SERDE or str, optional). Defaults to None.*) – Instance of *ads.model.SERDE*. Used for serialize/deserialize model.
- **model\_input\_serializer** (*(SERDE, optional). Defaults to None.*) – Instance of *ads.model.SERDE*. Used for serialize/deserialize data.

#### Returns

TensorFlowModel instance.

#### Return type

*TensorFlowModel*

**classmethod delete**(*model\_id: Optional[str] = None, delete\_associated\_model\_deployment: Optional[bool] = False, delete\_model\_artifact: Optional[bool] = False, artifact\_dir: Optional[str] = None, \*\*kwargs: Dict*) → None

Deletes a model from Model Catalog.

#### Parameters

- **model\_id** ((*str*, optional). Defaults to *None*.) – The model OCID to be deleted. If the method called on instance level, then *self.model\_id* will be used.
- **delete\_associated\_model\_deployment** ((*bool*, optional). Defaults to *False*.) – Whether associated model deployments need to be deleted or not.
- **delete\_model\_artifact** ((*bool*, optional). Defaults to *False*.) – Whether associated model artifacts need to be deleted or not.
- **artifact\_dir** ((*str*, optional). Defaults to *None*) – The local path to the model artifacts folder. If the method called on instance level, the *self.artifact\_dir* will be used by default.

**Return type**

*None*

**Raises**

**ValueError** – If *model\_id* not provided.

**delete\_deployment**(*wait\_for\_completion: bool = True*) → *None*

Deletes the current deployment.

**Parameters**

**wait\_for\_completion** ((*bool*, optional). Defaults to *True*.) – Whether to wait till completion.

**Return type**

*None*

**Raises**

**ValueError** – if there is not deployment attached yet.:

**deploy**(*wait\_for\_completion: Optional[bool] = True, display\_name: Optional[str] = None, description: Optional[str] = None, deployment\_instance\_shape: Optional[str] = None, deployment\_instance\_count: Optional[int] = None, deployment\_bandwidth\_mbps: Optional[int] = None, deployment\_log\_group\_id: Optional[str] = None, deployment\_access\_log\_id: Optional[str] = None, deployment\_predict\_log\_id: Optional[str] = None, deployment\_memory\_in\_gbs: Optional[float] = None, deployment\_ocpus: Optional[float] = None, deployment\_image: Optional[str] = None, \*\*kwargs: Dict*) → *ModelDeployment*

Deploys a model. The model needs to be saved to the model catalog at first. You can deploy the model on either conda or container runtime. The customized runtime allows you to bring your own service container. To deploy model on container runtime, make sure to build the container and push it to OCIR. For more information, see <https://docs.oracle.com/en-us/iaas/data-science/using/mod-dep-byoc.htm>.

**Example**

```
# This is an example to deploy model on container runtime >>> model = Generic-
Model(estimator=estimator, artifact_dir=tempfile.mkdtemp()) >>> model.summary_status() >>>
model.prepare( ... model_file_name="toy_model.pkl", ... ignore_conda_error=True, # set ig-
nore_conda_error=True for container runtime ... force_overwrite=True ... ) >>> model.verify() >>>
model.save() >>> model.deploy( ... deployment_image="iad.ocir.io/<namespace>/<image>:<tag>",
... entrypoint=["python", "/opt/ds/model/deployed_model/api.py"], ... server_port=5000, ...
health_check_port=5000, ... environment_variables={"key":"value"} ... )
```

**Parameters**

- **wait\_for\_completion** ((*bool*, optional). Defaults to *True*.) – Flag set for whether to wait for deployment to complete before proceeding.

- **display\_name** ((*str*, optional). Defaults to *None*.) – The name of the model. If a display\_name is not provided in kwargs, a randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55:02'.
- **description** ((*str*, optional). Defaults to *None*.) – The description of the model.
- **deployment\_instance\_shape** ((*str*, optional). Default to *VM.Standard2.1*.) – The shape of the instance used for deployment.
- **deployment\_instance\_count** ((*int*, optional). Defaults to *1*.) – The number of instance used for deployment.
- **deployment\_bandwidth\_mbps** ((*int*, optional). Defaults to *10*.) – The bandwidth limit on the load balancer in Mbps.
- **deployment\_memory\_in\_gbs** ((*float*, optional). Defaults to *None*.) – Specifies the size of the memory of the model deployment instance in GBs.
- **deployment\_ocpus** ((*float*, optional). Defaults to *None*.) – Specifies the ocpu count of the model deployment instance.
- **deployment\_log\_group\_id** ((*str*, optional). Defaults to *None*.) – The oci logging group id. The access log and predict log share the same log group.
- **deployment\_access\_log\_id** ((*str*, optional). Defaults to *None*.) – The access log OCID for the access logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_predict\_log\_id** ((*str*, optional). Defaults to *None*.) – The predict log OCID for the predict logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_image** ((*str*, optional). Defaults to *None*.) – The OCIR path of docker container image. Required for deploying model on container runtime.
- **kwargs** –

**project\_id:** (*str*, optional).

Project OCID. If not specified, the value will be taken from the environment variables.

**compartment\_id**

[(*str*, optional).] Compartment OCID. If not specified, the value will be taken from the environment variables.

**max\_wait\_time**

[(*int*, optional). Defaults to 1200 seconds.] Maximum amount of time to wait in seconds. Negative implies infinite wait time.

**poll\_interval**

[(*int*, optional). Defaults to 10 seconds.] Poll interval in seconds.

**freeform\_tags:** (*Dict*[*str*, *str*], optional). Defaults to *None*.

Freeform tags of the model deployment.

**defined\_tags:** (*Dict*[*str*, *dict*[*str*, *object*]], optional). Defaults to *None*.

Defined tags of the model deployment.

**image\_digest:** (*str*, optional). Defaults to *None*.

The digest of docker container image.

**cmd:** (*List*, optional). Defaults to *empty*.

The command line arguments for running docker container image.

**entrypoint: (List, optional). Defaults to empty.**

The entrypoint for running docker container image.

**server\_port: (int, optional). Defaults to 8080.**

The server port for docker container image.

**health\_check\_port: (int, optional). Defaults to 8080.**

The health check port for docker container image.

**deployment\_mode: (str, optional). Defaults to HTTPS\_ONLY.**

The deployment mode. Allowed values are: HTTPS\_ONLY and STREAM\_ONLY.

**input\_stream\_ids: (List, optional). Defaults to empty.**

The input stream ids. Required for STREAM\_ONLY mode.

**output\_stream\_ids: (List, optional). Defaults to empty.**

The output stream ids. Required for STREAM\_ONLY mode.

**environment\_variables: (Dict, optional). Defaults to empty.**

The environment variables for model deployment.

Also can be any keyword argument for initializing the  
*ads.model.deployment.ModelDeploymentProperties*. See

*ads.model.deployment.ModelDeploymentProperties()* for details.

#### Returns

The ModelDeployment instance.

#### Return type

*ModelDeployment*

#### Raises

**ValueError** – If *model\_id* is not specified.



```

evaluate(X: Union[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]], _SupportsArray[dtype],
Sequence[_SupportsArray[dtype]], Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
y: Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]], _SupportsArray[dtype],
Sequence[_SupportsArray[dtype]], Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
y_pred: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]]
= None, y_score: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]]
= None, X_train: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]]
= None, y_train: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]]
= None, classes: Optional[List] = None, positive_class: Optional[str] = None, legend_labels:
Optional[dict] = None, perfect: bool = True, filename: Optional[str] = None, use_case_type:
Optional[str] = None)

```

Creates an ads evaluation report.

### Parameters

- **X (DataFrame-like)** – The data used to make a prediction. Can be set to None if *y\_preds* is given. (And *y\_scores* for more thorough analysis).

- **y** (*array-like*) – The true values corresponding to the input data
- **y\_pred** (*array-like, optional*) – The predictions from each model in the same order as the models
- **y\_score** (*array-like, optional*) – The predict\_proba from each model in the same order as the models
- **X\_train** (*DataFrame-like, optional*) – The data used to train the model
- **y\_train** (*array-like, optional*) – The true values corresponding to the input training data
- **classes** (*List or None, optional*) – A List of the possible labels for y, when evaluating a classification use case
- **positive\_class** (*str or int, optional*) – The class to report metrics for binary dataset. If the target classes is True or False, positive\_class will be set to True by default. If the dataset is multiclass or multilabel, this will be ignored.
- **legend\_labels** (*dict, optional*) – List of legend labels. Defaults to *None*. If legend\_labels not specified class names will be used for plots.
- **use\_case\_type** (*str, optional*) – The type of problem this model is solving. This can be set during *prepare()*. Examples: “binary\_classification”, “regression”, “multinomial\_classification” Full list of supported types can be found here: *ads.common.model\_metadata.UseCaseType*
- **filename** (*str, optional*) – If filename is given, the html report will be saved to the location specified.

## Examples

```
>>> import tempfile
>>> from ads.evaluations.evaluator import Evaluator
>>> from sklearn.tree import DecisionTreeClassifier
>>> from sklearn.datasets import make_classification
>>> from sklearn.model_selection import train_test_split
>>> from ads.model.framework.sklearn_model import SklearnModel
>>> from ads.common.model_metadata import UseCaseType
>>>
>>> X, y = make_classification(n_samples=1000)
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.3)
>>> est = DecisionTreeClassifier().fit(X_train, y_train)
>>> model = SklearnModel(estimator=est, artifact_dir=tempfile.mkdtemp())
>>> model.prepare(
>>>     inference_conda_env="generalml_p38_cpu_v1",
>>>     training_conda_env="generalml_p38_cpu_v1",
>>>     X_sample=X_test,
>>>     y_sample=y_test,
>>>     use_case_type=UseCaseType.BINARY_CLASSIFICATION,
>>> )
>>> model.evaluate(X_test, y_test, filename="report.html")
```

```
classmethod from_id(ocid: str, model_file_name: Optional[str] = None, artifact_dir: Optional[str] =  
None, auth: Optional[Dict] = None, force_overwrite: Optional[bool] = False,  
properties: Optional[Union[ModelProperties, Dict]] = None, bucket_uri:  
Optional[str] = None, remove_existing_artifact: Optional[bool] = True,  
ignore_conda_error: Optional[bool] = False, **kwargs) → Self
```

Loads model from model OCID or model deployment OCID.

#### Parameters

- **ocid** (*str*) – The model OCID or model deployment OCID.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((*str*, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((*ModelProperties*, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **kwargs** –

#### **compartment\_id**

[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

#### **timeout**

[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

#### Returns

An instance of GenericModel class.

#### Return type

Self

```
classmethod from_model_artifact(uri: str, model_file_name: Optional[str] = None, artifact_dir:  
Optional[str] = None, auth: Optional[Dict] = None,  
force_overwrite: Optional[bool] = False, properties:  
Optional[ModelProperties] = None, ignore_conda_error:  
Optional[bool] = False, **kwargs: dict) → Self
```

Loads model from a folder, or zip/tar archive.

#### Parameters

- **uri** (*str*) – The folder path, ZIP file path, or TAR file path. It could contain a serialized model(required) as well as any files needed for deployment including: serialized model,

runtime.yaml, score.py and etc. The content of the folder will be copied to the *artifact\_dir* folder.

- **model\_file\_name** ((str, optional). Defaults to *None*.) – The serialized model file name. Will be extracted from artifacts if not provided.
- **artifact\_dir** ((str, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((ModelProperties, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **ignore\_conda\_error** ((bool, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.

#### Returns

An instance of *GenericModel* class.

#### Return type

Self

#### Raises

**ValueError** – If *model\_file\_name* not provided.

```
classmethod from_model_catalog(model_id: str, model_file_name: Optional[str] = None, artifact_dir:
    Optional[str] = None, auth: Optional[Dict] = None, force_overwrite:
    Optional[bool] = False, properties:
    Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] =
    True, ignore_conda_error: Optional[bool] = False, **kwargs) →
    Self
```

Loads model from model catalog.

#### Parameters

- **model\_id** (str) – The model OCID.
- **model\_file\_name** ((str, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((str, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((ModelProperties, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.

- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**compartment\_id**

[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

**timeout**

[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

**region: (str, optional). Defaults to *None*.**

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**Returns**

An instance of *GenericModel* class.

**Return type**

Self

```
classmethod from_model_deployment(model_deployment_id: str, model_file_name: Optional[str] =
    None, artifact_dir: Optional[str] = None, auth: Optional[Dict] =
    None, force_overwrite: Optional[bool] = False, properties:
    Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] =
    True, ignore_conda_error: Optional[bool] = False, **kwargs) →
    Self
```

Loads model from model deployment.

**Parameters**

- **model\_deployment\_id** (*str*) – The model deployment OCID.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((*str*, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((*ModelProperties*, optional). Defaults to *None*.) – *ModelProperties* object required to save and deploy model.

- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –
  - compartment\_id**  
[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.
  - timeout**  
[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.
  - region: (str, optional). Defaults to *None*.**  
The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**Returns**

An instance of GenericModel class.

**Return type**

Self

**get\_data\_serializer()**

Gets data serializer.

**Returns**

object

**Return type**

ads.model.Serializer object.

**get\_model\_serializer()**

Gets model serializer.

**introspect()** → DataFrame

Conducts introspection.

**Returns**

A pandas DataFrame which contains the introspection results.

**Return type**

pandas.DataFrame

**property metadata\_custom**

**property metadata\_provenance**

**property metadata\_taxonomy**

**property model\_deployment\_id**

**property model\_id**

**model\_input\_serializer\_type**

alias of ModelInputSerializerType

**model\_save\_serializer\_type**

alias of TensorflowModelSerializerType

**populate\_metadata**(*use\_case\_type*: Optional[str] = None, *data\_sample*: Optional[ADSDData] = None, *X\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *y\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *training\_script\_path*: Optional[str] = None, *training\_id*: Optional[str] = None, *ignore\_pending\_changes*: bool = True, *max\_col\_num*: int = 2000, *ignore\_conda\_error*: bool = False)

Populates input schema and output schema. If the schema exceeds the limit of 32kb, save as json files to the artifact directory.

**Parameters**

- **use\_case\_type**((str, optional). Defaults to None.) – The use case type of the model.
- **data\_sample**((ADSDData, optional). Defaults to None.) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path**(str. Defaults to None.) – Training script path.
- **training\_id**((str, optional). Defaults to None.) – The training model OCID.
- **ignore\_pending\_changes** (bool. Defaults to False.) – Ignore the pending changes in git.
- **max\_col\_num** ((int, optional). Defaults to utils.DATA\_SCHEMA\_MAX\_COL\_NUM.) – The maximum number of columns allowed in auto generated schema.

**Returns**

Nothing.

**Return type**

None

**populate\_schema**(*data\_sample*: Optional[ADSDData] = None, *X\_sample*: Optional[Union[List, Tuple, DataFrame, Series, ndarray]] = None, *y\_sample*: Optional[Union[List, Tuple, DataFrame, Series, ndarray]] = None, *max\_col\_num*: int = 2000)

Populate input and output schemas. If the schema exceeds the limit of 32kb, save as json files to the artifact dir.

**Parameters**

- **data\_sample**(ADSDData) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample**(Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]) – A sample of input data that will be used to generate the input schema.

- **y\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*) – A sample of output data that will be used to generate the output schema.
- **max\_col\_num** (*((int, optional). Defaults to utils.DATA\_SCHEMA\_MAX\_COL\_NUM.)*) – The maximum number of columns allowed in auto generated schema.

**predict** (*data: Optional[Any] = None, auto\_serialize\_data: bool = True, \*\*kwargs*) → Dict[str, Any]

Returns prediction of input data run against the model deployment endpoint.

## Examples

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.predict(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.predict(
...     image="oci://<bucket>@<tenancy>/myimage.png",
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

## Parameters

- **data** (*Any*) – Data for the prediction for onnx models, for local serialization method, data can be the data types that each framework support.
- **auto\_serialize\_data** (*bool.*) – Whether to auto serialize input data. Defaults to *False* for GenericModel, and *True* for other frameworks. *data* required to be json serializable if *auto\_serialize\_data=False*. If *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.
- **kwargs** – *content\_type*: str, used to indicate the media type of the resource. *image*: PIL.Image Object or uri for the image.

A valid string path for image file can be local path, http(s), oci, s3, gs.

### storage\_options: dict

Passed to *fsspec.open* for a particular storage connection. Please see *fsspec* (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.

## Returns

Dictionary with the predicted values.

## Return type

Dict[str, Any]

## Raises

- **NotActiveDeploymentError** – If model deployment process was not started or not finished yet.
- **ValueError** – If *data* is empty or not JSON serializable.



**prepare**(*inference\_conda\_env*: Optional[str] = None, *inference\_python\_version*: Optional[str] = None, *training\_conda\_env*: Optional[str] = None, *training\_python\_version*: Optional[str] = None, *model\_file\_name*: Optional[str] = None, *as\_onnx*: bool = False, *initial\_types*: Optional[List[Tuple]] = None, *force\_overwrite*: bool = False, *namespace*: str = 'id19sferra6z', *use\_case\_type*: Optional[str] = None, *X\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *y\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *training\_script\_path*: Optional[str] = None, *training\_id*: Optional[str] = None, *ignore\_pending\_changes*: bool = True, *max\_col\_num*: int = 2000, *ignore\_conda\_error*: bool = False, **\*\*kwargs**: Dict) → *GenericModel*

Prepare and save the score.py, serialized model and runtime.yaml file.

### Parameters

- **inference\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **inference\_python\_version** ((str, optional). Defaults to None.) – Python version which will be used in deployment.
- **training\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack. If *training\_conda\_env* is not provided, *training\_conda\_env* will use the same value of *inference\_conda\_env*.
- **training\_python\_version** ((str, optional). Defaults to None.) – Python version used during training.
- **model\_file\_name** ((str, optional). Defaults to None.) – Name of the serialized model. Will be auto generated if not provided.
- **as\_onnx** ((bool, optional). Defaults to False.) – Whether to serialize as onnx model.
- **initial\_types** ((list[Tuple], optional).) – Defaults to None. Only used for SklearnModel, LightGBMModel and XGBoostModel. Each element is a tuple of a variable name and a type. Check this link [http://onnx.ai/sklearn-onnx/api\\_summary.html#id2](http://onnx.ai/sklearn-onnx/api_summary.html#id2) for more explanation and examples for *initial\_types*.
- **force\_overwrite** ((bool, optional). Defaults to False.) – Whether to overwrite existing files.
- **namespace** ((str, optional).) – Namespace of region. This is used for identifying which region the service pack is from when you pass a slug to *inference\_conda\_env* and *training\_conda\_env*.
- **use\_case\_type** (str) – The use case type of the model. Use it through *UseCaseType* class or string provided in *UseCaseType*. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with *UseCaseType* class to see all supported types.
- **X\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (str. Defaults to None.) – Training script path.

- **training\_id** ((*str*, *optional*). Defaults to value from environment variables.) – The training OCID for model. Can be notebook session or job OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – whether to ignore the pending changes in the git.
- **max\_col\_num** ((*int*, *optional*). Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – Do not generate the input schema if the input has more than this number of features(columns).
- **ignore\_conda\_error** ((*bool*, *optional*). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**impute\_values: (dict, optional).**

The dictionary where the key is the column index(or names is accepted for pandas dataframe) and the value is the impute value for the corresponding column.

#### Raises

- **FileExistsError** – If files already exist but *force\_overwrite* is *False*.
- **ValueError** – If *inference\_python\_version* is not provided, but also cannot be found through manifest file.

#### Returns

An instance of *GenericModel* class.

#### Return type

*GenericModel*

**prepare\_save\_deploy**(*inference\_conda\_env: Optional[str] = None, inference\_python\_version: Optional[str] = None, training\_conda\_env: Optional[str] = None, training\_python\_version: Optional[str] = None, model\_file\_name: Optional[str] = None, as\_onnx: bool = False, initial\_types: Optional[List[Tuple]] = None, force\_overwrite: bool = False, namespace: str = 'id19sfcr6z', use\_case\_type: Optional[str] = None, X\_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, y\_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, training\_script\_path: Optional[str] = None, training\_id: Optional[str] = None, ignore\_pending\_changes: bool = True, max\_col\_num: int = 2000, ignore\_conda\_error: bool = False, model\_display\_name: Optional[str] = None, model\_description: Optional[str] = None, model\_freeform\_tags: Optional[dict] = None, model\_defined\_tags: Optional[dict] = None, ignore\_introspection: Optional[bool] = False, wait\_for\_completion: Optional[bool] = True, deployment\_display\_name: Optional[str] = None, deployment\_description: Optional[str] = None, deployment\_instance\_shape: Optional[str] = None, deployment\_instance\_count: Optional[int] = None, deployment\_bandwidth\_mbps: Optional[int] = None, deployment\_log\_group\_id: Optional[str] = None, deployment\_access\_log\_id: Optional[str] = None, deployment\_predict\_log\_id: Optional[str] = None, deployment\_memory\_in\_gbs: Optional[float] = None, deployment\_ocpus: Optional[float] = None, deployment\_image: Optional[str] = None, bucket\_uri: Optional[str] = None, overwrite\_existing\_artifact: Optional[bool] = True, remove\_existing\_artifact: Optional[bool] = True, model\_version\_set: Optional[Union[str, ModelVersionSet]] = None, version\_label: Optional[str] = None, \*\*kwargs: Dict) → *ModelDeployment**

Shortcut for prepare, save and deploy steps.

#### Parameters

- **inference\_conda\_env** ((*str*, optional). Defaults to *None*.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **inference\_python\_version** ((*str*, optional). Defaults to *None*.) – Python version which will be used in deployment.
- **training\_conda\_env** ((*str*, optional). Defaults to *None*.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack. If *training\_conda\_env* is not provided, *training\_conda\_env* will use the same value of *training\_conda\_env*.
- **training\_python\_version** ((*str*, optional). Defaults to *None*.) – Python version used during training.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – Name of the serialized model.
- **as\_onnx** ((*bool*, optional). Defaults to *False*.) – Whether to serialize as onnx model.
- **initial\_types** ((*list*[*Tuple*], optional).) – Defaults to *None*. Only used for SklearnModel, LightGBMModel and XGBoostModel. Each element is a tuple of a variable name and a type. Check this link [http://onnx.ai/sklearn-onnx/api\\_summary.html#id2](http://onnx.ai/sklearn-onnx/api_summary.html#id2) for more explanation and examples for *initial\_types*.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files.
- **namespace** ((*str*, optional).) – Namespace of region. This is used for identifying which region the service pack is from when you pass a slug to *inference\_conda\_env* and *training\_conda\_env*.
- **use\_case\_type** (*str*) – The use case type of the model. Use it through *UseCaseType* class or string provided in *UseCaseType*. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with *UseCaseType* class to see all supported types.
- **X\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (*str*. Defaults to *None*.) – Training script path.
- **training\_id** ((*str*, optional). Defaults to value from environment variables.) – The training OCID for model. Can be notebook session or job OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – whether to ignore the pending changes in the git.
- **max\_col\_num** ((*int*, optional). Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – Do not generate the input schema if the input has more than this number of features(columns).
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.

- **model\_display\_name** *((str, optional). Defaults to None.)* – The name of the model. If a model\_display\_name is not provided in kwargs, a randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55.02'.
- **model\_description** *((str, optional). Defaults to None.)* – The description of the model.
- **model\_freeform\_tags** *(Dict(str, str), Defaults to None.)* – Freeform tags for the model.
- **model\_defined\_tags** *((Dict(str, dict(str, object)), optional). Defaults to None.)* – Defined tags for the model.
- **ignore\_introspection** *((bool, optional). Defaults to None.)* – Determine whether to ignore the result of model introspection or not. If set to True, the save will ignore all model introspection errors.
- **wait\_for\_completion** *((bool, optional). Defaults to True.)* – Flag set for whether to wait for deployment to complete before proceeding.
- **deployment\_display\_name** *((str, optional). Defaults to None.)* – The name of the model deployment. If a deployment\_display\_name is not provided in kwargs, a randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55.02'.
- **description** *((str, optional). Defaults to None.)* – The description of the model.
- **deployment\_instance\_shape** *((str, optional). Default to VM.Standard2.1.)* – The shape of the instance used for deployment.
- **deployment\_instance\_count** *((int, optional). Defaults to 1.)* – The number of instance used for deployment.
- **deployment\_bandwidth\_mbps** *((int, optional). Defaults to 10.)* – The bandwidth limit on the load balancer in Mbps.
- **deployment\_log\_group\_id** *((str, optional). Defaults to None.)* – The oci logging group id. The access log and predict log share the same log group.
- **deployment\_access\_log\_id** *((str, optional). Defaults to None.)* – The access log OCID for the access logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_predict\_log\_id** *((str, optional). Defaults to None.)* – The predict log OCID for the predict logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_memory\_in\_gbs** *((float, optional). Defaults to None.)* – Specifies the size of the memory of the model deployment instance in GBs.
- **deployment\_ocpus** *((float, optional). Defaults to None.)* – Specifies the ocpu count of the model deployment instance.
- **deployment\_image** *((str, optional). Defaults to None.)* – The OCIR path of docker container image. Required for deploying model on container runtime.
- **bucket\_uri** *((str, optional). Defaults to None.)* – The OCI Object Storage URI where model artifacts will be copied to. The bucket\_uri is only necessary for downloading large artifacts with size is greater than 2GB. Example: `oci://<bucket_name>@<namespace>/prefix/`.

- **overwrite\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **model\_version\_set** ((*Union[str, ModelVersionSet]*, optional). Defaults to *None*.) – The Model version set OCID, or name, or *ModelVersionSet* instance.
- **version\_label** ((*str*, optional). Defaults to *None*.) – The model version label.
- **kwargs** –

**impute\_values: (dict, optional).**

The dictionary where the key is the column index(or names is accepted for pandas dataframe) and the value is the impute value for the corresponding column.

**project\_id: (str, optional).**

Project OCID. If not specified, the value will be taken either from the environment variables or model properties.

**compartment\_id**

[(*str*, optional).] Compartment OCID. If not specified, the value will be taken either from the environment variables or model properties.

**image\_digest: (str, optional). Defaults to None.**

The digest of docker container image.

**cmd: (List, optional). Defaults to empty.**

The command line arguments for running docker container image.

**entrypoint: (List, optional). Defaults to empty.**

The entrypoint for running docker container image.

**server\_port: (int, optional). Defaults to 8080.**

The server port for docker container image.

**health\_check\_port: (int, optional). Defaults to 8080.**

The health check port for docker container image.

**deployment\_mode: (str, optional). Defaults to HTTPS\_ONLY.**

The deployment mode. Allowed values are: HTTPS\_ONLY and STREAM\_ONLY.

**input\_stream\_ids: (List, optional). Defaults to empty.**

The input stream ids. Required for STREAM\_ONLY mode.

**output\_stream\_ids: (List, optional). Defaults to empty.**

The output stream ids. Required for STREAM\_ONLY mode.

**environment\_variables: (Dict, optional). Defaults to empty.**

The environment variables for model deployment.

**timeout: (int, optional). Defaults to 10 seconds.**

The connection timeout in seconds for the client.

**max\_wait\_time**

[(int, optional). Defaults to 1200 seconds.] Maximum amount of time to wait in seconds. Negative implies infinite wait time.

**poll\_interval**

[(int, optional). Defaults to 10 seconds.] Poll interval in seconds.

**freeform\_tags:** (`Dict[str, str]`, optional). Defaults to `None`.

Freeform tags of the model deployment.

**defined\_tags:** (`Dict[str, dict[str, object]]`, optional). Defaults to `None`.

Defined tags of the model deployment.

**region:** (`str`, optional). Defaults to `None`.

The destination Object Storage bucket region. By default the value will be extracted from the `OCI_REGION_METADATA` environment variables.

Also can be any keyword argument for initializing the `ads.model.deployment.ModelDeploymentProperties`. See

`ads.model.deployment.ModelDeploymentProperties()` for details.

#### Returns

The `ModelDeployment` instance.

#### Return type

[`ModelDeployment`](#)

#### Raises

- **FileExistsError** – If files already exist but `force_overwrite` is `False`.
- **ValueError** – If `inference_python_version` is not provided, but also cannot be found through manifest file.

**reload()** → [`GenericModel`](#)

Reloads the model artifact files: `score.py` and the `runtime.yaml`.

#### Returns

An instance of `GenericModel` class.

#### Return type

[`GenericModel`](#)

**reload\_runtime\_info()** → `None`

Reloads the model artifact file: `runtime.yaml`.

#### Returns

Nothing.

#### Return type

`None`

**restart\_deployment**(`max_wait_time: int = 1200`, `poll_interval: int = 10`) → [`ModelDeployment`](#)

Restarts the current deployment.

#### Parameters

- **max\_wait\_time** (`((int, optional). Defaults to 1200 seconds.)`) – Maximum amount of time to wait for activate or deactivate in seconds. Total amount of time to wait for restart deployment is twice as the value. Negative implies infinite wait time.
- **poll\_interval** (`((int, optional). Defaults to 10 seconds.)`) – Poll interval in seconds.

#### Returns

The `ModelDeployment` instance.

#### Return type

[`ModelDeployment`](#)

**save**(*display\_name*: Optional[str] = None, *description*: Optional[str] = None, *freeform\_tags*: Optional[dict] = None, *defined\_tags*: Optional[dict] = None, *ignore\_introspection*: Optional[bool] = False, *bucket\_uri*: Optional[str] = None, *overwrite\_existing\_artifact*: Optional[bool] = True, *remove\_existing\_artifact*: Optional[bool] = True, *model\_version\_set*: Optional[Union[str, ModelVersionSet]] = None, *version\_label*: Optional[str] = None, *\*\*kwargs*) → str

Saves model artifacts to the model catalog.

#### Parameters

- **display\_name** ((str, optional). Defaults to None.) – The name of the model. If a display\_name is not provided in kwargs, randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55:02'.
- **description** ((str, optional). Defaults to None.) – The description of the model.
- **freeform\_tags** (Dict(str, str), Defaults to None.) – Freeform tags for the model.
- **defined\_tags** ((Dict(str, dict(str, object)), optional). Defaults to None.) – Defined tags for the model.
- **ignore\_introspection** ((bool, optional). Defaults to None.) – Determine whether to ignore the result of model introspection or not. If set to True, the save will ignore all model introspection errors.
- **bucket\_uri** ((str, optional). Defaults to None.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for uploading large artifacts which size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **overwrite\_existing\_artifact** ((bool, optional). Defaults to True.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((bool, optional). Defaults to True.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **model\_version\_set** ((Union[str, ModelVersionSet], optional). Defaults to None.) – The model version set OCID, or model version set name, or *ModelVersionSet* instance.
- **version\_label** ((str, optional). Defaults to None.) – The model version label.
- **kwargs** –

**project\_id**: (str, optional).

Project OCID. If not specified, the value will be taken either from the environment variables or model properties.

**compartment\_id**

[(str, optional).] Compartment OCID. If not specified, the value will be taken either from the environment variables or model properties.

**region**: (str, optional). Defaults to None.

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**timeout**: (int, optional). Defaults to 10 seconds.

The connection timeout in seconds for the client.

Also can be any attribute that *oci.data\_science.models.Model* accepts.



**Raises**

**`RuntimeInfoInconsistencyError`** – When `.runtime_info` is not synched with `runtime.yaml` file.

**Returns**

The model id.

**Return type**

str

**property** `schema_input`

**property** `schema_output`

**`serialize_model`**(*as\_onnx: bool = False, X\_sample: Optional[Union[Dict, str, List, Tuple, ndarray, Series, DataFrame]] = None, force\_overwrite: bool = False, \*\*kwargs*) → None

Serialize and save Tensorflow model using ONNX or model specific method.

**Parameters**

- **`as_onnx`** ((*bool, optional*). Defaults to *False*.) – If set as True, convert into ONNX model.
- **`X_sample`** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*. Defaults to *None*.) – A sample of input data that will be used to generate input schema and detect `input_signature`.
- **`force_overwrite`** ((*bool, optional*). Defaults to *False*.) – If set as True, overwrite serialized model if exists.
- **`**kwargs`** (*optional params used to serialize tensorflow model to onnx,* ) –
- **`following`** (*including the*) – `input_signature`: a tuple or a list of `tf.TensorSpec` objects). default to *None*. Define the shape/dtype of the input so that `model(input_signature)` is a valid invocation of the model. `opset_version`: int. Defaults to *None*. Used for the ONNX model.

**Returns**

Nothing.

**Return type**

None

**`set_model_input_serializer`**(*model\_input\_serializer: Union[str, SERDE]*)

Registers serializer used for serializing data passed in `verify/predict`.

**Examples**

```
>>> generic_model.set_model_input_serializer(GenericModel.model_input_
↳serializer_type.CLOUDPICKLE)
```

```
>>> # Register serializer by passing the name of it.
>>> generic_model.set_model_input_serializer("cloudpickle")
```

```
>>> # Example of creating customized model input serializer and registering it.
>>> from ads.model import SERDE
>>> from ads.model.generic_model import GenericModel
```



```
>>> class MySERDE(SERDE):
...     def __init__(self):
...         super().__init__()
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
...     def deserialize(self, data):
...         deserialized_data = 2
...         return deserialized_data
```

```
>>> class Toy:
...     def predict(self, x):
...         return x ** 2
```

```
>>> generic_model = GenericModel(
...     estimator=Toy(),
...     artifact_dir=tempfile.mkdtemp(),
...     model_input_serializer=MySERDE()
... )
```

```
>>> # Or register the serializer after creating model instance.
>>> generic_model.set_model_input_serializer(MySERDE())
```

#### Parameters

**model\_input\_serializer** ((*str*, or `ads.model.SERDE`)) – name of the serializer, or instance of `SERDE`.

**set\_model\_save\_serializer**(*model\_save\_serializer: Union[str, SERDE]*)

Registers serializer used for saving model.

#### Examples

```
>>> generic_model.set_model_save_serializer(GenericModel.model_save_serializer_
↳ type.CLOUDPICKLE)
```

```
>>> # Register serializer by passing the name of it.
>>> generic_model.set_model_save_serializer("cloudpickle")
```

```
>>> # Example of creating customized model save serializer and registering it.
>>> from ads.model import SERDE
>>> from ads.model.generic_model import GenericModel
```

```
>>> class MySERDE(SERDE):
...     def __init__(self):
...         super().__init__()
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
...     def deserialize(self, data):
```

(continues on next page)

(continued from previous page)

```
...         deserialized_data = 2
...         return deserialized_data
```

```
>>> class Toy:
...     def predict(self, x):
...         return x ** 2
```

```
>>> generic_model = GenericModel(
...     estimator=Toy(),
...     artifact_dir=tempfile.mkdtemp(),
...     model_save_serializer=MySERDE()
... )
```

```
>>> # Or register the serializer after creating model instance.
>>> generic_model.set_model_save_serializer(MySERDE())
```

**Parameters**

**model\_save\_serializer** ((`ads.model.SERDE` or `str`)) – name of the serializer or instance of SERDE.

**summary\_status()** → `DataFrame`

A summary table of the current status.

**Returns**

The summary stable of the current status.

**Return type**

`pd.DataFrame`

**update(\*\*kwargs)** → *GenericModel*

Updates model metadata in the Model Catalog. Updates only metadata information. The model artifacts are immutable and cannot be updated.

**Parameters**

**kwargs** –

**display\_name:** (`str`, optional). Defaults to `None`.

The name of the model.

**description:** (`str`, optional). Defaults to `None`.

The description of the model.

**freeform\_tags**

[`Dict(str, str)`, Defaults to `None`.] Freeform tags for the model.

**defined\_tags**

[(`Dict(str, dict(str, object))`), optional]. Defaults to `None`.] Defined tags for the model.

**version\_label:** (`str`, optional). Defaults to `None`.

The model version label.

Additional kwargs arguments. Can be any attribute that *oci.data\_science.models.Model* accepts.

**Returns**

An instance of *GenericModel* (self).

**Return type***GenericModel***Raises****ValueError** – if model not saved to the Model Catalog.

**classmethod** `update_deployment(model_deployment_id: Optional[str] = None, properties: Optional[Union[ModelDeploymentProperties, dict]] = None, wait_for_completion: bool = True, max_wait_time: int = 1200, poll_interval: int = 10, **kwargs) → ModelDeployment`

Updates a model deployment.

You can update *model\_deployment\_configuration\_details* and change *instance\_shape* and *model\_id* when the model deployment is in the *ACTIVE* lifecycle state. The *bandwidth\_mbps* or *instance\_count* can only be updated while the model deployment is in the *INACTIVE* state. Changes to the *bandwidth\_mbps* or *instance\_count* will take effect the next time the *ActivateModelDeployment* action is invoked on the model deployment resource.

**Examples**

```
>>> # Update access log id, freeform tags and description for the model_
↳ deployment
>>> model.update_deployment(
>>>     properties=ModelDeploymentProperties(
>>>         access_log_id=<log_ocid>,
>>>         description="Description for Custom Model",
>>>         freeform_tags={"key": "value"},
>>>     )
>>> )
```

**Parameters**

- **model\_deployment\_id** (*str.*) – The model deployment OCID. Defaults to None. If the method called on instance level, then *self.model\_deployment.model\_deployment\_id* will be used.
- **properties** (*ModelDeploymentProperties* or *dict*) – The properties for updating the deployment.
- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to complete before proceeding. Defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).
- **kwargs** –

**auth:** (*Dict*, optional). Defaults to *None*.

The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.

**Returns**

An instance of *ModelDeployment* class.

**Return type***ModelDeployment***upload\_artifact**(*uri*: str, *auth*: Optional[Dict] = None, *force\_overwrite*: Optional[bool] = False) → None

Uploads model artifacts to the provided *uri*. The artifacts will be zipped before uploading.

**Parameters**

- **uri** (str) – The destination location for the model artifacts, which can be a local path or OCI object storage URI. Examples: `>>> upload_artifact(uri="/some/local/folder/") >>> upload_artifact(uri="oci://bucket@namespace/prefix/")`
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** (bool) – Overwrite target\_dir if exists.

**verify**(*data*: Optional[Any] = None, *reload\_artifacts*: bool = True, *auto\_serialize\_data*: bool = True, *\*\*kwargs*) → Dict[str, Any]

Test if deployment works in local environment.

**Examples**

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.verify(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.verify(
...     image="oci://<bucket>@<tenancy>/myimage.png",
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

**Parameters**

- **data** (Any) – Data used to test if deployment works in local environment.
- **reload\_artifacts** (bool. Defaults to *True*.) – Whether to reload artifacts or not.
- **auto\_serialize\_data** (bool.) – Whether to auto serialize input data. Defaults to *False* for GenericModel, and *True* for other frameworks. *data* required to be json serializable if *auto\_serialize\_data=False*. if *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.
- **kwargs** – content\_type: str, used to indicate the media type of the resource. image: PIL.Image Object or uri for the image.

A valid string path for image file can be local path, http(s), oci, s3, gs.

**storage\_options: dict**

Passed to *fsspec.open* for a particular storage connection. Please see *fsspec* (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.

**Returns**

A dictionary which contains prediction results.

**Return type**

Dict

**ads.model.framework.xgboost\_model module**

```
class ads.model.framework.xgboost_model.XGBoostModel(estimator: callable, artifact_dir: Optional[str]
                                                    = None, properties:
                                                    Optional[ModelProperties] = None, auth: Dict
                                                    = None, model_save_serializer:
                                                    Optional[SERDE] = 'xgboost',
                                                    model_input_serializer: Optional[SERDE] =
                                                    None, **kwargs)
```

Bases: *FrameworkSpecificModel*

XGBoostModel class for estimators from xgboost framework.

**algorithm**

The algorithm of the model.

**Type**

str

**artifact\_dir**

Artifact directory to store the files needed for deployment.

**Type**

str

**auth**

Default authentication is set using the *ads.set\_auth* API. To override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create an authentication signer to instantiate an IdentityClient object.

**Type**

Dict

**estimator**

A trained xgboost estimator/model using Xgboost.

**Type**

Callable

**framework**

“xgboost”, the framework name of the model.

**Type**

str

**hyperparameter**

The hyperparameters of the estimator.

**Type**

dict

**metadata\_custom**

The model custom metadata.

**Type***ModelCustomMetadata*

**metadata\_provenance**

The model provenance metadata.

**Type**

*ModelProvenanceMetadata*

**metadata\_taxonomy**

The model taxonomy metadata.

**Type**

*ModelTaxonomyMetadata*

**model\_artifact**

This is built by calling prepare.

**Type**

*ModelArtifact*

**model\_deployment**

A ModelDeployment instance.

**Type**

*ModelDeployment*

**model\_file\_name**

Name of the serialized model.

**Type**

str

**model\_id**

The model ID.

**Type**

str

**properties**

ModelProperties object required to save and deploy model. For more details, check [https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model\\_properties](https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model_properties).

**Type**

*ModelProperties*

**runtime\_info**

A RuntimeInfo instance.

**Type**

*RuntimeInfo*

**schema\_input**

Schema describes the structure of the input data.

**Type**

*Schema*

**schema\_output**

Schema describes the structure of the output data.

**Type**

*Schema*

**serialize**

Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under `artifact_dir` and update the `score.py` manually.

**Type**

bool

**version**

The framework version of the model.

**Type**

str

**delete\_deployment(...)**

Deletes the current model deployment.

**deploy(..., \\*\*kwargs)**

Deploys a model.

**from\_model\_artifact(uri, model\_file\_name, artifact\_dir, ..., \\*\*kwargs)**

Loads model from the specified folder, or zip/tar archive.

**from\_model\_catalog(model\_id, model\_file\_name, artifact\_dir, ..., \\*\*kwargs)**

Loads model from model catalog.

**introspect(...)**

Runs model introspection.

**predict(data, ...)**

Returns prediction of input data run against the model deployment endpoint.

**prepare(..., \\*\*kwargs)**

Prepare and save the `score.py`, serialized model and `runtime.yaml` file.

**reload(...)**

Reloads the model artifact files: `score.py` and the `runtime.yaml`.

**save(..., \\*\*kwargs)**

Saves model artifacts to the model catalog.

**summary\_status(...)**

Gets a summary table of the current status.

**verify(data, ...)**

Tests if deployment works in local environment.

**Examples**

```
>>> import xgboost as xgb
>>> import tempfile
>>> from sklearn.datasets import make_classification
>>> from sklearn.model_selection import train_test_split
>>> from sklearn.datasets import load_iris
>>> from ads.model.framework.xgboost_model import XGBoostModel
```

```

>>> iris = load_iris()
>>> X, y = iris.data, iris.target
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)
>>> xgboost_estimator = xgb.XGBClassifier()
>>> xgboost_estimator.fit(X_train, y_train)

>>> xgboost_model = XGBoostModel(estimator=xgboost_estimator, artifact_dir=tmp_
↳model_dir)
>>> xgboost_model.prepare(inference_conda_env="generalml_p37_cpu_v1", force_
↳overwrite=True)
>>> xgboost_model.reload()
>>> xgboost_model.verify(X_test)
>>> xgboost_model.save()
>>> model_deployment = xgboost_model.deploy(wait_for_completion=False)
>>> xgboost_model.predict(X_test)

```

Initiates a XGBoostModel instance. This class wraps the XGBoost model as estimator. It's primary purpose is to hold the trained model and do serialization.

#### Parameters

- **estimator** – XGBoostModel
- **artifact\_dir** (*str*) – artifact directory to store the files needed for deployment.
- **properties** ((*ModelProperties*, *optional*). *Defaults to None.*) – ModelProperties object required to save and deploy model.
- **auth** ((*Dict*, *optional*). *Defaults to None.*) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **model\_save\_serializer** ((*SERDE* or *str*, *optional*). *Defaults to None.*) – Instance of *ads.model.SERDE*. Used for serialize/deserialize model.
- **model\_input\_serializer** ((*SERDE*, *optional*). *Defaults to None.*) – Instance of *ads.model.SERDE*. Used for serialize/deserialize data.

#### Returns

XGBoostModel instance.

#### Return type

*XGBoostModel*

#### Examples

```

>>> import xgboost as xgb
>>> import tempfile
>>> from sklearn.datasets import make_classification
>>> from sklearn.model_selection import train_test_split
>>> from sklearn.datasets import load_iris
>>> from ads.model.framework.xgboost_model import XGBoostModel

```

```

>>> iris = load_iris()
>>> X, y = iris.data, iris.target

```



```

>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)
>>> train = xgb.DMatrix(X_train, y_train)
>>> test = xgb.DMatrix(X_test, y_test)
>>> xgboost_estimator = XGBClassifier()
>>> xgboost_estimator.fit(X_train, y_train)
>>> xgboost_model = XGBoostModel(estimator=xgboost_estimator, artifact_dir=tempfile.
↳mkdtemp())
>>> xgboost_model.prepare(inference_conda_env="generalml_p37_cpu_v1")
>>> xgboost_model.verify(X_test)
>>> xgboost_model.save()
>>> model_deployment = xgboost_model.deploy()
>>> xgboost_model.predict(X_test)
>>> xgboost_model.delete_deployment()

```

**classmethod delete**(*model\_id*: *Optional[str]* = *None*, *delete\_associated\_model\_deployment*: *Optional[bool]* = *False*, *delete\_model\_artifact*: *Optional[bool]* = *False*, *artifact\_dir*: *Optional[str]* = *None*, *\*\*kwargs*: *Dict*) → *None*

Deletes a model from Model Catalog.

#### Parameters

- **model\_id** ((*str*, optional). Defaults to *None*.) – The model OCID to be deleted. If the method called on instance level, then *self.model\_id* will be used.
- **delete\_associated\_model\_deployment** ((*bool*, optional). Defaults to *False*.) – Whether associated model deployments need to be deleted or not.
- **delete\_model\_artifact** ((*bool*, optional). Defaults to *False*.) – Whether associated model artifacts need to be deleted or not.
- **artifact\_dir** ((*str*, optional). Defaults to *None*) – The local path to the model artifacts folder. If the method called on instance level, the *self.artifact\_dir* will be used by default.

#### Return type

*None*

#### Raises

**ValueError** – If *model\_id* not provided.

**delete\_deployment**(*wait\_for\_completion*: *bool* = *True*) → *None*

Deletes the current deployment.

#### Parameters

**wait\_for\_completion** ((*bool*, optional). Defaults to *True*.) – Whether to wait till completion.

#### Return type

*None*

#### Raises

**ValueError** – if there is not deployment attached yet.:

**deploy**(*wait\_for\_completion*: *Optional[bool]* = *True*, *display\_name*: *Optional[str]* = *None*, *description*: *Optional[str]* = *None*, *deployment\_instance\_shape*: *Optional[str]* = *None*, *deployment\_instance\_count*: *Optional[int]* = *None*, *deployment\_bandwidth\_mbps*: *Optional[int]* = *None*, *deployment\_log\_group\_id*: *Optional[str]* = *None*, *deployment\_access\_log\_id*: *Optional[str]* = *None*, *deployment\_predict\_log\_id*: *Optional[str]* = *None*, *deployment\_memory\_in\_gbs*: *Optional[float]* = *None*, *deployment\_ocpus*: *Optional[float]* = *None*, *deployment\_image*: *Optional[str]* = *None*, *\*\*kwargs*: *Dict*) → *ModelDeployment*

Deploys a model. The model needs to be saved to the model catalog at first. You can deploy the model on either conda or container runtime. The customized runtime allows you to bring your own service container. To deploy model on container runtime, make sure to build the container and push it to OCIR. For more information, see <https://docs.oracle.com/en-us/iaas/data-science/using/mod-dep-byoc.htm>.

### Example

```
# This is an example to deploy model on container runtime >>> model = Generic-
Model(estimator=estimator, artifact_dir=tempfile.mkdtemp()) >>> model.summary_status() >>>
model.prepare( ... model_file_name="toy_model.pkl", ... ignore_conda_error=True, # set ig-
nore_conda_error=True for container runtime ... force_overwrite=True ... ) >>> model.verify() >>>
model.save() >>> model.deploy( ... deployment_image="iad.ocir.io/<namespace>/<image>:<tag>",
... entrypoint=["python", "/opt/ds/model/deployed_model/api.py"], ... server_port=5000, ...
health_check_port=5000, ... environment_variables={"key":"value"} ... )
```

#### Parameters

- **wait\_for\_completion** ((*bool*, optional). Defaults to *True*.) – Flag set for whether to wait for deployment to complete before proceeding.
- **display\_name** ((*str*, optional). Defaults to *None*.) – The name of the model. If a display\_name is not provided in kwargs, a randomly generated easy to remember name with timestamp will be generated, like ‘strange-spider-2022-08-17-23:55:02’.
- **description** ((*str*, optional). Defaults to *None*.) – The description of the model.
- **deployment\_instance\_shape** ((*str*, optional). Default to *VM.Standard2.1*.) – The shape of the instance used for deployment.
- **deployment\_instance\_count** ((*int*, optional). Defaults to *1*.) – The number of instance used for deployment.
- **deployment\_bandwidth\_mbps** ((*int*, optional). Defaults to *10*.) – The bandwidth limit on the load balancer in Mbps.
- **deployment\_memory\_in\_gbs** ((*float*, optional). Defaults to *None*.) – Specifies the size of the memory of the model deployment instance in GBs.
- **deployment\_ocpus** ((*float*, optional). Defaults to *None*.) – Specifies the ocpu count of the model deployment instance.
- **deployment\_log\_group\_id** ((*str*, optional). Defaults to *None*.) – The oci logging group id. The access log and predict log share the same log group.
- **deployment\_access\_log\_id** ((*str*, optional). Defaults to *None*.) – The access log OCID for the access logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_predict\_log\_id** ((*str*, optional). Defaults to *None*.) – The predict log OCID for the predict logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_image** ((*str*, optional). Defaults to *None*.) – The OCIR path of docker container image. Required for deploying model on container runtime.
- **kwargs** –

**project\_id:** (*str*, optional).

Project OCID. If not specified, the value will be taken from the environment variables.

**compartment\_id**

[(str, optional).] Compartment OCID. If not specified, the value will be taken from the environment variables.

**max\_wait\_time**

[(int, optional). Defaults to 1200 seconds.] Maximum amount of time to wait in seconds. Negative implies infinite wait time.

**poll\_interval**

[(int, optional). Defaults to 10 seconds.] Poll interval in seconds.

**freeform\_tags: (Dict[str, str], optional). Defaults to None.**

Freeform tags of the model deployment.

**defined\_tags: (Dict[str, dict[str, object]], optional). Defaults to None.**

Defined tags of the model deployment.

**image\_digest: (str, optional). Defaults to None.**

The digest of docker container image.

**cmd: (List, optional). Defaults to empty.**

The command line arguments for running docker container image.

**entrypoint: (List, optional). Defaults to empty.**

The entrypoint for running docker container image.

**server\_port: (int, optional). Defaults to 8080.**

The server port for docker container image.

**health\_check\_port: (int, optional). Defaults to 8080.**

The health check port for docker container image.

**deployment\_mode: (str, optional). Defaults to HTTPS\_ONLY.**

The deployment mode. Allowed values are: HTTPS\_ONLY and STREAM\_ONLY.

**input\_stream\_ids: (List, optional). Defaults to empty.**

The input stream ids. Required for STREAM\_ONLY mode.

**output\_stream\_ids: (List, optional). Defaults to empty.**

The output stream ids. Required for STREAM\_ONLY mode.

**environment\_variables: (Dict, optional). Defaults to empty.**

The environment variables for model deployment.

Also can be any keyword argument for initializing the *ads.model.deployment.ModelDeploymentProperties*. See *ads.model.deployment.ModelDeploymentProperties()* for details.

**Returns**

The ModelDeployment instance.

**Return type**

*ModelDeployment*

**Raises**

**ValueError** – If *model\_id* is not specified.

```

evaluate(X: Union[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]], _SupportsArray[dtype],
Sequence[_SupportsArray[dtype]], Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
y: Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]], _SupportsArray[dtype],
Sequence[_SupportsArray[dtype]], Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]],
y_pred: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]]
= None, y_score: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]]
= None, X_train: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]]
= None, y_train: Optional[Union[Sequence[Sequence[Sequence[Sequence[Sequence[Sequence[Any]]]]],
_SupportsArray[dtype], Sequence[_SupportsArray[dtype]],
Sequence[Sequence[_SupportsArray[dtype]]],
Sequence[Sequence[Sequence[_SupportsArray[dtype]]]],
Sequence[Sequence[Sequence[Sequence[_SupportsArray[dtype]]]]], bool, int, float, complex, str,
bytes, Sequence[Union[bool, int, float, complex, str, bytes]], Sequence[Sequence[Union[bool, int,
float, complex, str, bytes]]], Sequence[Sequence[Sequence[Union[bool, int, float, complex, str,
bytes]]]], Sequence[Sequence[Sequence[Sequence[Union[bool, int, float, complex, str, bytes]]]]]]
= None, classes: Optional[List] = None, positive_class: Optional[str] = None, legend_labels:
Optional[dict] = None, perfect: bool = True, filename: Optional[str] = None, use_case_type:
Optional[str] = None)

```

Creates an ads evaluation report.

### Parameters

- **X (DataFrame-like)** – The data used to make a prediction. Can be set to None if `y_preds` is given. (And `y_scores` for more thorough analysis).

- **y** (*array-like*) – The true values corresponding to the input data
- **y\_pred** (*array-like, optional*) – The predictions from each model in the same order as the models
- **y\_score** (*array-like, optional*) – The predict\_proba from each model in the same order as the models
- **X\_train** (*DataFrame-like, optional*) – The data used to train the model
- **y\_train** (*array-like, optional*) – The true values corresponding to the input training data
- **classes** (*List or None, optional*) – A List of the possible labels for y, when evaluating a classification use case
- **positive\_class** (*str or int, optional*) – The class to report metrics for binary dataset. If the target classes is True or False, positive\_class will be set to True by default. If the dataset is multiclass or multilabel, this will be ignored.
- **legend\_labels** (*dict, optional*) – List of legend labels. Defaults to *None*. If legend\_labels not specified class names will be used for plots.
- **use\_case\_type** (*str, optional*) – The type of problem this model is solving. This can be set during *prepare()*. Examples: “binary\_classification”, “regression”, “multinomial\_classification” Full list of supported types can be found here: *ads.common.model\_metadata.UseCaseType*
- **filename** (*str, optional*) – If filename is given, the html report will be saved to the location specified.

## Examples

```
>>> import tempfile
>>> from ads.evaluations.evaluator import Evaluator
>>> from sklearn.tree import DecisionTreeClassifier
>>> from sklearn.datasets import make_classification
>>> from sklearn.model_selection import train_test_split
>>> from ads.model.framework.sklearn_model import SklearnModel
>>> from ads.common.model_metadata import UseCaseType
>>>
>>> X, y = make_classification(n_samples=1000)
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.3)
>>> est = DecisionTreeClassifier().fit(X_train, y_train)
>>> model = SklearnModel(estimator=est, artifact_dir=tempfile.mkdtemp())
>>> model.prepare(
>>>     inference_conda_env="generalml_p38_cpu_v1",
>>>     training_conda_env="generalml_p38_cpu_v1",
>>>     X_sample=X_test,
>>>     y_sample=y_test,
>>>     use_case_type=UseCaseType.BINARY_CLASSIFICATION,
>>> )
>>> model.evaluate(X_test, y_test, filename="report.html")
```

```
classmethod from_id(ocid: str, model_file_name: Optional[str] = None, artifact_dir: Optional[str] =  
None, auth: Optional[Dict] = None, force_overwrite: Optional[bool] = False,  
properties: Optional[Union[ModelProperties, Dict]] = None, bucket_uri:  
Optional[str] = None, remove_existing_artifact: Optional[bool] = True,  
ignore_conda_error: Optional[bool] = False, **kwargs) → Self
```

Loads model from model OCID or model deployment OCID.

#### Parameters

- **ocid** (*str*) – The model OCID or model deployment OCID.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((*str*, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((*ModelProperties*, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **kwargs** –

#### **compartment\_id**

[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

#### **timeout**

[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

#### Returns

An instance of GenericModel class.

#### Return type

Self

```
classmethod from_model_artifact(uri: str, model_file_name: Optional[str] = None, artifact_dir:  
Optional[str] = None, auth: Optional[Dict] = None,  
force_overwrite: Optional[bool] = False, properties:  
Optional[ModelProperties] = None, ignore_conda_error:  
Optional[bool] = False, **kwargs: dict) → Self
```

Loads model from a folder, or zip/tar archive.

#### Parameters

- **uri** (*str*) – The folder path, ZIP file path, or TAR file path. It could contain a serialized model(required) as well as any files needed for deployment including: serialized model,

runtime.yaml, score.py and etc. The content of the folder will be copied to the *artifact\_dir* folder.

- **model\_file\_name** ((str, optional). Defaults to *None*.) – The serialized model file name. Will be extracted from artifacts if not provided.
- **artifact\_dir** ((str, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((ModelProperties, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **ignore\_conda\_error** ((bool, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.

#### Returns

An instance of *GenericModel* class.

#### Return type

Self

#### Raises

**ValueError** – If *model\_file\_name* not provided.

```
classmethod from_model_catalog(model_id: str, model_file_name: Optional[str] = None, artifact_dir:
    Optional[str] = None, auth: Optional[Dict] = None, force_overwrite:
    Optional[bool] = False, properties:
    Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] =
    True, ignore_conda_error: Optional[bool] = False, **kwargs) →
    Self
```

Loads model from model catalog.

#### Parameters

- **model\_id** (str) – The model OCID.
- **model\_file\_name** ((str, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((str, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((ModelProperties, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.

- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**compartment\_id**

[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

**timeout**

[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

**region: (str, optional). Defaults to None.**

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**Returns**

An instance of *GenericModel* class.

**Return type**

*Self*

```
classmethod from_model_deployment(model_deployment_id: str, model_file_name: Optional[str] =
    None, artifact_dir: Optional[str] = None, auth: Optional[Dict] =
    None, force_overwrite: Optional[bool] = False, properties:
    Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] =
    True, ignore_conda_error: Optional[bool] = False, **kwargs) →
    Self
```

Loads model from model deployment.

**Parameters**

- **model\_deployment\_id** (*str*) – The model deployment OCID.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((*str*, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((*ModelProperties*, optional). Defaults to *None*.) – *ModelProperties* object required to save and deploy model.



- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**compartment\_id**

[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

**timeout**

[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

**region: (str, optional). Defaults to *None*.**

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**Returns**

An instance of *GenericModel* class.

**Return type**

*Self*

**get\_data\_serializer()**

Gets data serializer.

**Returns**

*object*

**Return type**

*ads.model.Serializer* object.

**get\_model\_serializer()**

Gets model serializer.

**introspect()** → *DataFrame*

Conducts introspection.

**Returns**

A pandas *DataFrame* which contains the introspection results.

**Return type**

*pandas.DataFrame*

**property metadata\_custom**

**property metadata\_provenance**

**property metadata\_taxonomy**

**property model\_deployment\_id**

**property model\_id**

**model\_input\_serializer\_type**

alias of `ModelInputSerializerType`

**model\_save\_serializer\_type**

alias of `XgboostModelSerializerType`

**populate\_metadata**(*use\_case\_type*: *Optional*[*str*] = *None*, *data\_sample*: *Optional*[`ADSDData`] = *None*,  
*X\_sample*: *Optional*[*Union*[*list*, *tuple*, *DataFrame*, *Series*, *ndarray*]] = *None*,  
*y\_sample*: *Optional*[*Union*[*list*, *tuple*, *DataFrame*, *Series*, *ndarray*]] = *None*,  
*training\_script\_path*: *Optional*[*str*] = *None*, *training\_id*: *Optional*[*str*] = *None*,  
*ignore\_pending\_changes*: *bool* = *True*, *max\_col\_num*: *int* = 2000,  
*ignore\_conda\_error*: *bool* = *False*)

Populates input schema and output schema. If the schema exceeds the limit of 32kb, save as json files to the artifact directory.

**Parameters**

- **use\_case\_type** (*(str, optional)*. Defaults to *None*.) – The use case type of the model.
- **data\_sample** (*(ADSDData, optional)*. Defaults to *None*.) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (*str*. Defaults to *None*.) – Training script path.
- **training\_id** (*(str, optional)*. Defaults to *None*.) – The training model OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – Ignore the pending changes in git.
- **max\_col\_num** (*((int, optional)*. Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – The maximum number of columns allowed in auto generated schema.

**Returns**

Nothing.

**Return type**

*None*

**populate\_schema**(*data\_sample*: *Optional*[`ADSDData`] = *None*, *X\_sample*: *Optional*[*Union*[*List*, *Tuple*,  
*DataFrame*, *Series*, *ndarray*]] = *None*, *y\_sample*: *Optional*[*Union*[*List*, *Tuple*,  
*DataFrame*, *Series*, *ndarray*]] = *None*, *max\_col\_num*: *int* = 2000)

Populate input and output schemas. If the schema exceeds the limit of 32kb, save as json files to the artifact dir.

**Parameters**

- **data\_sample** (`ADSDData`) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]) – A sample of input data that will be used to generate the input schema.

- **y\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*) – A sample of output data that will be used to generate the output schema.
- **max\_col\_num** (*((int, optional). Defaults to utils.DATA\_SCHEMA\_MAX\_COL\_NUM.)*) – The maximum number of columns allowed in auto generated schema.

**predict** (*data: Optional[Any] = None, auto\_serialize\_data: bool = True, \*\*kwargs*) → Dict[str, Any]

Returns prediction of input data run against the model deployment endpoint.

## Examples

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.predict(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.predict(
...     image="oci://<bucket>@<tenancy>/myimage.png",
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

## Parameters

- **data** (*Any*) – Data for the prediction for onnx models, for local serialization method, data can be the data types that each framework support.
- **auto\_serialize\_data** (*bool.*) – Whether to auto serialize input data. Defaults to *False* for GenericModel, and *True* for other frameworks. *data* required to be json serializable if *auto\_serialize\_data=False*. If *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.
- **kwargs** – *content\_type*: str, used to indicate the media type of the resource. *image*: PIL.Image Object or uri for the image.

A valid string path for image file can be local path, http(s), oci, s3, gs.

### storage\_options: dict

Passed to *fsspec.open* for a particular storage connection. Please see *fsspec* (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.

## Returns

Dictionary with the predicted values.

## Return type

Dict[str, Any]

## Raises

- **NotActiveDeploymentError** – If model deployment process was not started or not finished yet.
- **ValueError** – If *data* is empty or not JSON serializable.

```
prepare(inference_conda_env: Optional[str] = None, inference_python_version: Optional[str] = None,
        training_conda_env: Optional[str] = None, training_python_version: Optional[str] = None,
        model_file_name: Optional[str] = None, as_onnx: bool = False, initial_types:
        Optional[List[Tuple]] = None, force_overwrite: bool = False, namespace: str = 'id19sferra6z',
        use_case_type: Optional[str] = None, X_sample: Optional[Union[list, tuple, DataFrame, Series,
        ndarray]] = None, y_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None,
        training_script_path: Optional[str] = None, training_id: Optional[str] = None,
        ignore_pending_changes: bool = True, max_col_num: int = 2000, ignore_conda_error: bool =
        False, **kwargs: Dict) → GenericModel
```

Prepare and save the score.py, serialized model and runtime.yaml file.

#### Parameters

- **inference\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **inference\_python\_version** ((str, optional). Defaults to None.) – Python version which will be used in deployment.
- **training\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack. If *training\_conda\_env* is not provided, *training\_conda\_env* will use the same value of *training\_conda\_env*.
- **training\_python\_version** ((str, optional). Defaults to None.) – Python version used during training.
- **model\_file\_name** ((str, optional). Defaults to None.) – Name of the serialized model. Will be auto generated if not provided.
- **as\_onnx** ((bool, optional). Defaults to False.) – Whether to serialize as onnx model.
- **initial\_types** ((list[Tuple], optional).) – Defaults to None. Only used for SklearnModel, LightGBMModel and XGBoostModel. Each element is a tuple of a variable name and a type. Check this link [http://onnx.ai/sklearn-onnx/api\\_summary.html#id2](http://onnx.ai/sklearn-onnx/api_summary.html#id2) for more explanation and examples for *initial\_types*.
- **force\_overwrite** ((bool, optional). Defaults to False.) – Whether to overwrite existing files.
- **namespace** ((str, optional).) – Namespace of region. This is used for identifying which region the service pack is from when you pass a slug to *inference\_conda\_env* and *training\_conda\_env*.
- **use\_case\_type** (str) – The use case type of the model. Use it through *UseCaseType* class or string provided in *UseCaseType*. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with *UseCaseType* class to see all supported types.
- **X\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (str. Defaults to None.) – Training script path.

- **training\_id** ((*str*, *optional*). Defaults to value from environment variables.) – The training OCID for model. Can be notebook session or job OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – whether to ignore the pending changes in the git.
- **max\_col\_num** ((*int*, *optional*). Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – Do not generate the input schema if the input has more than this number of features(columns).
- **ignore\_conda\_error** ((*bool*, *optional*). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**impute\_values: (dict, optional).**

The dictionary where the key is the column index(or names is accepted for pandas dataframe) and the value is the impute value for the corresponding column.

**Raises**

- **FileExistsError** – If files already exist but *force\_overwrite* is *False*.
- **ValueError** – If *inference\_python\_version* is not provided, but also cannot be found through manifest file.

**Returns**

An instance of *GenericModel* class.

**Return type**

*GenericModel*

**prepare\_save\_deploy**(*inference\_conda\_env: Optional[str] = None, inference\_python\_version: Optional[str] = None, training\_conda\_env: Optional[str] = None, training\_python\_version: Optional[str] = None, model\_file\_name: Optional[str] = None, as\_onnx: bool = False, initial\_types: Optional[List[Tuple]] = None, force\_overwrite: bool = False, namespace: str = 'id19sfcr6z', use\_case\_type: Optional[str] = None, X\_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, y\_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, training\_script\_path: Optional[str] = None, training\_id: Optional[str] = None, ignore\_pending\_changes: bool = True, max\_col\_num: int = 2000, ignore\_conda\_error: bool = False, model\_display\_name: Optional[str] = None, model\_description: Optional[str] = None, model\_freeform\_tags: Optional[dict] = None, model\_defined\_tags: Optional[dict] = None, ignore\_introspection: Optional[bool] = False, wait\_for\_completion: Optional[bool] = True, deployment\_display\_name: Optional[str] = None, deployment\_description: Optional[str] = None, deployment\_instance\_shape: Optional[str] = None, deployment\_instance\_count: Optional[int] = None, deployment\_bandwidth\_mbps: Optional[int] = None, deployment\_log\_group\_id: Optional[str] = None, deployment\_access\_log\_id: Optional[str] = None, deployment\_predict\_log\_id: Optional[str] = None, deployment\_memory\_in\_gbs: Optional[float] = None, deployment\_ocpus: Optional[float] = None, deployment\_image: Optional[str] = None, bucket\_uri: Optional[str] = None, overwrite\_existing\_artifact: Optional[bool] = True, remove\_existing\_artifact: Optional[bool] = True, model\_version\_set: Optional[Union[str, ModelVersionSet]] = None, version\_label: Optional[str] = None, \*\*kwargs: Dict) → *ModelDeployment**

Shortcut for prepare, save and deploy steps.

**Parameters**

- **inference\_conda\_env** ((*str*, optional). Defaults to *None*.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **inference\_python\_version** ((*str*, optional). Defaults to *None*.) – Python version which will be used in deployment.
- **training\_conda\_env** ((*str*, optional). Defaults to *None*.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack. If *training\_conda\_env* is not provided, *training\_conda\_env* will use the same value of *training\_conda\_env*.
- **training\_python\_version** ((*str*, optional). Defaults to *None*.) – Python version used during training.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – Name of the serialized model.
- **as\_onnx** ((*bool*, optional). Defaults to *False*.) – Whether to serialize as onnx model.
- **initial\_types** ((*list*[*Tuple*], optional).) – Defaults to *None*. Only used for *SklearnModel*, *LightGBMModel* and *XGBoostModel*. Each element is a tuple of a variable name and a type. Check this link [http://onnx.ai/sklearn-onnx/api\\_summary.html#id2](http://onnx.ai/sklearn-onnx/api_summary.html#id2) for more explanation and examples for *initial\_types*.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files.
- **namespace** ((*str*, optional).) – Namespace of region. This is used for identifying which region the service pack is from when you pass a slug to *inference\_conda\_env* and *training\_conda\_env*.
- **use\_case\_type** (*str*) – The use case type of the model. Use it through *UseCaseType* class or string provided in *UseCaseType*. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with *UseCaseType* class to see all supported types.
- **X\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (*str*. Defaults to *None*.) – Training script path.
- **training\_id** ((*str*, optional). Defaults to value from environment variables.) – The training OCID for model. Can be notebook session or job OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – whether to ignore the pending changes in the git.
- **max\_col\_num** ((*int*, optional). Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – Do not generate the input schema if the input has more than this number of features(columns).
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.

- **model\_display\_name**((*str*, *optional*). *Defaults to None.*) – The name of the model. If a `model_display_name` is not provided in `kwargs`, a randomly generated easy to remember name with timestamp will be generated, like ‘strange-spider-2022-08-17-23:55.02’.
- **model\_description**((*str*, *optional*). *Defaults to None.*) – The description of the model.
- **model\_freeform\_tags** (*Dict(str, str)*, *Defaults to None.*) – Freeform tags for the model.
- **model\_defined\_tags** ((*Dict(str, dict(str, object))*), *optional*). *Defaults to None.*) – Defined tags for the model.
- **ignore\_introspection** ((*bool*, *optional*). *Defaults to None.*) – Determine whether to ignore the result of model introspection or not. If set to `True`, the save will ignore all model introspection errors.
- **wait\_for\_completion** ((*bool*, *optional*). *Defaults to True.*) – Flag set for whether to wait for deployment to complete before proceeding.
- **deployment\_display\_name**((*str*, *optional*). *Defaults to None.*) – The name of the model deployment. If a `deployment_display_name` is not provided in `kwargs`, a randomly generated easy to remember name with timestamp will be generated, like ‘strange-spider-2022-08-17-23:55.02’.
- **description** ((*str*, *optional*). *Defaults to None.*) – The description of the model.
- **deployment\_instance\_shape** ((*str*, *optional*). *Default to VM.Standard2.1.*) – The shape of the instance used for deployment.
- **deployment\_instance\_count** ((*int*, *optional*). *Defaults to 1.*) – The number of instance used for deployment.
- **deployment\_bandwidth\_mbps** ((*int*, *optional*). *Defaults to 10.*) – The bandwidth limit on the load balancer in Mbps.
- **deployment\_log\_group\_id** ((*str*, *optional*). *Defaults to None.*) – The oci logging group id. The access log and predict log share the same log group.
- **deployment\_access\_log\_id** ((*str*, *optional*). *Defaults to None.*) – The access log OCID for the access logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_predict\_log\_id** ((*str*, *optional*). *Defaults to None.*) – The predict log OCID for the predict logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_memory\_in\_gbs** ((*float*, *optional*). *Defaults to None.*) – Specifies the size of the memory of the model deployment instance in GBs.
- **deployment\_ocpus** ((*float*, *optional*). *Defaults to None.*) – Specifies the ocpu count of the model deployment instance.
- **deployment\_image** ((*str*, *optional*). *Defaults to None.*) – The OCIR path of docker container image. Required for deploying model on container runtime.
- **bucket\_uri** ((*str*, *optional*). *Defaults to None.*) – The OCI Object Storage URI where model artifacts will be copied to. The `bucket_uri` is only necessary for downloading large artifacts with size is greater than 2GB. Example: `oci://<bucket_name>@<namespace>/prefix/`.

- **overwrite\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **model\_version\_set** ((*Union[str, ModelVersionSet]*, optional). Defaults to *None*.) – The Model version set OCID, or name, or *ModelVersionSet* instance.
- **version\_label** ((*str*, optional). Defaults to *None*.) – The model version label.
- **kwargs** –

**impute\_values: (dict, optional).**

The dictionary where the key is the column index(or names is accepted for pandas dataframe) and the value is the impute value for the corresponding column.

**project\_id: (str, optional).**

Project OCID. If not specified, the value will be taken either from the environment variables or model properties.

**compartment\_id**

[(*str*, optional).] Compartment OCID. If not specified, the value will be taken either from the environment variables or model properties.

**image\_digest: (str, optional). Defaults to None.**

The digest of docker container image.

**cmd: (List, optional). Defaults to empty.**

The command line arguments for running docker container image.

**entrypoint: (List, optional). Defaults to empty.**

The entrypoint for running docker container image.

**server\_port: (int, optional). Defaults to 8080.**

The server port for docker container image.

**health\_check\_port: (int, optional). Defaults to 8080.**

The health check port for docker container image.

**deployment\_mode: (str, optional). Defaults to HTTPS\_ONLY.**

The deployment mode. Allowed values are: HTTPS\_ONLY and STREAM\_ONLY.

**input\_stream\_ids: (List, optional). Defaults to empty.**

The input stream ids. Required for STREAM\_ONLY mode.

**output\_stream\_ids: (List, optional). Defaults to empty.**

The output stream ids. Required for STREAM\_ONLY mode.

**environment\_variables: (Dict, optional). Defaults to empty.**

The environment variables for model deployment.

**timeout: (int, optional). Defaults to 10 seconds.**

The connection timeout in seconds for the client.

**max\_wait\_time**

[(int, optional). Defaults to 1200 seconds.] Maximum amount of time to wait in seconds. Negative implies infinite wait time.

**poll\_interval**

[(int, optional). Defaults to 10 seconds.] Poll interval in seconds.



**freeform\_tags:** (`Dict[str, str]`, optional). Defaults to `None`.

Freeform tags of the model deployment.

**defined\_tags:** (`Dict[str, dict[str, object]]`, optional). Defaults to `None`.

Defined tags of the model deployment.

**region:** (`str`, optional). Defaults to `None`.

The destination Object Storage bucket region. By default the value will be extracted from the `OCI_REGION_METADATA` environment variables.

Also can be any keyword argument for initializing the `ads.model.deployment.ModelDeploymentProperties`. See `ads.model.deployment.ModelDeploymentProperties()` for details.

#### Returns

The `ModelDeployment` instance.

#### Return type

`ModelDeployment`

#### Raises

- **FileExistsError** – If files already exist but `force_overwrite` is `False`.
- **ValueError** – If `inference_python_version` is not provided, but also cannot be found through manifest file.

**reload()** → `GenericModel`

Reloads the model artifact files: `score.py` and the `runtime.yaml`.

#### Returns

An instance of `GenericModel` class.

#### Return type

`GenericModel`

**reload\_runtime\_info()** → `None`

Reloads the model artifact file: `runtime.yaml`.

#### Returns

Nothing.

#### Return type

`None`

**restart\_deployment**(`max_wait_time: int = 1200`, `poll_interval: int = 10`) → `ModelDeployment`

Restarts the current deployment.

#### Parameters

- **max\_wait\_time** (`((int, optional). Defaults to 1200 seconds.)`) – Maximum amount of time to wait for activate or deactivate in seconds. Total amount of time to wait for restart deployment is twice as the value. Negative implies infinite wait time.
- **poll\_interval** (`((int, optional). Defaults to 10 seconds.)`) – Poll interval in seconds.

#### Returns

The `ModelDeployment` instance.

#### Return type

`ModelDeployment`

```
save(display_name: Optional[str] = None, description: Optional[str] = None, freeform_tags: Optional[dict] = None, defined_tags: Optional[dict] = None, ignore_introspection: Optional[bool] = False, bucket_uri: Optional[str] = None, overwrite_existing_artifact: Optional[bool] = True, remove_existing_artifact: Optional[bool] = True, model_version_set: Optional[Union[str, ModelVersionSet]] = None, version_label: Optional[str] = None, **kwargs) → str
```

Saves model artifacts to the model catalog.

#### Parameters

- **display\_name** ((str, optional). Defaults to None.) – The name of the model. If a display\_name is not provided in kwargs, randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55:02'.
- **description** ((str, optional). Defaults to None.) – The description of the model.
- **freeform\_tags** (Dict(str, str), Defaults to None.) – Freeform tags for the model.
- **defined\_tags** ((Dict(str, dict(str, object)), optional). Defaults to None.) – Defined tags for the model.
- **ignore\_introspection** ((bool, optional). Defaults to None.) – Determine whether to ignore the result of model introspection or not. If set to True, the save will ignore all model introspection errors.
- **bucket\_uri** ((str, optional). Defaults to None.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for uploading large artifacts which size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **overwrite\_existing\_artifact** ((bool, optional). Defaults to True.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((bool, optional). Defaults to True.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **model\_version\_set** ((Union[str, ModelVersionSet], optional). Defaults to None.) – The model version set OCID, or model version set name, or *ModelVersionSet* instance.
- **version\_label** ((str, optional). Defaults to None.) – The model version label.
- **kwargs** –

**project\_id:** (str, optional).

Project OCID. If not specified, the value will be taken either from the environment variables or model properties.

**compartment\_id**

[(str, optional).] Compartment OCID. If not specified, the value will be taken either from the environment variables or model properties.

**region:** (str, optional). Defaults to None.

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**timeout:** (int, optional). Defaults to 10 seconds.

The connection timeout in seconds for the client.

Also can be any attribute that *oci.data\_science.models.Model* accepts.

**Raises**

**`RuntimeInfoInconsistencyError`** – When `.runtime_info` is not synched with `runtime.yaml` file.

**Returns**

The model id.

**Return type**

str

**property** `schema_input`

**property** `schema_output`

**serialize\_model**(*as\_onnx: bool = False, initial\_types: List[Tuple] = None, force\_overwrite: bool = False, X\_sample: Optional[Union[Dict, str, List, Tuple, ndarray, Series, DataFrame]] = None, \*\*kwargs*)

Serialize and save Xgboost model using ONNX or model specific method.

**Parameters**

- **artifact\_dir** (*str*) – Directory for generate artifact.
- **as\_onnx** (*(boolean, optional). Defaults to False.*) – If set as True, provide `initial_types` or `X_sample` to convert into ONNX.
- **initial\_types** (*(List[Tuple], optional). Defaults to None.*) – Each element is a tuple of a variable name and a type.
- **force\_overwrite** (*(boolean, optional). Defaults to False.*) – If set as True, overwrite serialized model if exists.
- **X\_sample** (*Union[Dict, str, List, np.ndarray, pd.core.series.Series, pd.core.frame.DataFrame,]. Defaults to None.*) – Contains model inputs such that `model(X_sample)` is a valid invocation of the model. Used to generate `initial_types`.

**Returns**

Nothing.

**Return type**

None

**set\_model\_input\_serializer**(*model\_input\_serializer: Union[str, SERDE]*)

Registers serializer used for serializing data passed in `verify/predict`.

**Examples**

```
>>> generic_model.set_model_input_serializer(GenericModel.model_input_
↳serializer_type.CLOUDPICKLE)
```

```
>>> # Register serializer by passing the name of it.
>>> generic_model.set_model_input_serializer("cloudpickle")
```

```
>>> # Example of creating customized model input serializer and registering it.
>>> from ads.model import SERDE
>>> from ads.model.generic_model import GenericModel
```

```
>>> class MySERDE(SERDE):
...     def __init__(self):
...         super().__init__()
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
...     def deserialize(self, data):
...         deserialized_data = 2
...         return deserialized_data
```

```
>>> class Toy:
...     def predict(self, x):
...         return x ** 2
```

```
>>> generic_model = GenericModel(
...     estimator=Toy(),
...     artifact_dir=tempfile.mkdtemp(),
...     model_input_serializer=MySERDE()
... )
```

```
>>> # Or register the serializer after creating model instance.
>>> generic_model.set_model_input_serializer(MySERDE())
```

#### Parameters

**model\_input\_serializer** ((*str*, or `ads.model.SERDE`)) – name of the serializer, or instance of `SERDE`.

**set\_model\_save\_serializer**(*model\_save\_serializer: Union[str, SERDE]*)

Registers serializer used for saving model.

#### Examples

```
>>> generic_model.set_model_save_serializer(GenericModel.model_save_serializer_
↳ type.CLOUDPICKLE)
```

```
>>> # Register serializer by passing the name of it.
>>> generic_model.set_model_save_serializer("cloudpickle")
```

```
>>> # Example of creating customized model save serializer and registering it.
>>> from ads.model import SERDE
>>> from ads.model.generic_model import GenericModel
```

```
>>> class MySERDE(SERDE):
...     def __init__(self):
...         super().__init__()
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
...     def deserialize(self, data):
```

(continues on next page)

(continued from previous page)

```
...     deserialized_data = 2
...     return deserialized_data
```

```
>>> class Toy:
...     def predict(self, x):
...         return x ** 2
```

```
>>> generic_model = GenericModel(
...     estimator=Toy(),
...     artifact_dir=tempfile.mkdtemp(),
...     model_save_serializer=MySERDE()
... )
```

```
>>> # Or register the serializer after creating model instance.
>>> generic_model.set_model_save_serializer(MySERDE())
```

**Parameters**

**model\_save\_serializer** ((`ads.model.SERDE` or `str`)) – name of the serializer or instance of SERDE.

**summary\_status()** → `DataFrame`

A summary table of the current status.

**Returns**

The summary stable of the current status.

**Return type**

`pd.DataFrame`

**update(\*\*kwargs)** → *GenericModel*

Updates model metadata in the Model Catalog. Updates only metadata information. The model artifacts are immutable and cannot be updated.

**Parameters**

**kwargs** –

**display\_name:** (`str`, optional). Defaults to `None`.

The name of the model.

**description:** (`str`, optional). Defaults to `None`.

The description of the model.

**freeform\_tags**

[`Dict(str, str)`, Defaults to `None`.] Freeform tags for the model.

**defined\_tags**

[(`Dict(str, dict(str, object))`), optional]. Defaults to `None`.] Defined tags for the model.

**version\_label:** (`str`, optional). Defaults to `None`.

The model version label.

Additional kwargs arguments. Can be any attribute that *oci.data\_science.models.Model* accepts.

**Returns**

An instance of *GenericModel* (self).

**Return type***GenericModel***Raises****ValueError** – if model not saved to the Model Catalog.

**classmethod** `update_deployment(model_deployment_id: Optional[str] = None, properties: Optional[Union[ModelDeploymentProperties, dict]] = None, wait_for_completion: bool = True, max_wait_time: int = 1200, poll_interval: int = 10, **kwargs) → ModelDeployment`

Updates a model deployment.

You can update *model\_deployment\_configuration\_details* and change *instance\_shape* and *model\_id* when the model deployment is in the *ACTIVE* lifecycle state. The *bandwidth\_mbps* or *instance\_count* can only be updated while the model deployment is in the *INACTIVE* state. Changes to the *bandwidth\_mbps* or *instance\_count* will take effect the next time the *ActivateModelDeployment* action is invoked on the model deployment resource.

**Examples**

```
>>> # Update access log id, freeform tags and description for the model_
↳ deployment
>>> model.update_deployment(
>>>     properties=ModelDeploymentProperties(
>>>         access_log_id=<log_ocid>,
>>>         description="Description for Custom Model",
>>>         freeform_tags={"key": "value"},
>>>     )
>>> )
```

**Parameters**

- **model\_deployment\_id** (*str.*) – The model deployment OCID. Defaults to None. If the method called on instance level, then *self.model\_deployment.model\_deployment\_id* will be used.
- **properties** (*ModelDeploymentProperties* or *dict*) – The properties for updating the deployment.
- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to complete before proceeding. Defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).
- **kwargs** –

**auth:** (*Dict*, optional). Defaults to *None*.

The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.

**Returns**

An instance of *ModelDeployment* class.

**Return type***ModelDeployment***upload\_artifact**(*uri*: str, *auth*: Optional[Dict] = None, *force\_overwrite*: Optional[bool] = False) → NoneUploads model artifacts to the provided *uri*. The artifacts will be zipped before uploading.**Parameters**

- **uri** (str) – The destination location for the model artifacts, which can be a local path or OCI object storage URI. Examples: `>>> upload_artifact(uri="/some/local/folder/") >>> upload_artifact(uri="oci://bucket@namespace/prefix/")`
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** (bool) – Overwrite target\_dir if exists.

**verify**(*data*: Optional[Any] = None, *reload\_artifacts*: bool = True, *auto\_serialize\_data*: bool = True, *\*\*kwargs*) → Dict[str, Any]

Test if deployment works in local environment.

**Examples**

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.verify(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.verify(
...     image="oci://<bucket>@<tenancy>/myimage.png",
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

**Parameters**

- **data** (Any) – Data used to test if deployment works in local environment.
- **reload\_artifacts** (bool. Defaults to *True*.) – Whether to reload artifacts or not.
- **auto\_serialize\_data** (bool.) – Whether to auto serialize input data. Defaults to *False* for GenericModel, and *True* for other frameworks. *data* required to be json serializable if *auto\_serialize\_data=False*. if *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.
- **kwargs** – content\_type: str, used to indicate the media type of the resource. image: PIL.Image Object or uri for the image.

A valid string path for image file can be local path, http(s), oci, s3, gs.

**storage\_options: dict**Passed to *fsspec.open* for a particular storage connection. Please see *fsspec* (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.**Returns**

A dictionary which contains prediction results.

**Return type**  
Dict

## Module contents

**ads.model.model\_artifact\_boilerplate package**

## Subpackages

**ads.model.model\_artifact\_boilerplate.artifact\_introspection\_test package**

## Submodules

**ads.model.model\_artifact\_boilerplate.artifact\_introspection\_test.model\_artifact\_validate module**

ads.model.model\_artifact\_boilerplate.artifact\_introspection\_test.model\_artifact\_validate.**check\_mandatory**

Check if score.py and runtime.yaml are present or not.

ads.model.model\_artifact\_boilerplate.artifact\_introspection\_test.model\_artifact\_validate.**check\_runtime\_y**

Check runtime yaml mandatory fields

ads.model.model\_artifact\_boilerplate.artifact\_introspection\_test.model\_artifact\_validate.**check\_score\_fi**

Change current working directory to temporary directory and validate python file

ads.model.model\_artifact\_boilerplate.artifact\_introspection\_test.model\_artifact\_validate.**combine\_msgs**(te

st

For a given test\_list combine all error\_msg if test failed

ads.model.model\_artifact\_boilerplate.artifact\_introspection\_test.model\_artifact\_validate.**get\_object\_stor**

ads.model.model\_artifact\_boilerplate.artifact\_introspection\_test.model\_artifact\_validate.**get\_test\_resul**

Gives a number based on test result: 0: test was success 1: test failed 2: didn't run test

ads.model.model\_artifact\_boilerplate.artifact\_introspection\_test.model\_artifact\_validate.**model\_deploymen**



Recursively checks in MODEL\_DEPLOYMENT if INFERENCE\_ENV\_SLUG, INFERENCE\_ENV\_TYPE, INFERENCE\_ENV\_PATH Also saves its value if present.

`ads.model.model_artifact_boilerplate.artifact_introspection_test.model_artifact_validate.validate_artifact`

Unzip the artifact zip file passed. Check for test cases. The method returns the status of check and error message if any. :artifact: str

`ads.model.model_artifact_boilerplate.artifact_introspection_test.model_artifact_validate.write_html` (output\_path: str, tests: dict) → Non

writes an html file to output\_path based on TESTS

## Module contents

### Submodules

`ads.model.model_artifact_boilerplate.score` module

### Module contents

`ads.model.runtime` package

### Submodules

`ads.model.runtime.env_info` module

**class** `ads.model.runtime.env_info.EnvInfo`

Bases: ABC

Env Info Base class.

**classmethod** `from_path`(env\_path: str, auth: Optional[dict] = None) → *EnvInfo*

Initiate an object from a conda pack path.

#### Parameters

- **env\_path** (str) – conda pack path.
- **auth** ((Dict, optional). Defaults to None.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

#### Returns

An EnvInfo instance.

#### Return type

*EnvInfo*

```
classmethod from_slug(env_slug: str, namespace: str = 'id19sferra6z', bucketname: str =  
'service-conda-packs', auth: Optional[dict] = None)  $\rightarrow$  EnvInfo
```

Initiate an EnvInfo object from a slug. Only service pack is allowed to use this method.

#### Parameters

- **env\_slug** (*str*) – service pack slug.
- **namespace** ((*str*, *optional*)) – namespace of region.
- **bucketname** ((*str*, *optional*)) – bucketname of service pack.
- **auth** ((*Dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

#### Returns

An EnvInfo instance.

#### Return type

*EnvInfo*

```
class ads.model.runtime.env_info.InferenceEnvInfo(inference_env_slug: str = "  
str = ", inference_env_path: str = "  
inference_python_version: str = ")
```

Bases: *EnvInfo*, *DataClassSerializable*

Inference conda environment info.

```
inference_env_path: str = ''
```

```
inference_env_slug: str = ''
```

```
inference_env_type: str = ''
```

```
inference_python_version: str = ''
```

```
class ads.model.runtime.env_info.PACK_TYPE(value)
```

Bases: Enum

Conda Pack Type

```
SERVICE_PACK = 'data_science'
```

```
USER_CUSTOM_PACK = 'published'
```

```
class ads.model.runtime.env_info.TrainingEnvInfo(training_env_slug: str = "  
str = ", training_env_path: str = "  
training_python_version: str = ")
```

Bases: *EnvInfo*, *DataClassSerializable*

Training conda environment info.

```
training_env_path: str = ''
```

```
training_env_slug: str = ''
```

```
training_env_type: str = ''
```

```
training_python_version: str = ''
```

**ads.model.runtime.model\_deployment\_details module**

```
class ads.model.runtime.model_deployment_details.ModelDeploymentDetails(inference_conda_env:
~ads.model.runtime.env_info.InferenceEnvInfo,
= <factory>)
```

Bases: *DataClassSerializable*

ModelDeploymentDetails class.

**inference\_conda\_env:** *InferenceEnvInfo*

**ads.model.runtime.model\_provenance\_details module**

```
class ads.model.runtime.model_provenance_details.ModelProvenanceDetails(project_ocid: str = "
tenancy_ocid: str = "
training_code:
~ads.model.runtime.model_provenance_details.TrainingCode,
= <factory>, training_compartment_ocid:
str = "
training_conda_env:
~ads.model.runtime.env_info.TrainingEnvInfo,
= <factory>,
training_region: str = "
training_resource_ocid: str = "
user_ocid: str = "
vm_image_internal_id:
str = ")
```

Bases: *DataClassSerializable*

ModelProvenanceDetails class.

**project\_ocid:** *str = ''*

**tenancy\_ocid:** *str = ''*

**training\_code:** *TrainingCode*

**training\_compartment\_ocid:** *str = ''*

**training\_conda\_env:** *TrainingEnvInfo*

**training\_region:** *str = ''*

**training\_resource\_ocid:** *str = ''*

**user\_ocid:** *str = ''*

**vm\_image\_internal\_id:** *str = ''*

```
class ads.model.runtime.model_provenance_details.TrainingCode(artifact_directory: str = "
```

Bases: *DataClassSerializable*

TrainingCode class.

**artifact\_directory:** *str = ''*

## ads.model.runtime.runtime\_info module

```
class ads.model.runtime.runtime_info.RuntimeInfo(model_artifact_version: str = "", model_deployment:
~ads.model.runtime.model_deployment_details.ModelDeploymentDetails, model_provenance:
~ads.model.runtime.model_provenance_details.ModelProvenanceDetails)
    = <factory>, model_provenance:
    = <factory>)
```

Bases: *DataClassSerializable*

RuntimeInfo class which is the data class representation of the runtime yaml file.

```
classmethod from_env() → RuntimeInfo
```

Populate the RuntimeInfo from environment variables.

**Returns**

A RuntimeInfo instance.

**Return type**

*RuntimeInfo*

```
model_artifact_version: str = ''
```

```
model_deployment: ModelDeploymentDetails
```

```
model_provenance: ModelProvenanceDetails
```

```
save()
```

Save the RuntimeInfo object into runtime.yaml file under the artifact directory.

**Returns**

Nothing.

**Return type**

None

## ads.model.runtime.utils module

```
class ads.model.runtime.utils.SchemaValidator(schema_file_path: str)
```

Bases: object

Base Schema Validator which validate yaml file.

Initiate a SchemaValidator instance.

**Parameters**

**schema\_file\_path** ((str)) – schema file path. The schema is used to validate the yaml file.

**Returns**

A SchemaValidator instance.

**Return type**

*SchemaValidator*

```
validate(document: Dict) → bool
```

Validate the schema.

**Parameters**

**document** ((Dict)) – yaml file content to validate.

**Raises**

**DocumentError** – Raised when the validation schema is missing, has the wrong format or contains errors.:

**Returns**

validation result.

**Return type**

bool

```
ads.model.runtime.utils.get_service_packs(namespace: str, bucketname: str, auth: Optional[dict] =
                                         None) → Tuple[Dict, Dict]
```

Get the service pack path mapping and service pack slug mapping. Note: deprecated packs are also included.

**Parameters**

- **namespace** (*str*) – namespace of the service pack.
- **bucketname** (*str*) – bucketname of the service pack.
- **auth** (*(Dict, optional). Defaults to None.*) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

**Returns**

Service pack path mapping(service pack path -> (slug, python version)) and the service pack slug mapping(service pack slug -> (pack path, python version)).

**Return type**

(Dict, Dict)

**Module contents****ads.model.service package****Submodules****ads.model.service.oci\_datascience\_model module**

```
exception ads.model.service.oci_datascience_model.ModelArtifactNotFoundError
```

Bases: Exception

```
exception ads.model.service.oci_datascience_model.ModelNotSavedError
```

Bases: Exception

```
exception ads.model.service.oci_datascience_model.ModelProvenanceNotFoundError
```

Bases: Exception

```
exception ads.model.service.oci_datascience_model.ModelWithActiveDeploymentError
```

Bases: Exception

```
class ads.model.service.oci_datascience_model.OCIDataScienceModel(config: Optional[dict] =
                                                                    None, signer:
                                                                    Optional[Signer] = None,
                                                                    client_kwargs: Optional[dict]
                                                                    = None, **kwargs)
```

Bases: *OCIDataScienceMixin*, *OCIWorkRequestMixin*, *Model*

Represents an OCI Data Science Model. This class contains all attributes of the *oci.data\_science.models.Model*. The main purpose of this class is to link the *oci.data\_science.models.Model* and the related client methods. Linking the *Model* (payload) to Create/Update/Get/List/Delete methods.

The *OCIDataScienceModel* can be initialized by unpacking the properties stored in a dictionary:

```
properties = {
    "compartment_id": "<compartment_ocid>",
    "name": "<model_name>",
    "description": "<model_description>",
}
ds_model = OCIDataScienceModel(**properties)
```

The properties can also be OCI REST API payload, in which the keys are in camel format.

```
payload = {
    "compartmentId": "<compartment_ocid>",
    "name": "<model_name>",
    "description": "<model_description>",
}
ds_model = OCIDataScienceModel(**payload)
```

**create**(*self*) → 'OCIDataScienceModel'

Creates datascience model in model catalog.

**create\_model\_provenance**(*self*, *model\_provenance*: *ModelProvenance*) → *oci.data\_science.models.ModelProvenance*:

Creates model provenance metadata.

**def update\_model\_provenance**(*self*, *ModelProvenance*) -> *oci.data\_science.models.ModelProvenance*:

Updates model provenance metadata.

**get\_model\_provenance**(*self*) → *oci.data\_science.models.ModelProvenance*:

Gets model provenance metadata.

**get\_artifact\_info**(*self*) → Dict:

Gets model artifact attachment information.

**def get\_model\_artifact\_content**(*self*) -> *BytesIO*:

Gets model artifact content.

**create\_model\_artifact**(*self*, *bytes\_content*: *BytesIO*) → None:

Creates model artifact for specified model.

**import\_model\_artifact**(*self*, *bucket\_uri*: *str*, *region*: *str* = None) → None:

Imports model artifact content from the model catalog.

**export\_model\_artifact**(*self*, *bucket\_uri*: *str*, *region*: *str* = None):

Exports model artifact to the model catalog.

**update**(*self*) → 'OCIDataScienceModel':

Updates datascience Model.

**delete**(*self*, *delete\_associated\_model\_deployment*: *Optional[bool]* = *False*) → "OCIDataScienceModel":

Deletes datascience Model.

**model\_deployment**(*self*, ...) → List:

Gets the list of model deployments by model ID across the compartments.

**from\_id**(*cls*, *ocid*: *str*) → "OCIDataScienceModel":

Gets model by OCID.

## Examples

```
>>> oci_model = OCIDataScienceModel.from_id(<model_ocid>)
>>> oci_model.model_deployment()
>>> oci_model.get_model_provenance()
>>> oci_model.description = "A brand new description"
... oci_model.update()
>>> oci_model.sync()
>>> oci_model.get_artifact_info()
```

Initializes a service/resource with OCI client as a property. If config or signer is specified, it will be used to initialize the OCI client. If neither of them is specified, the client will be initialized with `ads.common.auth.default_signer`. If both of them are specified, both of them will be passed into the OCI client, and the authentication will be determined by OCI Python SDK.

### Parameters

- **config** (*dict*, *optional*) – OCI API key config dictionary, by default None.
- **signer** (*oci.signer.Signer*, *optional*) – OCI authentication signer, by default None.
- **client\_kwargs** (*dict*, *optional*) – Additional keyword arguments for initializing the OCI client.

**create**() → *OCIDataScienceModel*

Creates datascience model in model catalog.

### Returns

The *OCIDataScienceModel* instance (*self*), which allows chaining additional method.

### Return type

*OCIDataScienceModel*

**create\_model\_artifact**(*bytes\_content*: *BytesIO*) → None

Creates model artifact for specified model.

### Parameters

**bytes\_content** (*BytesIO*) – Model artifacts to upload.

**create\_model\_provenance**(*model\_provenance*: *ModelProvenance*) → *ModelProvenance*

Creates model provenance metadata.

### Parameters

**model\_provenance** (*oci.data\_science.models.ModelProvenance*) – OCI model provenance metadata.

### Returns

The OCI model provenance object.

**Return type**

oci.data\_science.models.ModelProvenance

**delete**(*delete\_associated\_model\_deployment: Optional[bool] = False*) → *OCIDataScienceModel*

Deletes datascience Model.

**Parameters**

**delete\_associated\_model\_deployment** ((bool, optional). Defaults to *False*.) – Whether associated model deployments need to be deleted or not.

**Returns**

The *OCIDataScienceModel* instance (self).

**Return type**

*OCIDataScienceModel*

**Raises**

**ModelWithActiveDeploymentError** – If model has active deployments and *delete\_associated\_model\_deployment* set to *False*.

**export\_model\_artifact**(*bucket\_uri: str, region: str = None*)

Exports model artifact to the model catalog. Can be used for any model artifact. Requires to provide an Object Storage bucket, for transitional saving artifacts. For the small artifacts use *create\_model\_artifact* method.

**Parameters**

- **bucket\_uri** (*str*) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts which size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **region** ((*str*, optional). Defaults to *None*.) – The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**Return type**

*None*

**classmethod from\_id**(*ocid: str*) → *OCIDataScienceModel*

Gets model by OCID.

**Parameters**

**ocid** (*str*) – The OCID of the datascience model.

**Returns**

An instance of *OCIDataScienceModel*.

**Return type**

*OCIDataScienceModel*

**get\_artifact\_info**() → Dict

Gets model artifact attachment information.

**Returns**

The model artifact attachment info. Example: {

```
'Date': 'Sun, 13 Nov 2022 06:01:27 GMT', 'opc-request-id': 'E4F7', 'ETag':  
'77156317-8bb9-4c4a-882b-0d85f8140d93', 'Content-Disposition': 'attachment; file-  
name=artifact.zip', 'Last-Modified': 'Sun, 09 Oct 2022 16:50:14 GMT', 'Content-  
Type': 'application/json', 'Content-MD5': 'orMy3Gs386GZLjYWATJWuA==', 'X-  
Content-Type-Options': 'nosniff', 'Content-Length': '4029958'
```



```
}
```

**Return type**

Dict

**Raises*****ModelArtifactNotFoundError*** – If model artifact attachment not found.**get\_model\_artifact\_content()** → BytesIO

Gets model artifact content. Can only be used to the small artifacts, which size is less than 2GB. For the large artifacts needs to be used a *import\_model\_artifact* method.

**Returns**

Object with data of type stream.

**Return type**

BytesIO

**Raises*****ModelArtifactNotFoundError*** – If model artifact not found.**get\_model\_provenance()** → ModelProvenance

Gets model provenance metadata.

**Returns**

OCI model provenance metadata.

**Return type**

oci.data\_science.models.ModelProvenance

**Raises*****ModelProvenanceNotFoundError*** – If model provenance not found.**import\_model\_artifact(bucket\_uri: str, region: str = None)** → None

Imports model artifact content from the model catalog. Requires to provide an Object Storage bucket for transitional saving artifacts. This method can be used either for small or large artifacts.

**Parameters**

- **bucket\_uri** (*str*) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts which size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **region** ((*str*, optional). Defaults to *None*.) – The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variable.

**Return type**

None

**Raises*****ModelArtifactNotFoundError*** – If model artifact not found.

**model\_deployments** (*config: Optional[Dict] = None, tenant\_id: Optional[str] = None, limit: Optional[int] = 500, page: Optional[str] = None, \*\*kwargs: Dict*) → List

Gets the list of model deployments by model ID across the compartments.

**Parameters**

- **model\_id** (*str*) – The model ID.

- **config** ((Dict, optional). Defaults to *None*.) – Configuration keys and values as per SDK and Tool Configuration. The `from_file()` method can be used to load configuration from a file. Alternatively, a dict can be passed. You can validate\_config the dict using `validate_config()`. Defaults to *None*.
- **tenant\_id** ((str, optional). Defaults to *None*.) – The tenancy ID, which can be used to specify a different tenancy (for cross-tenancy authorization) when searching for resources in a different tenancy. Defaults to *None*.
- **limit** ((int, optional). Defaults to *None*.) – The maximum number of items to return. The value must be between 1 and 1000. Defaults to 500.
- **page** ((str, optional). Defaults to *None*.) – The page at which to start retrieving results.

**Return type**

The list of model deployments associated with given model ID.

**update()** → *OCIDataScienceModel*

Updates datascience Model.

**Returns**

The *OCIDataScienceModel* instance (self).

**Return type**

*OCIDataScienceModel*

**update\_model\_provenance**(*model\_provenance: ModelProvenance*) → *ModelProvenance*

Updates model provenance metadata.

**Parameters**

**model\_provenance** (*oci.data\_science.models.ModelProvenance*) – OCI model provenance metadata.

**Returns**

The OCI model provenance object.

**Return type**

*oci.data\_science.models.ModelProvenance*

**ads.model.service.oci\_datascience\_model.check\_for\_model\_id**(*msg: str = 'Model needs to be saved to the Model Catalog before it can be accessed.'*)

The decorator helping to check if the ID attribute sepcified for a datascience model.

**Parameters**

**msg** (*str*) – The message that will be thrown.

**Raises**

*ModelNotSavedError* – In case if the ID attribute not specified.

## Examples

```
>>> @check_for_id(msg="Some message.")
... def test_function(self, name: str, last_name: str)
...     pass
```

### ads.model.service.oci\_datascience\_model\_version\_set module

```
class ads.model.service.oci_datascience_model_version_set.DataScienceModelVersionSet(config:
                                                    Optional[dict]
                                                    =
                                                    None,
                                                    signer:
                                                    Optional[Signer]
                                                    =
                                                    None,
                                                    client_kwargs:
                                                    Optional[dict]
                                                    =
                                                    None,
                                                    **kwargs)
```

Bases: *OCIDataScienceMixin*, *OCIModelWithNameMixin*, *OCIWorkRequestMixin*, *ModelVersionSet*

Represents an OCI Data Science Model Version Set. This class contains all attributes of the `oci.data_science.models.ModelVersionSet`. The main purpose of this class is to link the `oci.data_science.models.ModelVersionSet` model and the related client methods. Mainly, linking the `ModelVersionSet` model (payload) to Create/Update/Get/List/Delete methods.

A *DataScienceModelVersionSet* can be initialized by unpacking the properties stored in a dictionary (payload):

```
properties = {
    "name": "experiment1",
    "description": "my experiment"
}
experiment = DataScienceModelVersionSet(**properties)
```

The properties can also be OCI REST API payload, in which the keys are in camel format.

```
payload = {
    "Id": "<model_version_set_ocid>",
    "compartmentId": "<compartment_ocid>",
    "Name": "<model_version_set_name>",
}
experiment = DataScienceModelVersionSet(**payload)
```

Initializes a service/resource with OCI client as a property. If `config` or `signer` is specified, it will be used to initialize the OCI client. If neither of them is specified, the client will be initialized with `ads.common.auth.default_signer`. If both of them are specified, both of them will be passed into the OCI client, and the authentication will be determined by OCI Python SDK.

**Parameters**

- **config** (*dict*, *optional*) – OCI API key config dictionary, by default None.
- **signer** (*oci.signer.Signer*, *optional*) – OCI authentication signer, by default None.
- **client\_kwargs** (*dict*, *optional*) – Additional keyword arguments for initializing the OCI client.

**create()** → *DataScienceModelVersionSet*

Creates model version set on OCI Data Science platform

**Returns**

The DataScienceModelVersionSet instance (self), which allows chaining additional method.

**Return type**

*DataScienceModelVersionSet*

**delete**(*delete\_model: Optional[bool] = False*) → *DataScienceModelVersionSet*

Deletes the model version set.

**Parameters**

**delete\_model** (*(bool, optional). Defaults to False.*) – By default, this parameter is false. A model version set can only be deleted if all the models associate with it are already in the DELETED state. You can optionally specify the deleteRelatedModels boolean query parameters to true, which deletes all associated models for you.

**Returns**

The DataScienceModelVersionSet instance (self), which allows chaining additional method.

**Return type**

*DataScienceModelVersionSet*

**classmethod from\_name**(*name: str, compartment\_id: Optional[str] = None*) → *DataScienceModelVersionSet*

Gets a Model Version Set by name.

**Parameters**

- **compartment\_id** (*(str, optional). Defaults to None.*) – Compartment OCID of the OCI resources. If *compartment\_id* is not specified, the value will be taken from environment variables.
- **name** (*str*) – The name of the model version set.

**Returns**

An instance of DataScienceModelVersionSet.

**Return type**

*DataScienceModelVersionSet*

**classmethod from\_ocid**(*ocid: str*) → *DataScienceModelVersionSet*

Gets a Model Version Set by OCID.

**Parameters**

**ocid** (*str*) – The OCID of the model version set.

**Returns**

An instance of DataScienceModelVersionSet.

**Return type**

*DataScienceModelVersionSet*

**update()** → *DataScienceModelVersionSet*

Updates the Data Science Model Version Set.

**exception** `ads.model.service.oci_datascience_model_version_set.ModelVersionSetNotExists`

Bases: Exception

**exception** `ads.model.service.oci_datascience_model_version_set.ModelVersionSetNotSaved`

Bases: Exception

## Module contents

### ads.model.transformer package

#### Submodules

#### ads.model.transformer.onnx\_transformer module

**class** `ads.model.transformer.onnx_transformer.ONNXTransformer`

Bases: object

This is a transformer to convert X [pandas.DataFrame, pd.Series] data into Onnx readable dtypes and formats. It is Serializable, so it can be reloaded at another time.

#### Examples

```
>>> from ads.model.transformer.onnx_transformer import ONNXTransformer
>>> onnx_data_transformer = ONNXTransformer()
>>> train_transformed = onnx_data_transformer.fit_transform(train.X, {"column_name1": "impute_value1", "column_name2": "impute_value2"})
>>> test_transformed = onnx_data_transformer.transform(test.X)
```

**fit**(*X: Union[DataFrame, Series, ndarray, list], impute\_values: Optional[Dict] = None*)

Fits the OnnxTransformer on the dataset :param X: The DataFrame for the training data :type X: Union[pandas.DataFrame, pandas.Series, np.ndarray, list]

#### Returns

**Self** – The fitted estimator

#### Return type

ads.Model

**fit\_transform**(*X: Union[DataFrame, Series], impute\_values: Optional[Dict] = None*)

Fits, then transforms the data :param X: The DataFrame for the training data :type X: Union[pandas.DataFrame, pandas.Series]

#### Returns

The transformed X data

#### Return type

Union[pandas.DataFrame, pandas.Series]

**static load**(filename, \*\*kwargs)

Loads the Onnx model to disk :param filename: The filename location for where the model should be loaded :type filename: Str

**Returns**

**onnx\_transformer** – The loaded model

**Return type**

*ONNXTransformer*

**save**(filename, \*\*kwargs)

Saves the Onnx model to disk :param filename: The filename location for where the model should be saved :type filename: Str

**Returns**

**filename** – The filename where the model was saved

**Return type**

Str

**transform**(X: Union[DataFrame, Series, ndarray, list])

Transforms the data for the OnnxTransformer.

**Parameters**

**X** (Union[pandas.DataFrame, pandas.Series, np.ndarray, list]) – The Dataframe for the training data

**Returns**

The transformed X data

**Return type**

Union[pandas.DataFrame, pandas.Series, np.ndarray, list]

## Module contents

### 18.1.1.15.2 Submodules

#### 18.1.1.15.3 ads.model.artifact module

**exception** ads.model.artifact.**ArtifactFolderStructureError**(required\_files: Tuple[str])

Bases: Exception

**exception** ads.model.artifact.**ArtifactNestedFolderError**(folder: str)

Bases: Exception

**exception** ads.model.artifact.**ArtifactRequiredFilesError**(required\_files: Tuple[str])

Bases: Exception

**class** ads.model.artifact.**ModelArtifact**(artifact\_dir: str, model\_file\_name: Optional[str] = None, reload: Optional[bool] = False, ignore\_conda\_error: Optional[bool] = False)

Bases: object

The class that represents model artifacts. It is designed to help to generate and manage model artifacts.

Initializes a ModelArtifact instance.

**Parameters**

- **artifact\_dir** (*str*) – The local artifact folder to store the files needed for deployment.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The file name of the serialized model.
- **reload** ((*bool*, optional). Defaults to *False*.) – Determine whether will reload the Model into the env.

**Returns**

A ModelArtifact instance.

**Return type**

*ModelArtifact*

**Raises**

**ValueError** – If *artifact\_dir* not provided.

**classmethod from\_uri**(*uri: str, artifact\_dir: str, model\_file\_name: Optional[str] = None, force\_overwrite: Optional[bool] = False, auth: Optional[Dict] = None, ignore\_conda\_error: Optional[bool] = False*)

Constructs a ModelArtifact object from the existing model artifacts.

**Parameters**

- **uri** (*str*) – The URI of source artifact folder or archive. Can be local path or OCI object storage URI.
- **artifact\_dir** (*str*) – The local artifact folder to store the files needed for deployment.
- **model\_file\_name** ((*str*, optional). Defaults to *None*) – The file name of the serialized model.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

**Returns**

A ModelArtifact instance

**Return type**

*ModelArtifact*

**Raises**

**ValueError** – If *uri* is equal to *artifact\_dir*, and it not exists.

**prepare\_runtime\_yaml**(*inference\_conda\_env: str, inference\_python\_version: Optional[str] = None, training\_conda\_env: Optional[str] = None, training\_python\_version: Optional[str] = None, force\_overwrite: bool = False, namespace: str = 'id19sfcr6z', bucketname: str = 'service-conda-packs', auth: Optional[dict] = None, ignore\_conda\_error: bool = False*) → None

Generate a runtime yaml file and save it to the artifact directory.

**Parameters**

- **inference\_conda\_env** ((*str*, optional). Defaults to *None*.) – The object storage path of conda pack which will be used in deployment. Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.

- **inference\_python\_version** ((*str*, *optional*). Defaults to *None*.) – The python version which will be used in deployment.
- **training\_conda\_env** ((*str*, *optional*). Defaults to *None*.) – The object storage path of conda pack used during training. Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **training\_python\_version** ((*str*, *optional*). Defaults to *None*.) – The python version used during training.
- **force\_overwrite** ((*bool*, *optional*). Defaults to *False*.) – Whether to overwrite existing files.
- **namespace** ((*str*, *optional*)) – The namespace of region. Defaults to environment variable CONDA\_BUCKET\_NS.
- **bucketname** ((*str*, *optional*)) – The bucketname of service pack. Defaults to environment variable CONDA\_BUCKET\_NAME.
- **auth** ((*Dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

**Raises**

**ValueError** – If neither slug or conda\_env\_uri is provided.

**Returns**

A RuntimeInfo instance.

**Return type**

*RuntimeInfo*

**prepare\_score\_py**(*jinja\_template\_filename*: *str*, *model\_file\_name*: *Optional[str]* = *None*, *\*\*kwargs*)

Prepares *score.py* file.

**Parameters**

- **jinja\_template\_filename** (*str*.) – The jinja template file name.
- **model\_file\_name** ((*str*, *optional*). Defaults to *None*.) – The file name of the serialized model.
- **\*\*kwargs** ((*dict*)) – use\_torch\_script: *bool* data\_deserializer: *str*

**Return type**

*None*

**Raises**

**ValueError** – If *model\_file\_name* not provided.

**reload()**

Syncs the *score.py* to reload the model and predict function.

**Returns**

Nothing

**Return type**

*None*



#### 18.1.1.15.4 ads.model.artifact\_downloader module

```
class ads.model.artifact_downloader.ArtifactDownloader(dsc_model: OCIDataScienceModel,
                                                         target_dir: str, force_overwrite:
                                                         Optional[bool] = False)
```

Bases: ABC

The abstract class to download model artifacts.

Initializes *ArtifactDownloader* instance.

##### Parameters

- **dsc\_model** (*OCIDataScienceModel*) – The data science model instance.
- **target\_dir** (*str*) – The target location of model after download.
- **force\_overwrite** (*bool*) – Overwrite *target\_dir* if exists.

**PROGRESS\_STEPS\_COUNT** = 1

**download()**

Downloads model artifacts.

##### Return type

None

##### Raises

**ValueError** – If target directory does not exist.

```
class ads.model.artifact_downloader.LargeArtifactDownloader(dsc_model: OCIDataScienceModel,
                                                             target_dir: str, auth: Optional[Dict]
                                                             = None, force_overwrite:
                                                             Optional[bool] = False, region:
                                                             Optional[str] = None, bucket_uri:
                                                             Optional[str] = None,
                                                             overwrite_existing_artifact:
                                                             Optional[bool] = True,
                                                             remove_existing_artifact:
                                                             Optional[bool] = True)
```

Bases: *ArtifactDownloader*

Initializes *LargeArtifactDownloader* instance.

##### Parameters

- **dsc\_model** (*OCIDataScienceModel*) – The data science model instance.
- **target\_dir** (*str*) – The target location of model after download.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Overwrite *target\_dir* if exists.
- **region** ((str, optional). Defaults to *None*.) – The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for uploading large artifacts which size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **overwrite\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.

PROGRESS\_STEPS\_COUNT = 4

```
class ads.model.artifact_downloader.SmallArtifactDownloader(dsc_model: OCIDataScienceModel,  
                                                         target_dir: str, force_overwrite:  
                                                         Optional[bool] = False)
```

Bases: [ArtifactDownloader](#)

Initializes *ArtifactDownloader* instance.

#### Parameters

- **dsc\_model** ([OCIDataScienceModel](#)) – The data science model instance.
- **target\_dir** (*str*) – The target location of model after download.
- **force\_overwrite** (*bool*) – Overwrite *target\_dir* if exists.

PROGRESS\_STEPS\_COUNT = 3

### 18.1.1.15.5 ads.model.artifact\_uploader module

```
class ads.model.artifact_uploader.ArtifactUploader(dsc_model: OCIDataScienceModel,  
                                                  artifact_path: str)
```

Bases: ABC

The abstract class to upload model artifacts.

Initializes *ArtifactUploader* instance.

#### Parameters

- **dsc\_model** ([OCIDataScienceModel](#)) – The data science model instance.
- **artifact\_path** (*str*) – The model artifact location.

PROGRESS\_STEPS\_COUNT = 3

**upload()**

Uploads model artifacts.

```
class ads.model.artifact_uploader.LargeArtifactUploader(dsc_model: OCIDataScienceModel,  
                                                       artifact_path: str, bucket_uri: str, auth:  
                                                       Optional[Dict] = None, region:  
                                                       Optional[str] = None,  
                                                       overwrite_existing_artifact: Optional[bool]  
                                                       = True, remove_existing_artifact:  
                                                       Optional[bool] = True)
```

Bases: [ArtifactUploader](#)

Initializes *LargeArtifactUploader* instance.

**Parameters**

- **dsc\_model** ([OCIDataScienceModel](#)) – The data science model instance.
- **artifact\_path** (*str*) – The model artifact location.
- **bucket\_uri** (*str*) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for uploading large artifacts which size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **region** ((*str*, optional). Defaults to *None*.) – The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.
- **overwrite\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.

PROGRESS\_STEPS\_COUNT = 4

```
class ads.model.artifact_uploader.SmallArtifactUploader(dsc_model: OCIDataScienceModel,
                                                         artifact_path: str)
```

Bases: [ArtifactUploader](#)

Initializes *ArtifactUploader* instance.

**Parameters**

- **dsc\_model** ([OCIDataScienceModel](#)) – The data science model instance.
- **artifact\_path** (*str*) – The model artifact location.

PROGRESS\_STEPS\_COUNT = 1

**18.1.1.15.6 ads.model.base\_properties module**

```
class ads.model.base_properties.BaseProperties
```

Bases: [Serializable](#)

Represents base properties class.

```
with_prop(name: str, value: Any) → BaseProperties
```

Sets property value.

```
with_dict(obj_dict: Dict) → BaseProperties
```

Populates properties values from dict.

```
with_env() → BaseProperties
```

Populates properties values from environment variables.

```
to_dict() → Dict
```

Serializes instance of class into a dictionary.

**with\_config**(*config*: *ads.config.ConfigSection*) → *BaseProperties*

Sets properties values from the config profile.

**from\_dict**(*obj\_dict*: *Dict[str, Any]*) → 'BaseProperties'

Creates an instance of the properties class from a dictionary.

**from\_config**(*uri*: *str*, *profile*: *str*, *auth*: *Optional[Dict] = None*) → "BaseProperties":

Loads properties from the config file.

**to\_config**(*uri*: *str*, *profile*: *str*, *force\_overwrite*: *Optional[bool] = False*, *auth*: *Optional[Dict] = None*) → None

Saves properties to the config file.

**classmethod from\_config**(*uri*: *str*, *profile*: *str*, *auth*: *Optional[Dict] = None*) → *BaseProperties*

Loads properties from the config file.

#### Parameters

- **uri** (*str*) – The URI of the config file. Can be local path or OCI object storage URI.
- **profile** (*str*) – The config profile name.
- **auth** ((*Dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

#### Returns

Instance of the BaseProperties.

#### Return type

*BaseProperties*

**classmethod from\_dict**(*obj\_dict*: *Dict[str, Any]*) → *BaseProperties*

Creates an instance of the properties class from a dictionary.

#### Parameters

**obj\_dict** (*Dict[str, Any]*) – List of properties and values in dictionary format.

#### Returns

Instance of the BaseProperties.

#### Return type

*BaseProperties*

**to\_config**(*uri*: *str*, *profile*: *str*, *force\_overwrite*: *Optional[bool] = False*, *auth*: *Optional[Dict] = None*) → None

Saves properties to the config file.

#### Parameters

- **uri** (*str*) – The URI of the config file. Can be local path or OCI object storage URI.
- **profile** (*str*) – The config profile name.
- **force\_overwrite** ((*bool*, *optional*). Defaults to *False*.) – Whether to overwrite existing files or not.
- **auth** ((*Dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

**Returns**

Nothing

**Return type**

None

**to\_dict**(\*\*kwargs)

Serializes instance of class into a dictionary.

**Returns**

A dictionary.

**Return type**

Dict

**with\_config**(config: *ConfigSection*) → *BaseProperties*

Sets properties values from the config profile.

**Returns**

Instance of the BaseProperties.

**Return type***BaseProperties***with\_dict**(obj\_dict: Dict[str, Any]) → *BaseProperties*

Sets properties from a dict.

**Parameters****obj\_dict** (Dict[str, Any]) – List of properties and values in dictionary format.**Returns**

Instance of the BaseProperties.

**Return type***BaseProperties***Raises****TypeError** – If input object has a wrong type.**with\_env**() → *BaseProperties*

Sets properties values from environment variables.

**Returns**

Instance of the BaseProperties.

**Return type***BaseProperties***with\_prop**(name: str, value: Any) → *BaseProperties*

Sets property value.

**Parameters**

- **name** (str) – Property name.
- **value** – Property value.

**Returns**

Instance of the BaseProperties.

**Return type***BaseProperties*

```
class ads.model.generic_model.DataScienceModelType
```

```
    Bases: str
```

```
    MODEL = 'datasciencemodel'
```

```
    MODEL_DEPLOYMENT = 'datasciencemodeldeployment'
```

```
class ads.model.generic_model.FrameworkSpecificModel(
    estimator: Optional[Callable] = None,
    artifact_dir: Optional[str] = None, properties:
    Optional[ModelProperties] = None, auth:
    Optional[Dict] = None, serialize: bool = True,
    model_save_serializer: Optional[SERDE] =
    None, model_input_serializer:
    Optional[SERDE] = None, **kwargs: dict)
```

Bases: [GenericModel](#)

GenericModel Constructor.

#### Parameters

- **estimator** ((Callable).) – Trained model.
- **artifact\_dir** ((str, optional). Defaults to None.) – Artifact directory to store the files needed for deployment.
- **properties** ((ModelProperties, optional). Defaults to None.) – ModelProperties object required to save and deploy model.
- **auth** ((Dict, optional). Defaults to None.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **serialize** ((bool, optional). Defaults to True.) – Whether to serialize the model to pickle file by default. If False, you need to serialize the model manually, save it under `artifact_dir` and update the score.py manually.
- **model\_save\_serializer** ((SERDE or str, optional). Defaults to None.) – Instance of `ads.model.SERDE`. Used for serialize/deserialize model.
- **model\_input\_serializer** ((SERDE or str, optional). Defaults to None.) – Instance of `ads.model.SERDE`. Used for serialize/deserialize model input.

**predict** (data: Optional[Any] = None, auto\_serialize\_data: bool = True, \*\*kwargs) → Dict[str, Any]

Returns prediction of input data run against the model deployment endpoint.

#### Examples

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.predict(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.predict(
...     image="oci://<bucket>@<tenancy>/myimage.png",
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

#### Parameters

- **data** (*Any*) – Data for the prediction for onnx models, for local serialization method, data can be the data types that each framework support.
- **auto\_serialize\_data** (*bool*.) – Whether to auto serialize input data. Defaults to *False* for *GenericModel*, and *True* for other frameworks. *data* required to be json serializable if *auto\_serialize\_data=False*. If *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.
- **kwargs** – *content\_type*: str, used to indicate the media type of the resource. *image*: PIL.Image Object or uri for the image.

A valid string path for image file can be local path, http(s), oci, s3, gs.

#### storage\_options: dict

Passed to *fsspec.open* for a particular storage connection. Please see *fsspec* (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.

#### Returns

Dictionary with the predicted values.

#### Return type

Dict[str, Any]

#### Raises

- **NotActiveDeploymentError** – If model deployment process was not started or not finished yet.
- **ValueError** – If *data* is empty or not JSON serializable.

**verify**(*data: Optional[Any] = None, reload\_artifacts: bool = True, auto\_serialize\_data: bool = True, \*\*kwargs*) → Dict[str, Any]

Test if deployment works in local environment.

#### Examples

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.verify(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.verify(
...     image="oci://<bucket>@<tenancy>/myimage.png",
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

#### Parameters

- **data** (*Any*) – Data used to test if deployment works in local environment.
- **reload\_artifacts** (*bool*. Defaults to *True*.) – Whether to reload artifacts or not.
- **auto\_serialize\_data** (*bool*.) – Whether to auto serialize input data. Defaults to *False* for *GenericModel*, and *True* for other frameworks. *data* required to be json serializable if *auto\_serialize\_data=False*. if *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.

- **kwargs** – `content_type`: str, used to indicate the media type of the resource. `image`: PIL.Image Object or uri for the image.

A valid string path for image file can be local path, http(s), oci, s3, gs.

**storage\_options: dict**

Passed to `fsspec.open` for a particular storage connection. Please see `fsspec` (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.

**Returns**

A dictionary which contains prediction results.

**Return type**

Dict

```
class ads.model.generic_model.GenericModel(estimator: Optional[Callable] = None, artifact_dir:  
                                           Optional[str] = None, properties:  
                                           Optional[ModelProperties] = None, auth: Optional[Dict] =  
                                           None, serialize: bool = True, model_save_serializer:  
                                           Optional[SERDE] = None, model_input_serializer:  
                                           Optional[SERDE] = None, **kwargs: dict)
```

Bases: [MetadataMixin](#), [Introspectable](#), [EvaluatorMixin](#)

Generic Model class which is the base class for all the frameworks including the unsupported frameworks.

**algorithm**

The algorithm of the model.

**Type**

str

**artifact\_dir**

Artifact directory to store the files needed for deployment.

**Type**

str

**auth**

Default authentication is set using the `ads.set_auth` API. To override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create an authentication signer to instantiate an IdentityClient object.

**Type**

Dict

**estimator**

Any model object generated by sklearn framework

**Type**

Callable

**framework**

The framework of the model.

**Type**

str



**hyperparameter**

The hyperparameters of the estimator.

**Type**

dict

**metadata\_custom**

The model custom metadata.

**Type**

*ModelCustomMetadata*

**metadata\_provenance**

The model provenance metadata.

**Type**

*ModelProvenanceMetadata*

**metadata\_taxonomy**

The model taxonomy metadata.

**Type**

*ModelTaxonomyMetadata*

**model\_artifact**

This is built by calling prepare.

**Type**

*ModelArtifact*

**model\_deployment**

A ModelDeployment instance.

**Type**

*ModelDeployment*

**model\_file\_name**

Name of the serialized model.

**Type**

str

**model\_id**

The model ID.

**Type**

str

**model\_input\_serializer**

Instance of ads.model.SERDE. Used for serialize/deserialize data.

**Type**

*SERDE*

**properties**

ModelProperties object required to save and deploy model.

**Type**

*ModelProperties*

**runtime\_info**

A RuntimeInfo instance.

**Type**

*RuntimeInfo*

**schema\_input**

Schema describes the structure of the input data.

**Type**

*Schema*

**schema\_output**

Schema describes the structure of the output data.

**Type**

*Schema*

**serialize**

Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under artifact\_dir and update the score.py manually.

**Type**

bool

**version**

The framework version of the model.

**Type**

str

**delete\_deployment(...)**

Deletes the current model deployment.

**deploy(..., \\*\*kwargs)**

Deploys a model.

**from\_model\_artifact(uri, ..., \\*\*kwargs)**

Loads model from the specified folder, or zip/tar archive.

**from\_model\_catalog(model\_id, ..., \\*\*kwargs)**

Loads model from model catalog.

**from\_model\_deployment(model\_deployment\_id, ..., \\*\*kwargs)**

Loads model from model deployment.

**update\_deployment(model\_deployment\_id, ..., \\*\*kwargs)**

Updates a model deployment.

**from\_id(ocid, ..., \\*\*kwargs)**

Loads model from model OCID or model deployment OCID.

**introspect(...)**

Runs model introspection.

**predict(data, ...)**

Returns prediction of input data run against the model deployment endpoint.

**prepare(..., \\*\*kwargs)**

Prepare and save the score.py, serialized model and runtime.yaml file.

**prepare\_save\_deploy(..., *\\*\*kwargs*)**

Shortcut for prepare, save and deploy steps.

**reload(...)**

Reloads the model artifact files: *score.py* and the *runtime.yaml*.

**restart\_deployment(...)**

Restarts the model deployment.

**save(..., *\\*\*kwargs*)**

Saves model artifacts to the model catalog.

**set\_model\_input\_serializer(*serde*)**

Registers serializer used for serializing data passed in verify/predict.

**summary\_status(...)**

Gets a summary table of the current status.

**verify(*data*, ...)**

Tests if deployment works in local environment.

**upload\_artifact(...)**

Uploads model artifacts to the provided *uri*.

## Examples

```
>>> import tempfile
>>> from ads.model.generic_model import GenericModel
```

```
>>> class Toy:
...     def predict(self, x):
...         return x ** 2
>>> estimator = Toy()
```

```
>>> model = GenericModel(estimator=estimator, artifact_dir=tempfile.mkdtemp())
>>> model.summary_status()
>>> model.prepare(
...     inference_conda_env="dbexp_p38_cpu_v1",
...     inference_python_version="3.8",
...     model_file_name="toy_model.pkl",
...     training_id=None,
...     force_overwrite=True
... )
>>> model.verify(2)
>>> model.save()
>>> model.deploy()
>>> # Update access log id, freeform tags and description for the model deployment
>>> model.update_deployment(
>>>     properties=ModelDeploymentProperties(
>>>         access_log_id=<log_ocid>,
>>>         description="Description for Custom Model",
>>>         freeform_tags={"key": "value"},
>>>     )
>>>
```

(continues on next page)

(continued from previous page)

```

>>> )
>>> model.predict(2)
>>> # Uncomment the line below to delete the model and the associated model_
↳ deployment
>>> # model.delete(delete_associated_model_deployment = True)

```

GenericModel Constructor.

#### Parameters

- **estimator** ((Callable).) – Trained model.
- **artifact\_dir** ((str, optional). Defaults to None.) – Artifact directory to store the files needed for deployment.
- **properties** ((ModelProperties, optional). Defaults to None.) – ModelProperties object required to save and deploy model.
- **auth** ((Dict, optional). Defaults to None.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **serialize** ((bool, optional). Defaults to True.) – Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under `artifact_dir` and update the `score.py` manually.
- **model\_save\_serializer** ((SERDE or str, optional). Defaults to None.) – Instance of `ads.model.SERDE`. Used for serialize/deserialize model.
- **model\_input\_serializer** ((SERDE or str, optional). Defaults to None.) – Instance of `ads.model.SERDE`. Used for serialize/deserialize model input.

**classmethod delete**(*model\_id: Optional[str] = None, delete\_associated\_model\_deployment: Optional[bool] = False, delete\_model\_artifact: Optional[bool] = False, artifact\_dir: Optional[str] = None, \*\*kwargs: Dict*) → None

Deletes a model from Model Catalog.

#### Parameters

- **model\_id** ((str, optional). Defaults to None.) – The model OCID to be deleted. If the method called on instance level, then `self.model_id` will be used.
- **delete\_associated\_model\_deployment** ((bool, optional). Defaults to False.) – Whether associated model deployments need to be deleted or not.
- **delete\_model\_artifact** ((bool, optional). Defaults to False.) – Whether associated model artifacts need to be deleted or not.
- **artifact\_dir** ((str, optional). Defaults to None) – The local path to the model artifacts folder. If the method called on instance level, the `self.artifact_dir` will be used by default.

#### Return type

None

#### Raises

**ValueError** – If `model_id` not provided.

**delete\_deployment**(*wait\_for\_completion: bool = True*) → None

Deletes the current deployment.

**Parameters**

**wait\_for\_completion** ((bool, optional). Defaults to *True*.) – Whether to wait till completion.

**Return type**

None

**Raises**

**ValueError** – if there is not deployment attached yet.:

```
deploy(wait_for_completion: Optional[bool] = True, display_name: Optional[str] = None, description:
Optional[str] = None, deployment_instance_shape: Optional[str] = None,
deployment_instance_count: Optional[int] = None, deployment_bandwidth_mbps: Optional[int] =
None, deployment_log_group_id: Optional[str] = None, deployment_access_log_id: Optional[str] =
None, deployment_predict_log_id: Optional[str] = None, deployment_memory_in_gbs:
Optional[float] = None, deployment_ocpus: Optional[float] = None, deployment_image:
Optional[str] = None, **kwargs: Dict) → ModelDeployment
```

Deploys a model. The model needs to be saved to the model catalog at first. You can deploy the model on either conda or container runtime. The customized runtime allows you to bring your own service container. To deploy model on container runtime, make sure to build the container and push it to OCIR. For more information, see <https://docs.oracle.com/en-us/iaas/data-science/using/mod-dep-byoc.htm>.

**Example**

```
# This is an example to deploy model on container runtime >>> model = Generic-
Model(estimator=estimator, artifact_dir=tempfile.mkdtemp()) >>> model.summary_status() >>>
model.prepare( ... model_file_name="toy_model.pkl", ... ignore_conda_error=True, # set ig-
nore_conda_error=True for container runtime ... force_overwrite=True ... ) >>> model.verify() >>>
model.save() >>> model.deploy( ... deployment_image="iad.ocir.io/<namespace>/<image>:<tag>",
... entrypoint=["python", "/opt/ds/model/deployed_model/api.py"], ... server_port=5000, ...
health_check_port=5000, ... environment_variables={"key":"value"} ... )
```

**Parameters**

- **wait\_for\_completion** ((bool, optional). Defaults to *True*.) – Flag set for whether to wait for deployment to complete before proceeding.
- **display\_name** ((str, optional). Defaults to *None*.) – The name of the model. If a display\_name is not provided in kwargs, a randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55.02'.
- **description** ((str, optional). Defaults to *None*.) – The description of the model.
- **deployment\_instance\_shape** ((str, optional). Default to *VM.Standard2.1*.) – The shape of the instance used for deployment.
- **deployment\_instance\_count** ((int, optional). Defaults to *1*.) – The number of instance used for deployment.
- **deployment\_bandwidth\_mbps** ((int, optional). Defaults to *10*.) – The bandwidth limit on the load balancer in Mbps.
- **deployment\_memory\_in\_gbs** ((float, optional). Defaults to *None*.) – Specifies the size of the memory of the model deployment instance in GBs.
- **deployment\_ocpus** ((float, optional). Defaults to *None*.) – Specifies the ocpu count of the model deployment instance.

- **deployment\_log\_group\_id** ((*str*, optional). Defaults to None.) – The oci logging group id. The access log and predict log share the same log group.
- **deployment\_access\_log\_id** ((*str*, optional). Defaults to None.) – The access log OCID for the access logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_predict\_log\_id** ((*str*, optional). Defaults to None.) – The predict log OCID for the predict logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_image** ((*str*, optional). Defaults to None.) – The OCIR path of docker container image. Required for deploying model on container runtime.
- **kwargs** –

**project\_id: (str, optional).**

Project OCID. If not specified, the value will be taken from the environment variables.

**compartment\_id**

[(*str*, optional).] Compartment OCID. If not specified, the value will be taken from the environment variables.

**max\_wait\_time**

[(*int*, optional). Defaults to 1200 seconds.] Maximum amount of time to wait in seconds. Negative implies infinite wait time.

**poll\_interval**

[(*int*, optional). Defaults to 10 seconds.] Poll interval in seconds.

**freeform\_tags: (Dict[str, str], optional). Defaults to None.**

Freeform tags of the model deployment.

**defined\_tags: (Dict[str, dict[str, object]], optional). Defaults to None.**

Defined tags of the model deployment.

**image\_digest: (str, optional). Defaults to None.**

The digest of docker container image.

**cmd: (List, optional). Defaults to empty.**

The command line arguments for running docker container image.

**entrypoint: (List, optional). Defaults to empty.**

The entrypoint for running docker container image.

**server\_port: (int, optional). Defaults to 8080.**

The server port for docker container image.

**health\_check\_port: (int, optional). Defaults to 8080.**

The health check port for docker container image.

**deployment\_mode: (str, optional). Defaults to HTTPS\_ONLY.**

The deployment mode. Allowed values are: HTTPS\_ONLY and STREAM\_ONLY.

**input\_stream\_ids: (List, optional). Defaults to empty.**

The input stream ids. Required for STREAM\_ONLY mode.

**output\_stream\_ids: (List, optional). Defaults to empty.**

The output stream ids. Required for STREAM\_ONLY mode.

**environment\_variables: (Dict, optional). Defaults to empty.**

The environment variables for model deployment.

Also can be any keyword argument for initializing the `ads.model.deployment.ModelDeploymentProperties`. See `ads.model.deployment.ModelDeploymentProperties()` for details.

### Returns

The `ModelDeployment` instance.

### Return type

*ModelDeployment*

### Raises

**ValueError** – If `model_id` is not specified.

```
classmethod from_id(ocid: str, model_file_name: Optional[str] = None, artifact_dir: Optional[str] =
                    None, auth: Optional[Dict] = None, force_overwrite: Optional[bool] = False,
                    properties: Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
                    Optional[str] = None, remove_existing_artifact: Optional[bool] = True,
                    ignore_conda_error: Optional[bool] = False, **kwargs) → Self
```

Loads model from model OCID or model deployment OCID.

### Parameters

- **ocid** (*str*) – The model OCID or model deployment OCID.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((*str*, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate `IdentityClient` object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((*ModelProperties*, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The `bucket_uri` is only necessary for downloading large artifacts with size is greater than 2GB. Example: `oci://<bucket_name>@<namespace>/prefix/`.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **kwargs** –

#### **compartment\_id**

[(*str*, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

#### **timeout**

[(*int*, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

### Returns

An instance of `GenericModel` class.

### Return type

*Self*

```
classmethod from_model_artifact(uri: str, model_file_name: Optional[str] = None, artifact_dir:
                                Optional[str] = None, auth: Optional[Dict] = None,
                                force_overwrite: Optional[bool] = False, properties:
                                Optional[ModelProperties] = None, ignore_conda_error:
                                Optional[bool] = False, **kwargs: dict) → Self
```

Loads model from a folder, or zip/tar archive.

#### Parameters

- **uri** (*str*) – The folder path, ZIP file path, or TAR file path. It could contain a serialized model(required) as well as any files needed for deployment including: serialized model, runtime.yaml, score.py and etc. The content of the folder will be copied to the *artifact\_dir* folder.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The serialized model file name. Will be extracted from artifacts if not provided.
- **artifact\_dir** ((*str*, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((*ModelProperties*, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.

#### Returns

An instance of *GenericModel* class.

#### Return type

Self

#### Raises

**ValueError** – If *model\_file\_name* not provided.

```
classmethod from_model_catalog(model_id: str, model_file_name: Optional[str] = None, artifact_dir:
                                Optional[str] = None, auth: Optional[Dict] = None, force_overwrite:
                                Optional[bool] = False, properties:
                                Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
                                Optional[str] = None, remove_existing_artifact: Optional[bool] =
                                True, ignore_conda_error: Optional[bool] = False, **kwargs) →
                                Self
```

Loads model from model catalog.

#### Parameters

- **model\_id** (*str*) – The model OCID.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((*str*, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.



- **auth**((Dict, optional). Defaults to None.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite**((bool, optional). Defaults to False.) – Whether to overwrite existing files or not.
- **properties**((ModelProperties, optional). Defaults to None.) – Model-Properties object required to save and deploy model.
- **bucket\_uri**((str, optional). Defaults to None.) – The OCI Object Storage URI where model artifacts will be copied to. The `bucket_uri` is only necessary for downloading large artifacts with size is greater than 2GB. Example: `oci://<bucket_name>@<namespace>/prefix/`.
- **remove\_existing\_artifact**((bool, optional). Defaults to True.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **ignore\_conda\_error**((bool, optional). Defaults to False.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**compartment\_id**

[(str, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

**timeout**

[(int, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

**region: (str, optional). Defaults to None.**

The destination Object Storage bucket region. By default the value will be extracted from the `OCI_REGION_METADATA` environment variables.

**Returns**

An instance of GenericModel class.

**Return type**

Self

```
classmethod from_model_deployment(model_deployment_id: str, model_file_name: Optional[str] =
    None, artifact_dir: Optional[str] = None, auth: Optional[Dict] =
    None, force_overwrite: Optional[bool] = False, properties:
    Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] =
    True, ignore_conda_error: Optional[bool] = False, **kwargs) →
    Self
```

Loads model from model deployment.

**Parameters**

- **model\_deployment\_id**(str) – The model deployment OCID.
- **model\_file\_name**((str, optional). Defaults to None.) – The name of the serialized model.
- **artifact\_dir**((str, optional). Defaults to None.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth**((Dict, optional). Defaults to None.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys`

or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate `IdentityClient` object.

- **force\_overwrite** ((*bool*, *optional*). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((`ModelProperties`, *optional*). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **bucket\_uri** ((*str*, *optional*). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: `oci://<bucket_name>@<namespace>/prefix/`.
- **remove\_existing\_artifact** ((*bool*, *optional*). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **ignore\_conda\_error** ((*bool*, *optional*). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**compartment\_id**

[(*str*, *optional*)] Compartment OCID. If not specified, the value will be taken from the environment variables.

**timeout**

[(*int*, *optional*). Defaults to 10 seconds.] The connection timeout in seconds for the client.

**region: (str, optional). Defaults to None.**

The destination Object Storage bucket region. By default the value will be extracted from the `OCI_REGION_METADATA` environment variables.

**Returns**

An instance of `GenericModel` class.

**Return type**

`Self`

**get\_data\_serializer()**

Gets data serializer.

**Returns**

**object**

**Return type**

`ads.model.Serializer` object.

**get\_model\_serializer()**

Gets model serializer.

**introspect()** → `DataFrame`

Conducts introspection.

**Returns**

A pandas `DataFrame` which contains the introspection results.

**Return type**

`pandas.DataFrame`

**property metadata\_custom**

**property metadata\_provenance**

**property metadata\_taxonomy**

**property model\_deployment\_id**

**property model\_id**

**model\_input\_serializer\_type**

alias of ModelInputSerializerType

**model\_save\_serializer\_type**

alias of ModelSerializerType

**predict**(data: Optional[Any] = None, auto\_serialize\_data: bool = False, \*\*kwargs) → Dict[str, Any]

Returns prediction of input data run against the model deployment endpoint.

## Examples

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.predict(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.predict(
...     image="oci://<bucket>@<tenancy>/myimage.png",
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

## Parameters

- **data** (*Any*) – Data for the prediction for onnx models, for local serialization method, data can be the data types that each framework support.
- **auto\_serialize\_data** (*bool*.) – Whether to auto serialize input data. Defaults to *False* for GenericModel, and *True* for other frameworks. *data* required to be json serializable if *auto\_serialize\_data=False*. If *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.
- **kwargs** – content\_type: str, used to indicate the media type of the resource. image: PIL.Image Object or uri for the image.

A valid string path for image file can be local path, http(s), oci, s3, gs.

### storage\_options: dict

Passed to *fsspec.open* for a particular storage connection. Please see *fsspec* (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.

## Returns

Dictionary with the predicted values.

## Return type

Dict[str, Any]

## Raises

- **NotActiveDeploymentError** – If model deployment process was not started or not finished yet.

- **ValueError** – If *data* is empty or not JSON serializable.

**prepare**(*inference\_conda\_env*: Optional[str] = None, *inference\_python\_version*: Optional[str] = None, *training\_conda\_env*: Optional[str] = None, *training\_python\_version*: Optional[str] = None, *model\_file\_name*: Optional[str] = None, *as\_onnx*: bool = False, *initial\_types*: Optional[List[Tuple]] = None, *force\_overwrite*: bool = False, *namespace*: str = 'id19sferra6z', *use\_case\_type*: Optional[str] = None, *X\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *y\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *training\_script\_path*: Optional[str] = None, *training\_id*: Optional[str] = None, *ignore\_pending\_changes*: bool = True, *max\_col\_num*: int = 2000, *ignore\_conda\_error*: bool = False, *\*\*kwargs*: Dict) → *GenericModel*

Prepare and save the score.py, serialized model and runtime.yaml file.

#### Parameters

- **inference\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **inference\_python\_version** ((str, optional). Defaults to None.) – Python version which will be used in deployment.
- **training\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack. If *training\_conda\_env* is not provided, *training\_conda\_env* will use the same value of *training\_conda\_env*.
- **training\_python\_version** ((str, optional). Defaults to None.) – Python version used during training.
- **model\_file\_name** ((str, optional). Defaults to None.) – Name of the serialized model. Will be auto generated if not provided.
- **as\_onnx** ((bool, optional). Defaults to False.) – Whether to serialize as onnx model.
- **initial\_types** ((list[Tuple], optional).) – Defaults to None. Only used for SklearnModel, LightGBMModel and XGBoostModel. Each element is a tuple of a variable name and a type. Check this link [http://onnx.ai/sklearn-onnx/api\\_summary.html#id2](http://onnx.ai/sklearn-onnx/api_summary.html#id2) for more explanation and examples for *initial\_types*.
- **force\_overwrite** ((bool, optional). Defaults to False.) – Whether to overwrite existing files.
- **namespace** ((str, optional).) – Namespace of region. This is used for identifying which region the service pack is from when you pass a slug to *inference\_conda\_env* and *training\_conda\_env*.
- **use\_case\_type** (str) – The use case type of the model. Use it through *UseCaseType* class or string provided in *UseCaseType*. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with *UseCaseType* class to see all supported types.
- **X\_sample** (Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.) – A sample of input data that will be used to generate input schema.

- **y\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]. Defaults to None.*) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (*str. Defaults to None.*) – Training script path.
- **training\_id** (*((str, optional). Defaults to value from environment variables.)*) – The training OCID for model. Can be notebook session or job OCID.
- **ignore\_pending\_changes** (*bool. Defaults to False.*) – whether to ignore the pending changes in the git.
- **max\_col\_num** (*((int, optional). Defaults to utils.DATA\_SCHEMA\_MAX\_COL\_NUM.)*) – Do not generate the input schema if the input has more than this number of features(columns).
- **ignore\_conda\_error** (*((bool, optional). Defaults to False.)*) – Parameter to ignore error when collecting conda information.
- **kwargs** –
  - impute\_values: (dict, optional).**  
The dictionary where the key is the column index(or names is accepted for pandas dataframe) and the value is the impute value for the corresponding column.

**Raises**

- **FileExistsError** – If files already exist but *force\_overwrite* is False.
- **ValueError** – If *inference\_python\_version* is not provided, but also cannot be found through manifest file.

**Returns**

An instance of *GenericModel* class.

**Return type**

*GenericModel*

```
prepare_save_deploy(inference_conda_env: Optional[str] = None, inference_python_version:
Optional[str] = None, training_conda_env: Optional[str] = None,
training_python_version: Optional[str] = None, model_file_name: Optional[str] =
None, as_onnx: bool = False, initial_types: Optional[List[Tuple]] = None,
force_overwrite: bool = False, namespace: str = 'id19sfcrra6z', use_case_type:
Optional[str] = None, X_sample: Optional[Union[list, tuple, DataFrame, Series,
ndarray]] = None, y_sample: Optional[Union[list, tuple, DataFrame, Series,
ndarray]] = None, training_script_path: Optional[str] = None, training_id:
Optional[str] = None, ignore_pending_changes: bool = True, max_col_num: int =
2000, ignore_conda_error: bool = False, model_display_name: Optional[str] =
None, model_description: Optional[str] = None, model_freeform_tags:
Optional[dict] = None, model_defined_tags: Optional[dict] = None,
ignore_introspection: Optional[bool] = False, wait_for_completion: Optional[bool]
= True, deployment_display_name: Optional[str] = None, deployment_description:
Optional[str] = None, deployment_instance_shape: Optional[str] = None,
deployment_instance_count: Optional[int] = None, deployment_bandwidth_mbps:
Optional[int] = None, deployment_log_group_id: Optional[str] = None,
deployment_access_log_id: Optional[str] = None, deployment_predict_log_id:
Optional[str] = None, deployment_memory_in_gbs: Optional[float] = None,
deployment_ocpus: Optional[float] = None, deployment_image: Optional[str] =
None, bucket_uri: Optional[str] = None, overwrite_existing_artifact:
Optional[bool] = True, remove_existing_artifact: Optional[bool] = True,
model_version_set: Optional[Union[str, ModelVersionSet]] = None, version_label:
Optional[str] = None, **kwargs: Dict) → ModelDeployment
```

Shortcut for prepare, save and deploy steps.

#### Parameters

- **inference\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **inference\_python\_version** ((str, optional). Defaults to None.) – Python version which will be used in deployment.
- **training\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack. If *training\_conda\_env* is not provided, *training\_conda\_env* will use the same value of *training\_conda\_env*.
- **training\_python\_version** ((str, optional). Defaults to None.) – Python version used during training.
- **model\_file\_name** ((str, optional). Defaults to None.) – Name of the serialized model.
- **as\_onnx** ((bool, optional). Defaults to False.) – Whether to serialize as onnx model.
- **initial\_types** ((list[Tuple], optional).) – Defaults to None. Only used for SklearnModel, LightGBMModel and XGBoostModel. Each element is a tuple of a variable name and a type. Check this link [http://onnx.ai/sklearn-onnx/api\\_summary.html#id2](http://onnx.ai/sklearn-onnx/api_summary.html#id2) for more explanation and examples for *initial\_types*.
- **force\_overwrite** ((bool, optional). Defaults to False.) – Whether to overwrite existing files.
- **namespace** ((str, optional).) – Namespace of region. This is used for identifying which region the service pack is from when you pass a slug to *inference\_conda\_env* and *training\_conda\_env*.

- **use\_case\_type** (*str*) – The use case type of the model. Use it through `UseCaseType` class or string provided in `UseCaseType`. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with `UseCaseType` class to see all supported types.
- **X\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*. Defaults to *None*.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*. Defaults to *None*.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (*str*. Defaults to *None*.) – Training script path.
- **training\_id** ((*str*, *optional*). Defaults to value from environment variables.) – The training OCID for model. Can be notebook session or job OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – whether to ignore the pending changes in the git.
- **max\_col\_num** ((*int*, *optional*). Defaults to `utils.DATA_SCHEMA_MAX_COL_NUM`.) – Do not generate the input schema if the input has more than this number of features(columns).
- **ignore\_conda\_error** ((*bool*, *optional*). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **model\_display\_name** ((*str*, *optional*). Defaults to *None*.) – The name of the model. If a `model_display_name` is not provided in `kwargs`, a randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55.02'.
- **model\_description** ((*str*, *optional*). Defaults to *None*.) – The description of the model.
- **model\_freeform\_tags** (*Dict(str, str)*, Defaults to *None*.) – Freeform tags for the model.
- **model\_defined\_tags** ((*Dict(str, dict(str, object))*, *optional*). Defaults to *None*.) – Defined tags for the model.
- **ignore\_introspection** ((*bool*, *optional*). Defaults to *None*.) – Determine whether to ignore the result of model introspection or not. If set to *True*, the save will ignore all model introspection errors.
- **wait\_for\_completion** ((*bool*, *optional*). Defaults to *True*.) – Flag set for whether to wait for deployment to complete before proceeding.
- **deployment\_display\_name** ((*str*, *optional*). Defaults to *None*.) – The name of the model deployment. If a `deployment_display_name` is not provided in `kwargs`, a randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55.02'.
- **description** ((*str*, *optional*). Defaults to *None*.) – The description of the model.
- **deployment\_instance\_shape** ((*str*, *optional*). Default to `VM.Standard2.1`.) – The shape of the instance used for deployment.

- **deployment\_instance\_count** ((*int*, *optional*). Defaults to 1.) – The number of instance used for deployment.
- **deployment\_bandwidth\_mbps** ((*int*, *optional*). Defaults to 10.) – The bandwidth limit on the load balancer in Mbps.
- **deployment\_log\_group\_id** ((*str*, *optional*). Defaults to None.) – The oci logging group id. The access log and predict log share the same log group.
- **deployment\_access\_log\_id** ((*str*, *optional*). Defaults to None.) – The access log OCID for the access logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_predict\_log\_id** ((*str*, *optional*). Defaults to None.) – The predict log OCID for the predict logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_memory\_in\_gbs** ((*float*, *optional*). Defaults to None.) – Specifies the size of the memory of the model deployment instance in GBs.
- **deployment\_ocpus** ((*float*, *optional*). Defaults to None.) – Specifies the ocpu count of the model deployment instance.
- **deployment\_image** ((*str*, *optional*). Defaults to None.) – The OCIR path of docker container image. Required for deploying model on container runtime.
- **bucket\_uri** ((*str*, *optional*). Defaults to None.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **overwrite\_existing\_artifact** ((*bool*, *optional*). Defaults to *True*.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((*bool*, *optional*). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **model\_version\_set** ((*Union*[*str*, *ModelVersionSet*], *optional*). Defaults to None.) – The Model version set OCID, or name, or *ModelVersionSet* instance.
- **version\_label** ((*str*, *optional*). Defaults to None.) – The model version label.
- **kwargs** –

**impute\_values:** (*dict*, *optional*).

The dictionary where the key is the column index(or names is accepted for pandas dataframe) and the value is the impute value for the corresponding column.

**project\_id:** (*str*, *optional*).

Project OCID. If not specified, the value will be taken either from the environment variables or model properties.

**compartment\_id**

[(*str*, *optional*).] Compartment OCID. If not specified, the value will be taken either from the environment variables or model properties.

**image\_digest:** (*str*, *optional*). Defaults to None.

The digest of docker container image.

**cmd:** (*List*, *optional*). Defaults to empty.

The command line arguments for running docker container image.



**entrypoint: (List, optional). Defaults to empty.**

The entrypoint for running docker container image.

**server\_port: (int, optional). Defaults to 8080.**

The server port for docker container image.

**health\_check\_port: (int, optional). Defaults to 8080.**

The health check port for docker container image.

**deployment\_mode: (str, optional). Defaults to HTTPS\_ONLY.**

The deployment mode. Allowed values are: HTTPS\_ONLY and STREAM\_ONLY.

**input\_stream\_ids: (List, optional). Defaults to empty.**

The input stream ids. Required for STREAM\_ONLY mode.

**output\_stream\_ids: (List, optional). Defaults to empty.**

The output stream ids. Required for STREAM\_ONLY mode.

**environment\_variables: (Dict, optional). Defaults to empty.**

The environment variables for model deployment.

**timeout: (int, optional). Defaults to 10 seconds.**

The connection timeout in seconds for the client.

**max\_wait\_time**

[(int, optional). Defaults to 1200 seconds.] Maximum amount of time to wait in seconds.

Negative implies infinite wait time.

**poll\_interval**

[(int, optional). Defaults to 10 seconds.] Poll interval in seconds.

**freeform\_tags: (Dict[str, str], optional). Defaults to None.**

Freeform tags of the model deployment.

**defined\_tags: (Dict[str, dict[str, object]], optional). Defaults to None.**

Defined tags of the model deployment.

**region: (str, optional). Defaults to None.**

The destination Object Storage bucket region. By default the value will be extracted from the `OCI_REGION_METADATA` environment variables.

Also can be any keyword argument for initializing the `ads.model.deployment.ModelDeploymentProperties`. See

`ads.model.deployment.ModelDeploymentProperties()` for details.

#### Returns

The ModelDeployment instance.

#### Return type

*ModelDeployment*

#### Raises

- **FileExistsError** – If files already exist but *force\_overwrite* is False.
- **ValueError** – If *inference\_python\_version* is not provided, but also cannot be found through manifest file.

**reload()** → *GenericModel*

Reloads the model artifact files: *score.py* and the *runtime.yaml*.

#### Returns

An instance of GenericModel class.

**Return type***GenericModel***reload\_runtime\_info()** → NoneReloads the model artifact file: *runtime.yaml*.**Returns**

Nothing.

**Return type**

None

**restart\_deployment**(*max\_wait\_time: int = 1200, poll\_interval: int = 10*) → *ModelDeployment*

Restarts the current deployment.

**Parameters**

- **max\_wait\_time** ((*int, optional*). Defaults to 1200 seconds.) – Maximum amount of time to wait for activate or deactivate in seconds. Total amount of time to wait for restart deployment is twice as the value. Negative implies infinite wait time.
- **poll\_interval** ((*int, optional*). Defaults to 10 seconds.) – Poll interval in seconds.

**Returns**The *ModelDeployment* instance.**Return type***ModelDeployment***save**(*display\_name: Optional[str] = None, description: Optional[str] = None, freeform\_tags: Optional[dict] = None, defined\_tags: Optional[dict] = None, ignore\_introspection: Optional[bool] = False, bucket\_uri: Optional[str] = None, overwrite\_existing\_artifact: Optional[bool] = True, remove\_existing\_artifact: Optional[bool] = True, model\_version\_set: Optional[Union[str, ModelVersionSet]] = None, version\_label: Optional[str] = None, \*\*kwargs*) → str

Saves model artifacts to the model catalog.

**Parameters**

- **display\_name** ((*str, optional*). Defaults to None.) – The name of the model. If a *display\_name* is not provided in *kwargs*, randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55:02'.
- **description** ((*str, optional*). Defaults to None.) – The description of the model.
- **freeform\_tags** (*Dict(str, str)*, Defaults to None.) – Freeform tags for the model.
- **defined\_tags** ((*Dict(str, dict(str, object))*), optional). Defaults to None.) – Defined tags for the model.
- **ignore\_introspection** ((*bool, optional*). Defaults to None.) – Determine whether to ignore the result of model introspection or not. If set to True, the save will ignore all model introspection errors.
- **bucket\_uri** ((*str, optional*). Defaults to None.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for uploading large artifacts which size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.

- **overwrite\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **model\_version\_set** ((*Union[str, ModelVersionSet]*, optional). Defaults to *None*.) – The model version set OCID, or model version set name, or *ModelVersionSet* instance.
- **version\_label** ((*str*, optional). Defaults to *None*.) – The model version label.
- **kwargs** –

**project\_id:** (*str*, optional).

Project OCID. If not specified, the value will be taken either from the environment variables or model properties.

**compartment\_id**

[(*str*, optional).] Compartment OCID. If not specified, the value will be taken either from the environment variables or model properties.

**region:** (*str*, optional). Defaults to *None*.

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**timeout:** (*int*, optional). Defaults to 10 seconds.

The connection timeout in seconds for the client.

Also can be any attribute that *oci.data\_science.models.Model* accepts.

**Raises**

*RuntimeInfoInconsistencyError* – When *.runtime\_info* is not synched with *runtime.yaml* file.

**Returns**

The model id.

**Return type**

*str*

**property schema\_input**

**property schema\_output**

**serialize\_model**(*as\_onnx: bool = False, initial\_types: Optional[List[Tuple]] = None, force\_overwrite: bool = False, X\_sample: Optional[any] = None, \*\*kwargs*)

Serialize and save model using ONNX or model specific method.

**Parameters**

- **as\_onnx** ((*boolean*, optional)) – If set as *True*, convert into ONNX model.
- **initial\_types** ((*List[Tuple]*, optional)) – a python list. Each element is a tuple of a variable name and a data type.
- **force\_overwrite** ((*boolean*, optional)) – If set as *True*, overwrite serialized model if exists.
- **X\_sample** ((*any*, optional). Defaults to *None*.) – Contains model inputs such that *model(X\_sample)* is a valid invocation of the model, used to valid model input type.

**Returns**

Nothing

**Return type**

None

**set\_model\_input\_serializer**(*model\_input\_serializer: Union[str, SERDE]*)

Registers serializer used for serializing data passed in verify/predict.

**Examples**

```
>>> generic_model.set_model_input_serializer(GenericModel.model_input_
↳serializer_type.CLOUDPICKLE)
```

```
>>> # Register serializer by passing the name of it.
>>> generic_model.set_model_input_serializer("cloudpickle")
```

```
>>> # Example of creating customized model input serializer and registering it.
>>> from ads.model import SERDE
>>> from ads.model.generic_model import GenericModel
```

```
>>> class MySERDE(SERDE):
...     def __init__(self):
...         super().__init__()
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
...     def deserialize(self, data):
...         deserialized_data = 2
...         return deserialized_data
```

```
>>> class Toy:
...     def predict(self, x):
...         return x ** 2
```

```
>>> generic_model = GenericModel(
...     estimator=Toy(),
...     artifact_dir=tempfile.mkdtemp(),
...     model_input_serializer=MySERDE()
... )
```

```
>>> # Or register the serializer after creating model instance.
>>> generic_model.set_model_input_serializer(MySERDE())
```

**Parameters****model\_input\_serializer** ((*str*, or `ads.model.SERDE`)) – name of the serializer, or instance of SERDE.**set\_model\_save\_serializer**(*model\_save\_serializer: Union[str, SERDE]*)

Registers serializer used for saving model.

## Examples

```
>>> generic_model.set_model_save_serializer(GenericModel.model_save_serializer_
↳ type.CLOUDPICKLE)
```

```
>>> # Register serializer by passing the name of it.
>>> generic_model.set_model_save_serializer("cloudpickle")
```

```
>>> # Example of creating customized model save serializer and registering it.
>>> from ads.model import SERDE
>>> from ads.model.generic_model import GenericModel
```

```
>>> class MySERDE(SERDE):
...     def __init__(self):
...         super().__init__()
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
...     def deserialize(self, data):
...         deserialized_data = 2
...         return deserialized_data
```

```
>>> class Toy:
...     def predict(self, x):
...         return x ** 2
```

```
>>> generic_model = GenericModel(
...     estimator=Toy(),
...     artifact_dir=tempfile.mkdtemp(),
...     model_save_serializer=MySERDE()
... )
```

```
>>> # Or register the serializer after creating model instance.
>>> generic_model.set_model_save_serializer(MySERDE())
```

### Parameters

**model\_save\_serializer** ((ads.model.SERDE or str)) – name of the serializer or instance of SERDE.

**summary\_status()** → DataFrame

A summary table of the current status.

### Returns

The summary stable of the current status.

### Return type

pd.DataFrame

**update(\*\*kwargs)** → *GenericModel*

Updates model metadata in the Model Catalog. Updates only metadata information. The model artifacts are immutable and cannot be updated.

**Parameters****kwargs** –**display\_name:** (str, optional). Defaults to None.

The name of the model.

**description:** (str, optional). Defaults to None.

The description of the model.

**freeform\_tags**

[Dict(str, str), Defaults to None.] Freeform tags for the model.

**defined\_tags**

[(Dict(str, dict(str, object)), optional). Defaults to None.] Defined tags for the model.

**version\_label:** (str, optional). Defaults to None.

The model version label.

Additional kwargs arguments. Can be any attribute that *oci.data\_science.models.Model* accepts.**Returns**An instance of *GenericModel* (self).**Return type***GenericModel***Raises****ValueError** – if model not saved to the Model Catalog.

```
classmethod update_deployment(model_deployment_id: Optional[str] = None, properties: Optional[Union[ModelDeploymentProperties, dict]] = None, wait_for_completion: bool = True, max_wait_time: int = 1200, poll_interval: int = 10, **kwargs) → ModelDeployment
```

Updates a model deployment.

You can update *model\_deployment\_configuration\_details* and change *instance\_shape* and *model\_id* when the model deployment is in the *ACTIVE* lifecycle state. The *bandwidth\_mbps* or *instance\_count* can only be updated while the model deployment is in the *INACTIVE* state. Changes to the *bandwidth\_mbps* or *instance\_count* will take effect the next time the *ActivateModelDeployment* action is invoked on the model deployment resource.

**Examples**

```
>>> # Update access log id, freeform tags and description for the model deployment
>>> model.update_deployment(
>>>     properties=ModelDeploymentProperties(
>>>         access_log_id=<log_ocid>,
>>>         description="Description for Custom Model",
>>>         freeform_tags={"key": "value"},
>>>     )
>>> )
```

**Parameters**

- **model\_deployment\_id** (*str.*) – The model deployment OCID. Defaults to *None*. If the method called on instance level, then *self.model\_deployment.model\_deployment\_id* will be used.
- **properties** (*ModelDeploymentProperties* or *dict*) – The properties for updating the deployment.
- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to complete before proceeding. Defaults to *True*.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).
- **kwargs** –

**auth:** (*Dict*, optional). Defaults to *None*.

The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.

#### Returns

An instance of *ModelDeployment* class.

#### Return type

*ModelDeployment*

**upload\_artifact**(*uri: str, auth: Optional[Dict] = None, force\_overwrite: Optional[bool] = False*) → *None*

Uploads model artifacts to the provided *uri*. The artifacts will be zipped before uploading.

#### Parameters

- **uri** (*str*) – The destination location for the model artifacts, which can be a local path or OCI object storage URI. Examples: `>>> upload_artifact(uri="/some/local/folder/") >>> upload_artifact(uri="oci://bucket@namespace/prefix/")`
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.
- **force\_overwrite** (*bool*) – Overwrite target\_dir if exists.

**verify**(*data: Optional[Any] = None, reload\_artifacts: bool = True, auto\_serialize\_data: bool = False, \*\*kwargs*) → *Dict[str, Any]*

Test if deployment works in local environment.

#### Examples

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.verify(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.verify(
...     image="oci://<bucket>@<tenancy>/myimage.png",
```

(continues on next page)

(continued from previous page)

```
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

### Parameters

- **data** (*Any*) – Data used to test if deployment works in local environment.
- **reload\_artifacts** (*bool. Defaults to True.*) – Whether to reload artifacts or not.
- **is\_json\_payload** (*bool*) – Defaults to False. Indicate whether to send data with a *application/json* MIME TYPE.
- **auto\_serialize\_data** (*bool.*) – Whether to auto serialize input data. Defaults to *False* for *GenericModel*, and *True* for other frameworks. *data* required to be json serializable if *auto\_serialize\_data=False*. if *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.
- **kwargs** – *content\_type*: str, used to indicate the media type of the resource. *image*: PIL.Image Object or uri for the image.

A valid string path for image file can be local path, http(s), oci, s3, gs.

### storage\_options: dict

Passed to *fsspec.open* for a particular storage connection. Please see *fsspec* (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.

### Returns

A dictionary which contains prediction results.

### Return type

Dict

```
class ads.model.generic_model.ModelDeploymentRuntimeType
```

Bases: object

CONDA = 'conda'

CONTAINER = 'container'

```
class ads.model.generic_model.ModelState(value)
```

Bases: Enum

An enumeration.

AVAILABLE = 'Available'

DONE = 'Done'

NEEDSACTION = 'Needs Action'

NOTAVAILABLE = 'Not Available'

```
exception ads.model.generic_model.NotActiveDeploymentError(state: str)
```

Bases: Exception

```
exception ads.model.generic_model.RuntimeInfoInconsistencyError
```

Bases: Exception



**exception** `ads.model.generic_model.SerializeInputNotImplementedError`

Bases: `NotImplementedError`

**exception** `ads.model.generic_model.SerializeModelNotImplementedError`

Bases: `NotImplementedError`

**class** `ads.model.generic_model.SummaryStatus`

Bases: `object`

SummaryStatus class which track the status of the Model frameworks.

**update\_action**(*detail: str, action: str*) → None

Updates the action of the summary status table of the corresponding detail.

#### Parameters

- **detail** ((*str*)) – Value of the detail in the Details column. Used to locate which row to update.
- **status** ((*str*)) – New status to be updated for the row specified by detail.

#### Returns

Nothing.

#### Return type

None

**update\_status**(*detail: str, status: str*) → None

Updates the status of the summary status table of the corresponding detail.

#### Parameters

- **detail** ((*str*)) – value of the detail in the Details column. Used to locate which row to update.
- **status** ((*str*)) – new status to be updated for the row specified by detail.

#### Returns

Nothing.

#### Return type

None

### 18.1.1.15.7 `ads.model.model_introspect` module

The module that helps to minimize the number of errors of the model post-deployment process. The model provides a simple testing harness to ensure that model artifacts are thoroughly tested before being saved to the model catalog.

## Classes

### `ModelIntrospect`

Class to introspect model artifacts.

## Examples

```
>>> model_introspect = ModelIntrospect(artifact=model_artifact)
>>> model_introspect()
... Test key      Test name      Result      Message
... -----
... test_key_1    test_name_1    Passed      test passed
... test_key_2    test_name_2    Not passed  some error occurred
>>> model_introspect.status
... Passed
```

**class** `ads.model.model_introspect.Introspectable`

Bases: `ABC`

Base class that represents an introspectable object.

**exception** `ads.model.model_introspect.IntrospectionNotPassed`

Bases: `ValueError`

**class** `ads.model.model_introspect.ModelIntrospect(artifact: Introspectable)`

Bases: `object`

Class to introspect model artifacts.

### Parameters

- **status** (*str*) – Returns the current status of model introspection. The possible variants: *Passed*, *Not passed*, *Not tested*.
- **failures** (*int*) – Returns the number of failures of introspection result.

**run**(*self*) → `None`

Invokes model artifacts introspection.

**to\_dataframe**(*self*) → `pd.DataFrame`

Serializes model introspection result into a `DataFrame`.

## Examples

```
>>> model_introspect = ModelIntrospect(artifact=model_artifact)
>>> result = model_introspect()
... Test key      Test name      Result      Message
... -----
... test_key_1    test_name_1    Passed      test passed
... test_key_2    test_name_2    Not passed  some error occurred
```

Initializes the Model Introspect.

### Parameters

**artifact** ([Introspectable](#)) – The instance of `ModelArtifact` object.

### Raises

- **ValueError** – If model artifact object not provided.:
- **TypeError** – If provided input parameter not a `ModelArtifact` instance.:

**property failures: int**

Calculates the number of failures.

**Returns**

The number of failures.

**Return type**

int

**run()** → DataFrame

Invokes introspection.

**Returns**

The introspection result in a DataFrame format.

**Return type**

pd.DataFrame

**property status: str**

Gets the current status of model introspection.

**to\_dataframe()** → DataFrame

Serializes model introspection result into a DataFrame.

**Returns**

The model introspection result in a DataFrame representation.

**Return type**

*pandas.DataFrame*

**class** ads.model.model\_introspect.**PrintItem**(key: str = "", case: str = "", result: str = "", message: str = "")

Bases: object

Class represents the model introspection print item.

**case:** str = ''

**key:** str = ''

**message:** str = ''

**result:** str = ''

**to\_list()** → List[str]

Converts instance to a list representation.

**Returns**

The instance in a list representation.

**Return type**

List[str]

**class** ads.model.model\_introspect.**TEST\_STATUS**

Bases: str

**NOT\_PASSED** = 'Failed'

**NOT\_TESTED** = 'Skipped'

**PASSED** = 'Passed'

#### 18.1.1.15.8 ads.model.model\_metadata module

```
class ads.model.model_metadata.Framework
```

```
    Bases: str
```

```
    BERT = 'bert'
```

```
    CUML = 'cuml'
```

```
    EMCEE = 'emcee'
```

```
    ENSEMBLE = 'ensemble'
```

```
    FLAIR = 'flair'
```

```
    GENSIM = 'gensim'
```

```
    H2O = 'h2o'
```

```
    KERAS = 'keras'
```

```
    LIGHT_GBM = 'lightgbm'
```

```
    MXNET = 'mxnet'
```

```
    NLTK = 'nltk'
```

```
    ORACLE_AUTOML = 'oracle_automl'
```

```
    OTHER = 'other'
```

```
    PROPHET = 'prophet'
```

```
    PYMC3 = 'pymc3'
```

```
    PYOD = 'pyod'
```

```
    PYSTAN = 'pystan'
```

```
    PYTORCH = 'pytorch'
```

```
    SCIKIT_LEARN = 'scikit-learn'
```

```
    SKTIME = 'sktime'
```

```
    SPACY = 'spacy'
```

```
    SPARK = 'pyspark'
```

```
    STATSMODELS = 'statsmodels'
```

```
    TENSORFLOW = 'tensorflow'
```

```
    TRANSFORMERS = 'transformers'
```

```
    WORD2VEC = 'word2vec'
```

```
    XGBOOST = 'xgboost'
```

```

class ads.model.model_metadata.MetadataCustomCategory
    Bases: str
    OTHER = 'Other'
    PERFORMANCE = 'Performance'
    TRAINING_AND_VALIDATION_DATASETS = 'Training and Validation Datasets'
    TRAINING_ENV = 'Training Environment'
    TRAINING_PROFILE = 'Training Profile'

class ads.model.model_metadata.MetadataCustomKeys
    Bases: str
    CLIENT_LIBRARY = 'ClientLibrary'
    CONDA_ENVIRONMENT = 'CondaEnvironment'
    CONDA_ENVIRONMENT_PATH = 'CondaEnvironmentPath'
    ENVIRONMENT_TYPE = 'EnvironmentType'
    MODEL_ARTIFACTS = 'ModelArtifacts'
    MODEL_FILE_NAME = 'ModelFileName'
    MODEL_SERIALIZATION_FORMAT = 'ModelSerializationFormat'
    SLUG_NAME = 'SlugName'
    TRAINING_DATASET = 'TrainingDataset'
    TRAINING_DATASET_NUMBER_OF_COLS = 'TrainingDatasetNumberOfCols'
    TRAINING_DATASET_NUMBER_OF_ROWS = 'TrainingDatasetNumberOfRows'
    TRAINING_DATASET_SIZE = 'TrainingDatasetSize'
    VALIDATION_DATASET = 'ValidationDataset'
    VALIDATION_DATASET_NUMBER_OF_COLS = 'ValidationDataSetNumberOfCols'
    VALIDATION_DATASET_NUMBER_OF_ROWS = 'ValidationDatasetNumberOfRows'
    VALIDATION_DATASET_SIZE = 'ValidationDatasetSize'

class ads.model.model_metadata.MetadataCustomPrintColumns
    Bases: str
    CATEGORY = 'Category'
    DESCRIPTION = 'Description'
    KEY = 'Key'
    VALUE = 'Value'

```

**exception** `ads.model.model_metadata.MetadataDescriptionTooLong(key: str, length: int)`

Bases: `ValueError`

Maximum allowed length of metadata description has been exceeded. See [https://docs.oracle.com/en-us/iaas/data-science/using/models\\_saving\\_catalog.htm](https://docs.oracle.com/en-us/iaas/data-science/using/models_saving_catalog.htm) for more details.

**exception** `ads.model.model_metadata.MetadataSizeTooLarge(size: int)`

Bases: `ValueError`

Maximum allowed size for model metadata has been exceeded. See [https://docs.oracle.com/en-us/iaas/data-science/using/models\\_saving\\_catalog.htm](https://docs.oracle.com/en-us/iaas/data-science/using/models_saving_catalog.htm) for more details.

**class** `ads.model.model_metadata.MetadataTaxonomyKeys`

Bases: `str`

`ALGORITHM = 'Algorithm'`

`ARTIFACT_TEST_RESULT = 'ArtifactTestResults'`

`FRAMEWORK = 'Framework'`

`FRAMEWORK_VERSION = 'FrameworkVersion'`

`HYPERPARAMETERS = 'Hyperparameters'`

`USE_CASE_TYPE = 'UseCaseType'`

**class** `ads.model.model_metadata.MetadataTaxonomyPrintColumns`

Bases: `str`

`KEY = 'Key'`

`VALUE = 'Value'`

**exception** `ads.model.model_metadata.MetadataValueTooLong(key: str, length: int)`

Bases: `ValueError`

Maximum allowed length of metadata value has been exceeded. See [https://docs.oracle.com/en-us/iaas/data-science/using/models\\_saving\\_catalog.htm](https://docs.oracle.com/en-us/iaas/data-science/using/models_saving_catalog.htm) for more details.

**class** `ads.model.model_metadata.ModelCustomMetadata`

Bases: `ModelMetadata`

Class that represents Model Custom Metadata.

**get**(*self*, key: str) → `ModelCustomMetadataItem`

Returns the model metadata item by provided key.

**reset**(*self*) → None

Resets all model metadata items to empty values.

**to\_dataframe**(*self*) → `pd.DataFrame`

Returns the model metadata list in a data frame format.

**size**(*self*) → int

Returns the size of the model metadata in bytes.

**validate**(*self*) → bool

Validates metadata.

**to\_dict**(*self*)

Serializes model metadata into a dictionary.

**from\_dict**(*cls*) → *ModelCustomMetadata*

Constructs model metadata from dictionary.

**to\_yaml**(*self*)

Serializes model metadata into a YAML.

**add**(*self*, *key*: str, *value*: str, *description*: str = "", *category*: str = *MetadataCustomCategory.OTHER*, *replace*: bool = False) → None:

Adds a new model metadata item. Replaces existing one if replace flag is True.

**remove**(*self*, *key*: str) → None

Removes a model metadata item by key.

**clear**(*self*) → None

Removes all metadata items.

**isempty**(*self*) → bool

Checks if metadata is empty.

**to\_json**(*self*)

Serializes model metadata into a JSON.

**to\_json\_file**(*self*, *file\_path*: str, *storage\_options*: dict = None) → None

Saves the metadata to a local file or object storage.

## Examples

```
>>> metadata_custom = ModelCustomMetadata()
>>> metadata_custom.add(key="format", value="pickle")
>>> metadata_custom.add(key="note", value="important note", description="some_
↵description")
>>> metadata_custom["format"].description = "some description"
>>> metadata_custom.to_dataframe()

```

	Key	Value	Description	Category
0	format	pickle	some description	user defined
1	note	important note	some description	user defined

```
>>> metadata_custom
metadata:
- category: user defined
  description: some description
  key: format
  value: pickle
- category: user defined
  description: some description
  key: note
  value: important note
>>> metadata_custom.remove("format")
>>> metadata_custom
metadata:
- category: user defined
```

(continues on next page)

(continued from previous page)

```

    description: some description
    key: note
    value: important note
>>> metadata_custom.to_dict()
{'metadata': [{
    'key': 'note',
    'value': 'important note',
    'category': 'user defined',
    'description': 'some description'
}]}
>>> metadata_custom.reset()
>>> metadata_custom
metadata:
- category: None
  description: None
  key: note
  value: None
>>> metadata_custom.clear()
>>> metadata_custom.to_dataframe()

```

Key	Value	Description	Category
-----			

Initializes custom model metadata.

**add**(key: str, value: str, description: str = "", category: str = 'Other', replace: bool = False) → None

Adds a new model metadata item. Overrides the existing one if replace flag is True.

#### Parameters

- **key** (str) – The metadata item key.
- **value** (str) – The metadata item value.
- **description** (str) – The metadata item description.
- **category** (str) – The metadata item category.
- **replace** (bool) – Overrides the existing metadata item if replace flag is True.

#### Returns

Nothing.

#### Return type

None

#### Raises

- **TypeError** – If provided key is not a string. If provided description not a string.
- **ValueError** – If provided key is empty. If provided value is empty. If provided value cannot be serialized to JSON. If item with provided key is already registered and replace flag is False. If provided category is not supported.
- **MetadataValueTooLong** – If the length of provided value exceeds 255 characters.
- **MetadataDescriptionTooLong** – If the length of provided description exceeds 255 characters.

**clear**() → None

Removes all metadata items.



**Returns**

Nothing.

**Return type**

None

**classmethod** `from_dict(data: Dict) → ModelCustomMetadata`

Constructs an instance of *ModelCustomMetadata* from a dictionary.

**Parameters**

**data** (*Dict*) – Model metadata in a dictionary format.

**Returns**

An instance of model custom metadata.

**Return type**

*ModelCustomMetadata*

**Raises**

**ValueError** – In case of the wrong input data format.

**isempty()** → bool

Checks if metadata is empty.

**Returns**

True if metadata is empty, False otherwise.

**Return type**

bool

**remove(key: str) → None**

Removes a model metadata item.

**Parameters**

**key** (*str*) – The key of the metadata item that should be removed.

**Returns**

Nothing.

**Return type**

None

**set\_training\_data(path: str, data\_size: Optional[str] = None)**

Adds training\_data path and data size information into model custom metadata.

**Parameters**

- **path** (*str*) – The path where the training\_data is stored.
- **data\_size** (*str*) – The size of the training\_data.

**Returns**

Nothing.

**Return type**

None

**set\_validation\_data(path: str, data\_size: Optional[str] = None)**

Adds validation\_data path and data size information into model custom metadata.

**Parameters**

- **path** (*str*) – The path where the validation\_data is stored.

- **data\_size** (*str*) – The size of the validation\_data.

**Returns**

Nothing.

**Return type**

None

**to\_dataframe()** → DataFrame

Returns the model metadata list in a data frame format.

**Returns**

The model metadata in a dataframe format.

**Return type**

*pandas.DataFrame*

**class** `ads.model.model_metadata.ModelCustomMetadataItem`(*key: str, value: Optional[str] = None, description: Optional[str] = None, category: Optional[str] = None*)

Bases: [\*ModelTaxonomyMetadataItem\*](#)

Class that represents model custom metadata item.

**key**

The model metadata item key.

**Type**

*str*

**value**

The model metadata item value.

**Type**

*str*

**description**

The model metadata item description.

**Type**

*str*

**category**

The model metadata item category.

**Type**

*str*

**reset**(*self*) → None

Resets model metadata item.

**to\_dict**(*self*) → dict

Serializes model metadata item to dictionary.

**from\_dict**(*cls*) → [\*ModelCustomMetadataItem\*](#)

Constructs model metadata item from dictionary.

**to\_yaml**(*self*)

Serializes model metadata item to YAML.

**size**(*self*) → int

Returns the size of the metadata in bytes.

**update**(*self*, *value*: str = "", *description*: str = "", *category*: str = "") → None

Updates metadata item information.

**to\_json**(*self*) → JSON

Serializes metadata item into a JSON.

**to\_json\_file**(*self*, *file\_path*: str, *storage\_options*: dict = None) → None

Saves the metadata item value to a local file or object storage.

**validate**(*self*) → bool

Validates metadata item.

**property category: str**

**property description: str**

**reset**() → None

Resets model metadata item.

Resets value, description and category to None.

**Returns**

Nothing.

**Return type**

None

**update**(*value*: str, *description*: str, *category*: str) → None

Updates metadata item.

**Parameters**

- **value** (*str*) – The value of model metadata item.
- **description** (*str*) – The description of model metadata item.
- **category** (*str*) – The category of model metadata item.

**Returns**

Nothing.

**Return type**

None

**validate**() → bool

Validates metadata item.

**Returns**

True if validation passed.

**Return type**

bool

**Raises**

- **ValueError** – If invalid category provided.
- **MetadataValueTooLong** – If value exceeds the length limit.

**class** `ads.model.model_metadata.ModelMetadata`

Bases: ABC

The base abstract class representing model metadata.

**get**(*self*, *key*: *str*) → *ModelMetadataItem*  
Returns the model metadata item by provided key.

**reset**(*self*) → None  
Resets all model metadata items to empty values.

**to\_dataframe**(*self*) → *pd.DataFrame*  
Returns the model metadata list in a data frame format.

**size**(*self*) → int  
Returns the size of the model metadata in bytes.

**validate**(*self*) → bool  
Validates metadata.

**to\_dict**(*self*)  
Serializes model metadata into a dictionary.

**from\_dict**(*cls*) → *ModelMetadata*  
Constructs model metadata from dictionary.

**to\_yaml**(*self*)  
Serializes model metadata into a YAML.

**to\_json**(*self*)  
Serializes model metadata into a JSON.

**to\_json\_file**(*self*, *file\_path*: *str*, *storage\_options*: *dict* = None) → None  
Saves the metadata to a local file or object storage.

Initializes Model Metadata.

**abstract classmethod from\_dict**(*data*: *Dict*) → *ModelMetadata*  
Constructs an instance of *ModelMetadata* from a dictionary.

**Parameters**  
**data** (*Dict*) – Model metadata in a dictionary format.

**Returns**  
An instance of model metadata.

**Return type**  
*ModelMetadata*

**get**(*key*: *str*) → *ModelMetadataItem*  
Returns the model metadata item by provided key.

**Parameters**  
**key** (*str*) – The key of model metadata item.

**Returns**  
The model metadata item.

**Return type**  
*ModelMetadataItem*

**Raises**

**ValueError** – If provided key is empty or metadata item not found.

**property keys: Tuple[str]**

Returns all registered metadata keys.

**Returns**

The list of metadata keys.

**Return type**

Tuple[str]

**reset()** → None

Resets all model metadata items to empty values.

Resets value, description and category to None for every metadata item.

**size()** → int

Returns the size of the model metadata in bytes.

**Returns**

The size of model metadata in bytes.

**Return type**

int

**abstract to\_dataframe()** → DataFrame

Returns the model metadata list in a data frame format.

**Returns**

The model metadata in a dataframe format.

**Return type**

*pandas.DataFrame*

**to\_dict()**

Serializes model metadata into a dictionary.

**Returns**

The model metadata in a dictionary representation.

**Return type**

Dict

**to\_json()**

Serializes model metadata into a JSON.

**Returns**

The model metadata in a JSON representation.

**Return type**

JSON

**to\_json\_file(file\_path: str, storage\_options: Optional[dict] = None)** → None

Saves the metadata to a local file or object storage.

**Parameters**

- **file\_path** (str) – The file path to store the data.  
“oci://bucket\_name@namespace/folder\_name” “oci://bucket\_name@namespace/folder\_name/metadata.json”  
“path/to/local/folder” “path/to/local/folder/metadata.json”

- **storage\_options** (*dict*. Default *None*) – Parameters passed on to the backend filesystem class. Defaults to *options* set using *DatasetFactory.set\_default\_storage()*.

**Returns**

Nothing.

**Return type**

None

**Raises**

- **ValueError** – When file path is empty.:
- **TypeError** – When file path not a string.:

**Examples**

```
>>> metadata = ModelTaxonomyMetadataItem()
>>> storage_options = {"config": oci.config.from_file(os.path.join("~/oci",
↪ "config"))}
>>> storage_options
{'log_requests': False,
 'additional_user_agent': '',
 'pass_phrase': None,
 'user': '<user-id>',
 'fingerprint': '05:15:2b:b1:46:8a:32:ec:e2:69:5b:32:01:**:**:**)',
 'tenancy': '<tenancy-id>',
 'region': 'us-ashburn-1',
 'key_file': '/home/datascience/.oci/oci_api_key.pem'}
>>> metadata.to_json_file(file_path = 'oci://bucket_name@namespace/folder_name/
↪ metadata_taxonomy.json', storage_options=storage_options)
>>> metadata_item.to_json_file("path/to/local/folder/metadata_taxonomy.json")
```

**to\_yaml()**

Serializes model metadata into a YAML.

**Returns**

The model metadata in a YAML representation.

**Return type**

Yaml

**validate()** → bool

Validates model metadata.

**Returns**

True if metadata is valid.

**Return type**

bool

**validate\_size()** → bool

Validates model metadata size.

Validates the size of metadata. Throws an error if the size of the metadata exceeds expected value.

**Returns**

True if metadata size is valid.

**Return type**

bool

**Raises***MetadataSizeTooLarge* – If the size of the metadata exceeds expected value.**class** `ads.model.model_metadata.ModelMetadataItem`

Bases: ABC

The base abstract class representing model metadata item.

**to\_dict**(*self*) → Dict

Serializes model metadata item to dictionary.

**from\_dict**(*cls*, *data*: Dict) → *ModelMetadataItem*

Constructs an instance of ModelMetadataItem from a dictionary.

**to\_yaml**(*self*)

Serializes model metadata item to YAML.

**size**(*self*) → int

Returns the size of the metadata in bytes.

**to\_json**(*self*) → JSON

Serializes metadata item to JSON.

**to\_json\_file**(*self*, *file\_path*: str, *storage\_options*: dict = None) → None

Saves the metadata item value to a local file or object storage.

**validate**(*self*) → bool

Validates metadata item.

**classmethod** **from\_dict**(*data*: Dict) → *ModelMetadataItem*Constructs an instance of *ModelMetadataItem* from a dictionary.**Parameters****data** (Dict) – Metadata item in a dictionary format.**Returns**

An instance of model metadata item.

**Return type***ModelMetadataItem***size**() → int

Returns the size of the model metadata in bytes.

**Returns**

The size of model metadata in bytes.

**Return type**

int

**to\_dict**() → dict

Serializes model metadata item to dictionary.

**Returns**

The dictionary representation of model metadata item.

**Return type**

dict

**to\_json()**

Serializes metadata item into a JSON.

**Returns**

The metadata item in a JSON representation.

**Return type**

JSON

**to\_json\_file**(*file\_path*: str, *storage\_options*: Optional[dict] = None) → None

Saves the metadata item value to a local file or object storage.

**Parameters**

- **file\_path** (str) – The file path to store the data.  
“oci://bucket\_name@namespace/folder\_name/” “oci://bucket\_name@namespace/folder\_name/result.json”  
“path/to/local/folder” “path/to/local/folder/result.json”
- **storage\_options** (dict. Default None) – Parameters passed on to the backend filesystem class. Defaults to *options* set using *DatasetFactory.set\_default\_storage()*.

**Returns**

Nothing.

**Return type**

None

**Raises**

- **ValueError** – When file path is empty.:
- **TypeError** – When file path not a string.:

**Examples**

```
>>> metadata_item = ModelCustomMetadataItem(key="key1", value="value1")
>>> storage_options = {"config": oci.config.from_file(os.path.join("~/oci",
↪ "config"))}
>>> storage_options
{'log_requests': False,
 'additional_user_agent': '',
 'pass_phrase': None,
 'user': '<user-id>',
 'fingerprint': '05:15:2b:b1:46:8a:32:ec:e2:69:5b:32:01:**:**:**)',
 'tenancy': '<tenancy-id>',
 'region': 'us-ashburn-1',
 'key_file': '/home/datascience/.oci/oci_api_key.pem'}
>>> metadata_item.to_json_file(file_path = 'oci://bucket_name@namespace/folder_
↪ name/file.json', storage_options=storage_options)
>>> metadata_item.to_json_file("path/to/local/folder/file.json")
```

**to\_yaml()**

Serializes model metadata item to YAML.

**Returns**

The model metadata item in a YAML representation.

**Return type**

Yaml



**abstract validate()** → bool

Validates metadata item.

**Returns**

True if validation passed.

**Return type**

bool

```
class ads.model.model_metadata.ModelProvenanceMetadata(repo: Optional[str] = None, git_branch:
Optional[str] = None, git_commit:
Optional[str] = None, repository_url:
Optional[str] = None, training_script_path:
Optional[str] = None, training_id:
Optional[str] = None, artifact_dir:
Optional[str] = None)
```

Bases: [DataClassSerializable](#)

ModelProvenanceMetadata class.

## Examples

```
>>> provenance_metadata = ModelProvenanceMetadata.fetch_training_code_details()
ModelProvenanceMetadata(repo=<git.repo.base.Repo '/home/datascience/.git'>, git_
↳branch='master', git_commit='99ad04c31803f1d4ffcc3bf4afbd6bcf69a06af2',
↳repository_url='file:///home/datascience', "", "")
>>> provenance_metadata.assert_path_not_dirty("your_path", ignore=False)
```

**artifact\_dir:** str = None

**assert\_path\_not\_dirty**(path: str, ignore: bool)

Checks if all the changes in this path has been committed.

**Parameters**

- **path** ((str)) – path.
- **(bool)** (ignore) – whether to ignore the changes or not.

**Raises**

[ChangesNotCommitted](#) – if there are changes not being committed.:

**Returns**

Nothing.

**Return type**

None

```
classmethod fetch_training_code_details(training_script_path: Optional[str] = None, training_id:
Optional[str] = None, artifact_dir: Optional[str] = None)
```

Fetches the training code details: repo, git\_branch, git\_commit, repository\_url, training\_script\_path and training\_id.

**Parameters**

- **training\_script\_path** ((str, optional). Defaults to None.) – Training script path.

- **training\_id** ((*str*, optional). Defaults to *None*.) – The training OCID for model.
- **artifact\_dir** (*str*) – artifact directory to store the files needed for deployment.

**Returns**

A `ModelProvenanceMetadata` instance.

**Return type**

*ModelProvenanceMetadata*

**classmethod** **from\_dict**(*data: Dict[str, str]*) → *ModelProvenanceMetadata*

Constructs an instance of `ModelProvenanceMetadata` from a dictionary.

**Parameters**

**data** (*Dict[str, str]*) – Model provenance metadata in dictionary format.

**Returns**

An instance of `ModelProvenanceMetadata`.

**Return type**

*ModelProvenanceMetadata*

**git\_branch: str = None**

**git\_commit: str = None**

**repo: str = None**

**repository\_url: str = None**

**to\_dict()** → dict

Serializes model provenance metadata into a dictionary.

**Returns**

The dictionary representation of the model provenance metadata.

**Return type**

Dict

**training\_id: str = None**

**training\_script\_path: str = None**

**class** `ads.model.model_metadata.ModelTaxonomyMetadata`

Bases: *ModelMetadata*

Class that represents Model Taxonomy Metadata.

**get**(*self*, *key: str*) → *ModelTaxonomyMetadataItem*

Returns the model metadata item by provided key.

**reset**(*self*) → None

Resets all model metadata items to empty values.

**to\_dataframe**(*self*) → `pd.DataFrame`

Returns the model metadata list in a data frame format.

**size**(*self*) → int

Returns the size of the model metadata in bytes.

**validate**(*self*) → bool

Validates metadata.

**to\_dict**(*self*)

Serializes model metadata into a dictionary.

**from\_dict**(*cls*) → *ModelTaxonomyMetadata*

Constructs model metadata from dictionary.

**to\_yaml**(*self*)

Serializes model metadata into a YAML.

**to\_json**(*self*)

Serializes model metadata into a JSON.

**to\_json\_file**(*self*, *file\_path*: str, *storage\_options*: dict = None) → None

Saves the metadata to a local file or object storage.

## Examples

```
>>> metadata_taxonomy = ModelTaxonomyMetadata()
>>> metadata_taxonomy.to_dataframe()
```

	Key	Value
0	UseCaseType	binary_classification
1	Framework	sklearn
2	FrameworkVersion	0.2.2
3	Algorithm	algorithm
4	Hyperparameters	{}

```
>>> metadata_taxonomy.reset()
>>> metadata_taxonomy.to_dataframe()
```

	Key	Value
0	UseCaseType	None
1	Framework	None
2	FrameworkVersion	None
3	Algorithm	None
4	Hyperparameters	None

```
>>> metadata_taxonomy
metadata:
- key: UseCaseType
  category: None
  description: None
  value: None
```

Initializes Model Metadata.

**classmethod from\_dict**(*data*: Dict) → *ModelTaxonomyMetadata*

Constructs an instance of *ModelTaxonomyMetadata* from a dictionary.

### Parameters

**data** (Dict) – Model metadata in a dictionary format.

**Returns**

An instance of model taxonomy metadata.

**Return type**

*ModelTaxonomyMetadata*

**Raises**

**ValueError** – In case of the wrong input data format.

**to\_dataframe()** → DataFrame

Returns the model metadata list in a data frame format.

**Returns**

The model metadata in a dataframe format.

**Return type**

*pandas.DataFrame*

**class** ads.model.model\_metadata.**ModelTaxonomyMetadataItem**(key: str, value: Optional[str] = None)

Bases: *ModelMetadataItem*

Class that represents model taxonomy metadata item.

**key**

The model metadata item key.

**Type**

str

**value**

The model metadata item value.

**Type**

str

**reset(self)** → None

Resets model metadata item.

**to\_dict(self)** → Dict

Serializes model metadata item to dictionary.

**from\_dict(cls)** → *ModelTaxonomyMetadataItem*

Constructs model metadata item from dictionary.

**to\_yaml(self)**

Serializes model metadata item to YAML.

**size(self)** → int

Returns the size of the metadata in bytes.

**update(self, value: str = "")** → None

Updates metadata item information.

**to\_json(self)** → JSON

Serializes metadata item into a JSON.

**to\_json\_file(self, file\_path: str, storage\_options: dict = None)** → None

Saves the metadata item value to a local file or object storage.

**validate(self)** → bool

Validates metadata item.

**property key:** `str`

**reset()**  $\rightarrow$  `None`

Resets model metadata item.

Resets value to `None`.

**Returns**

Nothing.

**Return type**

`None`

**update(value: str)**  $\rightarrow$  `None`

Updates metadata item value.

**Parameters**

**value** (`str`) – The value of model metadata item.

**Returns**

Nothing.

**Return type**

`None`

**validate()**  $\rightarrow$  `bool`

Validates metadata item.

**Returns**

True if validation passed.

**Return type**

`bool`

**Raises**

**ValueError** – If invalid `UseCaseType` provided. If invalid `Framework` provided.

**property value:** `str`

**class** `ads.model.model_metadata.UseCaseType`

Bases: `str`

**ANOMALY\_DETECTION** = `'anomaly_detection'`

**BINARY\_CLASSIFICATION** = `'binary_classification'`

**CLUSTERING** = `'clustering'`

**DIMENSIONALITY\_REDUCTION** = `'dimensionality_reduction/representation'`

**IMAGE\_CLASSIFICATION** = `'image_classification'`

**MULTINOMIAL\_CLASSIFICATION** = `'multinomial_classification'`

**NER** = `'ner'`

**OBJECT\_LOCALIZATION** = `'object_localization'`

**OTHER** = `'other'`

**RECOMMENDER** = `'recommender'`

```
REGRESSION = 'regression'

SENTIMENT_ANALYSIS = 'sentiment_analysis'

TIME_SERIES_FORECASTING = 'time_series_forecasting'

TOPIC_MODELING = 'topic_modeling'
```

#### 18.1.1.15.9 ads.model.model\_metadata\_mixin module

**class** ads.model.model\_metadata\_mixin.**MetadataMixin**

Bases: object

MetadataMixin class which populates the custom metadata, taxonomy metadata, input/output schema and provenance metadata.

**populate\_metadata**(*use\_case\_type: Optional[str] = None, data\_sample: Optional[ADSDData] = None, X\_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, y\_sample: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, training\_script\_path: Optional[str] = None, training\_id: Optional[str] = None, ignore\_pending\_changes: bool = True, max\_col\_num: int = 2000, ignore\_conda\_error: bool = False*)

Populates input schema and output schema. If the schema exceeds the limit of 32kb, save as json files to the artifact directory.

##### Parameters

- **use\_case\_type**((*str, optional*). Defaults to *None*.) – The use case type of the model.
- **data\_sample**((*ADSDData, optional*). Defaults to *None*.) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*. Defaults to *None*.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*. Defaults to *None*.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path**(*str*. Defaults to *None*.) – Training script path.
- **training\_id**((*str, optional*). Defaults to *None*.) – The training model OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – Ignore the pending changes in git.
- **max\_col\_num** (*((int, optional)*. Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – The maximum number of columns allowed in auto generated schema.

##### Returns

Nothing.

##### Return type

None

```
populate_schema(data_sample: Optional[ADSDData] = None, X_sample: Optional[Union[List, Tuple,
DataFrame, Series, ndarray]] = None, y_sample: Optional[Union[List, Tuple,
DataFrame, Series, ndarray]] = None, max_col_num: int = 2000)
```

Populate input and output schemas. If the schema exceeds the limit of 32kb, save as json files to the artifact dir.

#### Parameters

- **data\_sample** ([ADSDData](#)) – A sample of the data that will be used to generate input\_schema and output\_schema.
- **X\_sample** ([Union\[list, tuple, pd.Series, np.ndarray, pd.DataFrame\]](#)) – A sample of input data that will be used to generate the input schema.
- **y\_sample** ([Union\[list, tuple, pd.Series, np.ndarray, pd.DataFrame\]](#)) – A sample of output data that will be used to generate the output schema.
- **max\_col\_num** ((int, optional). Defaults to `utils.DATA_SCHEMA_MAX_COL_NUM`.) – The maximum number of columns allowed in auto generated schema.

#### 18.1.1.15.10 ads.model.model\_properties module

```
class ads.model.model_properties.ModelProperties(inference_conda_env: Optional[str] = None,
inference_python_version: Optional[str] = None,
training_conda_env: Optional[str] = None,
training_python_version: Optional[str] = None,
training_resource_id: Optional[str] = None,
training_script_path: Optional[str] = None,
training_id: Optional[str] = None, compartment_id:
Optional[str] = None, project_id: Optional[str] =
None, bucket_uri: Optional[str] = None,
remove_existing_artifact: Optional[bool] = None,
overwrite_existing_artifact: Optional[bool] = None,
deployment_instance_shape: Optional[str] = None,
deployment_instance_count: Optional[int] = None,
deployment_bandwidth_mbps: Optional[int] =
None, deployment_log_group_id: Optional[str] =
None, deployment_access_log_id: Optional[str] =
None, deployment_predict_log_id: Optional[str] =
None, deployment_memory_in_gbs:
Optional[Union[float, int]] = None,
deployment_ocpus: Optional[Union[float, int]] =
None, deployment_image: Optional[str] = None)
```

Bases: [BaseProperties](#)

Represents properties required to save and deploy model.

**bucket\_uri:** str = None

**compartment\_id:** str = None

**deployment\_access\_log\_id:** str = None

**deployment\_bandwidth\_mbps:** int = None

```
deployment_image: str = None
deployment_instance_count: int = None
deployment_instance_shape: str = None
deployment_log_group_id: str = None
deployment_memory_in_gbs: Union[float, int] = None
deployment_ocpus: Union[float, int] = None
deployment_predict_log_id: str = None
inference_conda_env: str = None
inference_python_version: str = None
overwrite_existing_artifact: bool = None
project_id: str = None
remove_existing_artifact: bool = None
training_conda_env: str = None
training_id: str = None
training_python_version: str = None
training_resource_id: str = None
training_script_path: str = None
```

#### 18.1.1.15.11 `ads.model.model_version_set` module

```
class ads.model.model_version_set.ModelVersionSet(spec: Optional[Dict] = None, **kwargs)
```

Bases: *Builder*

Represents Model Version Set.

**id**

Model version set OCID.

**Type**

str

**project\_id**

Project OCID.

**Type**

str

**compartment\_id**

Compartment OCID.

**Type**

str



**name**

Model version set name.

**Type**

str

**description**

Model version set description.

**Type**

str

**freeform\_tags**

Model version set freeform tags.

**Type**

Dict[str, str]

**defined\_tags**

Model version set defined tags.

**Type**

Dict[str, Dict[str, object]]

**details\_link**

Link to details page in OCI console.

**Type**

str

**create**(*self*, *\*\*kwargs*) → 'ModelVersionSet'

Creates a model version set.

**update**(*self*, *\*\*kwargs*) → 'ModelVersionSet'

Updates a model version set.

**delete**(*self*, *delete\_model*: Optional[bool] = False) → "ModelVersionSet":

Removes a model version set.

**to\_dict**(*self*) → dict

Serializes model version set to a dictionary.

**from\_id**(*cls*, *id*: str) → 'ModelVersionSet'

Gets an existing model version set by OCID.

**from\_ocid**(*cls*, *ocid*: str) → 'ModelVersionSet'

Gets an existing model version set by OCID.

**from\_name**(*cls*, *name*: str) → 'ModelVersionSet'

Gets an existing model version set by name.

**from\_dict**(*cls*, *config*: dict) → 'ModelVersionSet'

Load a model version set instance from a dictionary of configurations.

## Examples

```
>>> mvs = (ModelVersionSet()
...       .with_compartment_id(os.environ["PROJECT_COMPARTMENT_OCID"])
...       .with_project_id(os.environ["PROJECT_OCID"])
...       .with_name("test_experiment")
...       .with_description("Experiment number one"))
>>> mvs.create()
>>> mvs.model_add(model_ocid, version_label="Version label 1")
>>> mvs.model_list()
>>> mvs.details_link
... https://console.<region>.oraclecloud.com/data-science/model-version-sets/<ocid>
>>> mvs.delete()
```

Initializes a model version set.

### Parameters

- **spec** (*Dict, optional*). Defaults to *None*.) – Object specification.
- **kwargs** (*Dict*) – Specification as keyword arguments. If ‘spec’ contains the same key as the one in kwargs, the value from kwargs will be used.
  - project\_id: str
  - compartment\_id: str
  - name: str
  - description: str
  - defined\_tags: Dict[str, Dict[str, object]]
  - freeform\_tags: Dict[str, str]

CONST\_COMPARTMENT\_ID = 'compartmentId'

CONST\_DEFINED\_TAG = 'definedTags'

CONST\_DESCRIPTION = 'description'

CONST\_FREEFORM\_TAG = 'freeformTags'

CONST\_ID = 'id'

CONST\_NAME = 'name'

CONST\_PROJECT\_ID = 'projectId'

LIFECYCLE\_STATE\_ACTIVE = 'ACTIVE'

LIFECYCLE\_STATE\_DELETED = 'DELETED'

LIFECYCLE\_STATE\_DELETING = 'DELETING'

LIFECYCLE\_STATE\_FAILED = 'FAILED'

attribute\_map = {'compartmentId': 'compartment\_id', 'definedTags': 'defined\_tags',  
'description': 'description', 'freeformTags': 'freeform\_tags', 'id': 'id', 'name':  
'name', 'projectId': 'project\_id'}

**property compartment\_id:** str

**create**(\*\*kwargs) → *ModelVersionSet*

Creates a model version set.

**Parameters**

**kwargs** – Additional keyword arguments.

**Returns**

The ModelVersionSet instance (self)

**Return type**

*ModelVersionSet*

**property defined\_tags:** Dict[str, Dict[str, object]]

**delete**(delete\_model: Optional[bool] = False) → *ModelVersionSet*

Removes a model version set.

**Parameters**

**delete\_model** ((bool, optional). Defaults to False.) – By default, this parameter is false. A model version set can only be deleted if all the models associate with it are already in the DELETED state. You can optionally specify the deleteRelatedModels boolean query parameters to true, which deletes all associated models for you.

**Returns**

The ModelVersionSet instance (self).

**Return type**

*ModelVersionSet*

**property description:** str

**property details\_link:** str

Link to details page in OCI console.

**Returns**

Link to details page in OCI console.

**Return type**

str

**property freeform\_tags:** Dict[str, str]

**classmethod from\_dict**(config: dict) → *ModelVersionSet*

Load a model version set instance from a dictionary of configurations.

**Parameters**

**config** (dict) – A dictionary of configurations.

**Returns**

The model version set instance.

**Return type**

*ModelVersionSet*

**classmethod from\_dsc\_model\_version\_set**(dsc\_model\_version\_set: *DataScienceModelVersionSet*) → *ModelVersionSet*

Initialize a ModelVersionSet instance from a DataScienceModelVersionSet.

**Parameters**

**dsc\_model\_version\_set** (`DataScienceModelVersionSet`) – An instance of `DataScienceModelVersionSet`.

**Returns**

An instance of `ModelVersionSet`.

**Return type**

*ModelVersionSet*

**classmethod from\_id**(*id: str*) → *ModelVersionSet*

Gets an existing model version set by OCID.

**Parameters**

**id** (*str*) – The model version set OCID.

**Returns**

An instance of `ModelVersionSet`.

**Return type**

*ModelVersionSet*

**classmethod from\_name**(*name: str, compartment\_id: Optional[str] = None*) → *ModelVersionSet*

Gets an existing model version set by name.

**Parameters**

- **name** (*str*) – The model version set name.
- **compartment\_id** (*((str, optional). Defaults to None.)*) – Compartment OCID of the OCI resources. If *compartment\_id* is not specified, the value will be taken from environment variables.

**Returns**

An instance of `ModelVersionSet`.

**Return type**

*ModelVersionSet*

**classmethod from\_ocid**(*ocid: str*) → *ModelVersionSet*

Gets an existing model version set by OCID.

**Parameters**

**id** (*str*) – The model version set OCID.

**Returns**

An instance of `ModelVersionSet`.

**Return type**

*ModelVersionSet*

**property id:** `Optional[str]`

The OCID of the model version set.

**property kind:** `str`

The kind of the object as showing in YAML.

**Returns**

“modelVersionSet”

**Return type**

`str`

**classmethod** `list`(*compartment\_id: Optional[str] = None, \*\*kwargs*) → List[*ModelVersionSet*]

List model version sets in a given compartment.

**Parameters**

- **compartment\_id** (*str*) – The OCID of compartment.
- **kwargs** – Additional keyword arguments for filtering model version sets.

**Returns**

The list of model version sets.

**Return type**

List[*ModelVersionSet*]

**model\_add**(*model\_id: str, version\_label: Optional[str] = None, \*\*kwargs*) → None

Adds new model to model version set.

**Parameters**

- **model\_id** (*str*) – The OCID of the model which needs to be associated with the model version set.
- **version\_label** (*str*) – The model version label.
- **kwargs** – Additional keyword arguments.

**Returns**

Nothing.

**Return type**

None

**Raises**

*ModelVersionSetNotSaved* – If model version set has not been saved yet.:

**models**(*\*\*kwargs*) → List[*DataScienceModel*]

Gets list of models associated with a model version set.

**Parameters**

**kwargs** –

**project\_id: str**  
Project OCID.

**lifecycle\_state: str**

Filter results by the specified lifecycle state. Must be a valid state for the resource type. Allowed values are: “ACTIVE”, “DELETED”, “FAILED”, “INACTIVE”

Can be any attribute that *oci.data\_science.data\_science\_client.DataScienceClient.list\_models* accepts.

**Returns**

List of models associated with the model version set.

**Return type**

List[*DataScienceModel*]

**Raises**

*ModelVersionSetNotSaved* – If model version set has not been saved yet.:

**property name: str**

**property project\_id:** str

**property status:** Optional[str]

Status of the model version set.

**Returns**

Status of the model version set.

**Return type**

str

**to\_dict()** → dict

Serializes model version set to a dictionary.

**Returns**

The model version set serialized as a dictionary.

**Return type**

dict

**update()** → *ModelVersionSet*

Updates a model version set.

**Returns**

The ModelVersionSet instance (self).

**Return type**

*ModelVersionSet*

**with\_compartment\_id**(compartment\_id: str) → *ModelVersionSet*

Sets the compartment OCID.

**Parameters**

**compartment\_id** (str) – The compartment OCID.

**Returns**

The ModelVersionSet instance (self)

**Return type**

*ModelVersionSet*

**with\_defined\_tags**(\*\*kwargs: Dict[str, Dict[str, object]]) → *ModelVersionSet*

Sets defined tags.

**Returns**

The ModelVersionSet instance (self)

**Return type**

*ModelVersionSet*

**with\_description**(description: str) → *ModelVersionSet*

Sets the description.

**Parameters**

**description** (str) – The description of the model version set.

**Returns**

The ModelVersionSet instance (self)

**Return type**

*ModelVersionSet*

**with\_freeform\_tags**(*\*\*kwargs: Dict[str, str]*) → *ModelVersionSet*

Sets freeform tags.

**Returns**

The *ModelVersionSet* instance (self)

**Return type**

*ModelVersionSet*

**with\_name**(*name: str*) → *ModelVersionSet*

Sets the name of the model version set.

**Parameters**

**name** (*str*) – The name of the model version set.

**Returns**

The *ModelVersionSet* instance (self)

**Return type**

*ModelVersionSet*

**with\_project\_id**(*project\_id: str*) → *ModelVersionSet*

Sets the project OCID.

**Parameters**

**project\_id** (*str*) – The project OCID.

**Returns**

The *ModelVersionSet* instance (self)

**Return type**

*ModelVersionSet*

`ads.model.model_version_set.experiment`(*name: str, create\_if\_not\_exists: Optional[bool] = True, \*\*kwargs: Dict*)

Context manager helping to operate with model version set.

**Parameters**

- **name** (*str*) – The name of the model version set.
- **create\_if\_not\_exists** (*(bool, optional). Defaults to True.*) – Creates model version set if not exists.
- **kwargs** (*(Dict, optional).*) –
  - compartment\_id**: (*str, optional*). Defaults to value from the environment variables.  
The compartment OCID.
  - project\_id**: (*str, optional*). Defaults to value from the environment variables.  
The project OCID.
  - description**: (*str, optional*). Defaults to None.  
The description of the model version set.

**Yields**

*ModelVersionSet* – The model version set object.

### 18.1.1.15.12 Module contents

```
class ads.model.AutoMLModel(estimator: Callable, artifact_dir: str, properties: Optional[ModelProperties] =  
                           None, auth: Dict = None, model_save_serializer: Optional[SERDE] = None,  
                           model_input_serializer: Optional[SERDE] = None, **kwargs)
```

Bases: [\*FrameworkSpecificModel\*](#)

AutoMLModel class for estimators from AutoML framework.

**algorithm**

“ensemble”, the algorithm name of the model.

**Type**

str

**artifact\_dir**

Artifact directory to store the files needed for deployment.

**Type**

str

**auth**

Default authentication is set using the `ads.set_auth` API. To override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create an authentication signer to instantiate an IdentityClient object.

**Type**

Dict

**estimator**

A trained automl estimator/model using oracle automl.

**Type**

Callable

**framework**

“oracle\_automl”, the framework name of the estimator.

**Type**

str

**hyperparameter**

The hyperparameters of the estimator.

**Type**

dict

**metadata\_custom**

The model custom metadata.

**Type**

[\*ModelCustomMetadata\*](#)

**metadata\_provenance**

The model provenance metadata.

**Type**

[\*ModelProvenanceMetadata\*](#)



**metadata\_taxonomy**

The model taxonomy metadata.

**Type**

*ModelTaxonomyMetadata*

**model\_artifact**

This is built by calling prepare.

**Type**

*ModelArtifact*

**model\_deployment**

A ModelDeployment instance.

**Type**

*ModelDeployment*

**model\_file\_name**

Name of the serialized model. Default to “model.pkl”.

**Type**

str

**model\_id**

The model ID.

**Type**

str

**properties**

ModelProperties object required to save and deploy model. For more details, check [https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model\\_properties](https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model_properties).

**Type**

*ModelProperties*

**runtime\_info**

A RuntimeInfo instance.

**Type**

*RuntimeInfo*

**schema\_input**

Schema describes the structure of the input data.

**Type**

*Schema*

**schema\_output**

Schema describes the structure of the output data.

**Type**

*Schema*

**serialize**

Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under artifact\_dir and update the score.py manually.

**Type**

bool

**version**

The framework version of the model.

**Type**

str

**delete\_deployment(...)**

Deletes the current model deployment.

**deploy(..., *\*\*kwargs*)**

Deploys a model.

**from\_model\_artifact(uri, model\_file\_name, artifact\_dir, ..., *\*\*kwargs*)**

Loads model from the specified folder, or zip/tar archive.

**from\_model\_catalog(model\_id, model\_file\_name, artifact\_dir, ..., *\*\*kwargs*)**

Loads model from model catalog.

**introspect(...)**

Runs model introspection.

**predict(data, ...)**

Returns prediction of input data run against the model deployment endpoint.

**prepare(..., *\*\*kwargs*)**

Prepare and save the score.py, serialized model and runtime.yaml file.

**reload(...)**

Reloads the model artifact files: *score.py* and the *runtime.yaml*.

**save(..., *\*\*kwargs*)**

Saves model artifacts to the model catalog.

**summary\_status(...)**

Gets a summary table of the current status.

**verify(data, ...)**

Tests if deployment works in local environment.

**Examples**

```
>>> import tempfile
>>> import logging
>>> import warnings
>>> from ads.automl.driver import AutoML
>>> from ads.automl.provider import OracleAutoMLProvider
>>> from ads.dataset.dataset_browser import DatasetBrowser
>>> from ads.model.framework.automl_model import AutoMLModel
>>> from ads.model.model_metadata import UseCaseType
>>> ds = DatasetBrowser.sklearn().open("wine").set_target("target")
>>> train, test = ds.train_test_split(test_size=0.1, random_state = 42)
```

```
>>> ml_engine = OracleAutoMLProvider(n_jobs=-1, loglevel=logging.ERROR)
>>> oracle_automl = AutoML(train, provider=ml_engine)
>>> model, baseline = oracle_automl.train(
```

(continues on next page)

(continued from previous page)

```
...         model_list=['LogisticRegression', 'DecisionTreeClassifier'],
...         random_state = 42,
...         time_budget = 500
...     )
```

```
>>> automl_model.prepare(inference_conda_env=inference_conda_env, force_
↳ overwrite=True)
>>> automl_model.verify(...)
>>> automl_model.save()
>>> model_deployment = automl_model.deploy(wait_for_completion=False)
```

Initiates a AutoMLModel instance.

#### Parameters

- **estimator** (*Callable*) – Any model object generated by automl framework.
- **artifact\_dir** (*str*) – Directory for generate artifact.
- **properties** ((*ModelProperties*, *optional*). *Defaults to None.*) – ModelProperties object required to save and deploy model.
- **auth** ((*Dict*, *optional*). *Defaults to None.*) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **model\_save\_serializer** ((*SERDE* or *str*, *optional*). *Defaults to None.*) – Instance of *ads.model.SERDE*. Used for serialize/deserialize model.
- **model\_input\_serializer** ((*SERDE*, *optional*). *Defaults to None.*) – Instance of *ads.model.SERDE*. Used for serialize/deserialize data.

#### Returns

AutoMLModel instance.

#### Return type

*AutoMLModel*

#### Raises

**TypeError** – If the input model is not an AutoML model.

**class** *ads.model.DataScienceModel* (*spec: Optional[Dict] = None, \*\*kwargs*)

Bases: *Builder*

Represents a Data Science Model.

#### id

Model ID.

#### Type

*str*

#### project\_id

Project OCID.

#### Type

*str*

**compartment\_id**

Compartment OCID.

**Type**

str

**name**

Model name.

**Type**

str

**description**

Model description.

**Type**

str

**freeform\_tags**

Model freeform tags.

**Type**

Dict[str, str]

**defined\_tags**

Model defined tags.

**Type**

Dict[str, Dict[str, object]]

**input\_schema**

Model input schema.

**Type**

ads.feature\_engineering.Schema

**output\_schema**

Model output schema.

**Type**

ads.feature\_engineering.Schema, Dict

**defined\_metadata\_list**

Model defined metadata.

**Type**

*ModelTaxonomyMetadata*

**custom\_metadata\_list**

Model custom metadata.

**Type**

*ModelCustomMetadata*

**provenance\_metadata**

Model provenance metadata.

**Type**

*ModelProvenanceMetadata*

**artifact**

The artifact location. Can be either path to folder with artifacts or path to zip archive.

**Type**

str

**status**

Model status.

**Type**

Union[str, None]

**model\_version\_set\_id**

Model version set ID

**Type**

str

**version\_label**

Model version label

**Type**

str

**create**(*self*, *\*\*kwargs*) → 'DataScienceModel'

Creates model.

**delete**(*self*, *delete\_associated\_model\_deployment*: *Optional[bool] = False*) → "DataScienceModel":

Removes model.

**to\_dict**(*self*) → dict

Serializes model to a dictionary.

**from\_id**(*cls*, *id*: str) → 'DataScienceModel'

Gets an existing model by OCID.

**from\_dict**(*cls*, *config*: dict) → 'DataScienceModel'

Loads model instance from a dictionary of configurations.

**upload\_artifact**(*self*, ...) → None

Uploads model artifacts to the model catalog.

**download\_artifact**(*self*, ...) → None

Downloads model artifacts from the model catalog.

**update**(*self*, *\*\*kwargs*) → 'DataScienceModel'

Updates datascience model in model catalog.

**list**(*cls*, *compartment\_id*: str = None, *\*\*kwargs*) → List['DataScienceModel']

Lists datascience models in a given compartment.

**sync(self):**

Sync up a datascience model with OCI datascience model.

**with\_project\_id**(*self*, *project\_id*: str) → 'DataScienceModel'

Sets the project ID.

**with\_description**(*self*, *description*: str) → 'DataScienceModel'

Sets the description.

**with\_compartment\_id**(self, compartment\_id: str) → 'DataScienceModel'

Sets the compartment ID.

**with\_display\_name**(self, name: str) → 'DataScienceModel'

Sets the name.

**with\_freeform\_tags**(self, *kwargs*: Dict[str, str]) → 'DataScienceModel'

Sets freeform tags.

**with\_defined\_tags**(self, *kwargs*: Dict[str, Dict[str, object]]) → 'DataScienceModel'

Sets defined tags.

**with\_input\_schema**(self, schema: Union[Schema, Dict]) → 'DataScienceModel'

Sets the model input schema.

**with\_output\_schema**(self, schema: Union[Schema, Dict]) → 'DataScienceModel'

Sets the model output schema.

**with\_defined\_metadata\_list**(self, metadata: Union[ModelTaxonomyMetadata, Dict]) → 'DataScienceModel'

Sets model taxonomy (defined) metadata.

**with\_custom\_metadata\_list**(self, metadata: Union[ModelCustomMetadata, Dict]) → 'DataScienceModel'

Sets model custom metadata.

**with\_provenance\_metadata**(self, metadata: Union[ModelProvenanceMetadata, Dict]) → 'DataScienceModel'

Sets model provenance metadata.

**with\_artifact**(self, uri: str)

Sets the artifact location. Can be a local.

**with\_model\_version\_set\_id**(self, model\_version\_set\_id: str):

Sets the model version set ID.

**with\_version\_label**(self, version\_label: str):

Sets the model version label.

## Examples

```
>>> ds_model = (DataScienceModel()
...     .with_compartment_id(os.environ["NB_SESSION_COMPARTMENT_OCID"])
...     .with_project_id(os.environ["PROJECT_OCID"])
...     .with_display_name("TestModel")
...     .with_description("Testing the test model")
...     .with_freeform_tags(tag1="val1", tag2="val2")
...     .with_artifact("/path/to/the/model/artifacts/"))
>>> ds_model.create()
>>> ds_model.status()
>>> ds_model.with_description("new description").update()
>>> ds_model.download_artifact("/path/to/dst/folder/")
>>> ds_model.delete()
>>> DataScienceModel.list()
```

Initializes datascience model.

#### Parameters

- **spec** (*Dict, optional*). Defaults to None.) – Object specification.
- **kwargs** (*Dict*) – Specification as keyword arguments. If ‘spec’ contains the same key as the one in kwargs, the value from kwargs will be used.
  - project\_id: str
  - compartment\_id: str
  - name: str
  - description: str
  - defined\_tags: Dict[str, Dict[str, object]]
  - freeform\_tags: Dict[str, str]
  - input\_schema: Union[ads.feature\_engineering.Schema, Dict]
  - output\_schema: Union[ads.feature\_engineering.Schema, Dict]
  - defined\_metadata\_list: Union[ModelTaxonomyMetadata, Dict]
  - custom\_metadata\_list: Union[ModelCustomMetadata, Dict]
  - provenance\_metadata: Union[ModelProvenanceMetadata, Dict]
  - artifact: str

CONST\_ARTIFACT = 'artifact'

CONST\_COMPARTMENT\_ID = 'compartmentId'

CONST\_CUSTOM\_METADATA = 'customMetadataList'

CONST\_DEFINED\_METADATA = 'definedMetadataList'

CONST\_DEFINED\_TAG = 'definedTags'

CONST\_DESCRIPTION = 'description'

CONST\_DISPLAY\_NAME = 'displayName'

CONST\_FREEFORM\_TAG = 'freeformTags'

CONST\_ID = 'id'

CONST\_INPUT\_SCHEMA = 'inputSchema'

CONST\_MODEL\_VERSION\_LABEL = 'versionLabel'

CONST\_MODEL\_VERSION\_SET\_ID = 'modelVersionSetId'

CONST\_OUTPUT\_SCHEMA = 'outputSchema'

CONST\_PROJECT\_ID = 'projectId'

CONST\_PROVENANCE\_METADATA = 'provenanceMetadata'

property artifact: str

```
attribute_map = {'artifact': 'artifact', 'compartmentId': 'compartment_id',
'customMetadataList': 'custom_metadata_list', 'definedMetadataList':
'defined_metadata_list', 'definedTags': 'defined_tags', 'description':
'description', 'displayName': 'display_name', 'freeformTags': 'freeform_tags', 'id':
'id', 'inputSchema': 'input_schema', 'modelVersionSetId': 'model_version_set_id',
'outputSchema': 'output_schema', 'projectId': 'project_id', 'provenanceMetadata':
'provenance_metadata', 'versionLabel': 'version_label'}
```

**property compartment\_id:** str

**create(\*\*kwargs)** → *DataScienceModel*

Creates datascience model.

#### Parameters

**kwargs** – Additional kwargs arguments. Can be any attribute that *oci.data\_science.models.Model* accepts.

In addition can be also provided the attributes listed below.

**bucket\_uri:** (str, optional). Defaults to None.

The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for uploading large artifacts which size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.

**overwrite\_existing\_artifact:** (bool, optional). Defaults to *True*.

Overwrite target bucket artifact if exists.

**remove\_existing\_artifact:** (bool, optional). Defaults to *True*.

Whether artifacts uploaded to object storage bucket need to be removed or not.

**region:** (str, optional). Defaults to *None*.

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variable.

**auth:** (Dict, optional). Defaults to *None*.

The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.

**timeout:** (int, optional). Defaults to 10 seconds.

The connection timeout in seconds for the client.

#### Returns

The DataScienceModel instance (self)

#### Return type

*DataScienceModel*

#### Raises

**ValueError** – If compartment id not provided. If project id not provided.

**property custom\_metadata\_list:** *ModelCustomMetadata*

Returns model custom metadata.

**property defined\_metadata\_list:** *ModelTaxonomyMetadata*

Returns model taxonomy (defined) metadata.

**property defined\_tags:** Dict[str, Dict[str, object]]



**delete**(*delete\_associated\_model\_deployment*: *Optional[bool] = False*) → *DataScienceModel*

Removes model from the model catalog.

#### Parameters

**delete\_associated\_model\_deployment** ((bool, optional). Defaults to *False*.) – Whether associated model deployments need to be deleted or not.

#### Returns

The *DataScienceModel* instance (self).

#### Return type

*DataScienceModel*

**property description**: str

**property display\_name**: str

**download\_artifact**(*target\_dir*: str, *auth*: *Optional[Dict] = None*, *force\_overwrite*: *Optional[bool] = False*, *bucket\_uri*: *Optional[str] = None*, *region*: *Optional[str] = None*, *overwrite\_existing\_artifact*: *Optional[bool] = True*, *remove\_existing\_artifact*: *Optional[bool] = True*, *timeout*: *Optional[int] = None*)

Downloads model artifacts from the model catalog.

#### Parameters

- **target\_dir** (str) – The target location of model artifacts.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Overwrite target directory if exists.
- **bucket\_uri** ((str, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for uploading large artifacts which size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **region** ((str, optional). Defaults to *None*.) – The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.
- **overwrite\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **timeout** ((int, optional). Defaults to 10 seconds.) – The connection timeout in seconds for the client.

#### Raises

**ModelArtifactSizeError** – If model artifacts size greater than 2GB and temporary OS bucket uri not provided.

**property freeform\_tags**: Dict[str, str]

**classmethod from\_dict**(*config*: Dict) → *DataScienceModel*

Loads model instance from a dictionary of configurations.

**Parameters**

**config** (*Dict*) – A dictionary of configurations.

**Returns**

The model instance.

**Return type**

*DataScienceModel*

**classmethod from\_id**(*id: str*) → *DataScienceModel*

Gets an existing model by OCID.

**Parameters**

**id** (*str*) – The model OCID.

**Returns**

An instance of DataScienceModel.

**Return type**

*DataScienceModel*

**property id: Optional[str]**

The model OCID.

**property input\_schema: Schema**

Returns model input schema.

**Returns**

Model input schema.

**Return type**

ads.feature\_engineering.Schema

**property kind: str**

The kind of the object as showing in a YAML.

**classmethod list**(*compartment\_id: Optional[str] = None, project\_id: Optional[str] = None, \*\*kwargs*)  
→ List[*DataScienceModel*]

Lists datascience models in a given compartment.

**Parameters**

- **compartment\_id** ((*str*, optional). Defaults to *None*.) – The compartment OCID.
- **project\_id** ((*str*, optional). Defaults to *None*.) – The project OCID.
- **kwargs** – Additional keyword arguments for filtering models.

**Returns**

The list of the datascience models.

**Return type**

List[*DataScienceModel*]

**classmethod list\_df**(*compartment\_id: Optional[str] = None, project\_id: Optional[str] = None, \*\*kwargs*) → DataFrame

Lists datascience models in a given compartment.

**Parameters**

- **compartment\_id** ((*str*, optional). Defaults to *None*.) – The compartment OCID.
- **project\_id** ((*str*, optional). Defaults to *None*.) – The project OCID.

- **kwargs** – Additional keyword arguments for filtering models.

**Returns**

The list of the datascience models in a pandas dataframe format.

**Return type**

pandas.DataFrame

**property model\_version\_set\_id:** str

**property output\_schema:** *Schema*

Returns model output schema.

**Returns**

Model output schema.

**Return type**

ads.feature\_engineering.Schema

**property project\_id:** str

**property provenance\_metadata:** *ModelProvenanceMetadata*

Returns model provenance metadatda.

**property status:** Optional[str]

Status of the model.

**Returns**

Status of the model.

**Return type**

str

**sync()**

Sync up a datascience model with OCI datascience model.

**to\_dict()** → Dict

Serializes model to a dictionary.

**Returns**

The model serialized as a dictionary.

**Return type**

dict

**update(\*\*kwargs)** → *DataScienceModel*

Updates datascience model in model catalog.

**Parameters**

**kwargs** – Additional kwargs arguments. Can be any attribute that *oci.data\_science.models.Model* accepts.

**Returns**

The DataScienceModel instance (self).

**Return type**

*DataScienceModel*

**upload\_artifact**(*bucket\_uri: Optional[str] = None, auth: Optional[Dict] = None, region: Optional[str] = None, overwrite\_existing\_artifact: Optional[bool] = True, remove\_existing\_artifact: Optional[bool] = True, timeout: Optional[int] = None*) → None

Uploads model artifacts to the model catalog.

### Parameters

- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for uploading large artifacts which size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **region** ((*str*, optional). Defaults to *None*.) – The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.
- **overwrite\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **timeout** ((*int*, optional). Defaults to *10 seconds*.) – The connection timeout in seconds for the client.

**property version\_label: str**

**with\_artifact**(*uri: str*)

Sets the artifact location. Can be a local.

### Parameters

**uri** (*str*) – Path to artifact directory or to the ZIP archive. It could contain a serialized model(required) as well as any files needed for deployment. The content of the source folder will be zipped and uploaded to the model catalog.

## Examples

```
>>> .with_artifact(uri="./model1/")
>>> .with_artifact(uri="./model1.zip")
```

**with\_compartment\_id**(*compartment\_id: str*) → *DataScienceModel*

Sets the compartment ID.

### Parameters

**compartment\_id** (*str*) – The compartment ID.

### Returns

The *DataScienceModel* instance (self)

### Return type

*DataScienceModel*

**with\_custom\_metadata\_list**(*metadata: Union[ModelCustomMetadata, Dict]*) → *DataScienceModel*

Sets model custom metadata.

### Parameters

**metadata** (*Union[ModelCustomMetadata, Dict]*) – The custom metadata.

### Returns

The *DataScienceModel* instance (self)

**Return type***DataScienceModel***with\_defined\_metadata\_list**(*metadata: Union[ModelTaxonomyMetadata, Dict]*) → *DataScienceModel*

Sets model taxonomy (defined) metadata.

**Parameters****metadata** (*Union[ModelTaxonomyMetadata, Dict]*) – The defined metadata.**Returns**

The DataScienceModel instance (self)

**Return type***DataScienceModel***with\_defined\_tags**(*\*\*kwargs: Dict[str, Dict[str, object]]*) → *DataScienceModel*

Sets defined tags.

**Returns**

The DataScienceModel instance (self)

**Return type***DataScienceModel***with\_description**(*description: str*) → *DataScienceModel*

Sets the description.

**Parameters****description** (*str*) – The description of the model.**Returns**

The DataScienceModel instance (self)

**Return type***DataScienceModel***with\_display\_name**(*name: str*) → *DataScienceModel*

Sets the name.

**Parameters****name** (*str*) – The name.**Returns**

The DataScienceModel instance (self)

**Return type***DataScienceModel***with\_freeform\_tags**(*\*\*kwargs: Dict[str, str]*) → *DataScienceModel*

Sets freeform tags.

**Returns**

The DataScienceModel instance (self)

**Return type***DataScienceModel***with\_input\_schema**(*schema: Union[Schema, Dict]*) → *DataScienceModel*

Sets the model input schema.

**Parameters****schema** (*Union[ads.feature\_engineering.Schema, Dict]*) – The model input schema.

**Returns**

The `DataScienceModel` instance (self)

**Return type**

*DataScienceModel*

**with\_model\_version\_set\_id**(*model\_version\_set\_id: str*)

Sets the model version set ID.

**Parameters**

**urmodel\_version\_set\_idi** (*str*) – The Model version set OCID.

**with\_output\_schema**(*schema: Union[Schema, Dict]*) → *DataScienceModel*

Sets the model output schema.

**Parameters**

**schema** (*Union[ads.feature\_engineering.Schema, Dict]*) – The model output schema.

**Returns**

The `DataScienceModel` instance (self)

**Return type**

*DataScienceModel*

**with\_project\_id**(*project\_id: str*) → *DataScienceModel*

Sets the project ID.

**Parameters**

**project\_id** (*str*) – The project ID.

**Returns**

The `DataScienceModel` instance (self)

**Return type**

*DataScienceModel*

**with\_provenance\_metadata**(*metadata: Union[ModelProvenanceMetadata, Dict]*) → *DataScienceModel*

Sets model provenance metadata.

**Parameters**

**provenance\_metadata** (*Union[ModelProvenanceMetadata, Dict]*) – The provenance metadata.

**Returns**

The `DataScienceModel` instance (self)

**Return type**

*DataScienceModel*

**with\_version\_label**(*version\_label: str*)

Sets the model version label.

**Parameters**

**version\_label** (*str*) – The model version label.

```
class ads.model.GenericModel(estimator: Optional[Callable] = None, artifact_dir: Optional[str] = None,
                             properties: Optional[ModelProperties] = None, auth: Optional[Dict] = None,
                             serialize: bool = True, model_save_serializer: Optional[SERDE] = None,
                             model_input_serializer: Optional[SERDE] = None, **kwargs: dict)
```

Bases: *MetadataMixin*, *Introspectable*, *EvaluatorMixin*

Generic Model class which is the base class for all the frameworks including the unsupported frameworks.

#### **algorithm**

The algorithm of the model.

**Type**

str

#### **artifact\_dir**

Artifact directory to store the files needed for deployment.

**Type**

str

#### **auth**

Default authentication is set using the *ads.set\_auth* API. To override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create an authentication signer to instantiate an IdentityClient object.

**Type**

Dict

#### **estimator**

Any model object generated by sklearn framework

**Type**

Callable

#### **framework**

The framework of the model.

**Type**

str

#### **hyperparameter**

The hyperparameters of the estimator.

**Type**

dict

#### **metadata\_custom**

The model custom metadata.

**Type**

*ModelCustomMetadata*

#### **metadata\_provenance**

The model provenance metadata.

**Type**

*ModelProvenanceMetadata*

#### **metadata\_taxonomy**

The model taxonomy metadata.

**Type**

*ModelTaxonomyMetadata*

#### **model\_artifact**

This is built by calling prepare.

**Type***ModelArtifact***model\_deployment**

A ModelDeployment instance.

**Type***ModelDeployment***model\_file\_name**

Name of the serialized model.

**Type**

str

**model\_id**

The model ID.

**Type**

str

**model\_input\_serializer**

Instance of ads.model.SERDE. Used for serialize/deserialize data.

**Type***SERDE***properties**

ModelProperties object required to save and deploy model.

**Type***ModelProperties***runtime\_info**

A RuntimeInfo instance.

**Type***RuntimeInfo***schema\_input**

Schema describes the structure of the input data.

**Type***Schema***schema\_output**

Schema describes the structure of the output data.

**Type***Schema***serialize**

Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under artifact\_dir and update the score.py manually.

**Type**

bool

**version**

The framework version of the model.



**Type**

str

**delete\_deployment(...)**

Deletes the current model deployment.

**deploy(..., \\*\*kwargs)**

Deploys a model.

**from\_model\_artifact(uri, ..., \\*\*kwargs)**

Loads model from the specified folder, or zip/tar archive.

**from\_model\_catalog(model\_id, ..., \\*\*kwargs)**

Loads model from model catalog.

**from\_model\_deployment(model\_deployment\_id, ..., \\*\*kwargs)**

Loads model from model deployment.

**update\_deployment(model\_deployment\_id, ..., \\*\*kwargs)**

Updates a model deployment.

**from\_id(ocid, ..., \\*\*kwargs)**

Loads model from model OCID or model deployment OCID.

**introspect(...)**

Runs model introspection.

**predict(data, ...)**

Returns prediction of input data run against the model deployment endpoint.

**prepare(..., \\*\*kwargs)**

Prepare and save the score.py, serialized model and runtime.yaml file.

**prepare\_save\_deploy(..., \\*\*kwargs)**

Shortcut for prepare, save and deploy steps.

**reload(...)**Reloads the model artifact files: *score.py* and the *runtime.yaml*.**restart\_deployment(...)**

Restarts the model deployment.

**save(..., \\*\*kwargs)**

Saves model artifacts to the model catalog.

**set\_model\_input\_serializer(serde)**

Registers serializer used for serializing data passed in verify/predict.

**summary\_status(...)**

Gets a summary table of the current status.

**verify(data, ...)**

Tests if deployment works in local environment.

**upload\_artifact(...)**Uploads model artifacts to the provided *uri*.

## Examples

```
>>> import tempfile
>>> from ads.model.generic_model import GenericModel

>>> class Toy:
...     def predict(self, x):
...         return x ** 2
>>> estimator = Toy()

>>> model = GenericModel(estimator=estimator, artifact_dir=tempfile.mkdtemp())
>>> model.summary_status()
>>> model.prepare(
...     inference_conda_env="dbexp_p38_cpu_v1",
...     inference_python_version="3.8",
...     model_file_name="toy_model.pkl",
...     training_id=None,
...     force_overwrite=True
... )
>>> model.verify(2)
>>> model.save()
>>> model.deploy()
>>> # Update access log id, freeform tags and description for the model deployment
>>> model.update_deployment(
>>>     properties=ModelDeploymentProperties(
>>>         access_log_id=<log_oid>,
>>>         description="Description for Custom Model",
>>>         freeform_tags={"key": "value"},
>>>     )
>>> )
>>> model.predict(2)
>>> # Uncomment the line below to delete the model and the associated model_
↪ deployment
>>> # model.delete(delete_associated_model_deployment = True)
```

GenericModel Constructor.

### Parameters

- **estimator** ((Callable).) – Trained model.
- **artifact\_dir** ((str, optional). Defaults to None.) – Artifact directory to store the files needed for deployment.
- **properties** ((ModelProperties, optional). Defaults to None.) – ModelProperties object required to save and deploy model.
- **auth** ((Dict, optional). Defaults to None.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **serialize** ((bool, optional). Defaults to True.) – Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under `artifact_dir` and update the score.py manually.

- **model\_save\_serializer** ((*SERDE* or *str*, optional). Defaults to *None*.) – Instance of `ads.model.SERDE`. Used for serialize/deserialize model.
- **model\_input\_serializer** ((*SERDE* or *str*, optional). Defaults to *None*.) – Instance of `ads.model.SERDE`. Used for serialize/deserialize model input.

**classmethod delete**(*model\_id*: Optional[*str*] = *None*, *delete\_associated\_model\_deployment*: Optional[*bool*] = *False*, *delete\_model\_artifact*: Optional[*bool*] = *False*, *artifact\_dir*: Optional[*str*] = *None*, **\*\*kwargs**: Dict) → *None*

Deletes a model from Model Catalog.

#### Parameters

- **model\_id** ((*str*, optional). Defaults to *None*.) – The model OCID to be deleted. If the method called on instance level, then *self.model\_id* will be used.
- **delete\_associated\_model\_deployment** ((*bool*, optional). Defaults to *False*.) – Whether associated model deployments need to be deleted or not.
- **delete\_model\_artifact** ((*bool*, optional). Defaults to *False*.) – Whether associated model artifacts need to be deleted or not.
- **artifact\_dir** ((*str*, optional). Defaults to *None*) – The local path to the model artifacts folder. If the method called on instance level, the *self.artifact\_dir* will be used by default.

#### Return type

*None*

#### Raises

**ValueError** – If *model\_id* not provided.

**delete\_deployment**(*wait\_for\_completion*: *bool* = *True*) → *None*

Deletes the current deployment.

#### Parameters

**wait\_for\_completion** ((*bool*, optional). Defaults to *True*.) – Whether to wait till completion.

#### Return type

*None*

#### Raises

**ValueError** – if there is not deployment attached yet.:

**deploy**(*wait\_for\_completion*: Optional[*bool*] = *True*, *display\_name*: Optional[*str*] = *None*, *description*: Optional[*str*] = *None*, *deployment\_instance\_shape*: Optional[*str*] = *None*, *deployment\_instance\_count*: Optional[*int*] = *None*, *deployment\_bandwidth\_mbps*: Optional[*int*] = *None*, *deployment\_log\_group\_id*: Optional[*str*] = *None*, *deployment\_access\_log\_id*: Optional[*str*] = *None*, *deployment\_predict\_log\_id*: Optional[*str*] = *None*, *deployment\_memory\_in\_gbs*: Optional[*float*] = *None*, *deployment\_ocpus*: Optional[*float*] = *None*, *deployment\_image*: Optional[*str*] = *None*, **\*\*kwargs**: Dict) → *ModelDeployment*

Deploys a model. The model needs to be saved to the model catalog at first. You can deploy the model on either conda or container runtime. The customized runtime allows you to bring your own service container. To deploy model on container runtime, make sure to build the container and push it to OCIR. For more information, see <https://docs.oracle.com/en-us/iaas/data-science/using/mod-dep-byoc.htm>.

## Example

```
# This is an example to deploy model on container runtime >>> model = Generic-
Model(estimator=estimator, artifact_dir=tempfile.mkdtemp()) >>> model.summary_status() >>>
model.prepare( ... model_file_name="toy_model.pkl", ... ignore_conda_error=True, # set ig-
nore_conda_error=True for container runtime ... force_overwrite=True ... ) >>> model.verify() >>>
model.save() >>> model.deploy( ... deployment_image="iad.ocir.io/<namespace>/<image>:<tag>",
... entrypoint=["python", "/opt/ds/model/deployed_model/api.py"], ... server_port=5000, ...
health_check_port=5000, ... environment_variables={"key":"value"} ... )
```

### Parameters

- **wait\_for\_completion** ((*bool*, *optional*). Defaults to *True*.) – Flag set for whether to wait for deployment to complete before proceeding.
- **display\_name** ((*str*, *optional*). Defaults to *None*.) – The name of the model. If a display\_name is not provided in kwargs, a randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55.02'.
- **description** ((*str*, *optional*). Defaults to *None*.) – The description of the model.
- **deployment\_instance\_shape** ((*str*, *optional*). Default to *VM.Standard2.1*.) – The shape of the instance used for deployment.
- **deployment\_instance\_count** ((*int*, *optional*). Defaults to *1*.) – The number of instance used for deployment.
- **deployment\_bandwidth\_mbps** ((*int*, *optional*). Defaults to *10*.) – The bandwidth limit on the load balancer in Mbps.
- **deployment\_memory\_in\_gbs** ((*float*, *optional*). Defaults to *None*.) – Specifies the size of the memory of the model deployment instance in GBs.
- **deployment\_ocpus** ((*float*, *optional*). Defaults to *None*.) – Specifies the ocpu count of the model deployment instance.
- **deployment\_log\_group\_id** ((*str*, *optional*). Defaults to *None*.) – The oci logging group id. The access log and predict log share the same log group.
- **deployment\_access\_log\_id** ((*str*, *optional*). Defaults to *None*.) – The access log OCID for the access logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_predict\_log\_id** ((*str*, *optional*). Defaults to *None*.) – The predict log OCID for the predict logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_image** ((*str*, *optional*). Defaults to *None*.) – The OCIR path of docker container image. Required for deploying model on container runtime.
- **kwargs** –
  - project\_id**: (*str*, *optional*).  
Project OCID. If not specified, the value will be taken from the environment variables.
  - compartment\_id**  
[(*str*, *optional*).] Compartment OCID. If not specified, the value will be taken from the environment variables.

**max\_wait\_time**

[(int, optional). Defaults to 1200 seconds.] Maximum amount of time to wait in seconds. Negative implies infinite wait time.

**poll\_interval**

[(int, optional). Defaults to 10 seconds.] Poll interval in seconds.

**freeform\_tags: (Dict[str, str], optional). Defaults to None.**

Freeform tags of the model deployment.

**defined\_tags: (Dict[str, dict[str, object]], optional). Defaults to None.**

Defined tags of the model deployment.

**image\_digest: (str, optional). Defaults to None.**

The digest of docker container image.

**cmd: (List, optional). Defaults to empty.**

The command line arguments for running docker container image.

**entrypoint: (List, optional). Defaults to empty.**

The entrypoint for running docker container image.

**server\_port: (int, optional). Defaults to 8080.**

The server port for docker container image.

**health\_check\_port: (int, optional). Defaults to 8080.**

The health check port for docker container image.

**deployment\_mode: (str, optional). Defaults to HTTPS\_ONLY.**

The deployment mode. Allowed values are: HTTPS\_ONLY and STREAM\_ONLY.

**input\_stream\_ids: (List, optional). Defaults to empty.**

The input stream ids. Required for STREAM\_ONLY mode.

**output\_stream\_ids: (List, optional). Defaults to empty.**

The output stream ids. Required for STREAM\_ONLY mode.

**environment\_variables: (Dict, optional). Defaults to empty.**

The environment variables for model deployment.

Also can be any keyword argument for initializing the *ads.model.deployment.ModelDeploymentProperties*. See *ads.model.deployment.ModelDeploymentProperties()* for details.

**Returns**

The ModelDeployment instance.

**Return type**

*ModelDeployment*

**Raises**

**ValueError** – If *model\_id* is not specified.

```
classmethod from_id(ocid: str, model_file_name: Optional[str] = None, artifact_dir: Optional[str] =
    None, auth: Optional[Dict] = None, force_overwrite: Optional[bool] = False,
    properties: Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] = True,
    ignore_conda_error: Optional[bool] = False, **kwargs) → Self
```

Loads model from model OCID or model deployment OCID.

**Parameters**

- **ocid** (*str*) – The model OCID or model deployment OCID.

- **model\_file\_name** ((str, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((str, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((ModelProperties, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **bucket\_uri** ((str, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **kwargs** –

**compartment\_id**

[(str, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

**timeout**

[(int, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

**Returns**

An instance of GenericModel class.

**Return type**

Self

```
classmethod from_model_artifact(uri: str, model_file_name: Optional[str] = None, artifact_dir:
                                Optional[str] = None, auth: Optional[Dict] = None,
                                force_overwrite: Optional[bool] = False, properties:
                                Optional[ModelProperties] = None, ignore_conda_error:
                                Optional[bool] = False, **kwargs: dict) → Self
```

Loads model from a folder, or zip/tar archive.

**Parameters**

- **uri** (str) – The folder path, ZIP file path, or TAR file path. It could contain a serialized model(required) as well as any files needed for deployment including: serialized model, runtime.yaml, score.py and etc. The content of the folder will be copied to the *artifact\_dir* folder.
- **model\_file\_name** ((str, optional). Defaults to *None*.) – The serialized model file name. Will be extracted from artifacts if not provided.
- **artifact\_dir** ((str, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys*

or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate `IdentityClient` object.

- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((`ModelProperties`, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.

#### Returns

An instance of *GenericModel* class.

#### Return type

Self

#### Raises

**ValueError** – If *model\_file\_name* not provided.

```
classmethod from_model_catalog(model_id: str, model_file_name: Optional[str] = None, artifact_dir:
    Optional[str] = None, auth: Optional[Dict] = None, force_overwrite:
    Optional[bool] = False, properties:
    Optional[Union[ModelProperties, Dict]] = None, bucket_uri:
    Optional[str] = None, remove_existing_artifact: Optional[bool] =
    True, ignore_conda_error: Optional[bool] = False, **kwargs) →
    Self
```

Loads model from model catalog.

#### Parameters

- **model\_id** (*str*) – The model OCID.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((*str*, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate `IdentityClient` object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((`ModelProperties`, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: `oci://<bucket_name>@<namespace>/prefix/`.
- **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –

**compartment\_id**

[(str, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

**timeout**

[(int, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

**region: (str, optional). Defaults to *None*.**

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**Returns**

An instance of GenericModel class.

**Return type**

Self

```
classmethod from_model_deployment(model_deployment_id: str, model_file_name: Optional[str] =  
    None, artifact_dir: Optional[str] = None, auth: Optional[Dict] =  
    None, force_overwrite: Optional[bool] = False, properties:  
    Optional[Union[ModelProperties, Dict]] = None, bucket_uri:  
    Optional[str] = None, remove_existing_artifact: Optional[bool] =  
    True, ignore_conda_error: Optional[bool] = False, **kwargs) →  
    Self
```

Loads model from model deployment.

**Parameters**

- **model\_deployment\_id** (str) – The model deployment OCID.
- **model\_file\_name** ((str, optional). Defaults to *None*.) – The name of the serialized model.
- **artifact\_dir** ((str, optional). Defaults to *None*.) – The artifact directory to store the files needed for deployment. Will be created if not exists.
- **auth** ((Dict, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **force\_overwrite** ((bool, optional). Defaults to *False*.) – Whether to overwrite existing files or not.
- **properties** ((ModelProperties, optional). Defaults to *None*.) – Model-Properties object required to save and deploy model.
- **bucket\_uri** ((str, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for downloading large artifacts with size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
- **remove\_existing\_artifact** ((bool, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **ignore\_conda\_error** ((bool, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **kwargs** –



**compartment\_id**

[(str, optional)] Compartment OCID. If not specified, the value will be taken from the environment variables.

**timeout**

[(int, optional). Defaults to 10 seconds.] The connection timeout in seconds for the client.

**region: (str, optional). Defaults to *None*.**

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

**Returns**

An instance of GenericModel class.

**Return type**

Self

**get\_data\_serializer()**

Gets data serializer.

**Returns**

object

**Return type**

ads.model.Serializer object.

**get\_model\_serializer()**

Gets model serializer.

**introspect()** → DataFrame

Conducts introspection.

**Returns**

A pandas DataFrame which contains the introspection results.

**Return type**

pandas.DataFrame

**property metadata\_custom****property metadata\_provenance****property metadata\_taxonomy****property model\_deployment\_id****property model\_id****model\_input\_serializer\_type**

alias of ModelInputSerializerType

**model\_save\_serializer\_type**

alias of ModelSerializerType

**predict**(data: Optional[Any] = None, auto\_serialize\_data: bool = False, \*\*kwargs) → Dict[str, Any]

Returns prediction of input data run against the model deployment endpoint.

## Examples

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.predict(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.predict(
...     image="oci://<bucket>@<tenancy>/myimage.png",
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

### Parameters

- **data** (*Any*) – Data for the prediction for onnx models, for local serialization method, data can be the data types that each framework support.
- **auto\_serialize\_data** (*bool*.) – Whether to auto serialize input data. Defaults to *False* for *GenericModel*, and *True* for other frameworks. *data* required to be json serializable if *auto\_serialize\_data=False*. If *auto\_serialize\_data* set to *True*, data will be serialized before sending to model deployment endpoint.
- **kwargs** – *content\_type*: *str*, used to indicate the media type of the resource. *image*: *PIL.Image* Object or *uri* for the image.

A valid string path for image file can be local path, http(s), oci, s3, gs.

#### storage\_options: dict

Passed to *fsspec.open* for a particular storage connection. Please see *fsspec* (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.

### Returns

Dictionary with the predicted values.

### Return type

Dict[str, Any]

### Raises

- **NotActiveDeploymentError** – If model deployment process was not started or not finished yet.
- **ValueError** – If *data* is empty or not JSON serializable.

**prepare**(*inference\_conda\_env*: Optional[str] = None, *inference\_python\_version*: Optional[str] = None, *training\_conda\_env*: Optional[str] = None, *training\_python\_version*: Optional[str] = None, *model\_file\_name*: Optional[str] = None, *as\_onnx*: bool = False, *initial\_types*: Optional[List[Tuple]] = None, *force\_overwrite*: bool = False, *namespace*: str = 'id19sferra6z', *use\_case\_type*: Optional[str] = None, *X\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *y\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *training\_script\_path*: Optional[str] = None, *training\_id*: Optional[str] = None, *ignore\_pending\_changes*: bool = True, *max\_col\_num*: int = 2000, *ignore\_conda\_error*: bool = False, *\*\*kwargs*: Dict) → *GenericModel*

Prepare and save the score.py, serialized model and runtime.yaml file.

### Parameters

- **inference\_conda\_env** ((*str*, *optional*). Defaults to *None*.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **inference\_python\_version** ((*str*, *optional*). Defaults to *None*.) – Python version which will be used in deployment.
- **training\_conda\_env** ((*str*, *optional*). Defaults to *None*.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack. If *training\_conda\_env* is not provided, *training\_conda\_env* will use the same value of *training\_conda\_env*.
- **training\_python\_version** ((*str*, *optional*). Defaults to *None*.) – Python version used during training.
- **model\_file\_name** ((*str*, *optional*). Defaults to *None*.) – Name of the serialized model. Will be auto generated if not provided.
- **as\_onnx** ((*bool*, *optional*). Defaults to *False*.) – Whether to serialize as onnx model.
- **initial\_types** ((*list*[*Tuple*], *optional*).) – Defaults to *None*. Only used for *SklearnModel*, *LightGBMModel* and *XGBoostModel*. Each element is a tuple of a variable name and a type. Check this link [http://onnx.ai/sklearn-onnx/api\\_summary.html#id2](http://onnx.ai/sklearn-onnx/api_summary.html#id2) for more explanation and examples for *initial\_types*.
- **force\_overwrite** ((*bool*, *optional*). Defaults to *False*.) – Whether to overwrite existing files.
- **namespace** ((*str*, *optional*).) – Namespace of region. This is used for identifying which region the service pack is from when you pass a slug to *inference\_conda\_env* and *training\_conda\_env*.
- **use\_case\_type** (*str*) – The use case type of the model. Use it through *UseCaseType* class or string provided in *UseCaseType*. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with *UseCaseType* class to see all supported types.
- **X\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (*str*. Defaults to *None*.) – Training script path.
- **training\_id** ((*str*, *optional*). Defaults to value from environment variables.) – The training OCID for model. Can be notebook session or job OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – whether to ignore the pending changes in the git.
- **max\_col\_num** ((*int*, *optional*). Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – Do not generate the input schema if the input has more than this number of features(columns).
- **ignore\_conda\_error** ((*bool*, *optional*). Defaults to *False*.) – Parameter to ignore error when collecting conda information.

- **kwargs** –

**impute\_values:** (dict, optional).

The dictionary where the key is the column index(or names is accepted for pandas dataframe) and the value is the impute value for the corresponding column.

#### Raises

- **FileExistsError** – If files already exist but *force\_overwrite* is False.
- **ValueError** – If *inference\_python\_version* is not provided, but also cannot be found through manifest file.

#### Returns

An instance of *GenericModel* class.

#### Return type

*GenericModel*

**prepare\_save\_deploy**(*inference\_conda\_env*: Optional[str] = None, *inference\_python\_version*: Optional[str] = None, *training\_conda\_env*: Optional[str] = None, *training\_python\_version*: Optional[str] = None, *model\_file\_name*: Optional[str] = None, *as\_onnx*: bool = False, *initial\_types*: Optional[List[Tuple]] = None, *force\_overwrite*: bool = False, *namespace*: str = 'id19sfcrra6z', *use\_case\_type*: Optional[str] = None, *X\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *y\_sample*: Optional[Union[list, tuple, DataFrame, Series, ndarray]] = None, *training\_script\_path*: Optional[str] = None, *training\_id*: Optional[str] = None, *ignore\_pending\_changes*: bool = True, *max\_col\_num*: int = 2000, *ignore\_conda\_error*: bool = False, *model\_display\_name*: Optional[str] = None, *model\_description*: Optional[str] = None, *model\_freeform\_tags*: Optional[dict] = None, *model\_defined\_tags*: Optional[dict] = None, *ignore\_introspection*: Optional[bool] = False, *wait\_for\_completion*: Optional[bool] = True, *deployment\_display\_name*: Optional[str] = None, *deployment\_description*: Optional[str] = None, *deployment\_instance\_shape*: Optional[str] = None, *deployment\_instance\_count*: Optional[int] = None, *deployment\_bandwidth\_mbps*: Optional[int] = None, *deployment\_log\_group\_id*: Optional[str] = None, *deployment\_access\_log\_id*: Optional[str] = None, *deployment\_predict\_log\_id*: Optional[str] = None, *deployment\_memory\_in\_gbs*: Optional[float] = None, *deployment\_ocpus*: Optional[float] = None, *deployment\_image*: Optional[str] = None, *bucket\_uri*: Optional[str] = None, *overwrite\_existing\_artifact*: Optional[bool] = True, *remove\_existing\_artifact*: Optional[bool] = True, *model\_version\_set*: Optional[Union[str, ModelVersionSet]] = None, *version\_label*: Optional[str] = None, **\*\*kwargs**: Dict) → *ModelDeployment*

Shortcut for prepare, save and deploy steps.

#### Parameters

- **inference\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack.
- **inference\_python\_version** ((str, optional). Defaults to None.) – Python version which will be used in deployment.
- **training\_conda\_env** ((str, optional). Defaults to None.) – Can be either slug or object storage path of the conda pack. You can only pass in slugs if the conda pack is a service pack. If *training\_conda\_env* is not provided, *training\_conda\_env* will use the same value of *training\_conda\_env*.

- **training\_python\_version** ((*str*, optional). Defaults to *None*.) – Python version used during training.
- **model\_file\_name** ((*str*, optional). Defaults to *None*.) – Name of the serialized model.
- **as\_onnx** ((*bool*, optional). Defaults to *False*.) – Whether to serialize as onnx model.
- **initial\_types** ((*list*[*Tuple*], optional).) – Defaults to *None*. Only used for SklearnModel, LightGBMModel and XGBoostModel. Each element is a tuple of a variable name and a type. Check this link [http://onnx.ai/sklearn-onnx/api\\_summary.html#id2](http://onnx.ai/sklearn-onnx/api_summary.html#id2) for more explanation and examples for *initial\_types*.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Whether to overwrite existing files.
- **namespace** ((*str*, optional).) – Namespace of region. This is used for identifying which region the service pack is from when you pass a slug to *inference\_conda\_env* and *training\_conda\_env*.
- **use\_case\_type** (*str*) – The use case type of the model. Use it through *UseCaseType* class or string provided in *UseCaseType*. For example, `use_case_type=UseCaseType.BINARY_CLASSIFICATION` or `use_case_type="binary_classification"`. Check with *UseCaseType* class to see all supported types.
- **X\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of input data that will be used to generate input schema.
- **y\_sample** (*Union*[*list*, *tuple*, *pd.Series*, *np.ndarray*, *pd.DataFrame*]. Defaults to *None*.) – A sample of output data that will be used to generate output schema.
- **training\_script\_path** (*str*. Defaults to *None*.) – Training script path.
- **training\_id** ((*str*, optional). Defaults to value from environment variables.) – The training OCID for model. Can be notebook session or job OCID.
- **ignore\_pending\_changes** (*bool*. Defaults to *False*.) – whether to ignore the pending changes in the git.
- **max\_col\_num** ((*int*, optional). Defaults to *utils.DATA\_SCHEMA\_MAX\_COL\_NUM*.) – Do not generate the input schema if the input has more than this number of features(columns).
- **ignore\_conda\_error** ((*bool*, optional). Defaults to *False*.) – Parameter to ignore error when collecting conda information.
- **model\_display\_name** ((*str*, optional). Defaults to *None*.) – The name of the model. If a *model\_display\_name* is not provided in *kwargs*, a randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55.02'.
- **model\_description** ((*str*, optional). Defaults to *None*.) – The description of the model.
- **model\_freeform\_tags** (*Dict*(*str*, *str*), Defaults to *None*.) – Freeform tags for the model.
- **model\_defined\_tags** ((*Dict*(*str*, *dict*(*str*, *object*)), optional). Defaults to *None*.) – Defined tags for the model.

- **ignore\_introspection** ((*bool*, *optional*). Defaults to *None*.) – Determine whether to ignore the result of model introspection or not. If set to *True*, the save will ignore all model introspection errors.
- **wait\_for\_completion** ((*bool*, *optional*). Defaults to *True*.) – Flag set for whether to wait for deployment to complete before proceeding.
- **deployment\_display\_name** ((*str*, *optional*). Defaults to *None*.) – The name of the model deployment. If a `deployment_display_name` is not provided in `kwargs`, a randomly generated easy to remember name with timestamp will be generated, like ‘strange-spider-2022-08-17-23:55.02’.
- **description** ((*str*, *optional*). Defaults to *None*.) – The description of the model.
- **deployment\_instance\_shape** ((*str*, *optional*). Default to *VM.Standard2.1*.) – The shape of the instance used for deployment.
- **deployment\_instance\_count** ((*int*, *optional*). Defaults to *1*.) – The number of instance used for deployment.
- **deployment\_bandwidth\_mbps** ((*int*, *optional*). Defaults to *10*.) – The bandwidth limit on the load balancer in Mbps.
- **deployment\_log\_group\_id** ((*str*, *optional*). Defaults to *None*.) – The oci logging group id. The access log and predict log share the same log group.
- **deployment\_access\_log\_id** ((*str*, *optional*). Defaults to *None*.) – The access log OCID for the access logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_predict\_log\_id** ((*str*, *optional*). Defaults to *None*.) – The predict log OCID for the predict logs. [https://docs.oracle.com/en-us/iaas/data-science/using/model\\_dep\\_using\\_logging.htm](https://docs.oracle.com/en-us/iaas/data-science/using/model_dep_using_logging.htm)
- **deployment\_memory\_in\_gbs** ((*float*, *optional*). Defaults to *None*.) – Specifies the size of the memory of the model deployment instance in GBs.
- **deployment\_ocpus** ((*float*, *optional*). Defaults to *None*.) – Specifies the ocpu count of the model deployment instance.
- **deployment\_image** ((*str*, *optional*). Defaults to *None*.) – The OCIR path of docker container image. Required for deploying model on container runtime.
- **bucket\_uri** ((*str*, *optional*). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The `bucket_uri` is only necessary for downloading large artifacts with size is greater than 2GB. Example: `oci://<bucket_name>@<namespace>/prefix/`.
- **overwrite\_existing\_artifact** ((*bool*, *optional*). Defaults to *True*.) – Overwrite target bucket artifact if exists.
- **remove\_existing\_artifact** ((*bool*, *optional*). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
- **model\_version\_set** ((*Union*[*str*, *ModelVersionSet*], *optional*). Defaults to *None*.) – The Model version set OCID, or name, or *ModelVersionSet* instance.
- **version\_label** ((*str*, *optional*). Defaults to *None*.) – The model version label.
- **kwargs** –

**impute\_values: (dict, optional).**

The dictionary where the key is the column index(or names is accepted for pandas dataframe) and the value is the impute value for the corresponding column.

**project\_id: (str, optional).**

Project OCID. If not specified, the value will be taken either from the environment variables or model properties.

**compartment\_id**

[(str, optional).] Compartment OCID. If not specified, the value will be taken either from the environment variables or model properties.

**image\_digest: (str, optional). Defaults to None.**

The digest of docker container image.

**cmd: (List, optional). Defaults to empty.**

The command line arguments for running docker container image.

**entrypoint: (List, optional). Defaults to empty.**

The entrypoint for running docker container image.

**server\_port: (int, optional). Defaults to 8080.**

The server port for docker container image.

**health\_check\_port: (int, optional). Defaults to 8080.**

The health check port for docker container image.

**deployment\_mode: (str, optional). Defaults to HTTPS\_ONLY.**

The deployment mode. Allowed values are: HTTPS\_ONLY and STREAM\_ONLY.

**input\_stream\_ids: (List, optional). Defaults to empty.**

The input stream ids. Required for STREAM\_ONLY mode.

**output\_stream\_ids: (List, optional). Defaults to empty.**

The output stream ids. Required for STREAM\_ONLY mode.

**environment\_variables: (Dict, optional). Defaults to empty.**

The environment variables for model deployment.

**timeout: (int, optional). Defaults to 10 seconds.**

The connection timeout in seconds for the client.

**max\_wait\_time**

[(int, optional). Defaults to 1200 seconds.] Maximum amount of time to wait in seconds. Negative implies infinite wait time.

**poll\_interval**

[(int, optional). Defaults to 10 seconds.] Poll interval in seconds.

**freeform\_tags: (Dict[str, str], optional). Defaults to None.**

Freeform tags of the model deployment.

**defined\_tags: (Dict[str, dict[str, object]], optional). Defaults to None.**

Defined tags of the model deployment.

**region: (str, optional). Defaults to None.**

The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.

Also can be any keyword argument for initializing the *ads.model.deployment.ModelDeploymentProperties*. See

*ads.model.deployment.ModelDeploymentProperties()* for details.

**Returns**

The ModelDeployment instance.

**Return type**

*ModelDeployment*

**Raises**

- **FileExistsError** – If files already exist but *force\_overwrite* is False.
- **ValueError** – If *inference\_python\_version* is not provided, but also cannot be found through manifest file.

**reload()** → *GenericModel*

Reloads the model artifact files: *score.py* and the *runtime.yaml*.

**Returns**

An instance of GenericModel class.

**Return type**

*GenericModel*

**reload\_runtime\_info()** → None

Reloads the model artifact file: *runtime.yaml*.

**Returns**

Nothing.

**Return type**

None

**restart\_deployment**(*max\_wait\_time: int = 1200, poll\_interval: int = 10*) → *ModelDeployment*

Restarts the current deployment.

**Parameters**

- **max\_wait\_time** ((*int, optional*). Defaults to 1200 seconds.) – Maximum amount of time to wait for activate or deactivate in seconds. Total amount of time to wait for restart deployment is twice as the value. Negative implies infinite wait time.
- **poll\_interval** ((*int, optional*). Defaults to 10 seconds.) – Poll interval in seconds.

**Returns**

The ModelDeployment instance.

**Return type**

*ModelDeployment*

**save**(*display\_name: Optional[str] = None, description: Optional[str] = None, freeform\_tags: Optional[dict] = None, defined\_tags: Optional[dict] = None, ignore\_introspection: Optional[bool] = False, bucket\_uri: Optional[str] = None, overwrite\_existing\_artifact: Optional[bool] = True, remove\_existing\_artifact: Optional[bool] = True, model\_version\_set: Optional[Union[str, ModelVersionSet]] = None, version\_label: Optional[str] = None, \*\*kwargs*) → str

Saves model artifacts to the model catalog.

**Parameters**

- **display\_name** ((*str, optional*). Defaults to None.) – The name of the model. If a display\_name is not provided in kwargs, randomly generated easy to remember name with timestamp will be generated, like 'strange-spider-2022-08-17-23:55.02'.



- **description** ((*str*, optional). Defaults to *None*.) – The description of the model.
  - **freeform\_tags** (*Dict(str, str)*, Defaults to *None*.) – Freeform tags for the model.
  - **defined\_tags** ((*Dict(str, dict(str, object))*, optional). Defaults to *None*.) – Defined tags for the model.
  - **ignore\_introspection** ((*bool*, optional). Defaults to *None*.) – Determine whether to ignore the result of model introspection or not. If set to *True*, the save will ignore all model introspection errors.
  - **bucket\_uri** ((*str*, optional). Defaults to *None*.) – The OCI Object Storage URI where model artifacts will be copied to. The *bucket\_uri* is only necessary for uploading large artifacts which size is greater than 2GB. Example: *oci://<bucket\_name>@<namespace>/prefix/*.
  - **overwrite\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Overwrite target bucket artifact if exists.
  - **remove\_existing\_artifact** ((*bool*, optional). Defaults to *True*.) – Whether artifacts uploaded to object storage bucket need to be removed or not.
  - **model\_version\_set** ((*Union[str, ModelVersionSet]*, optional). Defaults to *None*.) – The model version set OCID, or model version set name, or *ModelVersionSet* instance.
  - **version\_label** ((*str*, optional). Defaults to *None*.) – The model version label.
  - **kwargs** –
    - project\_id**: (*str*, optional).  
Project OCID. If not specified, the value will be taken either from the environment variables or model properties.
    - compartment\_id**  
[(*str*, optional).] Compartment OCID. If not specified, the value will be taken either from the environment variables or model properties.
    - region**: (*str*, optional). Defaults to *None*.  
The destination Object Storage bucket region. By default the value will be extracted from the *OCI\_REGION\_METADATA* environment variables.
    - timeout**: (*int*, optional). Defaults to 10 seconds.  
The connection timeout in seconds for the client.
- Also can be any attribute that *oci.data\_science.models.Model* accepts.

**Raises**

***RuntimeInfoInconsistencyError*** – When *.runtime\_info* is not synched with *runtime.yaml* file.

**Returns**

The model id.

**Return type**

*str*

**property schema\_input**

**property schema\_output**

**serialize\_model**(*as\_onnx: bool = False, initial\_types: Optional[List[Tuple]] = None, force\_overwrite: bool = False, X\_sample: Optional[any] = None, \*\*kwargs*)

Serialize and save model using ONNX or model specific method.

**Parameters**

- **as\_onnx** (*(boolean, optional)*) – If set as True, convert into ONNX model.
- **initial\_types** (*(List[Tuple], optional)*) – a python list. Each element is a tuple of a variable name and a data type.
- **force\_overwrite** (*(boolean, optional)*) – If set as True, overwrite serialized model if exists.
- **X\_sample** (*(any, optional). Defaults to None.*) – Contains model inputs such that model(X\_sample) is a valid invocation of the model, used to valid model input type.

**Returns**

Nothing

**Return type**

None

**set\_model\_input\_serializer**(*model\_input\_serializer: Union[str, SERDE]*)

Registers serializer used for serializing data passed in verify/predict.

**Examples**

```
>>> generic_model.set_model_input_serializer(GenericModel.model_input_
↳serializer_type.CLOUDPICKLE)
```

```
>>> # Register serializer by passing the name of it.
>>> generic_model.set_model_input_serializer("cloudpickle")
```

```
>>> # Example of creating customized model input serializer and registering it.
>>> from ads.model import SERDE
>>> from ads.model.generic_model import GenericModel
```

```
>>> class MySERDE(SERDE):
...     def __init__(self):
...         super().__init__()
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
...     def deserialize(self, data):
...         deserialized_data = 2
...         return deserialized_data
```

```
>>> class Toy:
...     def predict(self, x):
...         return x ** 2
```

```
>>> generic_model = GenericModel(
...     estimator=Toy(),
...     artifact_dir=tempfile.mkdtemp(),
...     model_input_serializer=MySERDE()
... )
```

```
>>> # Or register the serializer after creating model instance.
>>> generic_model.set_model_input_serializer(MySERDE())
```

#### Parameters

**model\_input\_serializer** ((str, or `ads.model.SERDE`)) – name of the serializer, or instance of SERDE.

**set\_model\_save\_serializer**(model\_save\_serializer: Union[str, SERDE])

Registers serializer used for saving model.

#### Examples

```
>>> generic_model.set_model_save_serializer(GenericModel.model_save_serializer_
↳ type.CLOUDPICKLE)
```

```
>>> # Register serializer by passing the name of it.
>>> generic_model.set_model_save_serializer("cloudpickle")
```

```
>>> # Example of creating customized model save serializer and registering it.
>>> from ads.model import SERDE
>>> from ads.model.generic_model import GenericModel
```

```
>>> class MySERDE(SERDE):
...     def __init__(self):
...         super().__init__()
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
...     def deserialize(self, data):
...         deserialized_data = 2
...         return deserialized_data
```

```
>>> class Toy:
...     def predict(self, x):
...         return x ** 2
```

```
>>> generic_model = GenericModel(
...     estimator=Toy(),
...     artifact_dir=tempfile.mkdtemp(),
...     model_save_serializer=MySERDE()
... )
```

```
>>> # Or register the serializer after creating model instance.
>>> generic_model.set_model_save_serializer(MySERDE())
```

**Parameters**

**model\_save\_serializer** ((`ads.model.SERDE` or `str`)) – name of the serializer or instance of SERDE.

**summary\_status()** → `DataFrame`

A summary table of the current status.

**Returns**

The summary stable of the current status.

**Return type**

`pd.DataFrame`

**update(\*\*kwargs)** → *GenericModel*

Updates model metadata in the Model Catalog. Updates only metadata information. The model artifacts are immutable and cannot be updated.

**Parameters**

**kwargs** –

**display\_name:** (`str`, optional). Defaults to `None`.

The name of the model.

**description:** (`str`, optional). Defaults to `None`.

The description of the model.

**freeform\_tags**

[`Dict(str, str)`, Defaults to `None`.] Freeform tags for the model.

**defined\_tags**

[(`Dict(str, dict(str, object))`, optional). Defaults to `None`.] Defined tags for the model.

**version\_label:** (`str`, optional). Defaults to `None`.

The model version lebel.

Additional kwargs arguments. Can be any attribute that *oci.data\_science.models.Model* accepts.

**Returns**

An instance of *GenericModel* (self).

**Return type**

*GenericModel*

**Raises**

**ValueError** – if model not saved to the Model Catalog.

**classmethod update\_deployment**(*model\_deployment\_id: Optional[str] = None, properties: Optional[Union[ModelDeploymentProperties, dict]] = None, wait\_for\_completion: bool = True, max\_wait\_time: int = 1200, poll\_interval: int = 10, \*\*kwargs*) → *ModelDeployment*

Updates a model deployment.

You can update *model\_deployment\_configuration\_details* and change *instance\_shape* and *model\_id* when the model deployment is in the *ACTIVE* lifecycle state. The *bandwidth\_mbps* or *instance\_count* can only be updated while the model deployment is in the *INACTIVE* state. Changes to the *bandwidth\_mbps* or

*instance\_count* will take effect the next time the *ActivateModelDeployment* action is invoked on the model deployment resource.

## Examples

```
>>> # Update access log id, freeform tags and description for the model_
    ↪ deployment
>>> model.update_deployment(
>>>     properties=ModelDeploymentProperties(
>>>         access_log_id=<log_ocid>,
>>>         description="Description for Custom Model",
>>>         freeform_tags={"key": "value"},
>>>     )
>>> )
```

## Parameters

- **model\_deployment\_id** (*str.*) – The model deployment OCID. Defaults to None. If the method called on instance level, then *self.model\_deployment.model\_deployment\_id* will be used.
- **properties** (*ModelDeploymentProperties* or *dict*) – The properties for updating the deployment.
- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to complete before proceeding. Defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).
- **kwargs** –

**auth:** (*Dict*, optional). Defaults to *None*.

The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.

## Returns

An instance of *ModelDeployment* class.

## Return type

*ModelDeployment*

**upload\_artifact** (*uri: str, auth: Optional[Dict] = None, force\_overwrite: Optional[bool] = False*) → None

Uploads model artifacts to the provided *uri*. The artifacts will be zipped before uploading.

## Parameters

- **uri** (*str*) – The destination location for the model artifacts, which can be a local path or OCI object storage URI. Examples: `>>> upload_artifact(uri="/some/local/folder/") >>> upload_artifact(uri="oci://bucket@namespace/prefix/")`
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys*

or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate `IdentityClient` object.

- **force\_overwrite** (*bool*) – Overwrite `target_dir` if exists.

**verify**(*data: Optional[Any] = None, reload\_artifacts: bool = True, auto\_serialize\_data: bool = False, \*\*kwargs*) → `Dict[str, Any]`

Test if deployment works in local environment.

## Examples

```
>>> uri = "https://github.com/pytorch/hub/raw/master/images/dog.jpg"
>>> prediction = model.verify(image=uri)['prediction']
```

```
>>> # examples on storage options
>>> prediction = model.verify(
...     image="oci://<bucket>@<tenancy>/myimage.png",
...     storage_options=ads.auth.default_signer()
... )['prediction']
```

## Parameters

- **data** (*Any*) – Data used to test if deployment works in local environment.
- **reload\_artifacts** (*bool. Defaults to True.*) – Whether to reload artifacts or not.
- **is\_json\_payload** (*bool*) – Defaults to `False`. Indicate whether to send data with a *application/json* MIME TYPE.
- **auto\_serialize\_data** (*bool.*) – Whether to auto serialize input data. Defaults to `False` for `GenericModel`, and `True` for other frameworks. *data* required to be json serializable if `auto_serialize_data=False`. if `auto_serialize_data` set to `True`, data will be serialized before sending to model deployment endpoint.
- **kwargs** – `content_type`: `str`, used to indicate the media type of the resource. `image`: `PIL.Image` Object or `uri` for the image.

A valid string path for image file can be local path, `http(s)`, `oci`, `s3`, `gs`.

### storage\_options: dict

Passed to `fsspec.open` for a particular storage connection. Please see `fsspec` (<https://filesystem-spec.readthedocs.io/en/latest/api.html#fsspec.open>) for more details.

## Returns

A dictionary which contains prediction results.

## Return type

`Dict`

```
class ads.model.HuggingFacePipelineModel(estimator: Callable, artifact_dir: Optional[str] = None,
                                         properties: Optional[ModelProperties] = None, auth: Dict =
                                         None, model_save_serializer: Optional[SERDE] =
                                         'huggingface', model_input_serializer: Optional[SERDE] =
                                         'cloudpickle', **kwargs)
```

Bases: `FrameworkSpecificModel`

`HuggingFacePipelineModel` class for estimators from `HuggingFace` framework.

**algorithm**

The algorithm of the model.

**Type**

str

**artifact\_dir**

Artifact directory to store the files needed for deployment.

**Type**

str

**auth**

Default authentication is set using the *ads.set\_auth* API. To override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create an authentication signer to instantiate an IdentityClient object.

**Type**

Dict

**estimator**

A trained HuggingFace Pipeline using transformers.

**Type**

Callable

**framework**

“transformers”, the framework name of the model.

**Type**

str

**hyperparameter**

The hyperparameters of the estimator.

**Type**

dict

**metadata\_custom**

The model custom metadata.

**Type**

*ModelCustomMetadata*

**metadata\_provenance**

The model provenance metadata.

**Type**

*ModelProvenanceMetadata*

**metadata\_taxonomy**

The model taxonomy metadata.

**Type**

*ModelTaxonomyMetadata*

**model\_artifact**

This is built by calling prepare.

**Type**

*ModelArtifact*

**model\_deployment**

A ModelDeployment instance.

**Type**

*ModelDeployment*

**model\_file\_name**

Name of the serialized model.

**Type**

str

**model\_id**

The model ID.

**Type**

str

**properties**

ModelProperties object required to save and deploy model.

**Type**

*ModelProperties*

**runtime\_info**

A RuntimeInfo instance.

**Type**

*RuntimeInfo*

**schema\_input**

Schema describes the structure of the input data.

**Type**

*Schema*

**schema\_output**

Schema describes the structure of the output data.

**Type**

*Schema*

**serialize**

Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under artifact\_dir and update the score.py manually.

**Type**

bool

**version**

The framework version of the model.

**Type**

str

**delete\_deployment(...)**

Deletes the current model deployment.

**deploy(..., \\*\*kwargs)**

Deploys a model.



**from\_model\_artifact**(uri, model\_file\_name, artifact\_dir, ..., *\\*\*kwargs*)

Loads model from the specified folder, or zip/tar archive.

**from\_model\_catalog**(model\_id, model\_file\_name, artifact\_dir, ..., *\\*\*kwargs*)

Loads model from model catalog.

**introspect**(...)

Runs model introspection.

**predict**(data, ...)

Returns prediction of input data run against the model deployment endpoint.

**prepare**(..., *\\*\*kwargs*)

Prepare and save the score.py, serialized model and runtime.yaml file.

**reload**(...)

Reloads the model artifact files: *score.py* and the *runtime.yaml*.

**save**(..., *\\*\*kwargs*)

Saves model artifacts to the model catalog.

**summary\_status**(...)

Gets a summary table of the current status.

**verify**(data, ...)

Tests if deployment works in local environment.

## Examples

```
>>> # Image Classification
>>> from transformers import pipeline
>>> import tempfile
>>> import PIL.Image
>>> import ads
>>> import requests
>>> import cloudpickle
>>> ## Download image data
>>> image_url = "https://huggingface.co/datasets/huggingface/documentation-images/
↳ resolve/main/pipeline-cat-chonk.jpeg"
>>> image = PIL.Image.open(requests.get(image_url, stream=True).raw)
>>> image_bytes = cloudpickle.dumps(image) # convert image to bytes
>>> ## Download a pretrained model
>>> vision_classifier = pipeline(model="google/vit-base-patch16-224")
>>> preds = vision_classifier(images=image)
>>> ## Initiate a HuggingFacePipelineModel instance
>>> vision_model = HuggingFacePipelineModel(vision_classifier, artifact_
↳ dir=tempfile.mkdtemp())
>>> ## Prepare
>>> vision_model.prepare(inference_conda_env="pytorch110_p38_cpu_v1", force_
↳ overwrite=True)
>>> ## Verify
>>> vision_model.verify(image)
>>> vision_model.verify(image_bytes)
>>> ## Save
```

(continues on next page)

(continued from previous page)

```

>>> vision_model.save()
>>> ## Deploy
>>> log_group_id = "<log_group_id>"
>>> log_id = "<log_id>"
>>> vision_model.deploy(deployment_bandwidth_mbps=1000,
...                     wait_for_completion=False,
...                     deployment_log_group_id = log_group_id,
...                     deployment_access_log_id = log_id,
...                     deployment_predict_log_id = log_id)
>>> ## Predict from endpoint
>>> vision_model.predict(image)
>>> vision_model.predict(image_bytes)
>>> ### Invoke the model
>>> auth = ads.common.auth.default_signer()['signer']
>>> endpoint = vision_model.model_deployment.url + "/predict"
>>> headers = {"Content-Type": "application/octet-stream"}
>>> requests.post(endpoint, data=image_bytes, auth=auth, headers=headers).json()

```

## Examples

```

>>> # Image Segmentation
>>> from transformers import pipeline
>>> import tempfile
>>> import PIL.Image
>>> import ads
>>> import requests
>>> import cloudpickle
>>> ## Download image data
>>> image_url = "https://huggingface.co/datasets/huggingface/documentation-images/
↳ resolve/main/pipeline-cat-chonk.jpeg"
>>> image = PIL.Image.open(requests.get(image_url, stream=True).raw)
>>> image_bytes = cloudpickle.dumps(image) # convert image to bytes
>>> ## Download pretrained model
>>> segmenter = pipeline(task="image-segmentation")
>>> preds = segmenter(image)
>>> ## Initiate a HuggingFacePipelineModel instance
>>> segmentation_model = HuggingFacePipelineModel(segmenter, artifact_dir=tempfile.
↳ mkdtemp())
>>> ## Prepare
>>> conda = "oci://bucket@namespace/path/to/conda/pack"
>>> python_version = "3.8"
>>> segmentation_model.prepare(inference_conda_env=conda, inference_python_version=
↳ python_version, force_overwrite=True)
>>> ## Verify
>>> segmentation_model.verify(data=image)
>>> segmentation_model.verify(data=image_bytes)
>>> ## Save
>>> segmentation_model.save()
>>> log_group_id = "<log_group_id>"
>>> log_id = "<log_id>"

```

(continues on next page)

(continued from previous page)

```

>>> ## Deploy
>>> segmentation_model.deploy(deployment_bandwidth_mbps=1000,
                             wait_for_completion=False,
                             deployment_log_group_id = log_group_id,
                             deployment_access_log_id = log_id,
                             deployment_predict_log_id = log_id)
>>> ## Predict from endpoint
>>> segmentation_model.predict(image)
>>> segmentation_model.predict(image_bytes)
>>> ## Invoke the model
>>> auth = ads.common.auth.default_signer()['signer']

>>> endpoint = segmentation_model.model_deployment.url + "/predict"
>>> headers = {"Content-Type": "application/octet-stream"}
>>> requests.post(endpoint, data=image_bytes, auth=auth, headers=headers).json()

```

## Examples

```

>>> # Zero Shot Image Classification
>>> from transformers import pipeline
>>> import tempfile
>>> import PIL.Image
>>> import ads
>>> import requests
>>> import cloudpickle
>>> ## Download the image data
>>> image_url = "https://huggingface.co/datasets/Narsil/image_dummy/raw/main/
↳parrots.png"
>>> image = PIL.Image.open(requests.get(image_url, stream=True).raw)
>>> image_bytes = cloudpickle.dumps(image)
>>> ## Download a pretrained model
>>> classifier = pipeline(model="openai/clip-vit-large-patch14")
>>> classifier(
    images=image,
    candidate_labels=["animals", "humans", "landscape"],
)
>>> ## Initiate a HuggingFacePipelineModel instance
>>> zero_shot_image_classification_model = HuggingFacePipelineModel(classifier,
↳artifact_dir=tempfile.mkdtemp())
>>> conda = "oci://bucket@namespace/path/to/conda/pack"
>>> python_version = "3.8"
>>> ## Prepare
>>> zero_shot_image_classification_model.prepare(inference_conda_env=conda,
↳inference_python_version = python_version, force_overwrite=True)
>>> data = {"images": image, "candidate_labels": ["animals", "humans", "landscape"]}
>>> body = cloudpickle.dumps(data) # convert image to bytes
>>> ## Verify
>>> zero_shot_image_classification_model.verify(data=data)
>>> zero_shot_image_classification_model.verify(data=body)
>>> ## Save

```

(continues on next page)

(continued from previous page)

```

>>> zero_shot_image_classification_model.save()
>>> ## Deploy
>>> log_group_id = "<log_group_id>"
>>> log_id = "<log_id>"
>>> zero_shot_image_classification_model.deploy(deployment_bandwidth_mbps=1000,
        wait_for_completion=False,
        deployment_log_group_id = log_group_id,
        deployment_access_log_id = log_id,
        deployment_predict_log_id = log_id)
>>> ## Predict from endpoint
>>> zero_shot_image_classification_model.predict(image)
>>> zero_shot_image_classification_model.predict(body)
>>> ### Invoke the model
>>> auth = ads.common.auth.default_signer()['signer']
>>> endpoint = zero_shot_image_classification_model.model_deployment.url + "/predict
↪"
>>> headers = {"Content-Type": "application/octet-stream"}
>>> requests.post(endpoint, data=body, auth=auth, headers=headers).json()

```

Initiates a HuggingFacePipelineModel instance.

#### Parameters

- **estimator** (*Callable*) – HuggingFacePipeline Model
- **artifact\_dir** (*str*) – Directory for generate artifact.
- **properties** ((*ModelProperties*, *optional*). Defaults to *None*.) – ModelProperties object required to save and deploy model. For more details, check [https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model\\_properties](https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model_properties).
- **auth** ((*Dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **model\_save\_serializer** ((*SERDE* or *str*, *optional*). Defaults to *None*.) – Instance of *ads.model.SERDE*. Used for serialize/deserialize model.
- **model\_input\_serializer** ((*SERDE*, *optional*). Defaults to *None*.) – Instance of *ads.model.SERDE*. Used for serialize/deserialize data.

#### Returns

HuggingFacePipelineModel instance.

#### Return type

*HuggingFacePipelineModel*

## Examples

```
>>> from transformers import pipeline
>>> import tempfile
>>> import PIL.Image
>>> import ads
>>> import requests
>>> import cloudpickle
>>> ## download the image
>>> image_url = "https://huggingface.co/datasets/Narsil/image_dummy/raw/main/
↳parrots.png"
>>> image = PIL.Image.open(requests.get(image_url, stream=True).raw)
>>> image_bytes = cloudpickle.dumps(image)
>>> ## download the pretrained model
>>> classifier = pipeline(model="openai/clip-vit-large-patch14")
>>> classifier(
    images=image,
    candidate_labels=["animals", "humans", "landscape"],
)
>>> ## Initiate a HuggingFacePipelineModel instance
>>> zero_shot_image_classification_model = HuggingFacePipelineModel(classifier,
↳artifact_dir=tempfile.mkdtemp())
>>> ## Prepare a model artifact
>>> conda = "oci://bucket@namespace/path/to/conda/pack"
>>> python_version = "3.8"
>>> zero_shot_image_classification_model.prepare(inference_conda_env=conda,
↳inference_python_version = python_version, force_overwrite=True)
>>> ## Test data
>>> data = {"images": image, "candidate_labels": ["animals", "humans", "landscape"]}
>>> body = cloudpickle.dumps(data) # convert image to bytes
>>> ## Verify
>>> zero_shot_image_classification_model.verify(data=data)
>>> zero_shot_image_classification_model.verify(data=body)
>>> ## Save
>>> zero_shot_image_classification_model.save()
>>> ## Deploy
>>> log_group_id = "<log_group_id>"
>>> log_id = "<log_id>"
>>> zero_shot_image_classification_model.deploy(deployment_bandwidth_mbps=100,
    wait_for_completion=False,
    deployment_log_group_id = log_group_id,
    deployment_access_log_id = log_id,
    deployment_predict_log_id = log_id)
>>> zero_shot_image_classification_model.predict(image)
>>> zero_shot_image_classification_model.predict(body)
>>> ### Invoke the model by sending bytes
>>> auth = ads.common.auth.default_signer()['signer']
>>> endpoint = zero_shot_image_classification_model.model_deployment.url + "/predict
↳"
>>> headers = {"Content-Type": "application/octet-stream"}
>>> requests.post(endpoint, data=body, auth=auth, headers=headers).json()
```

model\_save\_serializer\_type

alias of `HuggingFaceSerializerType`

**serialize\_model**(*as\_onnx*: bool = False, *force\_overwrite*: bool = False, *X\_sample*: Optional[Union[Dict, str, List, Image]] = None, *\*\*kwargs*) → None

Serialize and save HuggingFace model using model specific method.

#### Parameters

- **as\_onnx** ((bool, optional). Defaults to False.) – If set as True, convert into ONNX model.
- **force\_overwrite** ((bool, optional). Defaults to False.) – If set as True, overwrite serialized model if exists.
- **X\_sample** (Union[Dict, str, List, PIL.Image.Image]. Defaults to None.) – A sample of input data that will be used to generate input schema and detect onnx\_args.

#### Returns

Nothing.

#### Return type

None

```
class ads.model.LightGBMModel(estimator: Callable, artifact_dir: Optional[str] = None, properties:
    Optional[ModelProperties] = None, auth: Optional[Dict] = None,
    model_save_serializer: Optional[SERDE] = None, model_input_serializer:
    Optional[SERDE] = None, **kwargs)
```

Bases: [FrameworkSpecificModel](#)

LightGBMModel class for estimators from Lightgbm framework.

#### algorithm

The algorithm of the model.

#### Type

str

#### artifact\_dir

Artifact directory to store the files needed for deployment.

#### Type

str

#### auth

Default authentication is set using the `ads.set_auth` API. To override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create an authentication signer to instantiate an IdentityClient object.

#### Type

Dict

#### estimator

A trained lightgbm estimator/model using Lightgbm.

#### Type

Callable

#### framework

“lightgbm”, the framework name of the model.

#### Type

str

**hyperparameter**

The hyperparameters of the estimator.

**Type**

dict

**metadata\_custom**

The model custom metadata.

**Type**

*ModelCustomMetadata*

**metadata\_provenance**

The model provenance metadata.

**Type**

*ModelProvenanceMetadata*

**metadata\_taxonomy**

The model taxonomy metadata.

**Type**

*ModelTaxonomyMetadata*

**model\_artifact**

This is built by calling prepare.

**Type**

*ModelArtifact*

**model\_deployment**

A ModelDeployment instance.

**Type**

*ModelDeployment*

**model\_file\_name**

Name of the serialized model.

**Type**

str

**model\_id**

The model ID.

**Type**

str

**properties**

ModelProperties object required to save and deploy model. For more details, check [https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model\\_properties](https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model_properties).

**Type**

*ModelProperties*

**runtime\_info**

A RuntimeInfo instance.

**Type**

*RuntimeInfo*

**schema\_input**

Schema describes the structure of the input data.

**Type**

*Schema*

**schema\_output**

Schema describes the structure of the output data.

**Type**

*Schema*

**serialize**

Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under artifact\_dir and update the score.py manually.

**Type**

bool

**version**

The framework version of the model.

**Type**

str

**delete\_deployment(...)**

Deletes the current model deployment.

**deploy(..., *\*\*kwargs*)**

Deploys a model.

**from\_model\_artifact(uri, model\_file\_name, artifact\_dir, ..., *\*\*kwargs*)**

Loads model from the specified folder, or zip/tar archive.

**from\_model\_catalog(model\_id, model\_file\_name, artifact\_dir, ..., *\*\*kwargs*)**

Loads model from model catalog.

**introspect(...)**

Runs model introspection.

**predict(data, ...)**

Returns prediction of input data run against the model deployment endpoint.

**prepare(..., *\*\*kwargs*)**

Prepare and save the score.py, serialized model and runtime.yaml file.

**reload(...)**

Reloads the model artifact files: *score.py* and the *runtime.yaml*.

**save(..., *\*\*kwargs*)**

Saves model artifacts to the model catalog.

**summary\_status(...)**

Gets a summary table of the current status.

**verify(data, ...)**

Tests if deployment works in local environment.



## Examples

```
>>> import lightgbm as lgb
>>> import tempfile
>>> from sklearn.model_selection import train_test_split
>>> from sklearn.datasets import load_iris
>>> from ads.model.framework.lightgbm_model import LightGBMModel
```

```
>>> iris = load_iris()
>>> X, y = iris.data, iris.target
```

```
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)
>>> train = lgb.Dataset(X_train, label=y_train)
>>> param = {
...     'objective': 'multiclass', 'num_class': 3,
...     }
>>> lightgbm_estimator = lgb.train(param, train)
```

```
>>> lightgbm_model = LightGBMModel(estimator=lightgbm_estimator,
... artifact_dir=tempfile.mkdtemp())
```

```
>>> lightgbm_model.prepare(inference_conda_env="generalml_p37_cpu_v1", force_
↳ overwrite=True)
>>> lightgbm_model.reload()
>>> lightgbm_model.verify(X_test)
>>> lightgbm_model.save()
>>> model_deployment = lightgbm_model.deploy(wait_for_completion=False)
>>> lightgbm_model.predict(X_test)
```

Initiates a LightGBMModel instance. This class wraps the Lightgbm model as estimator. It's primary purpose is to hold the trained model and do serialization.

### Parameters

- **estimator** – any model object generated by Lightgbm framework
- **artifact\_dir** (*str*) – Directory for generate artifact.
- **properties** ((*ModelProperties*, *optional*). Defaults to *None*.) – ModelProperties object required to save and deploy model.
- **auth** ((*Dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **model\_save\_serializer** ((*SERDE* or *str*, *optional*). Defaults to *None*.) – Instance of *ads.model.SERDE*. Used for serialize/deserialize model.
- **model\_input\_serializer** ((*SERDE*, *optional*). Defaults to *None*.) – Instance of *ads.model.SERDE*. Used for serialize/deserialize data.

### Returns

LightGBMModel instance.

### Return type

*LightGBMModel*

**Raises**

**TypeError** – If the input model is not a Lightgbm model or not supported for serialization.:

**Examples**

```
>>> import lightgbm as lgb
>>> import tempfile
>>> from sklearn.model_selection import train_test_split
>>> from sklearn.datasets import load_iris
>>> from ads.model.framework.lightgbm_model import LightGBMModel
>>> iris = load_iris()
>>> X, y = iris.data, iris.target
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)
>>> train = lgb.Dataset(X_train, label=y_train)
>>> param = {
...     'objective': 'multiclass', 'num_class': 3,
... }
>>> lightgbm_estimator = lgb.train(param, train)
>>> lightgbm_model = LightGBMModel(estimator=lightgbm_estimator, artifact_
↳dir=tempfile.mkdtemp())
>>> lightgbm_model.prepare(inference_conda_env="generalml_p37_cpu_v1")
>>> lightgbm_model.verify(X_test)
>>> lightgbm_model.save()
>>> model_deployment = lightgbm_model.deploy()
>>> lightgbm_model.predict(X_test)
>>> lightgbm_model.delete_deployment()
```

**model\_save\_serializer\_type**

alias of LightGBMModelSerializerType

**serialize\_model**(*as\_onnx*: bool = False, *initial\_types*: Optional[List[Tuple]] = None, *force\_overwrite*: bool = False, *X\_sample*: Optional[Union[Dict, str, List, Tuple, ndarray, Series, DataFrame]] = None, *\*\*kwargs*: Dict)

Serialize and save Lightgbm model.

**Parameters**

- **as\_onnx** ((boolean, optional). Defaults to False.) – If set as True, provide *initial\_types* or *X\_sample* to convert into ONNX.
- **initial\_types** ((List[Tuple], optional). Defaults to None.) – Each element is a tuple of a variable name and a type.
- **force\_overwrite** ((boolean, optional). Defaults to False.) – If set as True, overwrite serialized model if exists.
- **X\_sample** (Union[Dict, str, List, np.ndarray, pd.core.series.Series, pd.core.frame.DataFrame,]). Defaults to None.) – Contains model inputs such that `model(X_sample)` is a valid invocation of the model. Used to generate *initial\_types*.

**Returns**

Nothing.

**Return type**

None

```
class ads.model.ModelDeployer(config: Optional[dict] = None, ds_client: Optional[DataScienceClient] = None)
```

Bases: object

ModelDeployer is the class responsible for deploying the ModelDeployment

#### **config**

ADS auth dictionary for OCI authentication.

#### **Type**

dict

#### **ds\_client**

data science client

#### **Type**

DataScienceClient

#### **ds\_composite\_client**

composite data science client

#### **Type**

DataScienceCompositeClient

#### **deploy**(*model\_deployment\_details, \\*\*kwargs*)

Deploy the model specified by *model\_deployment\_details*.

#### **get\_model\_deployment**(*model\_deployment\_id: str*)

Get the ModelDeployment specified by *model\_deployment\_id*.

#### **get\_model\_deployment\_state**(*model\_deployment\_id*)

Get the state of the current deployment specified by id.

#### **delete**(*model\_deployment\_id, \\*\*kwargs*)

Remove the model deployment specified by the id or Model Deployment Object

#### **list\_deployments**(*status*)

lists the model deployments associated with current compartment and data science client

#### **show\_deployments**(*status*)

shows the deployments filtered by *status* in a Dataframe

Initializes model deployer.

#### **Parameters**

**config** (*dict, optional*) –

#### **ADS auth dictionary for OCI authentication.**

This can be generated by calling `ads.common.auth.api_keys()` or `ads.common.auth.resource_principal()`. If this is `None`, `ads.common.default_signer(client_kwargs)` will be used.

**ds\_client:** `oci.data_science.data_science_client.DataScienceClient`

The Oracle DataScience client.

**delete**(*model\_deployment\_id, wait\_for\_completion: bool = True, max\_wait\_time: int = 1200, poll\_interval: int = 10*) → [ModelDeployment](#)

Deletes the model deployment specified by OCID.

#### **Parameters**

- **model\_deployment\_id** (*str*) – Model deployment OCID.
- **wait\_for\_completion** (*bool*) – Wait for deletion to complete. Defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 600). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 60).

**Return type**

A ModelDeployment instance that was deleted

**deploy**(*properties: Optional[Union[ModelDeploymentProperties, Dict]] = None, wait\_for\_completion: bool = True, max\_wait\_time: int = 1200, poll\_interval: int = 10, \*\*kwargs*) → *ModelDeployment*

Deploys a model.

**Parameters**

- **properties** (*ModelDeploymentProperties* or *dict*) – Properties to deploy the model. Properties can be None when kwargs are used for specifying properties.
- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to complete before proceeding. Optional, defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds. Optional, defaults to 1200. Negative value implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds. Optional, defaults to 30.
- **kwargs** – Keyword arguments for initializing ModelDeploymentProperties. See ModelDeploymentProperties() for details.

**Returns**

A ModelDeployment instance.

**Return type**

*ModelDeployment*

**deploy\_from\_model\_uri**(*model\_uri: str, properties: Optional[Union[ModelDeploymentProperties, Dict]] = None, wait\_for\_completion: bool = True, max\_wait\_time: int = 1200, poll\_interval: int = 10, \*\*kwargs*) → *ModelDeployment*

Deploys a model.

**Parameters**

- **model\_uri** (*str*) – uri to model files, can be local or in cloud storage
- **properties** (*ModelDeploymentProperties* or *dict*) – Properties to deploy the model. Properties can be None when kwargs are used for specifying properties.
- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to complete before proceeding. Defaults to True
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 30).
- **kwargs** – Keyword arguments for initializing ModelDeploymentProperties

**Returns**

A ModelDeployment instance

**Return type**

*ModelDeployment*

**get\_model\_deployment**(*model\_deployment\_id: str*) → *ModelDeployment*

Gets a ModelDeployment by OCID.

**Parameters**

**model\_deployment\_id** (*str*) – Model deployment OCID

**Returns**

A ModelDeployment instance

**Return type**

*ModelDeployment*

**get\_model\_deployment\_state**(*model\_deployment\_id: str*) → *State*

Gets the state of a deployment specified by OCID

**Parameters**

**model\_deployment\_id** (*str*) – Model deployment OCID

**Returns**

The state of the deployment

**Return type**

*str*

**list\_deployments**(*status=None, compartment\_id=None, \*\*kwargs*) → *list*

Lists the model deployments associated with current compartment and data science client

**Parameters**

- **status** (*str*) – Status of deployment. Defaults to None.
- **compartment\_id** (*str*) – Target compartment to list deployments from. Defaults to the compartment set in the environment variable “NB\_SESSION\_COMPARTMENT\_OCID”. If “NB\_SESSION\_COMPARTMENT\_OCID” is not set, the root compartment ID will be used. An ValueError will be raised if root compartment ID cannot be determined.
- **kwargs** – The values are passed to `oci.data_science.DataScienceClient.list_model_deployments`.

**Returns**

A list of ModelDeployment objects.

**Return type**

*list*

**Raises**

**ValueError** – If `compartment_id` is not specified and cannot be determined from the environment.

**show\_deployments**(*status=None, compartment\_id=None*) → *DataFrame*

**Returns the model deployments associated with current compartment and data science client**  
as a Dataframe that can be easily visualized

**Parameters**

- **status** (*str*) – Status of deployment. Defaults to None.
- **compartment\_id** (*str*) – Target compartment to list deployments from. Defaults to the compartment set in the environment variable “NB\_SESSION\_COMPARTMENT\_OCID”. If “NB\_SESSION\_COMPARTMENT\_OCID” is not set, the root compartment ID will be used. An ValueError will be raised if root compartment ID cannot be determined.

**Returns**

pandas Dataframe containing information about the ModelDeployments

**Return type**

DataFrame

**Raises**

**ValueError** – If compartment\_id is not specified and cannot be determined from the environment.

```
update(model_deployment_id: str, properties: Optional[ModelDeploymentProperties] = None,  
        wait_for_completion: bool = True, max_wait_time: int = 1200, poll_interval: int = 10, **kwargs) →  
        ModelDeployment
```

Updates an existing model deployment.

**Parameters**

- **model\_deployment\_id** (str) – Model deployment OCID.
- **properties** (ModelDeploymentProperties) – An instance of ModelDeploymentProperties or dict to initialize the ModelDeploymentProperties. Defaults to None.
- **wait\_for\_completion** (bool) – Flag set for whether to wait for deployment to complete before proceeding. Defaults to True.
- **max\_wait\_time** (int) – Maximum amount of time to wait in seconds (Defaults to 1200).
- **poll\_interval** (int) – Poll interval in seconds (Defaults to 30).
- **kwargs** – Keyword arguments for initializing ModelDeploymentProperties.

**Returns**

A ModelDeployment instance

**Return type**

ModelDeployment

```
class ads.model.ModelDeployment(properties: Optional[Union[ModelDeploymentProperties, Dict]] = None,  
                                config: Optional[Dict] = None, model_deployment_id: Optional[str] =  
                                None, model_deployment_url: str = "", spec: Optional[Dict] = None,  
                                **kwargs)
```

Bases: [Builder](#)

A class used to represent a Model Deployment.

**config**

Deployment configuration parameters

**Type**

(dict)

**properties**

ModelDeploymentProperties object

**Type**

(ModelDeploymentProperties)

**workflow\_state\_progress**

Workflow request id

**Type**

(str)

**workflow\_steps**

The number of steps in the workflow

**Type**

(int)

**dsc\_model\_deployment**

The OCIDataScienceModelDeployment instance.

**Type**

(OCIDataScienceModelDeployment)

**state**

Returns the deployment state of the current Model Deployment object

**Type**

(*State*)

**created\_by**

The user that creates the model deployment

**Type**

(str)

**lifecycle\_state**

Model deployment lifecycle state

**Type**

(str)

**lifecycle\_details**

Model deployment lifecycle details

**Type**

(str)

**time\_created**

The time when the model deployment is created

**Type**

(datetime)

**display\_name**

Model deployment display name

**Type**

(str)

**description**

Model deployment description

**Type**

(str)

**freeform\_tags**

Model deployment freeform tags

**Type**

(dict)

**defined\_tags**

Model deployment defined tags

**Type**

(dict)

**runtime**

Model deployment runtime

**Type**

(ModelDeploymentRuntime)

**infrastructure**

Model deployment infrastructure

**Type**

(ModelDeploymentInfrastructure)

**deploy**(*wait\_for\_completion*, *\*\*kwargs*)

Deploy the current Model Deployment object

**delete**(*wait\_for\_completion*, *\*\*kwargs*)

Deletes the current Model Deployment object

**update**(*wait\_for\_completion*, *\*\*kwargs*)

Updates a model deployment

**activate**(*wait\_for\_completion*, *max\_wait\_time*, *poll\_interval*)

Activates a model deployment

**deactivate**(*wait\_for\_completion*, *max\_wait\_time*, *poll\_interval*)

Deactivates a model deployment

**list**(*status*, *compartment\_id*, *project\_id*, *\*\*kwargs*)

List model deployment within given compartment and project.

**with\_display\_name**(*display\_name*)

Sets model deployment display name

**with\_description**(*description*)

Sets model deployment description

**with\_freeform\_tags**(*freeform\_tags*)

Sets model deployment freeform tags

**with\_defined\_tags**(*defined\_tags*)

Sets model deployment defined tags

**with\_runtime**(*self*, *runtime*)

Sets model deployment runtime

**with\_infrastructure**(*self*, *infrastructure*)

Sets model deployment infrastructure

**from\_dict**(*obj\_dict*)

Deserializes model deployment instance from dict

**from\_id**(*id*)

Loads model deployment instance from ocid



**sync()**

Updates the model deployment instance from backend

**Examples**

```
Build model deployment from builder apis: >>> ds_model_deployment = (ModelDeployment() ...
.with_display_name("TestModelDeployment") ... .with_description("Testing the test model deploy-
ment") ... .with_freeform_tags(tag1="val1", tag2="val2") ... .with_infrastructure( ... (ModelDeploy-
mentInfrastructure() ... .with_project_id(<project_id>) ... .with_compartment_id(<compartment_id>)
... .with_shape_name("VM.Standard.E4.Flex") ... .with_shape_config_details( ... ocpus=1, ... mem-
ory_in_gbs=16 ... ) ... .with_replica(1) ... .with_bandwidth_mbps(10) ... .with_web_concurrency(10)
... .with_access_log( ... log_group_id=<log_group_id>, ... log_id=<log_id> ... ) ...
.with_predict_log( ... log_group_id=<log_group_id>, ... log_id=<log_id> ... )) ... )
... .with_runtime( ... (ModelDeploymentContainerRuntime() ... .with_image(<image>) ...
.with_image_digest(<image_digest>) ... .with_entrypoint(<entrypoint>) ... .with_server_port(<server_port>)
... .with_health_check_port(<health_check_port>) ... .with_env({"key":"value"})
... .with_deployment_mode("HTTPS_ONLY") ... .with_model_uri(<model_uri>)) ...
) ... ) >>> ds_model_deployment.deploy() >>> ds_model_deployment.status >>>
ds_model_deployment.with_display_name("new name").update() >>> ds_model_deployment.deactivate()
>>> ds_model_deployment.sync() >>> ds_model_deployment.list(status="ACTIVE") >>>
ds_model_deployment.delete()
```

```
Build model deployment from yaml >>> ds_model_deployment = ModelDeploy-
ment.from_yaml(uri=<path_to_yaml>)
```

Initializes a ModelDeployment object.

**Parameters**

- **properties** ((*Union[ModelDeploymentProperties, Dict]*, *optional*)). *Defaults to None.* – Object containing deployment properties. The properties can be *None* when *kwargs* are used for specifying properties.
- **config** ((*Dict*, *optional*)). *Defaults to None.* – ADS auth dictionary for OCI authentication. This can be generated by calling *ads.common.auth.api\_keys()* or *ads.common.auth.resource\_principal()*. If this is *None* then the *ads.common.default\_signer(client\_kwargs)* will be used.
- **model\_deployment\_id** ((*str*, *optional*)). *Defaults to None.* – Model deployment OCID.
- **model\_deployment\_url** ((*str*, *optional*)). *Defaults to empty string.* – Model deployment url.
- **spec** ((*dict*, *optional*)). *Defaults to None.* – Model deployment spec.
- **kwargs** – Keyword arguments for initializing *ModelDeploymentProperties* or *ModelDeployment*.

```
CONST_CREATED_BY = 'createdBy'
```

```
CONST_DEFINED_TAG = 'definedTags'
```

```
CONST_DESCRIPTION = 'description'
```

```
CONST_DISPLAY_NAME = 'displayName'
```

```
CONST_FREEFORM_TAG = 'freeformTags'
```

```
CONST_ID = 'id'

CONST_INFRASTRUCTURE = 'infrastructure'

CONST_LIFECYCLE_DETAILS = 'lifecycleDetails'

CONST_LIFECYCLE_STATE = 'lifecycleState'

CONST_MODEL_DEPLOYMENT_URL = 'modelDeploymentUrl'

CONST_RUNTIME = 'runtime'

CONST_TIME_CREATED = 'timeCreated'
```

**property** `access_log`: *OCILog*

Gets the model deployment access logs object.

**Returns**

The OCILog object containing the access logs.

**Return type**

*OCILog*

**activate**(*wait\_for\_completion: bool = True, max\_wait\_time: int = 1200, poll\_interval: int = 10*) → *ModelDeployment*

Activates a model deployment

**Parameters**

- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to be activated before proceeding. Defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).

**Returns**

The instance of ModelDeployment.

**Return type**

*ModelDeployment*

```
attribute_map = {'createdBy': 'created_by', 'definedTags': 'defined_tags',
'description': 'description', 'displayName': 'display_name', 'freeformTags':
'freeform_tags', 'id': 'id', 'infrastructure': 'infrastructure', 'lifecycleDetails':
'lifecycle_details', 'lifecycleState': 'lifecycle_state', 'modelDeploymentUrl':
'model_deployment_url', 'runtime': 'runtime', 'timeCreated': 'time_created'}
```

**property** `created_by`: `str`

The user that creates the model deployment.

**Returns**

The user that creates the model deployment.

**Return type**

`str`

**deactivate**(*wait\_for\_completion: bool = True, max\_wait\_time: int = 1200, poll\_interval: int = 10*) → *ModelDeployment*

Deactivates a model deployment

**Parameters**

- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to be deactivated before proceeding. Defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).

**Returns**

The instance of `ModelDeployment`.

**Return type**

*ModelDeployment*

**property defined\_tags: Dict**

Model deployment defined tags.

**Returns**

Model deployment defined tags.

**Return type**

Dict

**delete**(*wait\_for\_completion: bool = True, max\_wait\_time: int = 1200, poll\_interval: int = 10*)

Deletes the `ModelDeployment`

**Parameters**

- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to be deleted before proceeding. Defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).

**Returns**

The instance of `ModelDeployment`.

**Return type**

*ModelDeployment*

**deploy**(*wait\_for\_completion: bool = True, max\_wait\_time: int = 1200, poll\_interval: int = 10*)

Deploys the current `ModelDeployment` object

**Parameters**

- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to be deployed before proceeding. Defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).

**Returns**

The instance of `ModelDeployment`.

**Return type**

*ModelDeployment*

**Raises**

*ModelDeploymentFailedError* – If model deployment fails to deploy

**property description: str**

Model deployment description.

**Returns**

Model deployment description.

**Return type**

str

**property display\_name: str**

Model deployment display name.

**Returns**

Model deployment display name.

**Return type**

str

**property freeform\_tags: Dict**

Model deployment freeform tags.

**Returns**

Model deployment freeform tags.

**Return type**

Dict

**classmethod from\_dict(obj\_dict: Dict) → ModelDeployment**

Loads model deployment instance from a dictionary of configurations.

**Parameters**

**obj\_dict** (*Dict*) – A dictionary of configurations.

**Returns**

The model deployment instance.

**Return type**

*ModelDeployment*

**classmethod from\_id(id: str) → ModelDeployment**

Loads the model deployment instance from ocid.

**Parameters**

**id** (*str*) – The ocid of model deployment.

**Returns**

The ModelDeployment instance (self).

**Return type**

*ModelDeployment*

**property infrastructure: ModelDeploymentInfrastructure**

Model deployment infrastructure.

**Returns**

Model deployment infrastructure.

**Return type**

ModelDeploymentInfrastructure

**initialize\_spec\_attributes** = ['display\_name', 'description', 'freeform\_tags',  
'defined\_tags', 'infrastructure', 'runtime']

**property kind: str**

The kind of the object as showing in YAML.

**Returns**

deployment

**Return type**

str

**property lifecycle\_details: str**

Model deployment lifecycle details.

**Returns**

Model deployment lifecycle details.

**Return type**

str

**property lifecycle\_state: str**

Model deployment lifecycle state.

**Returns**

Model deployment lifecycle state.

**Return type**

str

**classmethod list**(*status: Optional[str] = None, compartment\_id: Optional[str] = None, project\_id: Optional[str] = None, \*\*kwargs*) → List[[ModelDeployment](#)]

Lists the model deployments associated with current compartment id and status

**Parameters**

- **status** (*str*) – Status of deployment. Defaults to None. Allowed values: *ACTIVE*, *CREATING*, *DELETED*, *DELETING*, *FAILED*, *INACTIVE* and *UPDATING*.
- **compartment\_id** (*str*) – Target compartment to list deployments from. Defaults to the compartment set in the environment variable “NB\_SESSION\_COMPARTMENT\_OCID”. If “NB\_SESSION\_COMPARTMENT\_OCID” is not set, the root compartment ID will be used. An ValueError will be raised if root compartment ID cannot be determined.
- **project\_id** (*str*) – Target project to list deployments from. Defaults to the project id in the environment variable “PROJECT\_OCID”.
- **kwargs** – The values are passed to `oci.data_science.DataScienceClient.list_model_deployments`.

**Returns**

A list of ModelDeployment objects.

**Return type**

list

**classmethod list\_df**(*status: Optional[str] = None, compartment\_id: Optional[str] = None, project\_id: Optional[str] = None*) → DataFrame

Returns the model deployments associated with current compartment and status as a Dataframe that can be easily visualized

**Parameters**

- **status** (*str*) – Status of deployment. Defaults to None. Allowed values: *ACTIVE*, *CREATING*, *DELETED*, *DELETING*, *FAILED*, *INACTIVE* and *UPDATING*.

- **compartment\_id** (*str*) – Target compartment to list deployments from. Defaults to the compartment set in the environment variable “NB\_SESSION\_COMPARTMENT\_OCID”. If “NB\_SESSION\_COMPARTMENT\_OCID” is not set, the root compartment ID will be used. An ValueError will be raised if root compartment ID cannot be determined.
- **project\_id** (*str*) – Target project to list deployments from. Defaults to the project id in the environment variable “PROJECT\_OCID”.

**Returns**

pandas Dataframe containing information about the ModelDeployments

**Return type**

DataFrame

**logs**(*log\_type: Optional[str] = None*) → *ConsolidatedLog*

Gets the access or predict logs.

**Parameters**

**log\_type** ((*str*, *optional*)). Defaults to *None*.) – The log type. Can be “access”, “predict” or *None*.

**Returns**

The ConsolidatedLog object containing the logs.

**Return type**

*ConsolidatedLog*

**property model\_deployment\_id: str**

The model deployment ocid.

**Returns**

The model deployment ocid.

**Return type**

str

**model\_input\_serializer** = <ads.model.serde.model\_input.JsonModelInputSERDE object>

**predict**(*json\_input=None*, *data: ~typing.Any = None*, *serializer: ads.model.ModelInputSerializer = <ads.model.serde.model\_input.JsonModelInputSERDE object>*, *auto\_serialize\_data: bool = False*, *\*\*kwargs*) → dict

Returns prediction of input data run against the model deployment endpoint.

**Examples**

```
>>> import numpy as np
>>> from ads.model import ModelInputSerializer
>>> class MySerializer(ModelInputSerializer):
...     def serialize(self, data):
...         serialized_data = 1
...         return serialized_data
>>> model_deployment = ModelDeployment.from_id(<model_deployment_id>)
>>> prediction = model_deployment.predict(
...     data=np.array([1, 2, 3]),
...     serializer=MySerializer(),
...     auto_serialize_data=True,
... )['prediction']
```

**Parameters**

- **json\_input** (*Json serializable*) – JSON payload for the prediction.
- **data** (*Any*) – Data for the prediction.
- **serializer** (`ads.model.ModelInputSerializer`) – Defaults to `ads.model.JsonModelInputSerializer`.
- **auto\_serialize\_data** (*bool*) – Defaults to False. Indicate whether to auto serialize input data using *serializer*. If *auto\_serialize\_data=False*, *data* required to be bytes or json serializable and *json\_input* required to be json serializable. If *auto\_serialize\_data* set to True, data will be serialized before sending to model deployment endpoint.
- **kwargs** –
  - content\_type: str**  
Used to indicate the media type of the resource. By default, it will be *application/octet-stream* for bytes input and *application/json* otherwise. The content-type header will be set to this value when calling the model deployment endpoint.

**Returns**

Prediction results.

**Return type**

dict

**property predict\_log:** *OCILog*

Gets the model deployment predict logs object.

**Returns**

The OCILog object containing the predict logs.

**Return type**

*OCILog*

**property runtime:** `ModelDeploymentRuntime`

Model deployment runtime.

**Returns**

Model deployment runtime.

**Return type**

`ModelDeploymentRuntime`

**show\_logs**(*time\_start: Optional[datetime] = None, time\_end: Optional[datetime] = None, limit: int = 100, log\_type: Optional[str] = None*)

Shows deployment logs as a pandas dataframe.

**Parameters**

- **time\_start** (*((datetime.datetime, optional). Defaults to None.)*) – Starting date and time in RFC3339 format for retrieving logs. Defaults to None. Logs will be retrieved 14 days from now.
- **time\_end** (*((datetime.datetime, optional). Defaults to None.)*) – Ending date and time in RFC3339 format for retrieving logs. Defaults to None. Logs will be retrieved until now.
- **limit** (*((int, optional). Defaults to 100.)*) – The maximum number of items to return.

- **log\_type** ((*str*, optional). Defaults to *None*.) – The log type. Can be “access”, “predict” or *None*.

**Return type**

A pandas DataFrame containing logs.

**property state:** *State*

Returns the deployment state of the current Model Deployment object

**property status:** *State*

Returns the deployment state of the current Model Deployment object

**sync()** → *ModelDeployment*

Updates the model deployment instance from backend.

**Returns**

The ModelDeployment instance (self).

**Return type**

*ModelDeployment*

**property time\_created:** <module 'datetime' from  
'/home/docs/.pyenv/versions/3.7.9/lib/python3.7/datetime.py'>

The time when the model deployment is created.

**Returns**

The time when the model deployment is created.

**Return type**

datetime

**to\_dict()** → Dict

Serializes model deployment to a dictionary.

**Returns**

The model deployment serialized as a dictionary.

**Return type**

dict

**property type:** str

The type of the object as showing in YAML.

**Returns**

deployment

**Return type**

str

**update**(*properties: Optional[Union[ModelDeploymentProperties, dict]] = None*, *wait\_for\_completion: bool = True*, *max\_wait\_time: int = 1200*, *poll\_interval: int = 10*, *\*\*kwargs*)

Updates a model deployment

You can update *model\_deployment\_configuration\_details* and change *instance\_shape* and *model\_id* when the model deployment is in the *ACTIVE* lifecycle state. The *bandwidth\_mbps* or *instance\_count* can only be updated while the model deployment is in the *INACTIVE* state. Changes to the *bandwidth\_mbps* or *instance\_count* will take effect the next time the *ActivateModelDeployment* action is invoked on the model deployment resource.

**Parameters**



- **properties** (*ModelDeploymentProperties* or *dict*) – The properties for updating the deployment.
- **wait\_for\_completion** (*bool*) – Flag set for whether to wait for deployment to be updated before proceeding. Defaults to True.
- **max\_wait\_time** (*int*) – Maximum amount of time to wait in seconds (Defaults to 1200). Negative implies infinite wait time.
- **poll\_interval** (*int*) – Poll interval in seconds (Defaults to 10).
- **kwargs** – dict

**Returns**

The instance of *ModelDeployment*.

**Return type**

*ModelDeployment*

**property url:** *str*

Model deployment url.

**Returns**

Model deployment url.

**Return type**

*str*

**watch**(*log\_type: str = 'access', time\_start: <module 'datetime' from '/home/docs/.pyenv/versions/3.7.9/lib/python3.7/datetime.py'> = None, interval: int = 3, log\_filter: str = None*) → *ModelDeployment*

Streams the access and/or predict logs of model deployment.

**Parameters**

- **log\_type** (*str, optional*) – The log type. Can be *access*, *predict* or *None*. Defaults to *access*.
- **time\_start** (*datetime.datetime, optional*) – Starting time for the log query. Defaults to *None*.
- **interval** (*int, optional*) – The time interval between sending each request to pull logs from OCI logging service. Defaults to 3.
- **log\_filter** (*str, optional*) – Expression for filtering the logs. This will be the WHERE clause of the query. Defaults to *None*.

**Returns**

The instance of *ModelDeployment*.

**Return type**

*ModelDeployment*

**with\_defined\_tags**(*\*\*kwargs*) → *ModelDeployment*

Sets the defined tags of model deployment.

**Parameters**

**kwargs** – The defined tags of model deployment.

**Returns**

The *ModelDeployment* instance (self).

**Return type**

*ModelDeployment*

**with\_description**(*description: str*) → *ModelDeployment*

Sets the description of model deployment.

**Parameters**

**description** (*str*) – The description of model deployment.

**Returns**

The ModelDeployment instance (self).

**Return type**

*ModelDeployment*

**with\_display\_name**(*display\_name: str*) → *ModelDeployment*

Sets the name of model deployment.

**Parameters**

**display\_name** (*str*) – The name of model deployment.

**Returns**

The ModelDeployment instance (self).

**Return type**

*ModelDeployment*

**with\_freeform\_tags**(*\*\*kwargs*) → *ModelDeployment*

Sets the freeform tags of model deployment.

**Parameters**

**kwargs** – The freeform tags of model deployment.

**Returns**

The ModelDeployment instance (self).

**Return type**

*ModelDeployment*

**with\_infrastructure**(*infrastructure: ModelDeploymentInfrastructure*) → *ModelDeployment*

Sets the infrastructure of model deployment.

**Parameters**

**infrastructure** (*ModelDeploymentInfrastructure*) – The infrastructure of model deployment.

**Returns**

The ModelDeployment instance (self).

**Return type**

*ModelDeployment*

**with\_runtime**(*runtime: ModelDeploymentRuntime*) → *ModelDeployment*

Sets the runtime of model deployment.

**Parameters**

**runtime** (*ModelDeploymentRuntime*) – The runtime of model deployment.

**Returns**

The ModelDeployment instance (self).

**Return type**

*ModelDeployment*

```
class ads.model.ModelDeploymentProperties(model_id: Optional[str] = None, model_uri: Optional[str] =
                                         None, oci_model_deployment:
                                         Optional[Union[ModelDeployment,
                                         CreateModelDeploymentDetails,
                                         UpdateModelDeploymentDetails, Dict]] = None, config:
                                         Optional[dict] = None, **kwargs)
```

Bases: [OCIDataScienceMixin](#), [ModelDeployment](#)

Represents the details for a model deployment

#### swagger\_types

The property names and the corresponding types of OCI ModelDeployment model.

**Type**  
dict

#### model\_id

The model artifact OCID in model catalog.

**Type**  
str

#### model\_uri

uri to model files, can be local or in cloud storage.

**Type**  
str

#### with\_prop(*property\_name, value*)

Set the model deployment details *property\_name* attribute to *value*

#### with\_instance\_configuration(*config*)

Set the configuration of VM instance.

#### with\_access\_log(*log\_group\_id, log\_id*)

Config the access log with OCI logging service

#### with\_predict\_log(*log\_group\_id, log\_id*)

Config the predict log with OCI logging service

#### build()

Return an instance of [CreateModelDeploymentDetails](#) for creating the deployment.

Initialize a [ModelDeploymentProperties](#) object by specifying one of the followings:

#### Parameters

- **model\_id** ((*str, optiona*). Defaults to *None*.) – Model Artifact OCID. The *model\_id* must be specified either explicitly or as an attribute of the OCI object.
- **model\_uri** ((*str, optiona*). Defaults to *None*.) – Uri to model files, can be local or in cloud storage.
- **oci\_model\_deployment** ((*Union[[ModelDeployment](#), [CreateModelDeploymentDetails](#), [UpdateModelDeploymentDetails](#), Dict]*, *optional*). Defaults to *None*.) – An OCI model or Dict containing model deployment details. The OCI model can be an instance of either [ModelDeployment](#), [CreateModelDeploymentDetails](#) or [UpdateModelConfigurationDetails](#).

- **config** ((Dict, optional). Defaults to None.) – ADS auth dictionary for OCI authentication. This can be generated by calling `ads.common.auth.api_keys()` or `ads.common.auth.resource_principal()`. If this is None, `ads.common.default_signer(client_kwargs)` will be used.
- **kwargs** – Users can also initialize the object by using keyword arguments. The following keyword arguments are supported by `oci.data_science.models.data_science_models.ModelDeployment`:
  - *display\_name*,
  - *description*,
  - *project\_id*,
  - *compartment\_id*,
  - *model\_deployment\_configuration\_details*,
  - *category\_log\_details*,
  - *freeform\_tags*,
  - *defined\_tags*.

If *display\_name* is not specified, a randomly generated easy to remember name will be generated, like 'strange-spider-2022-08-17-23:55.02'.

`ModelDeploymentProperties` also supports the following additional keyword arguments:

- *instance\_shape*,
- *instance\_count*,
- *bandwidth\_mbps*,
- *access\_log\_group\_id*,
- *access\_log\_id*,
- *predict\_log\_group\_id*,
- *predict\_log\_id*,
- *memory\_in\_gbs*,
- *ocpus*.

These additional arguments will be saved into appropriate properties in the OCI model.

#### **Raises**

**ValueError** – *model\_id* is None AND not specified in `oci_model_deployment.model_deployment_configuration_details.model_configuration_details`.

**build()** → `CreateModelDeploymentDetails`

Converts the deployment properties to OCI `CreateModelDeploymentDetails` object. Converts a model URI into a model OCID if user passed in a URI.

#### **Returns**

A `CreateModelDeploymentDetails` instance ready for OCI API.

#### **Return type**

`CreateModelDeploymentDetails`

```
sub_properties = ['instance_shape', 'instance_count', 'bandwidth_mbps',
                 'access_log_group_id', 'access_log_id', 'predict_log_group_id', 'predict_log_id',
                 'memory_in_gbs', 'ocpus']
```

**to\_oci\_model**(*oci\_model*)

Convert properties into an OCI data model

**Parameters**

**oci\_model** (*class*) – The class of OCI data model, e.g.,  
oci.data\_science\_models.CreateModelDeploymentDetails

**to\_update\_deployment**() → UpdateModelDeploymentDetails

Converts the deployment properties to OCI UpdateModelDeploymentDetails object.

**Returns**

An UpdateModelDeploymentDetails instance ready for OCI API.

**Return type**

CreateModelDeploymentDetails

**with\_access\_log**(*log\_group\_id: str, log\_id: str*)

Adds access log config

**Parameters**

- **group\_id** (*str*) – Log group ID of OCI logging service
- **log\_id** (*str*) – Log ID of OCI logging service

**Returns**

self

**Return type**

*ModelDeploymentProperties*

**with\_category\_log**(*log\_type: str, group\_id: str, log\_id: str*)

Adds category log configuration

**Parameters**

- **log\_type** (*str*) – The type of logging to be configured. Must be “access” or “predict”
- **group\_id** (*str*) – Log group ID of OCI logging service
- **log\_id** (*str*) – Log ID of OCI logging service

**Returns**

self

**Return type**

*ModelDeploymentProperties*

**Raises**

**ValueError** – When log\_type is invalid

**with\_instance\_configuration**(*config*)

with\_instance\_configuration creates a ModelDeploymentDetails object with a specific config

**Parameters**

**config** (*dict*) – dictionary containing instance configuration about the deployment. The following keys are supported:

- instance\_shape: str,

- `instance_count`: int,
- `bandwidth_mbps`: int,
- `memory_in_gbs`: float,
- `ocpus`: float

The `instance_shape` and `instance_count` are required when creating a new deployment. They are optional when updating an existing deployment.

**Returns**

`self`

**Return type**

*ModelDeploymentProperties*

**with\_logging\_configuration**(*access\_log\_group\_id*: str, *access\_log\_id*: str, *predict\_log\_group\_id*: Optional[str] = None, *predict\_log\_id*: Optional[str] = None)

Adds OCI logging configurations for OCI logging service

**Parameters**

- **access\_log\_group\_id** (str) – Log group ID of OCI logging service for access log
- **access\_log\_id** (str) – Log ID of OCI logging service for access log
- **predict\_log\_group\_id** (str) – Log group ID of OCI logging service for predict log
- **predict\_log\_id** (str) – Log ID of OCI logging service for predict log

**Returns**

`self`

**Return type**

*ModelDeploymentProperties*

**with\_predict\_log**(*log\_group\_id*: str, *log\_id*: str)

Adds predict log config

**Parameters**

- **group\_id** (str) – Log group ID of OCI logging service
- **log\_id** (str) – Log ID of OCI logging service

**Returns**

`self`

**Return type**

*ModelDeploymentProperties*

**with\_prop**(*property\_name*: str, *value*: Any)

Sets model deployment's *property\_name* attribute to *value*

**Parameters**

- **property\_name** (str) – Name of a model deployment property.
- **value** – New value for property attribute.

**Returns**

`self`

**Return type**

*ModelDeploymentProperties*

**class** `ads.model.ModelInputSerializer`

Bases: `Serializer`

Abstract base class for creation of new data serializers.

**serialize**(*data*)

Serialize data/model into specific type.

**Returns**

**object**

**Return type**

Serialized data/model.

**class** `ads.model.ModelProperties`(*inference\_conda\_env: Optional[str] = None, inference\_python\_version: Optional[str] = None, training\_conda\_env: Optional[str] = None, training\_python\_version: Optional[str] = None, training\_resource\_id: Optional[str] = None, training\_script\_path: Optional[str] = None, training\_id: Optional[str] = None, compartment\_id: Optional[str] = None, project\_id: Optional[str] = None, bucket\_uri: Optional[str] = None, remove\_existing\_artifact: Optional[bool] = None, overwrite\_existing\_artifact: Optional[bool] = None, deployment\_instance\_shape: Optional[str] = None, deployment\_instance\_count: Optional[int] = None, deployment\_bandwidth\_mbps: Optional[int] = None, deployment\_log\_group\_id: Optional[str] = None, deployment\_access\_log\_id: Optional[str] = None, deployment\_predict\_log\_id: Optional[str] = None, deployment\_memory\_in\_gbs: Optional[Union[float, int]] = None, deployment\_ocpus: Optional[Union[float, int]] = None, deployment\_image: Optional[str] = None*)

Bases: [\*BaseProperties\*](#)

Represents properties required to save and deploy model.

**bucket\_uri: str = None**

**compartment\_id: str = None**

**deployment\_access\_log\_id: str = None**

**deployment\_bandwidth\_mbps: int = None**

**deployment\_image: str = None**

**deployment\_instance\_count: int = None**

**deployment\_instance\_shape: str = None**

**deployment\_log\_group\_id: str = None**

**deployment\_memory\_in\_gbs: Union[float, int] = None**

**deployment\_ocpus: Union[float, int] = None**

**deployment\_predict\_log\_id: str = None**

**inference\_conda\_env: str = None**

```
inference_python_version: str = None

overwrite_existing_artifact: bool = None

project_id: str = None

remove_existing_artifact: bool = None

training_conda_env: str = None

training_id: str = None

training_python_version: str = None

training_resource_id: str = None

training_script_path: str = None

class ads.model.ModelState(value)
    Bases: Enum
    An enumeration.
    AVAILABLE = 'Available'
    DONE = 'Done'
    NEEDSACTION = 'Needs Action'
    NOTAVAILABLE = 'Not Available'

class ads.model.ModelVersionSet(spec: Optional[Dict] = None, **kwargs)
    Bases: Builder
    Represents Model Version Set.
    id
        Model version set OCID.
        Type
        str
    project_id
        Project OCID.
        Type
        str
    compartment_id
        Compartment OCID.
        Type
        str
    name
        Model version set name.
        Type
        str
```



**description**

Model version set description.

**Type**

str

**freeform\_tags**

Model version set freeform tags.

**Type**

Dict[str, str]

**defined\_tags**

Model version set defined tags.

**Type**

Dict[str, Dict[str, object]]

**details\_link**

Link to details page in OCI console.

**Type**

str

**create**(*self*, *\*\*kwargs*) → 'ModelVersionSet'

Creates a model version set.

**update**(*self*, *\*\*kwargs*) → 'ModelVersionSet'

Updates a model version set.

**delete**(*self*, *delete\_model: Optional[bool] = False*) → "ModelVersionSet":

Removes a model version set.

**to\_dict**(*self*) → dict

Serializes model version set to a dictionary.

**from\_id**(*cls*, *id: str*) → 'ModelVersionSet'

Gets an existing model version set by OCID.

**from\_ocid**(*cls*, *ocid: str*) → 'ModelVersionSet'

Gets an existing model version set by OCID.

**from\_name**(*cls*, *name: str*) → 'ModelVersionSet'

Gets an existing model version set by name.

**from\_dict**(*cls*, *config: dict*) → 'ModelVersionSet'

Load a model version set instance from a dictionary of configurations.

**Examples**

```
>>> mvs = (ModelVersionSet()
...     .with_compartment_id(os.environ["PROJECT_COMPARTMENT_OCID"])
...     .with_project_id(os.environ["PROJECT_OCID"])
...     .with_name("test_experiment")
...     .with_description("Experiment number one"))
>>> mvs.create()
>>> mvs.model_add(model_ocid, version_label="Version label 1")
```

(continues on next page)

(continued from previous page)

```
>>> mvs.model_list()
>>> mvs.details_link
... https://console.<region>.oraclecloud.com/data-science/model-version-sets/<ocid>
>>> mvs.delete()
```

Initializes a model version set.

#### Parameters

- **spec** (*(Dict, optional). Defaults to None.*) – Object specification.
- **kwargs** (*Dict*) – Specification as keyword arguments. If ‘spec’ contains the same key as the one in kwargs, the value from kwargs will be used.
  - project\_id: str
  - compartment\_id: str
  - name: str
  - description: str
  - defined\_tags: Dict[str, Dict[str, object]]
  - freeform\_tags: Dict[str, str]

CONST\_COMPARTMENT\_ID = 'compartmentId'

CONST\_DEFINED\_TAG = 'definedTags'

CONST\_DESCRIPTION = 'description'

CONST\_FREEFORM\_TAG = 'freeformTags'

CONST\_ID = 'id'

CONST\_NAME = 'name'

CONST\_PROJECT\_ID = 'projectId'

LIFECYCLE\_STATE\_ACTIVE = 'ACTIVE'

LIFECYCLE\_STATE\_DELETED = 'DELETED'

LIFECYCLE\_STATE\_DELETING = 'DELETING'

LIFECYCLE\_STATE\_FAILED = 'FAILED'

attribute\_map = {'compartmentId': 'compartment\_id', 'definedTags': 'defined\_tags', 'description': 'description', 'freeformTags': 'freeform\_tags', 'id': 'id', 'name': 'name', 'projectId': 'project\_id'}

property compartment\_id: str

**create**(\*\*kwargs) → *ModelVersionSet*

Creates a model version set.

#### Parameters

**kwargs** – Additional keyword arguments.

#### Returns

The ModelVersionSet instance (self)

**Return type***ModelVersionSet***property defined\_tags:** Dict[str, Dict[str, object]]**delete**(delete\_model: Optional[bool] = False) → *ModelVersionSet*

Removes a model version set.

**Parameters****delete\_model** ((bool, optional). Defaults to False.) – By default, this parameter is false. A model version set can only be deleted if all the models associate with it are already in the DELETED state. You can optionally specify the deleteRelatedModels boolean query parameters to true, which deletes all associated models for you.**Returns**

The ModelVersionSet instance (self).

**Return type***ModelVersionSet***property description:** str**property details\_link:** str

Link to details page in OCI console.

**Returns**

Link to details page in OCI console.

**Return type**

str

**property freeform\_tags:** Dict[str, str]**classmethod from\_dict**(config: dict) → *ModelVersionSet*

Load a model version set instance from a dictionary of configurations.

**Parameters****config** (dict) – A dictionary of configurations.**Returns**

The model version set instance.

**Return type***ModelVersionSet***classmethod from\_dsc\_model\_version\_set**(dsc\_model\_version\_set: *DataScienceModelVersionSet*) → *ModelVersionSet*

Initialize a ModelVersionSet instance from a DataScienceModelVersionSet.

**Parameters****dsc\_model\_version\_set** (*DataScienceModelVersionSet*) – An instance of DataScienceModelVersionSet.**Returns**

An instance of ModelVersionSet.

**Return type***ModelVersionSet***classmethod from\_id**(id: str) → *ModelVersionSet*

Gets an existing model version set by OCID.

**Parameters**

**id** (*str*) – The model version set OCID.

**Returns**

An instance of `ModelVersionSet`.

**Return type**

*ModelVersionSet*

**classmethod from\_name**(*name: str, compartment\_id: Optional[str] = None*) → *ModelVersionSet*

Gets an existing model version set by name.

**Parameters**

- **name** (*str*) – The model version set name.
- **compartment\_id** ((*str, optional*). Defaults to *None*.) – Compartment OCID of the OCI resources. If *compartment\_id* is not specified, the value will be taken from environment variables.

**Returns**

An instance of `ModelVersionSet`.

**Return type**

*ModelVersionSet*

**classmethod from\_ocid**(*ocid: str*) → *ModelVersionSet*

Gets an existing model version set by OCID.

**Parameters**

**id** (*str*) – The model version set OCID.

**Returns**

An instance of `ModelVersionSet`.

**Return type**

*ModelVersionSet*

**property id: Optional[str]**

The OCID of the model version set.

**property kind: str**

The kind of the object as showing in YAML.

**Returns**

“modelVersionSet”

**Return type**

str

**classmethod list**(*compartment\_id: Optional[str] = None, \*\*kwargs*) → List[*ModelVersionSet*]

List model version sets in a given compartment.

**Parameters**

- **compartment\_id** (*str*) – The OCID of compartment.
- **kwargs** – Additional keyword arguments for filtering model version sets.

**Returns**

The list of model version sets.

**Return type**

List[*ModelVersionSet*]

**model\_add**(*model\_id*: str, *version\_label*: Optional[str] = None, *\*\*kwargs*) → None

Adds new model to model version set.

#### Parameters

- **model\_id** (*str*) – The OCID of the model which needs to be associated with the model version set.
- **version\_label** (*str*) – The model version label.
- **kwargs** – Additional keyword arguments.

#### Returns

Nothing.

#### Return type

None

#### Raises

**ModelVersionSetNotSaved** – If model version set has not been saved yet.:

**models**(*\*\*kwargs*) → List[*DataScienceModel*]

Gets list of models associated with a model version set.

#### Parameters

**kwargs** –

**project\_id**: str  
Project OCID.

**lifecycle\_state**: str

Filter results by the specified lifecycle state. Must be a valid state for the resource type. Allowed values are: “ACTIVE”, “DELETED”, “FAILED”, “INACTIVE”

Can be any attribute that *oci.data\_science.data\_science\_client.DataScienceClient.list\_models* accepts.

#### Returns

List of models associated with the model version set.

#### Return type

List[*DataScienceModel*]

#### Raises

**ModelVersionSetNotSaved** – If model version set has not been saved yet.:

**property name**: str

**property project\_id**: str

**property status**: Optional[str]

Status of the model version set.

#### Returns

Status of the model version set.

#### Return type

str

**to\_dict()** → dict

Serializes model version set to a dictionary.

**Returns**

The model version set serialized as a dictionary.

**Return type**

dict

**update()** → *ModelVersionSet*

Updates a model version set.

**Returns**

The ModelVersionSet instance (self).

**Return type**

*ModelVersionSet*

**with\_compartment\_id**(*compartment\_id: str*) → *ModelVersionSet*

Sets the compartment OCID.

**Parameters**

**compartment\_id** (*str*) – The compartment OCID.

**Returns**

The ModelVersionSet instance (self)

**Return type**

*ModelVersionSet*

**with\_defined\_tags**(*\*\*kwargs: Dict[str, Dict[str, object]]*) → *ModelVersionSet*

Sets defined tags.

**Returns**

The ModelVersionSet instance (self)

**Return type**

*ModelVersionSet*

**with\_description**(*description: str*) → *ModelVersionSet*

Sets the description.

**Parameters**

**description** (*str*) – The description of the model version set.

**Returns**

The ModelVersionSet instance (self)

**Return type**

*ModelVersionSet*

**with\_freeform\_tags**(*\*\*kwargs: Dict[str, str]*) → *ModelVersionSet*

Sets freeform tags.

**Returns**

The ModelVersionSet instance (self)

**Return type**

*ModelVersionSet*

**with\_name**(*name: str*) → *ModelVersionSet*

Sets the name of the model version set.

**Parameters**

**name** (*str*) – The name of the model version set.

**Returns**

The ModelVersionSet instance (self)

**Return type**

*ModelVersionSet*

**with\_project\_id**(*project\_id: str*) → *ModelVersionSet*

Sets the project OCID.

**Parameters**

**project\_id** (*str*) – The project OCID.

**Returns**

The ModelVersionSet instance (self)

**Return type**

*ModelVersionSet*

**exception** `ads.model.ModelVersionSetNotExists`

Bases: Exception

**exception** `ads.model.ModelVersionSetNotSaved`

Bases: Exception

**class** `ads.model.PyTorchModel`(*estimator: callable, artifact\_dir: Optional[str] = None, properties: Optional[ModelProperties] = None, auth: Dict = None, model\_save\_serializer: Optional[SERDE] = 'torch', model\_input\_serializer: Optional[SERDE] = None, \*\*kwargs*)

Bases: *FrameworkSpecificModel*

PyTorchModel class for estimators from Pytorch framework.

**algorithm**

The algorithm of the model.

**Type**

str

**artifact\_dir**

Artifact directory to store the files needed for deployment.

**Type**

str

**auth**

Default authentication is set using the `ads.set_auth` API. To override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create an authentication signer to instantiate an IdentityClient object.

**Type**

Dict

**estimator**

A trained pytorch estimator/model using Pytorch.

**Type**

Callable

**framework**

“pytorch”, the framework name of the model.

**Type**

str

**hyperparameter**

The hyperparameters of the estimator.

**Type**

dict

**metadata\_custom**

The model custom metadata.

**Type***ModelCustomMetadata***metadata\_provenance**

The model provenance metadata.

**Type***ModelProvenanceMetadata***metadata\_taxonomy**

The model taxonomy metadata.

**Type***ModelTaxonomyMetadata***model\_artifact**

This is built by calling prepare.

**Type***ModelArtifact***model\_deployment**

A ModelDeployment instance.

**Type***ModelDeployment***model\_file\_name**

Name of the serialized model.

**Type**

str

**model\_id**

The model ID.

**Type**

str

**properties**

ModelProperties object required to save and deploy model. For more details, check [https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model\\_properties](https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model_properties).



**Type***ModelProperties***runtime\_info**

A RuntimeInfo instance.

**Type***RuntimeInfo***schema\_input**

Schema describes the structure of the input data.

**Type***Schema***schema\_output**

Schema describes the structure of the output data.

**Type***Schema***serialize**

Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under artifact\_dir and update the score.py manually.

**Type**

bool

**version**

The framework version of the model.

**Type**

str

**delete\_deployment(...)**

Deletes the current model deployment.

**deploy(..., \\*\*kwargs)**

Deploys a model.

**from\_model\_artifact(uri, model\_file\_name, artifact\_dir, ..., \\*\*kwargs)**

Loads model from the specified folder, or zip/tar archive.

**from\_model\_catalog(model\_id, model\_file\_name, artifact\_dir, ..., \\*\*kwargs)**

Loads model from model catalog.

**introspect(...)**

Runs model introspection.

**predict(data, ...)**

Returns prediction of input data run against the model deployment endpoint.

**prepare(..., \\*\*kwargs)**

Prepare and save the score.py, serialized model and runtime.yaml file.

**reload(...)**Reloads the model artifact files: *score.py* and the *runtime.yaml*.**save(..., \\*\*kwargs)**

Saves model artifacts to the model catalog.

**summary\_status(...)**

Gets a summary table of the current status.

**verify(data, ...)**

Tests if deployment works in local environment.

**Examples**

```
>>> torch_model = PyTorchModel(estimator=torch_estimator,  
... artifact_dir=tmp_model_dir)  
>>> inference_conda_env = "generalml_p37_cpu_v1"
```

```
>>> torch_model.prepare(inference_conda_env=inference_conda_env, force_  
↳ overwrite=True)  
>>> torch_model.reload()  
>>> torch_model.verify(...)  
>>> torch_model.save()  
>>> model_deployment = torch_model.deploy(wait_for_completion=False)  
>>> torch_model.predict(...)
```

Initiates a PyTorchModel instance.

**Parameters**

- **estimator** (*callable*) – Any model object generated by pytorch framework
- **artifact\_dir** (*str*) – artifact directory to store the files needed for deployment.
- **properties** ((*ModelProperties*, *optional*). Defaults to *None*.) – *ModelProperties* object required to save and deploy model.
- **auth** ((*Dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.
- **model\_save\_serializer** ((*SERDE* or *str*, *optional*). Defaults to *None*.) – Instance of *ads.model.SERDE*. Used for serialize/deserialize model.
- **model\_input\_serializer** ((*SERDE*, *optional*). Defaults to *None*.) – Instance of *ads.model.SERDE*. Used for serialize/deserialize data.

**Returns**

PyTorchModel instance.

**Return type**

*PyTorchModel*

**model\_save\_serializer\_type**

alias of *PyTorchModelSerializerType*

**serialize\_model**(*as\_onnx: bool = False*, *force\_overwrite: bool = False*, *X\_sample: Optional[Union[Dict, str, List, Tuple, ndarray, Series, DataFrame]] = None*, *use\_torch\_script: Optional[bool] = None*, *\*\*kwargs*) → *None*

Serialize and save Pytorch model using ONNX or model specific method.

**Parameters**

- **as\_onnx** ((*bool*, *optional*). Defaults to *False*.) – If set as *True*, convert into ONNX model.
- **force\_overwrite** ((*bool*, *optional*). Defaults to *False*.) – If set as *True*, overwrite serialized model if exists.
- **X\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*. Defaults to *None*.) – A sample of input data that will be used to generate input schema and detect onnx\_args.
- **use\_torch\_script** ((*bool*, *optional*). Defaults to *None* (If the default value has not been changed, it will be set as *False*.) – If set as *True*, the model will be serialized as a TorchScript program. Check [https://pytorch.org/tutorials/beginner/saving\\_loading\\_models.html#export-load-model-in-torchscript-format](https://pytorch.org/tutorials/beginner/saving_loading_models.html#export-load-model-in-torchscript-format) for more details. If set as *False*, it will only save the trained model's learned parameters, and the score.py need to be modified to construct the model class instance first. Check [https://pytorch.org/tutorials/beginner/saving\\_loading\\_models.html#save-load-state-dict-recommended](https://pytorch.org/tutorials/beginner/saving_loading_models.html#save-load-state-dict-recommended) for more details.
- **\*\*kwargs** (*optional params used to serialize pytorch model to onnx*,) –
- **following** (*including the*) – onnx\_args: (tuple or torch.Tensor), default to *None* Contains model inputs such that model(onnx\_args) is a valid invocation of the model. Can be structured either as: 1) ONLY A TUPLE OF ARGUMENTS; 2) A TENSOR; 3) A TUPLE OF ARGUMENTS ENDING WITH A DICTIONARY OF NAMED ARGUMENTS  
input\_names: (List[str], optional). Names to assign to the input nodes of the graph, in order.  
output\_names: (List[str], optional). Names to assign to the output nodes of the graph, in order.  
dynamic\_axes: (dict, optional), default to *None*. Specify axes of tensors as dynamic (i.e. known only at run-time).

**Returns**

Nothing.

**Return type**

None

**class** ads.model.SERDE

Bases: Serializer, Deserializer

A layer contains two groups which can interact with each other to serialize and deserialize supported data structure using supported data format.

**name** = ''

**class** ads.model.SklearnModel(*estimator: Callable, artifact\_dir: Optional[str] = None, properties: Optional[ModelProperties] = None, auth: Optional[Dict] = None, model\_save\_serializer: Optional[SERDE] = 'joblib', model\_input\_serializer: Optional[SERDE] = None, \*\*kwargs*)

Bases: FrameworkSpecificModel

SklearnModel class for estimators from sklearn framework.

**algorithm**

The algorithm of the model.

**Type**

str

**artifact\_dir**

Artifact directory to store the files needed for deployment.

**Type**

str

**auth**

Default authentication is set using the `ads.set_auth` API. To override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create an authentication signer to instantiate an IdentityClient object.

**Type**

Dict

**estimator**

A trained sklearn estimator/model using scikit-learn.

**Type**

Callable

**framework**

“scikit-learn”, the framework name of the model.

**Type**

str

**hyperparameter**

The hyperparameters of the estimator.

**Type**

dict

**metadata\_custom**

The model custom metadata.

**Type***ModelCustomMetadata***metadata\_provenance**

The model provenance metadata.

**Type***ModelProvenanceMetadata***metadata\_taxonomy**

The model taxonomy metadata.

**Type***ModelTaxonomyMetadata***model\_artifact**

This is built by calling prepare.

**Type***ModelArtifact***model\_deployment**

A ModelDeployment instance.

**Type***ModelDeployment*

**model\_file\_name**

Name of the serialized model.

**Type**

str

**model\_id**

The model ID.

**Type**

str

**properties**

ModelProperties object required to save and deploy model. For more details, check [https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model\\_properties](https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model_properties).

**Type**

*ModelProperties*

**runtime\_info**

A RuntimeInfo instance.

**Type**

*RuntimeInfo*

**schema\_input**

Schema describes the structure of the input data.

**Type**

*Schema*

**schema\_output**

Schema describes the structure of the output data.

**Type**

*Schema*

**serialize**

Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under artifact\_dir and update the score.py manually.

**Type**

bool

**version**

The framework version of the model.

**Type**

str

**delete\_deployment(...)**

Deletes the current model deployment.

**deploy(..., \\*\*kwargs)**

Deploys a model.

**from\_model\_artifact(uri, model\_file\_name, artifact\_dir, ..., \\*\*kwargs)**

Loads model from the specified folder, or zip/tar archive.

**from\_model\_catalog**(*model\_id*, *model\_file\_name*, *artifact\_dir*, ..., *\*\*kwargs*)

Loads model from model catalog.

**introspect**(...)

Runs model introspection.

**predict**(*data*, ...)

Returns prediction of input data run against the model deployment endpoint.

**prepare**(..., *\*\*kwargs*)

Prepare and save the score.py, serialized model and runtime.yaml file.

**reload**(...)

Reloads the model artifact files: *score.py* and the *runtime.yaml*.

**save**(..., *\*\*kwargs*)

Saves model artifacts to the model catalog.

**summary\_status**(...)

Gets a summary table of the current status.

**verify**(*data*, ...)

Tests if deployment works in local environment.

## Examples

```
>>> import tempfile
>>> from sklearn.model_selection import train_test_split
>>> from ads.model.framework.sklearn_model import SklearnModel
>>> from sklearn.linear_model import LogisticRegression
>>> from sklearn.datasets import load_iris
```

```
>>> iris = load_iris()
>>> X, y = iris.data, iris.target
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)
>>> sklearn_estimator = LogisticRegression()
>>> sklearn_estimator.fit(X_train, y_train)
```

```
>>> sklearn_model = SklearnModel(estimator=sklearn_estimator,
... artifact_dir=tmp_model_dir)
```

```
>>> sklearn_model.prepare(inference_conda_env="generalml_p37_cpu_v1", force_
↳ overwrite=True)
>>> sklearn_model.reload()
>>> sklearn_model.verify(X_test)
>>> sklearn_model.save()
>>> model_deployment = sklearn_model.deploy(wait_for_completion=False)
>>> sklearn_model.predict(X_test)
```

Initiates a SklearnModel instance.

### Parameters

- **estimator** (*Callable*) – Sklearn Model

- **artifact\_dir** (*str*) – Directory for generate artifact.
- **properties** ((*ModelProperties*, *optional*). Defaults to *None*.) – *ModelProperties* object required to save and deploy model.
- **auth** ((*Dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate *IdentityClient* object.
- **model\_save\_serializer** ((*SERDE* or *str*, *optional*). Defaults to *None*.) – Instance of *ads.model.SERDE*. Used for serialize/deserialize model.
- **model\_input\_serializer** ((*SERDE*, *optional*). Defaults to *None*.) – Instance of *ads.model.SERDE*. Used for serialize/deserialize data.

**Returns**

*SklearnModel* instance.

**Return type**

*SklearnModel*

**Examples**

```
>>> import tempfile
>>> from sklearn.model_selection import train_test_split
>>> from ads.model.framework.sklearn_model import SklearnModel
>>> from sklearn.linear_model import LogisticRegression
>>> from sklearn.datasets import load_iris
```

```
>>> iris = load_iris()
>>> X, y = iris.data, iris.target
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)
>>> sklearn_estimator = LogisticRegression()
>>> sklearn_estimator.fit(X_train, y_train)
```

```
>>> sklearn_model = SklearnModel(estimator=sklearn_estimator, artifact_dir=tempfile.
↳mkdtemp())
>>> sklearn_model.prepare(inference_conda_env="dataexpl_p37_cpu_v3")
>>> sklearn_model.verify(X_test)
>>> sklearn_model.save()
>>> model_deployment = sklearn_model.deploy()
>>> sklearn_model.predict(X_test)
>>> sklearn_model.delete_deployment()
```

**model\_save\_serializer\_type**

alias of *SklearnModelSerializerType*

**serialize\_model**(*as\_onnx*: *Optional[bool]* = *False*, *initial\_types*: *Optional[List[Tuple]]* = *None*, *force\_overwrite*: *Optional[bool]* = *False*, *X\_sample*: *Optional[Union[Dict, str, List, Tuple, ndarray, Series, DataFrame]]* = *None*, *\*\*kwargs*: *Dict*)

Serialize and save scikit-learn model using ONNX or model specific method.

**Parameters**

- **as\_onnx** ((*bool*, *optional*). Defaults to *False*.) – If set as *True*, provide *initial\_types* or *X\_sample* to convert into ONNX.

- **initial\_types** ((*List[Tuple]*, *optional*). Defaults to *None*.) – Each element is a tuple of a variable name and a type.
- **force\_overwrite** ((*bool*, *optional*). Defaults to *False*.) – If set as *True*, overwrite serialized model if exists.
- **X\_sample** (*Union[Dict, str, List, np.ndarray, pd.core.series.Series, pd.core.frame.DataFrame,]*. Defaults to *None*.) – Contains model inputs such that `model(X_sample)` is a valid invocation of the model. Used to generate `initial_types`.

**Returns**

Nothing.

**Return type**

*None*

```
class ads.model.SparkPipelineModel(estimator: Callable, artifact_dir: Optional[str] = None, properties:
    Optional[ModelProperties] = None, auth: Dict = None,
    model_save_serializer: Optional[SERDE] = 'spark',
    model_input_serializer: Optional[SERDE] = 'spark', **kwargs)
```

Bases: [FrameworkSpecificModel](#)

SparkPipelineModel class for estimators from the pyspark framework.

**algorithm**

The algorithm of the model.

**Type**

*str*

**artifact\_dir**

Artifact directory to store the files needed for deployment.

**Type**

*str*

**auth**

Default authentication is set using the `ads.set_auth` API. To override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create an authentication signer to instantiate an `IdentityClient` object.

**Type**

*Dict*

**estimator**

A trained pyspark estimator/model using pyspark.

**Type**

*Callable*

**framework**

“spark”, the framework name of the model.

**Type**

*str*

**hyperparameter**

The hyperparameters of the estimator.

**Type**

*dict*



**metadata\_custom**

The model custom metadata.

**Type**

*ModelCustomMetadata*

**metadata\_provenance**

The model provenance metadata.

**Type**

*ModelProvenanceMetadata*

**metadata\_taxonomy**

The model taxonomy metadata.

**Type**

*ModelTaxonomyMetadata*

**model\_artifact**

This is built by calling prepare. A ModelDeployment instance.

**Type**

*ModelArtifact*

**model\_file\_name**

Name of the serialized model.

**Type**

str

**model\_id**

The model ID.

**Type**

str

**properties**

ModelProperties object required to save and deploy model. For more details, check [https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model\\_properties](https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model_properties).

**Type**

*ModelProperties*

**runtime\_info**

A RuntimeInfo instance.

**Type**

*RuntimeInfo*

**schema\_input**

Schema describes the structure of the input data.

**Type**

*Schema*

**schema\_output**

Schema describes the structure of the output data.

**Type**

*Schema*

**serialize**

Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under `artifact_dir` and update the `score.py` manually.

**Type**

bool

**version**

The framework version of the model.

**Type**

str

**delete\_deployment(...)**

Deletes the current model deployment.

**deploy(..., *\*\*kwargs*)**

Deploys a model.

**from\_model\_artifact(uri, model\_file\_name, artifact\_dir, ..., *\*\*kwargs*)**

Loads model from the specified folder, or zip/tar archive.

**from\_model\_catalog(model\_id, model\_file\_name, artifact\_dir, ..., *\*\*kwargs*)**

Loads model from model catalog.

**introspect(...)**

Runs model introspection.

**predict(data, ...)**

Returns prediction of input data run against the model deployment endpoint.

**prepare(..., *\*\*kwargs*)**

Prepare and save the `score.py`, serialized model and `runtime.yaml` file.

**reload(...)**

Reloads the model artifact files: `score.py` and the `runtime.yaml`.

**save(..., *\*\*kwargs*)**

Saves model artifacts to the model catalog.

**summary\_status(...)**

Gets a summary table of the current status.

**verify(data, ...)**

Tests if deployment works in local environment.

**Examples**

```
>>> import tempfile
>>> from ads.model.framework.spark_model import SparkPipelineModel
>>> from pyspark.ml.linalg import Vectors
>>> from pyspark.ml.classification import LogisticRegression
```

```
>>> training = spark.createDataFrame([
>>>     (1.0, Vectors.dense([0.0, 1.1, 0.1])),
>>>     (0.0, Vectors.dense([2.0, 1.0, -1.0])),
>>>     (0.0, Vectors.dense([2.0, 1.3, 1.0])),
>>>     (1.0, Vectors.dense([0.0, 1.2, -0.5]))], ["label", "features"])
>>> lr_estimator = LogisticRegression(maxIter=10, regParam=0.001)
>>> pipeline = Pipeline(stages=[lr_estimator])
>>> pipeline_model = pipeline.fit(training)
```

```
>>> spark_model = SparkPipelineModel(estimator=pipeline_model, artifact_
↳dir=tempfile.mkdtemp())
>>> spark_model.prepare(inference_conda_env="dataexpl_p37_cpu_v3")
>>> spark_model.verify(training)
>>> spark_model.save()
>>> model_deployment = spark_model.deploy()
>>> spark_model.predict(training)
>>> spark_model.delete_deployment()
```

Initiates a SparkPipelineModel instance.

#### Parameters

- **estimator** (*Callable*) – SparkPipelineModel
- **artifact\_dir** (*str*) – Directory for generate artifact.
- **properties** ((*ModelProperties*, *optional*). Defaults to *None*.) – ModelProperties object required to save and deploy model.
- **auth** ((*Dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **model\_save\_serializer** ((*SERDE* or *str*, *optional*). Defaults to *None*.) – Instance of *ads.model.SERDE*. Used for serialize/deserialize model.
- **model\_input\_serializer** ((*SERDE*, *optional*). Defaults to *ads.model.serde.model\_input.SparkModelInputSERDE*.) – Instance of *ads.model.SERDE*. Used for serialize/deserialize data.

#### Returns

SparkPipelineModel instance.

#### Return type

*SparkPipelineModel*

## Examples

```
>>> import tempfile
>>> from ads.model.framework.spark_model import SparkPipelineModel
>>> from pyspark.ml.linalg import Vectors
>>> from pyspark.ml.classification import LogisticRegression
>>> from pyspark.ml import Pipeline
```

```
>>> training = spark.createDataFrame([
>>>     (1.0, Vectors.dense([0.0, 1.1, 0.1])),
>>>     (0.0, Vectors.dense([2.0, 1.0, -1.0])),
>>>     (0.0, Vectors.dense([2.0, 1.3, 1.0])),
>>>     (1.0, Vectors.dense([0.0, 1.2, -0.5]))], ["label", "features"])
>>> lr_estimator = LogisticRegression(maxIter=10, regParam=0.001)
>>> pipeline = Pipeline(stages=[lr_estimator])
>>> pipeline_model = pipeline.fit(training)
```

```
>>> spark_model = SparkPipelineModel(estimator=pipeline_model, artifact_
↳dir=tempfile.mkdtemp())
>>> spark_model.prepare(inference_conda_env="pyspark30_p37_cpu_v5")
>>> spark_model.verify(training)
>>> spark_model.save()
>>> model_deployment = spark_model.deploy()
>>> spark_model.predict(training)
>>> spark_model.delete_deployment()
```

### model\_input\_serializer\_type

alias of SparkModelInputSerializerType

### model\_save\_serializer\_type

alias of SparkModelSerializerType

**serialize\_model**(*as\_onnx*: bool = False, *X\_sample*: Optional[Union[Dict, str, List, ndarray, Series, DataFrame, pyspark.sql.DataFrame, pyspark.pandas.DataFrame]] = None, *force\_overwrite*: bool = False, *\*\*kwargs*) → None

Serialize and save pyspark model using spark serialization.

#### Parameters

**force\_overwrite** ((bool, optional). Defaults to False.) – If set as True, overwrite serialized model if exists.

#### Return type

None

**class** ads.model.TensorFlowModel(*estimator*: callable, *artifact\_dir*: Optional[str] = None, *properties*: Optional[ModelProperties] = None, *auth*: Dict = None, *model\_save\_serializer*: Optional[SERDE] = 'tf', *model\_input\_serializer*: Optional[SERDE] = None, *\*\*kwargs*)

Bases: [FrameworkSpecificModel](#)

TensorFlowModel class for estimators from Tensorflow framework.

### algorithm

The algorithm of the model.

**Type**  
str

#### **artifact\_dir**

Directory for generate artifact.

**Type**  
str

#### **auth**

Default authentication is set using the *ads.set\_auth* API. To override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create an authentication signer to instantiate an IdentityClient object.

**Type**  
Dict

#### **estimator**

A trained tensorflow estimator/model using Tensorflow.

**Type**  
Callable

#### **framework**

“tensorflow”, the framework name of the model.

**Type**  
str

#### **hyperparameter**

The hyperparameters of the estimator.

**Type**  
dict

#### **metadata\_custom**

The model custom metadata.

**Type**  
*ModelCustomMetadata*

#### **metadata\_provenance**

The model provenance metadata.

**Type**  
*ModelProvenanceMetadata*

#### **metadata\_taxonomy**

The model taxonomy metadata.

**Type**  
*ModelTaxonomyMetadata*

#### **model\_artifact**

This is built by calling prepare.

**Type**  
*ModelArtifact*

**model\_deployment**

A ModelDeployment instance.

**Type**

*ModelDeployment*

**model\_file\_name**

Name of the serialized model.

**Type**

str

**model\_id**

The model ID.

**Type**

str

**properties**

ModelProperties object required to save and deploy model. For more details, check [https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model\\_properties](https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model_properties).

**Type**

*ModelProperties*

**runtime\_info**

A RuntimeInfo instance.

**Type**

*RuntimeInfo*

**schema\_input**

Schema describes the structure of the input data.

**Type**

*Schema*

**schema\_output**

Schema describes the structure of the output data.

**Type**

*Schema*

**serialize**

Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under artifact\_dir and update the score.py manually.

**Type**

bool

**version**

The framework version of the model.

**Type**

str

**delete\_deployment(...)**

Deletes the current model deployment.

**deploy**(..., *\\*\*kwargs*)

Deploys a model.

**from\_model\_artifact**(*uri, model\_file\_name, artifact\_dir, ..., \\*\*kwargs*)

Loads model from the specified folder, or zip/tar archive.

**from\_model\_catalog**(*model\_id, model\_file\_name, artifact\_dir, ..., \\*\*kwargs*)

Loads model from model catalog.

**introspect**(...)

Runs model introspection.

**predict**(*data, ...*)

Returns prediction of input data run against the model deployment endpoint.

**prepare**(..., *\\*\*kwargs*)

Prepare and save the *score.py*, serialized model and *runtime.yaml* file.

**reload**(...)

Reloads the model artifact files: *score.py* and the *runtime.yaml*.

**save**(..., *\\*\*kwargs*)

Saves model artifacts to the model catalog.

**summary\_status**(...)

Gets a summary table of the current status.

**verify**(*data, ...*)

Tests if deployment works in local environment.

## Examples

```
>>> from ads.model.framework.tensorflow_model import TensorFlowModel
>>> import tempfile
>>> import tensorflow as tf
```

```
>>> mnist = tf.keras.datasets.mnist
>>> (x_train, y_train), (x_test, y_test) = mnist.load_data()
>>> x_train, x_test = x_train / 255.0, x_test / 255.0
```

```
>>> tf_estimator = tf.keras.models.Sequential(
...     [
...         tf.keras.layers.Flatten(input_shape=(28, 28)),
...         tf.keras.layers.Dense(128, activation="relu"),
...         tf.keras.layers.Dropout(0.2),
...         tf.keras.layers.Dense(10),
...     ]
... )
>>> loss_fn = tf.keras.losses.SparseCategoricalCrossentropy(from_logits=True)
>>> tf_estimator.compile(optimizer="adam", loss=loss_fn, metrics=["accuracy"])
>>> tf_estimator.fit(x_train, y_train, epochs=1)
```

```
>>> tf_model = TensorFlowModel(estimator=tf_estimator,  
... artifact_dir=tempfile.mkdtemp())  
>>> inference_conda_env = "generalml_p37_cpu_v1"  
  
>>> tf_model.prepare(inference_conda_env="generalml_p37_cpu_v1", force_  
↳ overwrite=True)  
>>> tf_model.verify(x_test[:1])  
>>> tf_model.save()  
>>> model_deployment = tf_model.deploy(wait_for_completion=False)  
>>> tf_model.predict(x_test[:1])
```

Initiates a TensorFlowModel instance.

#### Parameters

- **estimator** (*callable*) – Any model object generated by tensorflow framework
- **artifact\_dir** (*str*) – Directory for generate artifact.
- **properties** ((*ModelProperties*, *optional*). Defaults to *None*.) – ModelProperties object required to save and deploy model.
- **auth** ((*Dict*, *optional*). Defaults to *None*.) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **model\_save\_serializer** ((*SERDE* or *str*, *optional*). Defaults to *None*.) – Instance of *ads.model.SERDE*. Used for serialize/deserialize model.
- **model\_input\_serializer** ((*SERDE*, *optional*). Defaults to *None*.) – Instance of *ads.model.SERDE*. Used for serialize/deserialize data.

#### Returns

TensorFlowModel instance.

#### Return type

*TensorFlowModel*

#### model\_save\_serializer\_type

alias of *TensorflowModelSerializerType*

**serialize\_model**(*as\_onnx*: *bool* = *False*, *X\_sample*: *Optional[Union[Dict, str, List, Tuple, ndarray, Series, DataFrame]]* = *None*, *force\_overwrite*: *bool* = *False*, *\*\*kwargs*) → *None*

Serialize and save Tensorflow model using ONNX or model specific method.

#### Parameters

- **as\_onnx** ((*bool*, *optional*). Defaults to *False*.) – If set as *True*, convert into ONNX model.
- **X\_sample** (*Union[list, tuple, pd.Series, np.ndarray, pd.DataFrame]*. Defaults to *None*.) – A sample of input data that will be used to generate input schema and detect input\_signature.
- **force\_overwrite** ((*bool*, *optional*). Defaults to *False*.) – If set as *True*, overwrite serialized model if exists.
- **\*\*kwargs** (*optional params used to serialize tensorflow model to onnx*, ) –



- **following** (*including the*) – `input_signature`: a tuple or a list of `tf.TensorSpec` objects). default to `None`. Define the shape/dtype of the input so that `model(input_signature)` is a valid invocation of the model. `opset_version`: int. Defaults to `None`. Used for the ONNX model.

**Returns**

Nothing.

**Return type**`None`

```
class ads.model.XGBoostModel(estimator: callable, artifact_dir: Optional[str] = None, properties:
    Optional[ModelProperties] = None, auth: Dict = None,
    model_save_serializer: Optional[SERDE] = 'xgboost', model_input_serializer:
    Optional[SERDE] = None, **kwargs)
```

Bases: [\*FrameworkSpecificModel\*](#)

XGBoostModel class for estimators from xgboost framework.

**algorithm**

The algorithm of the model.

**Type**`str`**artifact\_dir**

Artifact directory to store the files needed for deployment.

**Type**`str`**auth**

Default authentication is set using the `ads.set_auth` API. To override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create an authentication signer to instantiate an `IdentityClient` object.

**Type**`Dict`**estimator**

A trained xgboost estimator/model using Xgboost.

**Type**`Callable`**framework**

“xgboost”, the framework name of the model.

**Type**`str`**hyperparameter**

The hyperparameters of the estimator.

**Type**`dict`**metadata\_custom**

The model custom metadata.

**Type***ModelCustomMetadata***metadata\_provenance**

The model provenance metadata.

**Type***ModelProvenanceMetadata***metadata\_taxonomy**

The model taxonomy metadata.

**Type***ModelTaxonomyMetadata***model\_artifact**

This is built by calling prepare.

**Type***ModelArtifact***model\_deployment**

A ModelDeployment instance.

**Type***ModelDeployment***model\_file\_name**

Name of the serialized model.

**Type**

str

**model\_id**

The model ID.

**Type**

str

**properties**

ModelProperties object required to save and deploy model. For more details, check [https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model\\_properties](https://accelerated-data-science.readthedocs.io/en/latest/ads.model.html#module-ads.model.model_properties).

**Type***ModelProperties***runtime\_info**

A RuntimeInfo instance.

**Type***RuntimeInfo***schema\_input**

Schema describes the structure of the input data.

**Type***Schema***schema\_output**

Schema describes the structure of the output data.

**Type***Schema***serialize**

Whether to serialize the model to pkl file by default. If False, you need to serialize the model manually, save it under `artifact_dir` and update the `score.py` manually.

**Type**`bool`**version**

The framework version of the model.

**Type**`str`**delete\_deployment(...)**

Deletes the current model deployment.

**deploy(..., *\\*\*kwargs*)**

Deploys a model.

**from\_model\_artifact(*uri*, *model\_file\_name*, *artifact\_dir*, ..., *\\*\*kwargs*)**

Loads model from the specified folder, or zip/tar archive.

**from\_model\_catalog(*model\_id*, *model\_file\_name*, *artifact\_dir*, ..., *\\*\*kwargs*)**

Loads model from model catalog.

**introspect(...)**

Runs model introspection.

**predict(*data*, ...)**

Returns prediction of input data run against the model deployment endpoint.

**prepare(..., *\\*\*kwargs*)**

Prepare and save the `score.py`, serialized model and `runtime.yaml` file.

**reload(...)**

Reloads the model artifact files: `score.py` and the `runtime.yaml`.

**save(..., *\\*\*kwargs*)**

Saves model artifacts to the model catalog.

**summary\_status(...)**

Gets a summary table of the current status.

**verify(*data*, ...)**

Tests if deployment works in local environment.

## Examples

```
>>> import xgboost as xgb
>>> import tempfile
>>> from sklearn.datasets import make_classification
>>> from sklearn.model_selection import train_test_split
>>> from sklearn.datasets import load_iris
>>> from ads.model.framework.xgboost_model import XGBoostModel
```

```
>>> iris = load_iris()
>>> X, y = iris.data, iris.target
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)
>>> xgboost_estimator = xgb.XGBClassifier()
>>> xgboost_estimator.fit(X_train, y_train)
```

```
>>> xgboost_model = XGBoostModel(estimator=xgboost_estimator, artifact_dir=tmp_
↳model_dir)
>>> xgboost_model.prepare(inference_conda_env="generalml_p37_cpu_v1", force_
↳overwrite=True)
>>> xgboost_model.reload()
>>> xgboost_model.verify(X_test)
>>> xgboost_model.save()
>>> model_deployment = xgboost_model.deploy(wait_for_completion=False)
>>> xgboost_model.predict(X_test)
```

Initiates a XGBoostModel instance. This class wraps the XGBoost model as estimator. It's primary purpose is to hold the trained model and do serialization.

### Parameters

- **estimator** – XGBoostModel
- **artifact\_dir** (*str*) – artifact directory to store the files needed for deployment.
- **properties** ((*ModelProperties*, *optional*). *Defaults to None.*) – ModelProperties object required to save and deploy model.
- **auth** ((*Dict*, *optional*). *Defaults to None.*) – The default authentication is set using *ads.set\_auth* API. If you need to override the default, use the *ads.common.auth.api\_keys* or *ads.common.auth.resource\_principal* to create appropriate authentication signer and kwargs required to instantiate IdentityClient object.
- **model\_save\_serializer** ((*SERDE* or *str*, *optional*). *Defaults to None.*) – Instance of *ads.model.SERDE*. Used for serialize/deserialize model.
- **model\_input\_serializer** ((*SERDE*, *optional*). *Defaults to None.*) – Instance of *ads.model.SERDE*. Used for serialize/deserialize data.

### Returns

XGBoostModel instance.

### Return type

*XGBoostModel*

## Examples

```
>>> import xgboost as xgb
>>> import tempfile
>>> from sklearn.datasets import make_classification
>>> from sklearn.model_selection import train_test_split
>>> from sklearn.datasets import load_iris
>>> from ads.model.framework.xgboost_model import XGBoostModel
```

```
>>> iris = load_iris()
>>> X, y = iris.data, iris.target
```

```
>>> X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)
>>> train = xgb.DMatrix(X_train, y_train)
>>> test = xgb.DMatrix(X_test, y_test)
>>> xgboost_estimator = XGBClassifier()
>>> xgboost_estimator.fit(X_train, y_train)
>>> xgboost_model = XGBoostModel(estimator=xgboost_estimator, artifact_dir=tempfile.
↳mkdtemp())
>>> xgboost_model.prepare(inference_conda_env="generalml_p37_cpu_v1")
>>> xgboost_model.verify(X_test)
>>> xgboost_model.save()
>>> model_deployment = xgboost_model.deploy()
>>> xgboost_model.predict(X_test)
>>> xgboost_model.delete_deployment()
```

### model\_save\_serializer\_type

alias of XgboostModelSerializerType

**serialize\_model**(*as\_onnx*: bool = False, *initial\_types*: List[Tuple] = None, *force\_overwrite*: bool = False, *X\_sample*: Optional[Union[Dict, str, List, Tuple, ndarray, Series, DataFrame]] = None, *\*\*kwargs*)

Serialize and save Xgboost model using ONNX or model specific method.

#### Parameters

- **artifact\_dir** (*str*) – Directory for generate artifact.
- **as\_onnx** ((*boolean*, *optional*). Defaults to *False*.) – If set as True, provide *initial\_types* or *X\_sample* to convert into ONNX.
- **initial\_types** ((*List[Tuple]*, *optional*). Defaults to *None*.) – Each element is a tuple of a variable name and a type.
- **force\_overwrite** ((*boolean*, *optional*). Defaults to *False*.) – If set as True, overwrite serialized model if exists.
- **X\_sample** (*Union[Dict, str, List, np.ndarray, pd.core.series.Series, pd.core.frame.DataFrame,]*. Defaults to *None*.) – Contains model inputs such that `model(X_sample)` is a valid invocation of the model. Used to generate *initial\_types*.

#### Returns

Nothing.

#### Return type

None

`ads.model.experiment(name: str, create_if_not_exists: Optional[bool] = True, **kwargs: Dict)`

Context manager helping to operate with model version set.

#### Parameters

- **name** (*str*) – The name of the model version set.
- **create\_if\_not\_exists** (*(bool, optional)*). Defaults to *True*.) – Creates model version set if not exists.
- **kwargs** (*(Dict, optional)*.) –
  - compartment\_id**: (*str, optional*). Defaults to value from the environment variables.  
The compartment OCID.
  - project\_id**: (*str, optional*). Defaults to value from the environment variables.  
The project OCID.
  - description**: (*str, optional*). Defaults to *None*.  
The description of the model version set.

#### Yields

*ModelVersionSet* – The model version set object.

### 18.1.1.16 `ads.model_artifact_boilerplate` package

#### 18.1.1.16.1 Subpackages

#### `ads.model_artifact_boilerplate.artifact_introspection_test` package

#### Submodules

#### `ads.model_artifact_boilerplate.artifact_introspection_test.model_artifact_validate` module

`ads.model_artifact_boilerplate.artifact_introspection_test.model_artifact_validate.check_mandatory_files`

Check if score.py and runtime.yaml are present or not.

`ads.model_artifact_boilerplate.artifact_introspection_test.model_artifact_validate.check_runtime_yaml` (*file*  
→  
Tu-  
ple  
str]

Check runtime yaml mandatory fields

`ads.model_artifact_boilerplate.artifact_introspection_test.model_artifact_validate.check_score_file` (*file*  
→  
Tu-  
ple[  
str]

Change current working directory to temporary directory and validate python file

`ads.model_artifact_boilerplate.artifact_introspection_test.model_artifact_validate.combine_msgs(test_list)`  
→  
str

For a given test\_list combine all error\_msg if test failed

`ads.model_artifact_boilerplate.artifact_introspection_test.model_artifact_validate.get_object_storage_c`

`ads.model_artifact_boilerplate.artifact_introspection_test.model_artifact_validate.get_test_result(test_i`  
→  
int

Gives a number based on test result: 0: test was success 1: test failed 2: didn't run test

`ads.model_artifact_boilerplate.artifact_introspection_test.model_artifact_validate.model_deployment_fine`

Recursively checks in MODEL\_DEPLOYMENT if INFERENCE\_ENV\_SLUG, INFERENCE\_ENV\_TYPE, INFERENCE\_ENV\_PATH Also saves its value if present.

`ads.model_artifact_boilerplate.artifact_introspection_test.model_artifact_validate.validate_artifact(art`  
→  
Tu-  
ple  
str]

Unzip the artifact zip file passed. Check for test cases. The method returns the status of check and error message if any. :artifact: str

`ads.model_artifact_boilerplate.artifact_introspection_test.model_artifact_validate.write_html(output_path`  
→  
None

writes an html file to output\_path based on TESTS

Module contents

18.1.1.16.2 Submodules

18.1.1.16.3 ads.model\_artifact\_boilerplate.score module

18.1.1.16.4 Module contents

18.1.1.17 ads.mysqlldb package

18.1.1.17.1 Submodules

18.1.1.17.2 ads.mysqlldb.mysql\_db module

18.1.1.17.3 Module contents

18.1.1.18 ads.opctl package

18.1.1.18.1 Subpackages

## ads.opctl.backend package

### Submodules

#### ads.opctl.backend.ads\_dataflow module

**class** ads.opctl.backend.ads\_dataflow.**DataFlowBackend**(*config: Dict*)

Bases: *Backend*

Initialize a MLJobBackend object given config dictionary.

**Parameters**

**config** (*dict*) – dictionary of configurations

**apply()**

Create DataFlow and DataFlow Run from YAML.

**cancel()**

Cancel DataFlow Run from OCID.

**delete()**

Delete DataFlow or DataFlow Run from OCID.

**run()** → None

Create DataFlow and DataFlow Run from OCID or cli parameters.

**watch()**

Watch DataFlow Run from OCID.

#### ads.opctl.backend.ads\_ml\_job module

**class** ads.opctl.backend.ads\_ml\_job.**MLJobBackend**(*config: Dict*)

Bases: *Backend*

Initialize a MLJobBackend object given config dictionary.

**Parameters**

**config** (*dict*) – dictionary of configurations

**apply()** → None

Create Job and Job Run from YAML.

**cancel()**

Cancel Job Run from OCID.

**delete()**

Delete Job or Job Run from OCID.

**init\_operator()**

**run()** → None

Create Job and Job Run from OCID or cli parameters.

**watch()**

Watch Job Run from OCID.



```
class ads.opctl.backend.ads_ml_job.MLJobDistributedBackend(config: Dict)
```

Bases: [MLJobBackend](#)

Initialize a MLJobDistributedBackend object given config dictionary.

**Parameters**

**config** (*dict*) – dictionary of configurations

```
DIAGNOSTIC_COMMAND = 'python -m ads.opctl.diagnostics -t distributed'
```

```
static generate_worker_name(worker_jobrun_conf, i)
```

```
prepare_job_config(cluster_info)
```

```
run(cluster_info, dry_run=False) → None
```

- Creates Job Definition and starts main and worker jobruns from that job definition
- The Job Definition will contain all the environment variables defined at the cluster/spec/config level, environment variables defined by the user at runtime/spec/env level and *OCI\_\_* derived from the yaml specification
- The Job Run will have overrides provided by the user under cluster/spec/{ main|worker }/config section and 'OCI\_\_MODE'={MASTER|WORKER} depending on the run type

```
run_diagnostics(cluster_info, dry_run=False, **kwargs)
```

Implement Diagnostics check appropriate for the backend

## ads.opctl.backend.ads\_ml\_pipeline module

```
class ads.opctl.backend.ads_ml_pipeline.PipelineBackend(config: Dict)
```

Bases: [Backend](#)

Initialize a MLPipeline object given config dictionary.

**Parameters**

**config** (*dict*) – dictionary of configurations

```
apply() → None
```

Create Pipeline and Pipeline Run from YAML.

```
cancel() → None
```

Cancel Pipeline Run from OCID.

```
delete() → None
```

Delete Pipeline or Pipeline Run from OCID.

```
run() → None
```

Create Pipeline and Pipeline Run from OCID.

```
watch() → None
```

Watch Pipeline Run from OCID.

**ads.opctl.backend.base module**

**class** ads.opctl.backend.base.**Backend**(*config: Dict*)

Bases: object

Interface for backend

**activate**() → None

Activate a remote service.

**Return type**

None

**apply**() → None

Initiate Data Science service from YAML.

**Return type**

None

**cancel**() → None

Cancel a remote run.

**Return type**

None

**deactivate**() → None

Deactivate a remote service.

**Return type**

None

**delete**() → None

Delete a remote run.

**Return type**

None

**abstract run**() → Dict

Initiate a run.

**Return type**

None

**run\_diagnostics**()

Implement Diagnostics check appropriate for the backend

**watch**() → None

Stream logs from a remote run.

**Return type**

None

## ads.opctl.backend.local module

### Module contents

## ads.opctl.conda package

### Submodules

## ads.opctl.conda.cli module

## ads.opctl.conda.cmds module

`ads.opctl.conda.cmds.create(**kwargs) → str`

`ads.opctl.conda.cmds.install(**kwargs) → None`

`ads.opctl.conda.cmds.publish(**kwargs) → None`

## ads.opctl.conda.multipart\_uploader module

`class ads.opctl.conda.multipart_uploader.MultiPartUploader(source_file: str, dst_uri: str, parts: int, oci_config: Optional[str] = None, oci_profile: Optional[str] = None, auth_type: Optional[str] = None)`

Bases: object

Class that implements multipart uploading for conda packs.

Initialize the class.

#### Parameters

- **source\_file** (*str*) – path to conda pack file
- **dst\_uri** (*str*) – path to destination of object storage location
- **parts** (*int*) – number of parts
- **oci\_config** (*str*, *optional*) – path to oci config file, by default None
- **oci\_profile** (*str*, *optional*) – oci profile to use, by default None
- **auth\_type** (*str*) – authentication method, by default None

`upload(opc_meta: Optional[Dict] = None) → bool`

Uploading a conda pack to object storage.

#### Parameters

**opc\_meta** (*Dict*, *optional*) – metadata dictionary, by default None

#### Returns

whether uploading was successful

#### Return type

bool

#### Raises

**RuntimeError** – Uploading failed

## ads.opctl.conda.pack module

### Module contents

## ads.opctl.config package

### Subpackages

## ads.opctl.config.diagnostics package

### Module contents

## ads.opctl.config.yaml\_parsers package

### Subpackages

## ads.opctl.config.yaml\_parsers.distributed package

### Submodules

## ads.opctl.config.yaml\_parsers.distributed.yaml\_parser module

**class** ads.opctl.config.yaml\_parsers.distributed.yaml\_parser.**DistributedSpecParser**(*distributed*)

Bases: *YamlSpecParser*

**parse**()

**parse\_certificate**(*certificate*)

Expected yaml schema:

cluster:

spec:

certificate:

caCert:

id: oci.xxxx.<ca\_cert\_oid> downloadLocation: /code/ca.pem cert:

id: oci.xxxx.<cert\_oid> certDownloadLocation: /code/cert.pem keyDownloadLocation: /code/key.pem

**parse\_cluster**(*cluster\_def*)

**parse\_main**(*main*)

**parse\_ps**(*worker*)

**parse\_runtime**(*runtime*)

**parse\_worker**(*worker*)

**parse\_worker\_params**(*worker\_spec*)

## Module contents

### Submodules

#### ads.opctl.config.yaml\_parsers.base module

**class** ads.opctl.config.yaml\_parsers.base.YamlSpecParser

Bases: object

**parse()**

**classmethod** parse\_content(*file*)

**translate\_config**(*config: list*)

Translates config to three element tuple of dictionary- (file, envVars, concatenated args)

All elements that are of type *env* goes to envVars All elements that are of type *args* are concatenated as *-key1=value1 -key2=value2 .. string* All elements of type *file* are currently ignored

## Module contents

### Submodules

#### ads.opctl.config.base module

**class** ads.opctl.config.base.ConfigProcessor(*config: Optional[Dict] = None*)

Bases: object

Initializing a ConfigProcessor object given a configuration.

#### Parameters

**config** (*dict*) – a dictionary of configurations

**abstract process**(*\*\*kwargs*) → *ConfigProcessor*

Perform some processing on configuration associated with this object.

#### Parameters

**kwargs** (*dict*) – keyword arguments passed to the function

#### Returns

this instance itself

#### Return type

*ConfigProcessor*

**step**(*cls, \*\*kwargs*) → *ConfigProcessor*

Perform some processing according to the cls given.

#### Parameters

- **cls** (*ConfigProcessor*) – a subclass of *ConfigProcessor*
- **kwargs** (*dict*) – keyword arguments passed to the *process* function of *cls*

#### Returns

this instance itself

#### Return type

*ConfigProcessor*

### ads.opctl.config.merger module

**class** ads.opctl.config.merger.**ConfigMerger**(*config: Optional[Dict] = None*)

Bases: *ConfigProcessor*

Merge configurations from command line args, YAML, ini and default configs. The order of precedence is command line args > YAML + conf.ini > .ads\_ops/config.ini + .ads\_ops/ml\_job\_config.ini or .ads\_ops/dataflow\_config.ini Detailed examples can be found at the last section on this page: <https://bitbucket.oc.oraclecorp.com/projects/ODSC/repos/advanced-ds/browse/ads/opctl/README.md?at=refs%2Fheads%2Fads-ops-draft>

Initializing a ConfigProcessor object given a configuration.

**Parameters**

**config** (*dict*) – a dictionary of configurations

**process** (*\*\*kwargs*) → None

Perform some processing on configuration associated with this object.

**Parameters**

**kwargs** (*dict*) – keyword arguments passed to the function

**Returns**

this instance itself

**Return type**

*ConfigProcessor*

### ads.opctl.config.resolver module

**class** ads.opctl.config.resolver.**ConfigResolver**(*config: Optional[Dict] = None*)

Bases: *ConfigProcessor*

Infer and fill in fields necessary for running an operator based on user inputs. For instance, if user pass in an ADS operator name, we will fill in image name, command, volumes to mount for local run, source folder path, etc.

Please check functions with name *\_resolve\_<thing>*.

List of things being resolved (and brief description): - operator name (could be passed in directly or in YAML) - conda (type is determined on whether a slug or uri is passed in. slug -> service, uri -> published. also do some additional checks.) - source folder (mainly for ADS operator) - command (docker command) - image name (mainly for ADS operator) - env vars - mount volumes (for local runs)

There are additional comments in some of the functions below.

Initializing a ConfigProcessor object given a configuration.

**Parameters**

**config** (*dict*) – a dictionary of configurations

**process** ()

Perform some processing on configuration associated with this object.

**Parameters**

**kwargs** (*dict*) – keyword arguments passed to the function

**Returns**

this instance itself

**Return type**

*ConfigProcessor*

**ads.opctl.config.utils module**

**exception** ads.opctl.config.utils.**CondaPackInfoNotProvided**

Bases: Exception

**exception** ads.opctl.config.utils.**NotSupportedError**

Bases: Exception

**exception** ads.opctl.config.utils.**OperatorNotFound**

Bases: Exception

ads.opctl.config.utils.**convert\_notebook**(*input\_path*, *auth*, *exclude\_tags*: List = None, *output\_path*: str = None, *overwrite*: bool = False) → str

ads.opctl.config.utils.**read\_from\_ini**(*path*: str) → ConfigParser

**ads.opctl.config.validator module**

**class** ads.opctl.config.validator.**ConfigValidator**(*config*: Optional[Dict] = None)

Bases: *ConfigProcessor*

Initializing a ConfigProcessor object given a configuration.

**Parameters**

**config** (*dict*) – a dictionary of configurations

**process()**

Perform some processing on configuration associated with this object.

**Parameters**

**kwargs** (*dict*) – keyword arguments passed to the function

**Returns**

this instance itself

**Return type**

*ConfigProcessor*

**ads.opctl.config.versioner module**

**class** ads.opctl.config.versioner.**ConfigVersioner**(*config*: Optional[Dict] = None)

Bases: *ConfigProcessor*

ads opctl supports multiple yaml file types, kinds and versions. Each has its own slightly different yaml structure. This goal of this class is to provide a translation from the generic term for a variable to it's specific path in it's yaml.

Initializing a ConfigProcessor object given a configuration.

**Parameters**

**config** (*dict*) – a dictionary of configurations

**process()**

Perform some processing on configuration associated with this object.

**Parameters**

**kwargs** (*dict*) – keyword arguments passed to the function

**Returns**

this instance itself

**Return type**  
*ConfigProcessor*

## Module contents

**ads.opctl.diagnostics package**

## Submodules

**ads.opctl.diagnostics.check\_distributed\_job\_requirements module**

**ads.opctl.diagnostics.check\_requirements module**

**ads.opctl.diagnostics.requirement\_exception module**

**exception** ads.opctl.diagnostics.requirement\_exception.**RequirementException**  
Bases: Exception

## Module contents

**ads.opctl.distributed package**

## Subpackages

**ads.opctl.distributed.common package**

## Submodules

**ads.opctl.distributed.common.abstract\_cluster\_provider module**

**class** ads.opctl.distributed.common.abstract\_cluster\_provider.**ClusterProvider**(*mode*,  
*ephemeral=True*,  
*life\_span='0h'*,  
*work\_dir=""*)

Bases: object

Provides contract for implementing Framework specific Cluster Life Cycle Manager.

The main node is identified by the environment variable - *MAIN* The worker node is identified by the environment variable - *WORKER*

The worker and main coordinate cluster configuration using the directory provided via *WORK\_DIR*. The main node creates config.json in the *WORK\_DIR*. The worker nodes polls the config.json and exports the configuration as environment variables

**DEFAULT\_CODE\_DIR** = `'/code'`

**SYNC\_SCRIPT\_PATH** = `'/etc/datascience/sync.sh'`



**basic\_configuration()** → dict

Prepares basic set of configuration which is framework independent. This configuration is decorated later by *configuration* method implemented by framework specific implementations

**check\_cluster\_status()**

**configuration(conf={})** → dict

Provides the configuration information of the cluster.

**conf:**

Contains generic information about the cluster, generated using *basic\_configuration*. Eg. IP Address of the main process

**static create\_sync\_script(sync\_script\_fn, sync\_script)**

**execution\_failed()**

Invoked when code submitted to ephemeral cluster fails. Calling this method sets the cluster tearable state

**expected\_worker\_count()**

**export\_config\_files()**

By default only exports configuration generated by main. This behavior can be overridden.

**export\_configuration(files)**

Read the configuration in the files array and export to environment variable

**fetch\_all\_worker\_info()**

Fetches all the worker configs In some cluster the main requires information about all worker IPs apriori. This method maybe useful in such situation.

**fetch\_code()**

**classmethod find\_self\_ip(authinfo)**

Identify IP address by finding which of the host IP intersects with the CIDR block of the subnet associated with the JOB\_OCID

**get\_oci\_auth()**

**get\_sync\_loc()**

**get\_sync\_script()**

**profile\_cmd()**

**reached\_endoflife()**

**ready()**

**run\_code()**

**setup\_configuration(config: Optional[dict] = None)**

Writes the configuration information into location provided by *work\_dir*

**config:**

dictionary containing configuration information that needs to be shared with the workers if config is None, then this method calls *self.configuration* and saves the configuration

**work\_dir:**

Could be any valid URI supported by fsspec

**setup\_extra\_configs**(*conf: dict*)

**start**()

Starts the cluster processes

**start\_main**()

Implement this for starting the main process. Eg. *scheduler* for Dask

**start\_ps**()

Implement this for starting the ps process. Eg. *tf-parameter-server* for tensorflow

**start\_worker**()

Implement this for starting the worker process. Eg. *dask-worker* for Dask

**stop**()

Writes stop file and exits.

**property stop\_filesystem**

**sync**(*loop=True*)

**tearable**()

Checks if cluster is ready for tear down. If there is a *stop* file in the tmp directory then stop. If cluster is ephemeral type, check if code execution is complete If TTL is reached then stop

**when\_ready**(*func, \*args, \*\*kwargs*)

## ads.opctl.distributed.common.abstract\_framework\_spec\_builder module

**class** ads.opctl.distributed.common.abstract\_framework\_spec\_builder.**AbstractFrameworkSpecBuilder**(*config*)

Bases: object

Provides contract for implementing Framework specific Cluster Spec Builder

In the example of jobs, this class handles adding framework specific environment variables to the job definition.

NOTE: This class is not invoked while the cluster is running. Only after a call to *ads opctl*.

**update**()

ads.opctl.distributed.common.abstract\_framework\_spec\_builder.**update\_env\_vars**(*config*,  
*env\_vars: List*)

env\_vars: List, should be formatted as [{“name”: “OCI\_XXX”, “value”: YYY},]

## ads.opctl.distributed.common.cluster\_config\_helper module

**class** ads.opctl.distributed.common.cluster\_config\_helper.**ClusterConfigToJobSpecConverter**(*cluster\_info*)

Bases: object

**job\_def\_info**()

**job\_run\_info**(*jobType*)

**ads.opctl.distributed.common.cluster\_provider\_factory module**

```

class ads.opctl.distributed.common.cluster_provider_factory.ClusterProviderFactory
    Bases: object
    Factory class for creating provider instance.
    static get_provider(key, *args, **kwargs)
    provider = {}
    classmethod register(cluster_type, provider_class)

```

**ads.opctl.distributed.common.cluster\_runner module**

```

class ads.opctl.distributed.common.cluster_runner.ClusterRunner(cluster_provider=None,
                                                                cluster_key=None)
    Bases: object
    run()

```

**ads.opctl.distributed.common.framework\_factory module****Module contents****Submodules****ads.opctl.distributed.certificates module**

```

ads.opctl.distributed.certificates.download_certificates(auth, ca_file_name, cert_file_name,
                                                         key_file_name)

```

**ads.opctl.distributed.cli module****ads.opctl.distributed.cmds module****Module contents****ads.opctl.spark package****Submodules****ads.opctl.spark.cli module****ads.opctl.spark.cmds module**

```

ads.opctl.spark.cmds.core_site(auth, oci_config, overwrite, oci_profile)

```

```
ads.opctl.spark.cmds.generate_core_site_properties(authentication, oci_config=None,  
                                                  oci_profile=None)
```

```
ads.opctl.spark.cmds.generate_core_site_properties_str(properties)
```

## Module contents

**ads.opctl.spec package**

### Submodules

**ads.opctl.spec.abstract\_operator\_spec module**

**ads.opctl.spec.operator\_spec\_factory module**

**ads.opctl.spec.utils module**

## Module contents

### 18.1.1.18.2 Submodules

**18.1.1.18.3 ads.opctl.cli module**

**18.1.1.18.4 ads.opctl.cmds module**

**18.1.1.18.5 ads.opctl.constants module**

```
class ads.opctl.constants.BACKEND_NAME(value)
```

Bases: Enum

An enumeration.

```
DATAFLOW = 'dataflow'
```

```
JOB = 'job'
```

```
LOCAL = 'local'
```

```
MODEL_DEPLOYMENT = 'deployment'
```

```
PIPELINE = 'pipeline'
```

### 18.1.1.18.6 ads.opctl.utils module

`ads.opctl.utils.build_image(image_type: str, gpu: bool = False, source_folder: Optional[str] = None, dst_image: Optional[str] = None) → None`

Build an image for opctl.

#### Parameters

- **image\_type** (*str*) – specify the image to build, can take ‘job-local’ or ‘ads-ops-base’, former for running job with conda pack locally, latter for running operators
- **gpu** (*bool*) – whether to use gpu version of image
- **source\_folder** (*str*) – source folder when building custom operator, to be included in custom image
- **dst\_image** (*str*) – image to save as when building custom operator

#### Return type

None

`ads.opctl.utils.get_docker_client() → docker.client.DockerClient`

`ads.opctl.utils.get_namespace(auth: dict) → str`

`ads.opctl.utils.get_oci_region(auth: dict) → str`

`ads.opctl.utils.get_region_key(auth: dict) → str`

`ads.opctl.utils.get_service_pack_prefix() → Dict`

`ads.opctl.utils.is_in_notebook_session()`

`ads.opctl.utils.list_ads_operators() → dict`

`ads.opctl.utils.parse_conda_uri(uri: str) → Tuple[str, str, str, str]`

`ads.opctl.utils.publish_image(image: str, registry: Optional[str] = None) → None`

Publish an image.

#### Parameters

- **image** (*str*) – image name
- **registry** (*str*) – registry to push to

#### Return type

None

`ads.opctl.utils.run_command(cmd: Union[str, List[str]], cwd: Optional[str] = None, shell: bool = False) → Popen`

`ads.opctl.utils.run_container(image: str, bind_volumes: Dict, env_vars: Dict, command: str = None, endpoint: str = None, verbose: bool = False)`

`ads.opctl.utils.suppress_traceback(debug: bool = True) → None`

Decorator to suppress traceback when in debug mode.

#### Parameters

- **debug** (*bool*) – turn on debug mode or not

#### Return type

None

#### 18.1.1.18.7 Module contents

`ads.opctl.set_log_level(level)`

#### 18.1.1.19 `ads.oracledb` package

##### 18.1.1.19.1 Submodules

##### 18.1.1.19.2 `ads.oracledb.oracle_db` module

##### 18.1.1.19.3 Module contents

#### 18.1.1.20 `ads.pipeline` package

##### 18.1.1.20.1 Subpackages

`ads.pipeline.builders` package

Subpackages

`ads.pipeline.builders.infrastructure` package

Submodules

`ads.pipeline.builders.infrastructure.custom_script` module

```
class ads.pipeline.builders.infrastructure.custom_script.CustomScriptStep(spec:
                                                                    Optional[Dict] =
                                                                    None, **kwargs)
```

Bases: *DataScienceJob*

Initialize a custom script step infrastructure.

#### Example

Here is an example for defining a custom script step infrastructure using builder:

```
from ads.pipeline import CustomScriptStep
# Define an OCI Data Science custom script step infrastructure
infrastructure = (
    CustomScriptStep()
    .with_shape_name("VM.Standard2.1")
    .with_block_storage_size(50)
)
```

See also:

**https**

[//docs.oracle.com/en-us/iaas/tools/ads-sdk/latest/user\\_guide/pipeline/index.html](https://docs.oracle.com/en-us/iaas/tools/ads-sdk/latest/user_guide/pipeline/index.html)

## Module contents

## Module contents

### ads.pipeline.schema package

## Module contents

### ads.pipeline.visualizer package

## Submodules

### ads.pipeline.visualizer.base module

**class** ads.pipeline.visualizer.base.**GraphOrientation**

Bases: object

**LEFT\_RIGHT** = 'LR'

**TOP\_BOTTOM** = 'TB'

**class** ads.pipeline.visualizer.base.**PipelineRenderer**

Bases: ABC

The base class responsible for the vizualizing a pipeline.

**abstract render**(*steps: List[RendererItem]*, *deps: Dict[str, List[RendererItem]]*, *step\_status: Optional[Dict[str, List[RendererItemStatus]]] = None*, *\*\*kwargs*)

Renders pipeline run.

**save\_to**(\*args, *\*\*kwargs*) → str

Saves the pipeline visualization to the provided format.

**class** ads.pipeline.visualizer.base.**PipelineVisualizer**(*pipeline: Pipeline = None*, *pipeline\_run: PipelineRun = None*, *renderer: PipelineRenderer = None*)

Bases: object

PipelineVisualizer class to visualize pipeline in text or graph.

**pipeline**

Pipeline instance.

**Type**

*Pipeline*

**pipeline\_run**

PipelineRun instance.

**Type**

*PipelineRun*

**steps**

A list of RendererItem objects.

**Type**List[[RendererItem](#)]**deps**

A dictionary mapping the key of a [RendererItem](#) to a list of [RendererItem](#) that this step depends on.

**Type**Dict[str, List[[RendererItem](#)]]**step\_status**

A dictionary mapping the key of a [RendererItem](#) to its current status.

**Type**Dict[str, [RendererItemStatus](#)], defaults to None.

Initialize a [PipelineVisualizer](#) object.

**Parameters**

- **pipeline** ([Pipeline](#)) – Pipeline instance.
- **pipeline\_run** ([PipelineRun](#)) – PipelineRun instance.
- **renderer** ([PipelineRenderer](#)) – Renderer used to visualize pipeline in text or graph.

**render**(*rankdir*: str = 'TB')

Renders pipeline step status.

**Parameters**

**rankdir** (str, default to "TB".) – Direction of the rendered graph; allowed Values are {"TB", "LR"}.

**Return type**

None

**Raises**

[PipelineVisualizerError](#) – If *pipeline* or *renderer* not specified.

**to\_svg**(*uri*: Optional[str] = None, *rankdir*: str = 'TB', *\*\*kwargs*) → str

Renders pipeline as graph in SVG string.

**Parameters**

- **uri** ((string, optional). Defaults to None.) – URI location to save the SVG string.
- **rankdir** (str, default to "TB".) – Direction of the rendered graph; allowed Values are {"TB", "LR"}.

**Returns**

Graph in svg format.

**Return type**

str

**Raises**

[PipelineVisualizerError](#) – If *pipeline* or *renderer* not specified.

**with\_pipeline**(*value*: [Pipeline](#)) → [PipelineVisualizer](#)

Adds a [Pipeline](#) instance to be rendered.

**Parameters**

**value** ([Pipeline](#)) – Pipeline instance.



**Returns**

The PipelineVisualizer instance.

**Return type**

*PipelineVisualizer*

**Raises**

**PipelineVisualizerError** – If *pipeline* not specified.

**with\_pipeline\_run**(*value*: PipelineRun) → *PipelineVisualizer*

Adds a PipelineRun instance to be rendered.

**Parameters**

**value** (PipelineRun) – PipelineRun instance.

**Returns**

The PipelineVisualizer instance.

**Return type**

*PipelineVisualizer*

**Raises**

**PipelineVisualizerError** – If *pipeline run* not specified.

**with\_renderer**(*value*: PipelineRenderer) → *PipelineVisualizer*

Add renderer to visualize pipeline.

**Parameters**

**value** (*object*) – Renderer used to visualize pipeline in text or graph.

**Returns**

The PipelineVisualizer instance.

**Return type**

*PipelineVisualizer*

**Raises**

**PipelineVisualizerError** – If *renderer* not specified.

**exception** ads.pipeline.visualizer.base.PipelineVisualizerError

Bases: Exception

```
class ads.pipeline.visualizer.base.RendererItem(name: str, kind: str = "", spec:
                                             Union[ForwardRef('Pipeline'),
                                             ForwardRef('PipelineStep')] = None, _key: str = "")
```

Bases: object

**property key: str**

Key of the item.

**Returns**

The key of the item.

**Return type**

str

**kind: str = ''**

**name: str**

**spec: Union[Pipeline, PipelineStep] = None**

```
class ads.pipeline.visualizer.base.RendererItemStatus(name: str, kind: str = "", time_started:
                                                    Optional[datetime] = None, time_finished:
                                                    Optional[datetime] = None, lifecycle_state:
                                                    str = "", lifecycle_details: str = "", _key: str =
                                                    "")
```

Bases: object

Class represents the state of the renderer item.

**property duration: int**

Calculates duration in seconds between *time\_started* and *time\_finished*.

**Returns**

The duration in seconds between *time\_started* and *time\_finished*.

**Return type**

int

**static format\_datetime(value: datetime, format='%Y-%m-%d %H:%M:%S') → str**

Converts datetime object into a given format in string

**Parameters**

**dt** (*datetime.datetime*) – Datetime object to be formatted.

**Returns**

A timestamp in a string format.

**Return type**

str

**classmethod from\_pipeline\_run(pipeline\_run: PipelineRun) → *RendererItemStatus***

Creates class instance from the PipelineRun object.

**Parameters**

**pipeline\_run** (*PipelineRun*) – The PipelineRun object.

**Returns**

Instance of *RendererItemStatus*.

**Return type**

*RendererItemStatus*

**classmethod from\_pipeline\_step\_run(pipeline\_step\_run: PipelineStepRun) → *RendererItemStatus***

Creates class instance from the PipelineStepRun object.

**Parameters**

**pipeline\_run** (*PipelineStepRun*) – The PipelineStepRun object.

**Returns**

Instance of *RendererItemStatus*.

**Return type**

*RendererItemStatus*

**property key: str**

Key of the item.

**Returns**

The key of the item.

**Return type**

str

```

    kind: str = ''
    lifecycle_details: str = ''
    lifecycle_state: str = ''
    name: str
    time_finished: datetime = None
    time_started: datetime = None
class ads.pipeline.visualizer.base.StepKind
    Bases: object
    CUSTOM_SCRIPT = 'CUSTOM_SCRIPT'
    ML_JOB = 'ML_JOB'
    PIPELINE = 'pipeline'
class ads.pipeline.visualizer.base.StepStatus
    Bases: object
    ACCEPTED = 'ACCEPTED'
    CANCELED = 'CANCELED'
    CANCELING = 'CANCELING'
    DELETED = 'DELETED'
    FAILED = 'FAILED'
    IN_PROGRESS = 'IN_PROGRESS'
    SKIPPED = 'SKIPPED'
    SUCCEEDED = 'SUCCEEDED'
    WAITING = 'WAITING'

```

### ads.pipeline.visualizer.graph\_renderer module

```

class ads.pipeline.visualizer.graph_renderer.PipelineGraphRenderer(show_status: bool = False)
    Bases: PipelineRenderer
    Initialize a PipelineGraphRenderer class.
    Parameters
        show_status (bool, defaults to False.) – Whether to display status for steps.
    Returns
        Nothing.
    Return type
        None

```

```
render(steps: List[RendererItem], deps: Optional[Dict[str, List[RendererItem]]] = None, step_status: Optional[Dict[str, RendererItemStatus]] = None, rankdir: str = 'TB', **kwargs)
```

Renders Pipeline graph.

#### Parameters

- **steps** (*List[RendererItem]*) – A list of `RendererItem` objects.
- **deps** (*Dict[str, List[RendererItem]]*) – A dictionary mapping the key of a `RendererItem` to a list of `RendererItem` that this step depends on.
- **step\_status** (*Dict[str, RendererItemStatus]*, defaults to *None*.) – A dictionary mapping the key of a `RendererItem` to its current status.
- **rankdir** (*str*, default to *"TB"*.) – Direction of the rendered graph; allowed Values are {"TB", "LR"}.

#### Return type

*None*

```
save_to(steps: List[RendererItem], deps: Optional[Dict[str, List[RendererItem]]] = None, step_status: Optional[Dict[str, RendererItemStatus]] = None, rankdir: str = 'TB', uri: Optional[str] = None, format: str = 'svg', **kwargs) → str
```

Renders pipeline as graph in selected format.

**steps:** *List[RendererItem]*

A list of `RendererItem` objects.

**deps:** *Dict[str, List[RendererItem]]*

A dictionary mapping the key of a `RendererItem` to a list of `RendererItem` that this step depends on.

**step\_status:** *Dict[str, RendererItemStatus]*, defaults to *None*.

A dictionary mapping the key of a `RendererItem` to its current status.

**rankdir:** *str*, default to *"TB"*.

Direction of the rendered graph; allowed Values are {"TB", "LR"}.

**uri:** (*string*, optional). Defaults to *None*.

URI location to save the SVG string.

**format:** (*str*, optional). Defaults to *"svg"*.

The format to save the graph. Supported formats: "svg", "html".

#### Returns

Graph in selected format.

#### Return type

*str*

```
class ads.pipeline.visualizer.graph_renderer.RenderTo
```

Bases: *str*

**JPEG** = *'jpeg'*

**PNG** = *'png'*

**SVG** = *'svg'*

## ads.pipeline.visualizer.text\_renderer module

**class** ads.pipeline.visualizer.text\_renderer.PipelineTextRenderer

Bases: *PipelineRenderer*

**render**(*steps: List[RendererItem]*, *deps: Dict[str, List[RendererItem]]*, *step\_status: Optional[Dict[str, RendererItemStatus]] = None*, *\*\*kwargs*)

Render pipeline step status in text.

### Parameters

- **steps** (*List[RendererItem]*) – A list of *RendererItem* objects.
- **deps** (*Dict[str, List[RendererItem]]*) – A dictionary mapping the key of a *RendererItem* to a list of *RendererItem* that this step depends on.
- **step\_status** (*Dict[str, RendererItemStatus]*, *defaults to None.*) – A dictionary mapping the key of a *RendererItem* to its current status.

### Return type

None

## Module contents

### 18.1.1.20.2 Submodules

#### 18.1.1.20.3 ads.pipeline.ads\_pipeline module

**class** ads.pipeline.ads\_pipeline.DataSciencePipeline(*config: Optional[dict] = None*, *signer: Optional[Signer] = None*, *client\_kwargs: Optional[dict] = None*, *\*\*kwargs*)

Bases: *OCIDataScienceMixin*, *Pipeline*

Initializes a service/resource with OCI client as a property. If config or signer is specified, it will be used to initialize the OCI client. If neither of them is specified, the client will be initialized with `ads.common.auth.default_signer`. If both of them are specified, both of them will be passed into the OCI client, and the authentication will be determined by OCI Python SDK.

### Parameters

- **config** (*dict*, *optional*) – OCI API key config dictionary, by default None.
- **signer** (*oci.signer.Signer*, *optional*) – OCI authentication signer, by default None.
- **client\_kwargs** (*dict*, *optional*) – Additional keyword arguments for initializing the OCI client.

**build\_ads\_pipeline**() → *Pipeline*

Builds an ADS pipeline from OCI datascience pipeline.

### Returns

ADS Pipeline instance.

### Return type

*Pipeline*

**build\_ads\_pipeline\_step**(*step: Dict*) → *PipelineStep*

Builds an ADS pipeline step from OCI pipeline response.

**Parameters**

**step** (*dict*) – A dictionary that contains the information of a pipeline step.

**Returns**

ADS PipelineStep instance.

**Return type**

*Pipeline*

**create**(*step\_details: List, delete\_if\_fail: bool*) → *str*

Creates an OCI pipeline.

**Parameters**

**step\_details** (*list*) – List of pipeline step details.

**Returns**

The id of OCI pipeline.

**Return type**

*str*

**create\_step\_artifact**(*artifact\_path: str, step\_name: str*) → *DataSciencePipeline*

Creates step artifact.

**Parameters**

- **artifact\_path** (*str*) – Local path to artifact.
- **step\_name** (*str*) – Pipeline step name.

**Returns**

DataSciencePipeline instance.

**Return type**

*DataSciencePipeline*

**delete**(*id: str, operation\_kwargs: Dict = {'delete\_related\_job\_runs': True, 'delete\_related\_pipeline\_runs': True}, waiter\_kwargs: Dict = {'max\_wait\_seconds': 1800}*) → *DataSciencePipeline*

Deletes an OCI pipeline.

**Parameters**

- **id** (*str*) – The ocid of pipeline.
- **operation\_kwargs** (*dict, optional*) – The operational kwargs to be executed when deleting the pipeline. Defaults to: {"delete\_related\_pipeline\_runs": True, "delete\_related\_job\_runs": True}, which will delete the corresponding pipeline runs and job runs.

The allowed keys are: \* "delete\_related\_pipeline\_runs": bool, to specify whether to delete related PipelineRuns or not. \* "delete\_related\_job\_runs": bool, to specify whether to delete related JobRuns or not. \* "allow\_control\_chars": bool, to indicate whether or not this request should allow control characters in the response object. By default, the response will not allow control characters in strings \* "retry\_strategy": obj, to apply to this specific operation/call. This will override any retry strategy set at the client-level. This should be one of the strategies available in the `retry` module. This operation will not retry by default, users can also use the convenient `DEFAULT_RETRY_STRATEGY` provided by the SDK to enable retries for

it. The specifics of the default retry strategy are described [here](#). To have this operation explicitly not perform any retries, pass an instance of `NoneRetryStrategy`. \* `“if_match”`: str, for optimistic concurrency control. In the PUT or DELETE call for a resource, set the `if-match` parameter to the value of the etag from a previous GET or POST response for that resource. The resource is updated or deleted only if the `etag` you provide matches the resource’s current `etag` value. \* `“opc_request_id”`: str, unique Oracle assigned identifier for the request. If you need to contact Oracle about a particular request, then provide the request ID.

- **`waiter_kwargs`** (*dict, optional*) – The waiter kwargs to be passed when deleting the pipeline. Defaults to: `{“max_wait_seconds”: 1800}`, which will allow a maximum wait time to 1800 seconds to delete the pipeline. The allowed keys are: \* `“max_wait_seconds”`: int, the maximum time to wait, in seconds. \* `“max_interval_seconds”`: int, the maximum interval between queries, in seconds. \* `“succeed_on_not_found”`: bool, to determine whether or not the waiter should return successfully if the data we’re waiting on is not found (e.g. a 404 is returned from the service). This defaults to False and so a 404 would cause an exception to be thrown by this function. Setting it to True may be useful in scenarios when waiting for a resource to be terminated/deleted since it is possible that the resource would not be returned by the a GET call anymore. \* `“wait_callback”`: A function which will be called each time that we have to do an initial wait (i.e. because the property of the resource was not in the correct state, or the `evaluate_response` function returned False). This function should take two arguments - the first argument is the number of times we have checked the resource, and the second argument is the result of the most recent check. \* `“fetch_func”`: A function to be called to fetch the updated state from the server. This can be used if the call to check for state needs to be more complex than a single GET request. For example, if the goal is to wait until an item appears in a list, `fetch_func` can be a function that paginates through a full list on the server.

#### Returns

DataSciencePipeline instance.

#### Return type

*DataSciencePipeline*

**classmethod** `from_ocid(ocid: str) → DataSciencePipeline`

Gets a datascience pipeline by OCID.

#### Parameters

**`ocid`** (*str*) – The OCID of the datascience pipeline.

#### Returns

An instance of DataSciencePipeline.

#### Return type

*DataSciencePipeline*

**run**(*pipeline\_details: Dict, service\_logging: Optional[OCILog] = None*) → *PipelineRun*

Runs an OCI pipeline.

#### Parameters

- **`pipeline_details`** (*dict*) – A dictionary that contains pipeline details.
- **`service_logging`** (*OCILog instance.*) – The OCILog instance.

#### Returns

PipelineRun instance.

**Return type***PipelineRun***upload\_artifact**(*step\_details: List*) → *DataSciencePipeline*

Uploads artifacts to pipeline.

**Parameters****step\_details** (*list*) – List of pipeline step details.**Returns**

DataSciencePipeline instance.

**Return type***DataSciencePipeline***class** ads.pipeline.ads\_pipeline.**Pipeline**(*name: Optional[str] = None, spec: Optional[Dict] = None, \*\*kwargs*)Bases: *Builder*

Represents a Data Science Machine Learning Pipeline.

Initialize a pipeline.

**Parameters**

- **name** (*str*) – The name of the pipeline, default to None. If a name is not provided, a randomly generated easy to remember name with timestamp will be generated, like ‘strange-spider-2022-08-17-23:55.02’.
- **spec** (*dict, optional*) – Object specification, default to None
- **kwargs** (*dict*) – Specification as keyword arguments. If spec contains the same key as the one in kwargs, the value from kwargs will be used.
  - project\_id: str
  - compartment\_id: str
  - display\_name: str
  - description: str
  - maximum\_runtime\_in\_minutes: int
  - environment\_variables: dict(str, str)
  - command\_line\_arguments: str
  - log\_id: str
  - log\_group\_id: str
  - enable\_service\_log: bool
  - shape\_name: str
  - block\_storage\_size\_in\_gbs: int
  - shape\_config\_details: dict
  - step\_details: list[PipelineStep]
  - dag: list[str]
  - defined\_tags: dict(str, dict(str, object))
  - freeform\_tags: dict[str, str]



**kind**

The kind of the object as showing in YAML.

**Type**

str

**name**

The name of pipeline.

**Type**

str

**id**

The id of pipeline.

**Type**

str

**step\_details**

The step details of pipeline.

**Type**

List[*PipelineStep*]

**dag\_details**

The dag details of pipeline.

**Type**

List[str]

**log\_group\_id**

The log group id of pipeline.

**Type**

str

**log\_id**

The log id of pipeline.

**Type**

str

**project\_id**

The project id of pipeline.

**Type**

str

**compartment\_id**

The compartment id of pipeline.

**Type**

str

**created\_by**

The created by of pipeline.

**Type**

str

**description**

The description of pipeline.

**Type**

str

**environment\_variable**

The environment variables of pipeline.

**Type**

dict

**argument**

The command line argument of pipeline.

**Type**

str

**maximum\_runtime\_in\_minutes**

The maximum runtime in minutes of pipeline.

**Type**

int

**shape\_name**

The shape name of pipeline infrastructure.

**Type**

str

**block\_storage\_size\_in\_gbs**

The block storage of pipeline infrastructure.

**Type**

int

**shape\_config\_details**

The shape config details of pipeline infrastructure.

**Type**

dict

**enable\_service\_log**

The value to enable service log or not.

**Type**

bool

**service\_log\_id**

The service log id of pipeline.

**Type**

str

**status**

The status of the pipeline.

**Type**

str

**with\_name**(*self*, *name*: *str*) → *Pipeline*  
 Sets the name of pipeline.

**with\_id**(*self*, *id*: *str*) → *Pipeline*  
 Sets the ocid of pipeline.

**with\_step\_details**(*self*, *step\_details*: *List[PipelineStep]*) → *Pipeline*  
 Sets the step details of pipeline.

**with\_dag\_details**(*self*, *dag\_details*: *List[str]*) → *Pipeline*  
 Sets the dag details of pipeline.

**with\_log\_group\_id**(*self*, *log\_group\_id*: *str*) → *Pipeline*  
 Sets the log group id of pipeline.

**with\_log\_id**(*self*, *log\_id*: *str*) → *Pipeline*  
 Sets the log id of pipeline.

**with\_project\_id**(*self*, *project\_id*: *str*) → *Pipeline*  
 Sets the project id of pipeline.

**with\_compartment\_id**(*self*, *compartment\_id*: *str*) → *Pipeline*  
 Sets the compartment id of pipeline.

**with\_created\_by**(*self*, *created\_by*: *str*) → *Pipeline*  
 Sets the created by of pipeline.

**with\_description**(*self*, *description*: *str*) → *Pipeline*  
 Sets the description of pipeline.

**with\_environment\_variable**(*self*, *\*\*kwargs*) → *Pipeline*  
 Sets the environment variables of pipeline.

**with\_argument**(*self*, *\*args*, *\*\*kwargs*) → *Pipeline*  
 Sets the command line arguments of pipeline.

**with\_maximum\_runtime\_in\_minutes**(*self*, *maximum\_runtime\_in\_minutes*: *int*) → *Pipeline*  
 Sets the maximum runtime in minutes of pipeline.

**with\_freeform\_tags**(*self*, *freeform\_tags*: *Dict*) → *Pipeline*  
 Sets the freeform tags of pipeline.

**with\_defined\_tags**(*self*, *defined\_tags*: *Dict*) → *Pipeline*  
 Sets the defined tags of pipeline.

**with\_shape\_name**(*self*, *shape\_name*: *str*) → *Pipeline*  
 Sets the shape name of pipeline infrastructure.

**with\_block\_storage\_size\_in\_gbs**(*self*, *block\_storage\_size\_in\_gbs*: *int*) → *Pipeline*  
 Sets the block storage size of pipeline infrastructure.

**with\_shape\_config\_details**(*self*, *shape\_config\_details*: *Dict*) → *Pipeline*  
 Sets the shape config details of pipeline infrastructure.

**with\_enable\_service\_log**(*self*, *enable\_service\_log*: *bool*) → *Pipeline*  
 Sets the value to enable the service log of pipeline.

**to\_dict**(*self*) → dict:

Serializes the pipeline specifications to a dictionary.

**from\_dict**(*cls*, *obj\_dict*: dict):

Initializes the object from a dictionary.

**create**(*self*, *delete\_if\_fail*: bool = True) → Pipeline

Creates an ADS pipeline.

**show**(*self*, *rankdir*: str = GraphOrientation.TOP\_BOTTOM)

Render pipeline with step information in a graph.

**to\_svg**(*self*, *uri*: str = None, *rankdir*: str = GraphOrientation.TOP\_BOTTOM, *\\*\*kwargs*) → str:

Renders pipeline as graph into SVG.

**run**(*self*, *display\_name*: Optional[str] = None, *project\_id*: Optional[str] = None, *compartment\_id*: Optional[str] = None, *configuration\_override\_details*: Optional[dict] = None, *log\_configuration\_override\_details*: Optional[dict] = None, *step\_override\_details*: Optional[list] = None, *free\_form\_tags*: Optional[dict] = None, *defined\_tags*: Optional[dict] = None, *system\_tags*: Optional[dict] = None) → PipelineRun

Creates and/or overrides an ADS pipeline run.

**delete**(*self*, *delete\_related\_pipeline\_runs*: Optional[bool] = True, *delete\_related\_job\_runs*: Optional[bool] = True, *max\_wait\_seconds*: Optional[int] = MAXIMUM\_TIMEOUT, *\\*\*kwargs*) → Pipeline

Deletes an ADS pipeline run.

**from\_ocid**(*cls*, *ocid*: str) → Pipeline

Creates an ADS pipeline from ocid.

**from\_id**(*cls*, *id*: str) → Pipeline

Creates an ADS pipeline from ocid.

**to\_yaml**(*self*, *uri*=None, *\\*\*kwargs*)

Returns Pipeline serialized as a YAML string

**from\_yaml**(*cls*, *yaml\_string*=None, *uri*=None, *\\*\*kwargs*)

Creates an Pipeline from YAML string provided or from URI location containing YAML string

**list**(*cls*, *compartment\_id*: Optional[str] = None, *\\*\*kwargs*) → List[Pipeline]

List pipelines in a given compartment.

**run\_list**(*self*, *\\*\*kwargs*) → List[PipelineRun]

Gets a list of runs of the pipeline.

## Example

Here is an example for creating and running a pipeline using builder:

```
from ads.pipeline import Pipeline, CustomScriptStep, ScriptRuntime
# Define an OCI Data Science pipeline
pipeline = (
    Pipeline(name="<pipeline_name>")
    .with_compartment_id("<compartment_id>")
    .with_project_id("<project_id>")
    .with_log_group_id("<log_group_id>")
```

(continues on next page)

(continued from previous page)

```

.with_log_id("<log_id>")
.with_description("<description>")
.with_maximum_runtime_in_minutes(200)
.with_argument("argument", key="value")
.with_environment_variable(env="value")
.with_freeform_tags({"key": "value"})
.with_step_details([
    (
        PipelineStep(name="PipelineStepOne")
        .with_job_id("<job_id>")
        .with_description("<description>")
    ),
    (
        PipelineStep(name="PipelineStepTwo")
        .with_infrastructure(
            CustomScriptStep()
            .with_shape_name("VM.Standard2.1")
            .with_block_storage_size(50)
        )
        .with_runtime(
            ScriptRuntime()
            .with_source("oci://bucket_name@namespace/path/to/script.py")
            .with_service_conda("tensorflow26_p37_cpu_v2")
            .with_environment_variable(ENV="value")
            .with_argument("argument", key="value")
            .with_maximum_runtime_in_minutes(200)
        )
    )
])
.with_dag_details(["PipelineStepOne >> PipelineStepTwo"])
)
# Create and Run the pipeline
run = pipeline.create().run()
# Stream the pipeline run outputs
run.watch()

```

See also:

**https**

[//docs.oracle.com/en-us/iaas/tools/ads-sdk/latest/user\\_guide/pipeline/index.html](https://docs.oracle.com/en-us/iaas/tools/ads-sdk/latest/user_guide/pipeline/index.html)

**CONST\_BLOCK\_STORAGE\_SIZE** = 'blockStorageSizeInGBs'

**CONST\_COMMAND\_LINE\_ARGUMENTS** = 'commandLineArguments'

**CONST\_COMPARTMENT\_ID** = 'compartmentId'

**CONST\_CONFIGURATION\_DETAILS** = 'configurationDetails'

**CONST\_CONFIGURATION\_OVERRIDE\_DETAILS** = 'configurationOverrideDetails'

**CONST\_CREATED\_BY** = 'createdBy'

**CONST\_DAG** = 'dag'

```
CONST_DEFINED_TAGS = 'definedTags'
CONST_DESCRIPTION = 'description'
CONST_DISPLAY_NAME = 'displayName'
CONST_ENABLE_AUTO_LOG_CREATION = 'enableAutoLogCreation'
CONST_ENABLE_LOGGING = 'enableLogging'
CONST_ENABLE_SERVICE_LOG = 'enableServiceLog'
CONST_ENVIRONMENT_VARIABLES = 'environmentVariables'
CONST_FREEFROM_TAGS = 'freeformTags'
CONST_ID = 'id'
CONST_INFRA_CONFIG_DETAILS = 'infrastructureConfigurationDetails'
CONST_LOG_CONFIGURATION_DETAILS = 'logConfigurationDetails'
CONST_LOG_CONFIGURATION_OVERRIDE_DETAILS = 'logConfigurationOverrideDetails'
CONST_LOG_GROUP_ID = 'logGroupId'
CONST_LOG_ID = 'logId'
CONST_MAXIMUM_RUNTIME_IN_MINUTES = 'maximumRuntimeInMinutes'
CONST_MEMORY_IN_GBS = 'memoryInGBs'
CONST_OCPUS = 'ocpus'
CONST_PIPELINE_ID = 'pipelineId'
CONST_PROJECT_ID = 'projectId'
CONST_SERVICE = 'datascience'
CONST_SERVICE_LOG_CATEGORY = 'pipelinerunlog'
CONST_SERVICE_LOG_ID = 'serviceLogId'
CONST_SHAPE_CONFIG_DETAILS = 'shapeConfigDetails'
CONST_SHAPE_NAME = 'shapeName'
CONST_STEP_DETAILS = 'stepDetails'
CONST_STEP_OVERRIDE_DETAILS = 'stepOverrideDetails'
CONST_SYSTEM_TAGS = 'systemTags'
CONST_TYPE = 'type'
LIFECYCLE_STATE_ACTIVE = 'ACTIVE'
LIFECYCLE_STATE_CREATING = 'CREATING'
LIFECYCLE_STATE_DELETED = 'DELETED'
```

**LIFECYCLE\_STATE\_DELETING** = 'DELETING'

**LIFECYCLE\_STATE\_FAILED** = 'FAILED'

**property argument:** str

The command line arguments of the pipeline.

**Returns**

The command line arguments of the pipeline.

**Return type**

str

**property block\_storage\_size\_in\_gbs:** int

The block storage size of pipeline infrastructure.

**Returns**

The block storage size of the pipeline infrastructure.

**Return type**

int

**property compartment\_id:** str

The compartment id of the pipeline.

**Returns**

The compartment id of the pipeline.

**Return type**

str

**create**(*delete\_if\_fail: bool = True*) → *Pipeline*

Creates an ADS pipeline.

**Returns**

The ADS Pipeline instance.

**Return type**

*Pipeline*

**property created\_by:** str

The id that creates the pipeline.

**Returns**

The id that creates the pipeline.

**Return type**

str

**property dag:** List[str]

The dag details of the pipeline.

**Returns**

The dag details of the pipeline.

**Return type**

list

**delete**(*delete\_related\_pipeline\_runs: Optional[bool] = True, delete\_related\_job\_runs: Optional[bool] = True, max\_wait\_seconds: Optional[int] = 1800, \*\*kwargs*) → *Pipeline*

Deletes an ADS pipeline.

### Parameters

- **delete\_related\_pipeline\_runs** (*bool, optional*) – Specify whether to delete related PipelineRuns or not. Defaults to True.
- **delete\_related\_job\_runs** (*bool, optional*) – Specify whether to delete related JobRuns or not. Defaults to True.
- **max\_wait\_seconds** (*int, optional*) – The maximum time to wait, in seconds. Defaults to 1800.
- **kwargs** (*optional*) –
- **pipeline.** (*The kwargs to be executed when deleting the*) –
- **are** (*The allowed keys*) –
- **"allow\_control\_chars"** (\*) –
- **default** (*allow control characters in the response object. By*) –
- **will** (*the response*) –
- **strings.** (*not allow control characters in*) –
- **"retry\_strategy"** (\*) –
- **the** (*override any retry strategy set at the client-level. This should be one of*) –

:param strategies available in the `retry` module. This operation will not: :param retry by default: :param users can also use the convenient `DEFAULT_RETRY_STRATEGY`: :param provided by the SDK to enable retries for it. The specifics of the default retry: :param strategy are described [here](#) <<https://type-strategy-are-described-here>>. :param To have this operation explicitly not perform any retries: :param pass an instance of `NoneRetryStrategy`.: :param \* "if\_match": :type \* "if\_match": str, for optimistic concurrency control. In the PUT or DELETE call :param for a resource: :param set the *if-match* parameter to the value of the etag from a: :param previous GET or POST response for that resource. The resource is updated or: :param deleted only if the *etag* you provide matches the resource's current *etag* value.: :param \* "opc\_request\_id": :type \* "opc\_request\_id": str, unique Oracle assigned identifier for the request. :param If you need to contact Oracle about a particular request: :param then provide the request ID.: :param \* "max\_interval\_seconds": :type \* "max\_interval\_seconds": int, the maximum interval between queries, in seconds. :param \* "succeed\_on\_not\_found": :type \* "succeed\_on\_not\_found": bool, to determine whether or not the waiter should :param return successfully if the data we're waiting on is not found: :param (e.g. a 404 is returned from the service). This defaults to False and so a 404 would: :param cause an exception to be thrown by this function. Setting it to True may be useful in: :param scenarios when waiting for a resource to be terminated/deleted since it is possible that: :param the resource would not be returned by the a GET call anymore.: :param \* "wait\_callback": :type \* "wait\_callback": A function which will be called each time that we have to do an initial :param wait (i.e. because the property of the resource was not in the correct state: :param : :param or the `evaluate_response` function returned False). This function should take two: :param arguments - the first argument is the number of times we have checked the resource: :param : :param and the second argument is the result of the most recent check.: :param \* "fetch\_func": :type \* "fetch\_func": A function to be called to fetch the updated state from the server. :param This can be used if the call to check for state needs to be more complex than a single: :param GET request. For example: :param if the goal is to wait until an item appears in a list: :param : :param `fetch_func` can be a function that paginates through a full list on the server.:

### Returns

The ADS Pipeline instance.

### Return type

*Pipeline*



**property description: str**

The description of pipeline.

**Returns**

The description of pipeline.

**Return type**

str

**download**(*to\_dir: str, override\_if\_exists: Optional[bool] = False*) → *Pipeline*

Downloads artifacts from pipeline.

**Parameters**

- **to\_dir** (*str*) – Local directory to which the artifacts will be downloaded to.
- **override\_if\_exists** (*bool, optional*) – Bool to decide whether to override existing folder/file or not. Defaults to False.

**Returns**

The ADS Pipeline instance.

**Return type**

*Pipeline*

**property enable\_service\_log: bool**

Enables service log of pipeline.

**Returns**

The bool value to enable service log of pipeline.

**Return type**

bool

**property environment\_variable: dict**

The environment variables of the pipeline.

**Returns**

The environment variables of the pipeline.

**Return type**

dict

**classmethod from\_dict**(*obj\_dict: dict*)

Initializes the object from a dictionary.

**classmethod from\_id**(*id: str*) → *Pipeline*

Creates a pipeline by OCID.

**Parameters**

**id** (*str*) – The OCID of pipeline.

**Returns**

The Pipeline instance.

**Return type**

*Pipeline*

**classmethod from\_ocid**(*ocid: str*) → *Pipeline*

Creates a pipeline by OCID.

**Parameters**

**ocid** (*str*) – The OCID of pipeline.

**Returns**

The Pipeline instance.

**Return type**

*Pipeline*

**property id: str**

The id of the pipeline.

**Returns**

The id of the pipeline.

**Return type**

str

**property kind: str**

The kind of the object as showing in YAML.

**Returns**

pipeline

**Return type**

str

**classmethod list**(*compartment\_id: Optional[str] = None, \*\*kwargs*) → List[*Pipeline*]

List pipelines in a given compartment.

**Parameters**

- **compartment\_id** ((*str*, *optional*). *Defaults to None.*) – The OCID of compartment. If *None*, the value will be taken from the environment variables.
- **kwargs** – Additional keyword arguments for filtering pipelines. - *project\_id*: str - *lifecycle\_state*: str. Allowed values: “CREATING”, “ACTIVE”, “DELETING”, “FAILED”, “DELETED” - *created\_by*: str - *limit*: int

**Returns**

The list of pipelines.

**Return type**

List[*Pipeline*]

**property log\_group\_id: str**

The log group id of the pipeline.

**Returns**

The log group id of the pipeline.

**Return type**

str

**property log\_id: str**

The log id of the pipeline.

**Returns**

The log id of the pipeline.

**Return type**

str

**property maximum\_runtime\_in\_minutes: int**

The maximum runtime in minutes of the pipeline.

**Returns**

The maximum runtime minutes of the pipeline.

**Return type**

int

**property name: str**

The name of the pipeline.

**Returns**

The name of the pipeline.

**Return type**

str

**property project\_id: str**

The project id of the pipeline.

**Returns**

The project id of the pipeline.

**Return type**

str

**run**(*display\_name: Optional[str] = None, project\_id: Optional[str] = None, compartment\_id: Optional[str] = None, configuration\_override\_details: Optional[dict] = None, log\_configuration\_override\_details: Optional[dict] = None, step\_override\_details: Optional[list] = None, free\_form\_tags: Optional[dict] = None, defined\_tags: Optional[dict] = None, system\_tags: Optional[dict] = None*) → *PipelineRun*

Creates an ADS pipeline run.

**Parameters**

- **display\_name** (*str, optional*) – The display name to override the one defined previously. Defaults to None.
- **project\_id** (*str, optional*) – The project id to override the one defined previously. Defaults to None.
- **compartment\_id** (*str, optional*) – The compartment id to override the one defined previously. Defaults to None.
- **configuration\_override\_details** (*dict, optional*) – The configuration details dictionary to override the one defined previously. Defaults to None. The `configuration_override_details` contains the following keys: \* “type”: str, only “DEFAULT” is allowed. \* “environment\_variables”: dict, optional, the environment variables \* “command\_line\_arguments”: str, optional, the command line arguments \* “maximum\_runtime\_in\_minutes”: int, optional, the maximum runtime allowed in minutes
- **log\_configuration\_override\_details** (*dict(str, str), optional*) – The log configuration details dictionary to override the one defined previously. Defaults to None. The `log_configuration_override_details` contains the following keys: \* “log\_group\_id”: str, optional, the log group id \* “log\_id”: str, optional, the log id
- **step\_override\_details** (*list[PipelineStepOverrideDetails], optional*) – The step details list to override the one defined previously. Defaults to None. The `PipelineStepOverrideDetails` is a dict which contains the following keys: \* `step_name`: str, the name of step to override \* `step_configuration_details`: dict, which contains:
  - “maximum\_runtime\_in\_minutes”: int, optional

- "environment\_variables": dict, optional
- "command\_line\_arguments": str, optional
- **free\_form\_tags** (*dict(str, str), optional*) – The free form tags dictionary to override the one defined previously. Defaults to None.
- **defined\_tags** (*dict(str, dict(str, object)), optional*) – The defined tags dictionary to override the one defined previously. Defaults to None.
- **system\_tags** (*dict(str, dict(str, object)), optional*) – The system tags dictionary to override the one defined previously. Defaults to None.

### Example

```
# Creates a pipeline run using pipeline configurations
pipeline.run()

# Creates a pipeline run by overriding pipeline configurations
pipeline.run(
    display_name="OverrideDisplayName",
    configuration_override_details={
        "maximum_runtime_in_minutes": 30,
        "type": "DEFAULT",
        "environment_variables": {
            "key": "value"
        },
        "command_line_arguments": "ARGUMENT --KEY VALUE",
    },
    log_configuration_override_details={
        "log_group_id": "<log_group_id>"
    },
    step_override_details=[{
        "step_name" : "<step_name>",
        "step_configuration_details" : {
            "maximum_runtime_in_minutes": 200,
            "environment_variables": {
                "1": "2"
            },
        },
        "command_line_arguments": "argument --key value",
    }
    ])
)
```

#### Returns

The ADS PipelineRun instance.

#### Return type

*PipelineRun*

**run\_list** (*\*\*kwargs*) → List[*PipelineRun*]

Gets a list of runs of the pipeline.

#### Returns

A list of pipeline run instances.

**Return type**List[[PipelineRun](#)]**property service\_log\_id: str**

The service log id of pipeline.

**Returns**

The service log id of pipeline.

**Return type**

str

**property shape\_config\_details: dict**

The shape config details of pipeline infrastructure.

**Returns**

The shape config details of the pipeline infrastructure.

**Return type**

dict

**property shape\_name: str**

The shape name of pipeline infrastructure.

**Returns**

The shape name of the pipeline infrastructure.

**Return type**

str

**show(rankdir: str = 'TB') → None**

Render pipeline with step information in a graph

**Return type**

None

**property status: Optional[str]**

Status of the pipeline.

**Returns**

Status of the pipeline.

**Return type**

str

**property step\_details: List[[PipelineStep](#)]**

The step details of the pipeline.

**Returns**

The step details of the pipeline.

**Return type**

list

**to\_dict() → dict**

Serializes the pipeline specifications to a dictionary.

**Returns**

A dictionary containing pipeline specifications.

**Return type**

dict

**to\_svg**(*uri*: *Optional*[*str*] = *None*, *rankdir*: *str* = 'TB', *\*\*kwargs*) → *str*

Renders pipeline as graph in svg string.

**Parameters**

- **uri** ((*string*, *optional*). Defaults to *None*.) – URI location to save the SVG string.
- **rankdir** (*str*, default to "TB".) – Direction of the rendered graph; allowed Values are {"TB", "LR"}.

**Returns**

Graph in svg format.

**Return type**

*str*

**with\_argument**(*\*args*, *\*\*kwargs*) → *Pipeline*

Adds command line arguments to the pipeline. Existing arguments will be preserved. This method can be called (chained) multiple times to add various arguments. For example, `pipeline.with_argument(key="val").with_argument("path/to/file")` will result in: `"-key val path/to/file"`

**Parameters**

- **args** – Positional arguments. In a single method call, positional arguments are always added before keyword arguments. You can call `with_argument()` to add positional arguments after keyword arguments.
- **kwargs** – Keyword arguments. To add a keyword argument without value, set the value to *None*.

**Returns**

The Pipeline instance (self).

**Return type**

*Pipeline*

**Raises**

**ValueError** – Keyword arguments with space in a key.

**with\_block\_storage\_size\_in\_gbs**(*block\_storage\_size\_in\_gbs*: *int*) → *Pipeline*

Sets the block storage size of pipeline infrastructure.

**Parameters**

**block\_storage\_size\_in\_gbs** (*int*) – The block storage size of pipeline infrastructure.

**Returns**

The Pipeline instance (self).

**Return type**

*Pipeline*

**with\_compartment\_id**(*compartment\_id*: *str*) → *Pipeline*

Sets the compartment id of the pipeline.

**Parameters**

**compartment\_id** (*str*) – The compartment id of the pipeline.

**Returns**

The Pipeline instance (self).

**Return type***Pipeline***with\_created\_by**(*created\_by: str*) → *Pipeline*

Sets the id that creates the pipeline.

**Parameters****created\_by** (*str*) – The id that creates the pipeline.**Returns**

The Pipeline instance (self).

**Return type***Pipeline***with\_dag**(*dag: List[str]*) → *Pipeline*

Sets the pipeline dag details for the pipeline.

**Parameters****dag** (*List*) – A list of dag representing step dependencies in the pipeline.**Returns**

The Pipeline instance (self).

**Return type***Pipeline***with\_defined\_tags**(*defined\_tags: Dict*) → *Pipeline*

Sets defined tags of the pipeline.

**Parameters****defined\_tags** (*dict*) – The defined tags dictionary.**Returns**

The Pipeline instance (self).

**Return type***Pipeline***with\_description**(*description: str*) → *Pipeline*

Sets the description of the pipeline.

**Parameters****description** (*str*) – The description of the pipeline.**Returns**

The Pipeline instance (self).

**Return type***Pipeline***with\_enable\_service\_log**(*enable\_service\_log: bool*) → *Pipeline*

Sets the bool value to enable the service log of pipeline.

**Parameters****enable\_service\_log** (*bool*) – The value to enable the service log of pipeline.**Returns**

The Pipeline instance (self).

**Return type***Pipeline*

**with\_environment\_variable**(\*\*kwargs) → *Pipeline*

Sets environment variables of the pipeline.

**Parameters**

**kwargs** – Keyword arguments. To add a keyword argument without value, set the value to None.

**Returns**

The Pipeline instance (self).

**Return type**

*Pipeline*

**with\_freeform\_tags**(freeform\_tags: Dict) → *Pipeline*

Sets freeform tags of the pipeline.

**Parameters**

**freeform\_tags** (dict) – The freeform tags dictionary.

**Returns**

The Pipeline instance (self).

**Return type**

*Pipeline*

**with\_id**(id: str) → *Pipeline*

Sets the id of pipeline.

**Parameters**

**id** (str) – The id of pipeline.

**Returns**

The Pipeline instance (self).

**Return type**

*Pipeline*

**with\_log\_group\_id**(log\_group\_id: str) → *Pipeline*

Sets the log group id of the pipeline.

**Parameters**

**log\_group\_id** (str) – The log group id of the pipeline.

**Returns**

The Pipeline instance (self).

**Return type**

*Pipeline*

**with\_log\_id**(log\_id: str) → *Pipeline*

Sets the log id of the pipeline.

**Parameters**

**log\_id** (str) – The log id of the pipeline.

**Returns**

The Pipeline instance (self).

**Return type**

*Pipeline*



**with\_maximum\_runtime\_in\_minutes**(*maximum\_runtime\_in\_minutes: int*) → *Pipeline*

Sets the maximum runtime in minutes of the pipeline.

**Parameters**

**maximum\_runtime\_in\_minutes** (*int*) – The maximum\_runtime\_in\_minutes of the pipeline.

**Returns**

The Pipeline instance (self).

**Return type**

*Pipeline*

**with\_name**(*name: str*) → *Pipeline*

Sets the name of pipeline.

**Parameters**

**name** (*str*) – The name of pipeline.

**Returns**

The Pipeline instance (self).

**Return type**

*Pipeline*

**with\_project\_id**(*project\_id: str*) → *Pipeline*

Sets the project id of the pipeline.

**Parameters**

**project\_id** (*str*) – The project id of the pipeline.

**Returns**

The Pipeline instance (self).

**Return type**

*Pipeline*

**with\_shape\_config\_details**(*memory\_in\_gbs: float, ocpus: float, \*\*kwargs: Dict[str, Any]*) → *Pipeline*

Sets the shape config details of pipeline infrastructure. Specify only when a flex shape is selected. For example *VM.Standard.E3.Flex* allows the memory\_in\_gbs and cpu count to be specified.

**Parameters**

- **memory\_in\_gbs** (*float*) – The size of the memory in GBs.
- **ocpus** (*float*) – The OCPUs count.
- **kwargs** – Additional keyword arguments.

**Returns**

The Pipeline instance (self).

**Return type**

*Pipeline*

**with\_shape\_name**(*shape\_name: str*) → *Pipeline*

Sets the shape name of pipeline infrastructure.

**Parameters**

**shape\_name** (*str*) – The shape name of the pipeline infrastructure.

**Returns**

The Pipeline instance (self).

**Return type***Pipeline***with\_step\_details**(*step\_details: List[PipelineStep]*) → *Pipeline*

Sets the pipeline step details for the pipeline.

**Parameters****step\_details** (*list*) – A list of steps in the pipeline.**Returns**

The Pipeline instance (self).

**Return type***Pipeline***18.1.1.20.4 ads.pipeline.ads\_pipeline\_run module****exception** ads.pipeline.ads\_pipeline\_run.LogNotConfiguredError

Bases: Exception

**class** ads.pipeline.ads\_pipeline\_run.LogType

Bases: str

**CUSTOM\_LOG** = 'custom\_log'**SERVICE\_LOG** = 'service\_log'**class** ads.pipeline.ads\_pipeline\_run.PipelineRun(*config: Optional[dict] = None, signer: Optional[Signer] = None, client\_kwargs: Optional[dict] = None, \*\*kwargs*)Bases: *OCIDataScienceMixin*, PipelineRun, *RunInstance***pipeline**

Returns the ADS pipeline object for run instance.

**Type***Pipeline***status**

Returns Lifecycle status.

**Type**

str

**custom\_logging**

Returns the OCILog object containing the custom logs from the pipeline.

**Type***OCILog***create**(*self*) → *PipelineRun*

Creates an OCI pipeline run.

**delete**(*self, delete\_related\_job\_runs: Optional[bool] = True, max\_wait\_seconds: Optional[int] = MAXIMUM\_TIMEOUT, \\*\*kwargs*) → *PipelineRun*

Deletes an OCI pipeline run.

**cancel**(*self*, *maximum\_timeout*: int = MAXIMUM\_TIMEOUT) → PipelineRun

Cancels an OCI pipeline run.

**watch**(*self*, *steps*: List[str] = None, *interval*: float = LOG\_INTERVAL, *log\_type*: str = LogType.CUSTOM\_LOG, *\*args*) → PipelineRun

Watches the pipeline run until it finishes.

**list**(*cls*, *pipeline\_id*: str, *compartment\_id*: Optional[str] = None, *\*\*kwargs*) → List[PipelineRun]:

Lists pipeline runs for a given pipeline.

**to\_yaml**(*self*) → str

Serializes the object into YAML string.

**show**(*self*, *mode*: str = ShowMode.GRAPH, *wait*: bool = False, *rankdir*: str = GraphOrientation.TOP\_BOTTOM) → None

Renders pipeline run. Can be *text* or *graph* representation.

**to\_svg**(*self*, *uri*: str = None, *rankdir*: str = GraphOrientation.TOP\_BOTTOM, *\*\*kwargs*)

Renders pipeline run graph to SVG.

**sync**(*self*) → None

Syncs status of Pipeline run.

Initializes a service/resource with OCI client as a property. If config or signer is specified, it will be used to initialize the OCI client. If neither of them is specified, the client will be initialized with `ads.common.auth.default_signer`. If both of them are specified, both of them will be passed into the OCI client, and the authentication will be determined by OCI Python SDK.

#### Parameters

- **config** (*dict*, *optional*) – OCI API key config dictionary, by default None.
- **signer** (*oci.signer.Signer*, *optional*) – OCI authentication signer, by default None.
- **client\_kwargs** (*dict*, *optional*) – Additional keyword arguments for initializing the OCI client.

**cancel**(*maximum\_timeout*: int = 1800) → PipelineRun

Cancels an OCI pipeline run.

#### Parameters

- **maximum\_timeout** (*int*, *optional*) – The maximum timeout to cancel the pipeline run. Defaults to 1800 seconds.

#### Returns

Pipeline run instance (self).

#### Return type

PipelineRun

**create**() → PipelineRun

Creates an OCI pipeline run.

#### Returns

Pipeline run instance (self).

#### Return type

PipelineRun

**property custom\_logging:** *OCILog*

The OCILog object containing the custom logs from the pipeline run.

**delete**(*delete\_related\_job\_runs: Optional[bool] = True, max\_wait\_seconds: Optional[int] = 1800, \*\*kwargs*) → *PipelineRun*

Deletes an OCI pipeline run.

#### Parameters

- **delete\_related\_job\_runs** (*bool, optional*) – Specify whether to delete related JobRuns or not. Defaults to True.
- **max\_wait\_seconds** (*int, optional*) – The maximum time to wait, in seconds. Defaults to 1800.
- **kwargs** (*optional*) –
- **pipeline.** (*The kwargs to be executed when deleting the*) –
- **are** (*The allowed keys*) –
- **"allow\_control\_chars"** (\*) –
- **default** (*allow control characters in the response object. By*) –
- **will** (*the response*) –
- **strings.** (*not allow control characters in*) –
- **"retry\_strategy"** (\*) –
- **the** (*override any retry strategy set at the client-level. This should be one of*) –

:param strategies available in the `retry` module. This operation will not: :param retry by default: :param users can also use the convenient `DEFAULT_RETRY_STRATEGY`: :param provided by the SDK to enable retries for it. The specifics of the default retry: :param strategy are described [here](#) <<https://typestrategyaredescribedhere>>. :param To have this operation explicitly not perform any retries: :param pass an instance of `NoneRetryStrategy`.: :param \* "if\_match": :type \* "if\_match": str, for optimistic concurrency control. In the PUT or DELETE call :param for a resource: :param set the *if-match* parameter to the value of the etag from a: :param previous GET or POST response for that resource. The resource is updated or: :param deleted only if the *etag* you provide matches the resource's current *etag* value.: :param \* "opc\_request\_id": :type \* "opc\_request\_id": str, unique Oracle assigned identifier for the request. :param If you need to contact Oracle about a particular request: :param then provide the request ID.: :param \* "max\_interval\_seconds": :type \* "max\_interval\_seconds": int, the maximum interval between queries, in seconds. :param \* "wait\_callback": :type \* "wait\_callback": A function which will be called each time that we have to do an initial :param wait (i.e. because the property of the resource was not in the correct state: :param : :param or the `evaluate_response` function returned False). This function should take two: :param arguments - the first argument is the number of times we have checked the resource: :param : :param and the second argument is the result of the most recent check.: :param \* "fetch\_func": :type \* "fetch\_func": A function to be called to fetch the updated state from the server. :param This can be used if the call to check for state needs to be more complex than a single: :param GET request. For example: :param if the goal is to wait until an item appears in a list: :param : :param fetch\_func can be a function that paginates through a full list on the server.:

#### Returns

Pipeline run instance (self).

#### Return type

*PipelineRun*

**classmethod** `list`(*pipeline\_id*: str, *compartment\_id*: Optional[str] = None, \*\*kwargs) → List[PipelineRun]

List pipeline runs for a given pipeline.

#### Parameters

- **pipeline\_id** (str.) – The OCID of pipeline.
- **compartment\_id** ((str, optional). Defaults to None.) – The OCID of compartment. If None, the value will be taken from the environment variables.
- **kwargs** – Additional keyword arguments for filtering pipelines. - lifecycle\_state: str. Allowed values: “CREATING”, “ACTIVE”, “DELETING”, “FAILED”, “DELETED” - created\_by: str - limit: int

#### Returns

The list of pipeline runs.

#### Return type

List[PipelineRun]

**logs**(*log\_type*: Optional[str] = None) → ConsolidatedLog

Builds the consolidated log for pipeline run.

#### Parameters

**log\_type** (str) – The log type of the pipeline run. Defaults to None. Can be custom\_log, service\_log or None.

#### Returns

The ConsolidatedLog instance.

#### Return type

ConsolidatedLog

### property pipeline

Returns the ADS Pipeline instance. Step details will be synched with the Pipeline Run.

#### Parameters

None –

#### Returns

The ADS Pipeline instance, where Step details will be synched with the Pipeline Run.

#### Return type

Pipeline

### property service\_logging: OCILog

The OCILog object containing the service logs from the pipeline run.

**show**(*mode*: str = 'graph', *wait*: bool = False, *rankdir*: str = 'TB') → None

Renders pipeline run. Can be *text* or *graph* representation.

#### Parameters

- **mode** ((str, optional). Defaults to *graph*.) – Pipeline run display mode. Allowed values: *graph* or *text*.
- **wait** ((bool, optional). Default to *False*.) – Whether to wait until the completion of the pipeline run.
- **rankdir** ((str, optional). Default to *TB*.) – Direction of the rendered graph. Allowed Values: *TB* or *LR*. Applicable only for graph mode.

**Return type**

None

**property status: str**

Lifecycle status.

**Returns**

Status in a string.

**Return type**

str

**sync(\*\*kwargs)** → None

Syncs status of the Pipeline Run.

**Return type**

None

**to\_svg(uri: Optional[str] = None, rankdir: str = 'TB', \*\*kwargs)** → str

Renders pipeline run graph to SVG.

**Parameters**

- **uri** ((string, optional). Defaults to *None*.) – URI location to save the SVG string.
- **rankdir** ((str, optional). Default to *TB*.) – Direction of the rendered graph. Allowed Values: *TB* or *LR*. Applicable only for graph mode.

**Returns**

Pipeline run graph in svg format.

**Return type**

str

**to\_yaml()** → str

Serializes the object into YAML string.

**Returns**

YAML stored in a string.

**Return type**

str

**watch(steps: Optional[List[str]] = None, interval: float = 3, log\_type: Optional[str] = None, \*args)** → *PipelineRun*

Watches the pipeline run until it finishes. This method will keep streamming the service log of the pipeline run until it's succeeded, failed or cancelled.

**Parameters**

- **steps** ((List[str], optional). Defaults to *None*.) – Pipeline steps passed in to filter the logs.
- **interval** ((float, optional). Defaults to *3 seconds*.) – Time interval in seconds between each request to update the logs.
- **log\_type** ((str, optional). Defaults to *None*.) – The log type. Can be *custom\_log*, *service\_log* or *None*.
- **\*args** – Pipeline steps passed in to filter the logs. Example: `.watch("step1", "step2")`

## Examples

```
>>> .watch()
>>> .watch(log_type="service_log")
>>> .watch("step1", "step2", log_type="custom_log", interval=3)
>>> .watch(steps=["step1", "step2"], log_type="custom_log", interval=3)
```

### Returns

Pipeline run instance (self).

### Return type

*PipelineRun*

```
class ads.pipeline.ads_pipeline_run.ShowMode
```

Bases: str

**GRAPH** = 'graph'

**TEXT** = 'text'

```
class ads.pipeline.ads_pipeline_run.StepType
```

Bases: str

**CUSTOM\_SCRIPT** = 'CUSTOM\_SCRIPT'

**ML\_JOB** = 'ML\_JOB'

### 18.1.1.20.5 ads.pipeline.ads\_pipeline\_step module

```
class ads.pipeline.ads_pipeline_step.PipelineStep(name: str, job_id: Optional[str] = None,
                                                    infrastructure=None, runtime=None,
                                                    description=None,
                                                    maximum_runtime_in_minutes=None,
                                                    environment_variable=None,
                                                    command_line_argument=None, kind=None)
```

Bases: *Job*

Represents the Data Science Machine Learning Pipeline Step.

Initialize a pipeline step.

#### Parameters

- **name** (*str*, *required*) – The name of the pipeline step.
- **job\_id** (*str*, *optional*) – The job id of the pipeline step, by default None.
- **infrastructure** (*Infrastructure*, *optional*) – Pipeline step infrastructure, by default None.
- **runtime** (*Runtime*, *optional*) – Pipeline step runtime, by default None.
- **description** (*str*, *optional*) – The description for pipeline step, by default None.
- **maximum\_runtime\_in\_minutes** (*int*, *optional*) – The maximum runtime in minutes for pipeline step, by default None.
- **environment\_variable** (*dict*, *optional*) – The environment variable for pipeline step, by default None.

- **command\_line\_argument** (*str*, *optional*) – The command line argument for pipeline step, by default None.
- **kind** (*str*, *optional*) – The kind of pipeline step.

**kind**

The kind of the object as showing in YAML.

**Type**

str

**name**

The name of pipeline step.

**Type**

str

**job\_id**

The job id of pipeline step.

**Type**

str

**infrastructure**

The infrastructure of pipeline step.

**Type**

*DataScienceJob*

**runtime**

The runtime of pipeline step.

**Type**

*Runtime*

**description**

The description of pipeline step.

**Type**

str

**maximum\_runtime\_in\_minutes**

The maximum runtime in minutes of pipeline step.

**Type**

int

**environment\_variable**

The environment variables of pipeline step.

**Type**

dict

**argument**

The argument of pipeline step.

**Type**

str

**depends\_on**

The depends on of pipeline step.



**Type**

list

**with\_job\_id**(self, job\_id: str) → PipelineStep

Sets the job id for pipeline step.

**with\_infrastructure**(self, infrastructure) → PipelineStep

Sets the infrastructure for pipeline step.

**with\_runtime**(self, runtime) → PipelineStep

Sets the runtime for pipeline step.

**with\_description**(self, description: str) → PipelineStep

Sets the description for pipeline step.

**with\_maximum\_runtime\_in\_minutes**(self, maximum\_runtime\_in\_minutes: int) → PipelineStep

Sets the maximum runtime in minutes for pipeline step.

**with\_environment\_variable**(self, *kwargs*) → PipelineStep

Sets the environment variables for pipeline step.

**with\_argument**(self, *args*, *kwargs*) → PipelineStep

Sets the command line arguments for pipeline step.

**with\_kind**(self, kind: str) → PipelineStep

Sets the kind for pipeline step.

**to\_dict**(self) → dict

Serializes the pipeline step specification dictionary.

**from\_dict**(cls, config: dict) → PipelineStep

Initializes a PipelineStep from a dictionary containing the configurations.

**to\_yaml**(self, uri=None, *kwargs*)

Returns PipelineStep serialized as a YAML string

**from\_yaml**(cls, yaml\_string=None, uri=None, *kwargs*)

Creates an PipelineStep from YAML string provided or from URI location containing YAML string

**Example**

Here is an example for defining a pipeline step using builder:

```

from ads.pipeline import PipelineStep, CustomScriptStep, ScriptRuntime
# Define an OCI Data Science pipeline step to run a python script
pipeline_step = (
    PipelineStep(name="<pipeline_step_name>")
    .with_infrastructure(
        CustomScriptStep()
        .with_shape_name("VM.Standard2.1")
        .with_block_storage_size(50)
    )
    .with_runtime(
        ScriptRuntime()
        .with_source("oci://bucket_name@namespace/path/to/script.py")
        .with_service_conda("tensorflow26_p37_cpu_v2")
    )

```

(continues on next page)

(continued from previous page)

```

        .with_environment_variable(ENV="value")
        .with_argument("argument", key="value")
        .with_maximum_runtime_in_minutes(200)
    )
)

# Another way to define an OCI Data Science pipeline step from existing job
pipeline_step = (
    PipelineStep(name="<pipeline_step_name>")
    .with_job_id("<job_id>")
    .with_description("<description>")
)

```

See also:

**https**

[//docs.oracle.com/en-us/iaas/tools/ads-sdk/latest/user\\_guide/pipeline/index.html](https://docs.oracle.com/en-us/iaas/tools/ads-sdk/latest/user_guide/pipeline/index.html)

**CONST\_COMMAND\_LINE\_ARGUMENTS** = 'commandLineArguments'

**CONST\_DEPENDS\_ON** = 'dependsOn'

**CONST\_DESCRIPTION** = 'description'

**CONST\_ENVIRONMENT\_VARIABLES** = 'environmentVariables'

**CONST\_INFRASTRUCTURE** = 'infrastructure'

**CONST\_JOB\_ID** = 'jobId'

**CONST\_KIND** = 'stepType'

**CONST\_MAXIMUM\_RUNTIME\_IN\_MINUTES** = 'maximumRuntimeInMinutes'

**CONST\_NAME** = 'name'

**CONST\_RUNTIME** = 'runtime'

**CONST\_STEP\_CONFIG\_DETAILS** = 'stepConfigurationDetails'

**CONST\_STEP\_INFRA\_CONFIG\_DETAILS** = 'stepInfrastructureConfigurationDetails'

**property argument:** str

The command line arguments of the pipeline step.

**Returns**

The command line arguments of the pipeline step.

**Return type**

str

**property depends\_on:** list

The list of upstream pipeline steps for (self).

**Returns**

The list of upstream pipeline steps for (self).

**Return type**

list

**property description: str**

The description of the pipeline step.

**Returns**

The description of the pipeline step.

**Return type**

str

**property environment\_variable: dict**

The environment variables of the pipeline step.

**Returns**

The environment variables of the pipeline step.

**Return type**

dict

**classmethod from\_dict(*config: dict*) → *PipelineStep***

Initializes a PipelineStep from a dictionary containing the configurations.

**Parameters**

**config** (*dict*) – A dictionary containing the infrastructure and runtime specifications.

**Returns**

A PipelineStep instance

**Return type**

*PipelineStep*

**Raises**

**NotImplementedError** – If the type of the infrastructure or runtime is not supported.

**property infrastructure: *DataScienceJob***

The infrastructure of the pipeline step.

**Returns**

Data science pipeline step instance.

**Return type**

*DataScienceJob*

**property job\_id: str**

The job id of the pipeline step.

**Returns**

The job id of the pipeline step.

**Return type**

str

**property kind: str**

The kind of the object as showing in YAML.

**Returns**

The kind of the object as showing in YAML.

**Return type**

str

**property maximum\_runtime\_in\_minutes: int**

The maximum runtime in minutes of pipeline step.

**Returns**

The maximum runtime in minutes of the pipeline step.

**Return type**

int

**property name: str**

The name of pipeline step.

**Returns**

The name of the pipeline step.

**Return type**

str

**property runtime: *Runtime***

The runtime of the pipeline step.

**Returns**

Runtime instance.

**Return type**

*Runtime*

**to\_dict() → dict**

Serializes the pipeline step specification dictionary.

**Returns**

A dictionary containing pipeline step specification.

**Return type**

dict

**with\_argument(\*args, \*\*kwargs) → *PipelineStep***

Adds command line arguments to the pipeline step. Existing arguments will be preserved. This method can be called (chained) multiple times to add various arguments. For example, `pipeline.with_argument(key="val").with_argument("path/to/file")` will result in: “-key val path/to/file”

**Parameters**

- **args** – Positional arguments. In a single method call, positional arguments are always added before keyword arguments. You can call `with_argument()` to add positional arguments after keyword arguments.
- **kwargs** – Keyword arguments. To add a keyword argument without value, set the value to `None`.

**Returns**

The Pipeline step instance (self).

**Return type**

*Pipeline*

**Raises**

**ValueError** – Keyword arguments with space in a key.

**with\_description(description: str) → *PipelineStep***

Sets the description for pipeline step.

**Parameters****description** (*str*) – The description of pipeline step.**Return type**

Pipeline step instance (self).

**with\_environment\_variable**(\*\**kwargs*) → *PipelineStep*

Sets environment variables of the pipeline step.

**Parameters****kwargs** – Keyword arguments. To add a keyword argument without value, set the value to None.**Returns**

The Pipeline step instance (self).

**Return type***Pipeline***with\_infrastructure**(*infrastructure*) → *PipelineStep*

Sets the infrastructure for pipeline step.

**Parameters****infrastructure** – The infrastructure of pipeline step.**Return type**

Pipeline step instance (self).

**with\_job\_id**(*job\_id: str*) → *PipelineStep*

Sets the job id for pipeline step.

**Parameters****job\_id** (*str*) – The job id of pipeline step.**Return type**

Pipeline step instance (self).

**with\_kind**(*kind: str*) → *PipelineStep*

Sets the kind of pipeline step.

**Parameters****kind** (*str*) – The kind of pipeline step.**Return type**

Pipeline step instance (self).

**with\_maximum\_runtime\_in\_minutes**(*maximum\_runtime\_in\_minutes: int*) → *PipelineStep*

Sets the maximum runtime in minutes of pipeline step.

**Parameters****maximum\_runtime\_in\_minutes** (*int*) – The maximum runtime in minutes of pipeline step.**Return type**

Pipeline step instance (self).

**with\_runtime**(*runtime*) → *PipelineStep*

Sets the runtime for pipeline step.

**Parameters****runtime** – The runtime of pipeline step.

**Return type**

Pipeline step instance (self).

**18.1.1.20.6 ads.pipeline.cli module****18.1.1.20.7 ads.pipeline.extension module**`ads.pipeline.extension.load_ipython_extension(ipython)``ads.pipeline.extension.pipeline(line, cell=None)``ads.pipeline.extension.pipeline_cancel(options, args)``ads.pipeline.extension.pipeline_delete(options, args)``ads.pipeline.extension.pipeline_log(options, args)``ads.pipeline.extension.pipeline_run(options, args)``ads.pipeline.extension.pipeline_show(options, args)``ads.pipeline.extension.pipeline_status(options, args)`**18.1.1.20.8 Module contents****18.1.1.21 ads.secrets package****18.1.1.21.1 Submodules****18.1.1.21.2 ads.secrets.adb module**

```
class ads.secrets.adb.ADBSecret(user_name: str, password: str, service_name: str, wallet_location:  
                               ~typing.Optional[str] = None, wallet_file_name: ~typing.Optional[str] =  
                               None, wallet_content: ~typing.Optional[dict] = None, wallet_secret_ids:  
                               list = <factory>)
```

Bases: [Secret](#)

Dataclass representing the attributes managed and serialized by ADBSecretKeeper

**password: str****service\_name: str****user\_name: str****wallet\_content: dict = None****wallet\_file\_name: str = None****wallet\_location: str = None****wallet\_secret\_ids: list**

```
class ads.secrets.adb.ADBSecretKeeper(user_name: Optional[str] = None, password: Optional[str] =
                                     None, service_name: Optional[str] = None, wallet_location:
                                     Optional[str] = None, wallet_dir: Optional[str] = None,
                                     repository_path: Optional[str] = None, repository_key:
                                     Optional[str] = None, **kwargs)
```

Bases: [SecretKeeper](#)

*ADBSecretKeeper* provides an interface to save ADW/ATP database credentials. This interface does not store the wallet file by default. For saving wallet file, set *save\_wallet=True* while calling *ADBSecretKeeper.save* method.

## Examples

```
>>> # Saving credentials without saving the wallet file
>>> from ads.secrets.adb import ADBSecretKeeper
>>> vault_id = "ocidl.vault.oc1..<unique_ID>"
>>> key_id = "ocidl.key..<unique_ID>"
```

```
>>> import ads
>>> ads.set_auth("resource_principal") # If using resource principal for
↪ authentication
>>> connection_parameters={
...     "user_name": "admin",
...     "password": "<your password>",
...     "service_name": "service_name_{high|low|med}",
...     "wallet_location": "/home/datascience/Wallet_xxxx.zip"
... }
>>> adw_keeper = ADBSecretKeeper(vault_id=vault_id, key_id=key_id, **connection_
↪ parameters)
>>> adw_keeper.save("adw_employee", "My DB credentials", freeform_tags={"schema":
↪ "emp"}) # Does not save the wallet file
>>> print(adw_keeper.secret_id) # Prints the secret_id of the stored credentials
>>> adw_keeper.export_vault_details("adw_employee_att.json", format="json") # Save
↪ the secret id and vault info to a json file
```

```
>>> # Loading credentials
>>> import ads
>>> ads.set_auth("resource_principal") # If using resource principal for
↪ authentication
>>> from ads.secrets.adb import ADBSecretKeeper
>>> secret_id = "ocidl.vaultsecret.oc1..<unique_ID>"
>>> with ADBSecretKeeper.load_secret(source=secret_id,
                                   wallet_location='/home/datascience/Wallet_xxxxxx.zip')
↪ as adw_creds:
...     import pandas as pd
...     df = pd.DataFrame.ads.read_sql("select * from EMPLOYEE", connection_
↪ parameters=adw_creds)
```

```
>>> myadw_creds = ADBSecretKeeper.load_secret(source='adw_employee_att.json',
↪ format="json")
...     wallet_location='/home/datascience/Wallet_xxxxxx.zip')
>>> pd.DataFrame.ads.read_sql("select * from ATTRITION_DATA", connection_
↪ parameters=myadw_creds.to_dict()).head(2)
```

```
>>> # Saving and loading credentials with wallet storage
>>> # Saving credentials
>>> from ads.secrets.adw import ADBSecretKeeper
>>> vault_id = "ocid1.vault.oc1..<unique_ID>"
>>> key_id = "ocid1.key.oc1..<unique_ID>"
```

```
>>> import ads
>>> ads.set_auth("resource_principal") # If using resource principal for
↪ authentication
>>> connection_parameters={
...     "user_name":"admin",
...     "password":"<your password>",
...     "service_name":"service_name_{high|low|med}",
...     "wallet_location":"/home/datascience/Wallet_xxxx.zip"
... }
>>> adw_keeper = ADBSecretKeeper(vault_id=vault_id, key_id=key_id, **connection_
↪ parameters)
>>> adw_keeper.save("adw_employee", "My DB credentials", freeform_tags={"schema":
↪ "emp"}, save_wallet=True)
>>> print(adw_keeper.secret_id) # Prints the secret_id of the stored credentials
>>> adw_keeper.export_vault_details("adw_employee_att.json") # Save the secret id,
↪ and vault info to a json file
```

```
>>> # Loading credentials
>>> import ads
>>> ads.set_auth("resource_principal") # If using resource principal for
↪ authentication
>>> from ads.secrets.adw import ADBSecretKeeper
>>> secret_id = "ocid1.vaultsecret.oc1..<unique_ID>"
>>> with ADBSecretKeeper.load_secret(source=secret_id) as adw_creds:
...     import pandas as pd
...     df = pd.DataFrame(ads.read_sql("select * from EMPLOYEE", connection_
↪ parameters=adw_creds))
```

```
>>> myadw_creds = ADBSecretKeeper.load_secret(source='adw_employee_att.json',
↪ format='json')
>>> pd.DataFrame(ads.read_sql("select * from ATTRITION_DATA", connection_
↪ parameters=myadw_creds.to_dict()).head(2))
```

### Parameters

- **user\_name** ((str, optional). Default None) – user\_name of the database
- **password** ((str, optional). Default None) – password for connecting to the database
- **service\_name** ((str, optional). Default None) – service name of the ADB instance
- **wallet\_location** ((str, optional). Default None) – full path to the wallet zip file used for connecting to ADB instance.
- **wallet\_dir** ((str, optional). Default None) – local directory where the extracted wallet content is saved



- **repository\_path** ((*str*, optional). *Default None*.) – Path to credentials repository. For more details refer *ads.database.connection*
- **repository\_key** ((*str*, optional). *Default None*.) – Configuration key for loading the right configuration from repository. For more details refer *ads.database.connection*
- **kwargs** – vault\_id: str. OCID of the vault where the secret is stored. Required for saving secret. key\_id: str. OCID of the key used for encrypting the secret. Required for saving secret. compartment\_id: str. OCID of the compartment where the vault is located. Required for saving secret. auth: dict. Dictionary returned from *ads.common.auth.api\_keys()* or *ads.common.auth.resource\_principal()*. By default, will follow what is set in *ads.set\_auth*. Use this attribute to override the default.

**decode()** → *ADBSecretKeeper*

Converts the content in *self.secret* to *ADBSecret* and stores in *self.data*

If the *wallet\_location* is passed through the constructor, then retain it. We do not want to override what user has passed in If the *wallet\_location* was not passed, but the secret has *wallet\_secret\_ids*, then we generate the wallet zip file in the location specified by *wallet\_dir* in the constructor

#### Returns

Returns self object

#### Return type

*ADBSecretKeeper*

**encode**(*serialize\_wallet: bool = False*) → *ADBSecretKeeper*

Prepares content to save in vault. The user\_name, password and service\_name and the individual files inside the wallet zip file are base64 encoded and stored in *self.secret*

#### Parameters

**serialize\_wallet** (*bool*, optional) – When set to True, loads the wallet zip file and encodes the content of each file in the zip file.

#### Returns

Returns self object

#### Return type

*ADBSecretKeeper*

**save**(*name: str, description: str, freeform\_tags: Optional[dict] = None, defined\_tags: Optional[dict] = None, save\_wallet: bool = False*) → *ADBSecretKeeper*

Saves credentials to Vault and returns self.

#### Parameters

- **name** (*str*) – Name of the secret when saved in the Vault.
- **description** (*str*) – Description of the secret when saved in the Vault.
- **freeform\_tags** ((*dict*, optional). *Default is None*) – freeform\_tags to be used for saving the secret in OCI console.
- **defined\_tags** ((*dict*, optional). *Default is None*) – Save the tags under predefined tags in OCI console.
- **save\_wallet** ((*bool*, optional). *Default is False*) – If set to True, saves the contents of the wallet file as separate secret.

#### Returns

Returns self object

**Return type***ADBSecretKeeper***18.1.1.21.3 ads.secrets.auth\_token module****class** ads.secrets.auth\_token.**AuthToken**(auth\_token: str)Bases: *Secret*AuthToken dataclass holds *auth\_token* attribute**auth\_token: str****class** ads.secrets.auth\_token.**AuthTokenSecretKeeper**(auth\_token=None, \*\*kwargs)Bases: *SecretKeeper**AuthTokenSecretKeeper* uses *ads.secrets.auth\_token.AuthToken* class to manage Auth Token credentials. The credentials are stored in Vault as a dictionary with the following format - {"auth\_token": "user provided value"}**Examples**

```
>>> from ads.secrets.auth_token import AuthTokenSecretKeeper
>>> import ads
>>> ads.set_auth("resource_principal") #If using resource principal for
↳ authentication
>>> # Save Auth Tokens or Access Keys to the vault
>>>
>>>
>>> authtoken2 = AuthTokenSecretKeeper(vault_id=vault_id,
...     key_id=key_id,
...     auth_token="<your auth token>").save("my_xyz_auth_token2",
...                                           "This is my
↳ auth token for git repo xyz",
...                                           freeform_tags={
↳ "gitrepo": "xyz"})
>>> authtoken2.export_vault_details("my_git_token_vault_info.yaml", format="yaml")
>>> # Loading credentials
>>> with AuthTokenSecretKeeper.load_secret(source="ocid1.vaultsecret.oc1..<unique_
↳ ID>",
...     export_prefix="mygitrepo",
...     export_env=True
... ) as authtoken:
...     import os
...     print("Credentials inside environment variable:", os.environ.get('mygitrepo.
↳ auth_token'))
...     print("Credentials inside `authtoken` object: ", authtoken)
Credentials inside environment variable: <your auth token>
Credentials inside `authtoken` object: {'auth_token': '<your auth token>'}
>>> print("Credentials inside `authtoken` object: ", authtoken)
Credentials inside `authtoken` object: {'auth_token': None}
>>> print("Credentials inside environment variable:", os.environ.get('mygitrepo.
↳ auth_token'))
Credentials inside environment variable: None
```

**Parameters**

- **auth\_token** ((*str*, *optional*)). *Default None*) – auth token string that needs to be stored in the vault
- **kwargs** – vault\_id: str. OCID of the vault where the secret is stored. Required for saving secret. key\_id: str. OCID of the key used for encrypting the secret. Required for saving secret. compartment\_id: str. OCID of the compartment where the vault is located. Required for saving secret. auth: dict. Dictionary returned from ads.common.auth.api\_keys() or ads.common.auth.resource\_principal(). By default, will follow what is set in *ads.set\_auth*. Use this attribute to override the default.

**decode()** → *AuthTokenSecretKeeper*

Converts the content in *self.encoded* to *AuthToken* and stores in *self.data*

**Returns**

Returns the self object after decoding *self.encoded* and updates *self.data*

**Return type**

*AuthTokenSecretKeeper*

**18.1.1.21.4 ads.secrets.big\_data\_service module**

```
class ads.secrets.big_data_service.BDSSecret(principal: str, hdfs_host: str, hive_host: str, hdfs_port:  
str, hive_port: str, kerb5_path: ~typing.Optional[str] =  
None, kerb5_content: ~typing.Optional[dict] = None,  
keytab_path: ~typing.Optional[str] = None,  
keytab_content: ~typing.Optional[dict] = None,  
secret_id: str = <factory>)
```

Bases: *Secret*

Dataclass representing the attributes managed and serialized by BDSSecretKeeper.

**principal**

The unique identity to which Kerberos can assign tickets.

**Type**

str

**hdfs\_host**

hdfs host name from the bds cluster.

**Type**

str

**hive\_host**

hive host name from the bds cluster.

**Type**

str

**hdfs\_port**

hdfs port from the bds cluster.

**Type**

str

**hive\_port**

hive port from the bds cluster.

**Type**

str

**kerb5\_path**

krb5.conf file path.

**Type**

str

**kerb5\_content**

Content of the krb5.conf.

**Type**

dict

**keytab\_path**

Path to the keytab file.

**Type**

str

**keytab\_content**

Content of the keytab file.

**Type**

dict

**secret\_id**

secret id where the BDSSecret is stored.

**Type**

str

**hdfs\_host: str**

**hdfs\_port: str**

**hive\_host: str**

**hive\_port: str**

**kerb5\_content: dict = None**

**kerb5\_path: str = None**

**keytab\_content: dict = None**

**keytab\_path: str = None**

**principal: str**

**secret\_id: str**

```
class ads.secrets.big_data_service.BDSSecretKeeper(principal: Optional[str] = None, hdfs_host:
Optional[str] = None, hive_host: Optional[str] =
None, hdfs_port: Optional[str] = None,
hive_port: Optional[str] = None, kerb5_path:
Optional[str] = None, kerb5_content:
Optional[str] = None, keytab_path: Optional[str]
= None, keytab_content: Optional[str] = None,
keytab_dir: Optional[str] = None, secret_id:
Optional[str] = None, **kwargs)
```

Bases: [SecretKeeper](#)

*BDSSecretKeeper* provides an interface to save BDS hdfs and hive credentials. This interface does not store the wallet file by default. For saving keytab and krb5.cofig file, set *save\_files=True* while calling *BDSSecretKeeper.save* method.

#### **principal**

The unique identity to which Kerberos can assign tickets.

**Type**

str

#### **hdfs\_host**

hdfs host name from the bds cluster.

**Type**

str

#### **hive\_host**

hive host name from the bds cluster.

**Type**

str

#### **hdfs\_port**

hdfs port from the bds cluster.

**Type**

str

#### **hive\_port**

hive port from the bds cluster.

**Type**

str

#### **kerb5\_path**

krb5.conf file path.

**Type**

str

#### **kerb5\_content**

Content of the krb5.conf.

**Type**

dict

#### **keytab\_path**

Path to the keytab file.

**Type**

str

**keytab\_content**

Content of the keytab file.

**Type**

dict

**secret\_id**

secret id where the BDSSecret is stored.

**Type**

str

**kwargs**

-----

**vault\_id**

**Type**

str. OCID of the vault where the secret is stored. Required for saving secret.

**key\_id**

**Type**

str. OCID of the key used for encrypting the secret. Required for saving secret.

**compartment\_id**

**Type**

str. OCID of the compartment where the vault is located. Required for saving secret.

**auth**

**Type**

dict. Dictionary returned from `ads.common.auth.api_keys()` or `ads.common.auth.resource_principal()`. By default, will follow what is set in `ads.set_auth`. Use this attribute to override the default.

#### Parameters

- **principal** (*str*) – The unique identity to which Kerberos can assign tickets.
- **hdfs\_host** (*str*) – hdfs host name from the bds cluster.
- **hive\_host** (*str*) – hive host name from the bds cluster.
- **hdfs\_port** (*str*) – hdfs port from the bds cluster.
- **hive\_port** (*str*) – hive port from the bds cluster.
- **kerb5\_path** (*str*) – krb5.conf file path.
- **kerb5\_content** (*dict*) – Content of the krb5.conf.
- **keytab\_path** (*str*) – Path to the keytab file.
- **keytab\_content** (*dict*) – Content of the keytab file.
- **keytab\_dir** (*((str, optional).)*) – Default None. Local directory where the extracted keytab content is saved.
- **secret\_id** (*str*) – secret id where the BDSSecret is stored.

## kwargs

**vault\_id**: str. OCID of the vault where the secret is stored. Required for saving secret. **key\_id**: str. OCID of the key used for encrypting the secret. Required for saving secret. **compartment\_id**: str. OCID of the compartment where the vault is located. Required for saving secret. **auth**: dict. Dictionary returned from `ads.common.auth.api_keys()` or `ads.common.auth.resource_principal()`. By default, will follow what is set in `ads.set_auth`. Use this attribute to override the default.

**decode**(*save\_files*: bool = True) → `ads.secrets.bds.BDSSecretKeeper`

Converts the content in *self.secret* to *BDSSecret* and stores in *self.data*

If the *keytab\_path* and *kerb5\_path* are passed through the constructor, then retain it. We do not want to override what user has passed in. If the *keytab\_path* and *kerb5\_path* are not passed, but the secret has *secret\_id*, then we generate the keytab file in the location specified by *keytab\_path* in the constructor.

### Returns

Returns self object

### Return type

*BDSSecretKeeper*

**encode**(*serialize*: bool = True) → `ads.secrets.bds.BDSSecretKeeper`

Prepares content to save in vault. The port, host name and the keytab and krb5.config files are base64 encoded and stored in *self.secret*

### Parameters

**serialize** (bool, optional) – When set to True, loads the keytab and krb5.config file and encodes the content of both files.

### Returns

Returns self object

### Return type

*BDSSecretKeeper*

**save**(*name*: str, *description*: str, *freeform\_tags*: dict = None, *defined\_tags*: dict = None, *save\_files*: bool = True) → `ads.secrets.bds.BDSSecretKeeper`

Saves credentials to Vault and returns self.

### Parameters

- **name** (str) – Name of the secret when saved in the Vault.
- **description** (str) – Description of the secret when saved in the Vault.
- **freeform\_tags** ((dict, optional). Default is None) – freeform\_tags to be used for saving the secret in OCI console.
- **defined\_tags** ((dict, optional). Default is None) – Save the tags under predefined tags in OCI console.
- **save\_files** ((bool, optional). Default is False) – If set to True, saves the contents of the keytab and krb5 file as separate secret.

### Returns

Returns self object

### Return type

*BDSSecretKeeper*

#### 18.1.1.21.5 ads.secrets.mysqladb module

```
class ads.secrets.mysqladb.MySQLDBSecret(user_name: str, password: str, host: str, port: str, database:
                                         Optional[str] = None)
```

Bases: *Secret*

Dataclass representing the attributes managed and serialized by MySQLDBSecretKeeper

**database:** str = None

**host:** str

**password:** str

**port:** str

**user\_name:** str

```
class ads.secrets.mysqladb.MySQLDBSecretKeeper(user_name: Optional[str] = None, password:
                                                Optional[str] = None, host: Optional[str] = None, port:
                                                str = '3306', database: Optional[str] = None,
                                                repository_path: Optional[str] = None, repository_key:
                                                Optional[str] = None, **kwargs)
```

Bases: *SecretKeeper*

*MySQLDBSecretKeeper* provides an interface to save MySQL database credentials. If you use Wallet file for connecting to the database, please use *ADBSecretKeeper*.

#### Examples

```
>>> from ads.secrets.mysqladb import MySQLDBSecretKeeper
>>> vault_id = "ocidl.vault.oc1.<unique_ID>"
>>> key_id = "ocidl.key.<unique_ID>"
```

```
>>> import ads
>>> ads.set_auth("resource_principal") # If using resource principal for
↳ authentication
>>> connection_parameters={
...     "user_name": "<your user name>",
...     "password": "<your password>",
...     "host": "<db host>",
...     "port": "<db port>",
...     "database": "<database>",
... }
>>> mysqladb_keeper = MySQLDBSecretKeeper(vault_id=vault_id, key_id=key_id,
↳ **connection_parameters)
>>> mysqladb_keeper.save("mysqladb_employee", "My DB credentials", freeform_tags={
↳ "schema": "emp"})
>>> print(mysqladb_keeper.secret_id) # Prints the secret_id of the stored credentials
>>> mysqladb_keeper.export_vault_details("mysqladb_employee_att.json") # Save the
↳ secret id and vault info to a json file
```



```

>>> # Loading credentials
>>> import ads
>>> ads.set_auth("resource_principal") # If using resource principal for
↪ authentication
>>> from ads.secrets.mysqlldb import MySQLDBSecretKeeper
>>> secret_id = "ocidl.vaultsecret.oc1..<unique_ID>"
>>> with MySQLDBSecretKeeper.load_secret(source=secret_id) as mysqlldb_creds:
...     import pandas as pd
...     df = pd.DataFrame(ads.read_sql("select * from EMPLOYEE", connection_
↪ parameters=mysqlldb_creds, engine="mysql"))

>>> mymysqlldb_creds = MySQLDBSecretKeeper.load_secret(source='mysqlldb_employee_att.
↪ json', format="json")
>>> pd.DataFrame(ads.read_sql("select * from ATTRITION_DATA", connection_
↪ parameters=mymysqlldb_creds.to_dict(), engine="mysql")).head(2)

```

### Parameters

- **user\_name** ((*str*, optional). Default None) – user\_name of the database
- **password** ((*str*, optional). Default None) – password for connecting to the database
- **host** ((*str*, optional). Default None) – Database host name
- **port** ((*str*, optional). Default 1521) – Port number
- **database** ((*str*, optional). Default None) – database name
- **repository\_path** ((*str*, optional). Default None.) – Path to credentials repository. For more details refer *ads.database.connection*
- **repository\_key** ((*str*, optional). Default None.) – Configuration key for loading the right configuration from repository. For more details refer *ads.database.connection*
- **kwargs** – vault\_id: str. OCID of the vault where the secret is stored. Required for saving secret. key\_id: str. OCID of the key used for encrypting the secret. Required for saving secret. compartment\_id: str. OCID of the compartment where the vault is located. Required for saving secret. auth: dict. Dictionary returned from *ads.common.auth.api\_keys()* or *ads.common.auth.resource\_principal()*. By default, will follow what is set in *ads.set\_auth*. Use this attribute to override the default.

**decode()** → *MySQLDBSecretKeeper*

Converts the content in *self.encoded* to *MySQLDBSecret* and stores in *self.data*

### Returns

Returns self object

### Return type

*MySQLDBSecretKeeper*

#### 18.1.1.21.6 ads.secrets.oracledb module

```
class ads.secrets.oracledb.OracleDBSecret(user_name: str, password: str, host: str, port: str,
                                          service_name: Optional[str] = None, sid: Optional[str] =
                                          None, dsn: Optional[str] = None)
```

Bases: [Secret](#)

Dataclass representing the attributes managed and serialized by OracleDBSecretKeeper

**dsn:** str = None

**host:** str

**password:** str

**port:** str

**service\_name:** str = None

**sid:** str = None

**user\_name:** str

```
class ads.secrets.oracledb.OracleDBSecretKeeper(user_name: Optional[str] = None, password:
                                                Optional[str] = None, service_name: Optional[str] =
                                                None, sid: Optional[str] = None, host: Optional[str]
                                                = None, port: str = '1521', dsn: Optional[str] =
                                                None, repository_path: Optional[str] = None,
                                                repository_key: Optional[str] = None, **kwargs)
```

Bases: [SecretKeeper](#)

*OracleDBSecretKeeper* provides an interface to save Oracle database credentials. If you use Wallet file for connecting to the database, please use *ADBSecretKeeper*.

#### Examples

```
>>> from ads.secrets.oracledb import OracleDBSecretKeeper
>>> vault_id = "ocidl.vault.oc1.<unique_ID>"
>>> key_id = "ocidl.key.<unique_ID>"
```

```
>>> import ads
>>> ads.set_auth("resource_principal") # If using resource principal for
↪ authentication
>>> connection_parameters={
...     "user_name": "<your user name>",
...     "password": "<your password>",
...     "service_name": "service_name",
...     "host": "<db host>",
...     "port": "<db port>",
... }
>>> oracledb_keeper = OracleDBSecretKeeper(vault_id=vault_id, key_id=key_id,
↪ **connection_parameters)
>>> oracledb_keeper.save("oracledb_employee", "My DB credentials", freeform_tags={
↪ "schema": "emp"})
```

(continues on next page)

(continued from previous page)

```
>>> print(oracledb_keeper.secret_id) # Prints the secret_id of the stored_
↳ credentials
>>> oracledb_keeper.export_vault_details("oracledb_employee_att.json") # Save the_
↳ secret id and vault info to a json file
```

```
>>> # Loading credentials
>>> import ads
>>> ads.set_auth("resource_principal") # If using resource principal for_
↳ authentication
>>> from ads.secrets.oracledb import OracleDBSecretKeeper
>>> secret_id = "ocidl.vaultsecret.ocl.<unique_ID>"
>>> with OracleDBSecretKeeper.load_secret(source=secret_id) as oracledb_creds:
...     import pandas as pd
...     df = pd.DataFrame(ads.read_sql("select * from EMPLOYEE", connection_
↳ parameters=oracledb_creds))
```

```
>>> myoracledb_creds = OracleDBSecretKeeper.load_secret(source='oracledb_employee_
↳ att.json', format="json")
>>> pd.DataFrame(ads.read_sql("select * from ATTRITION_DATA", connection_
↳ parameters=myoracledb_creds.to_dict())).head(2)
```

### Parameters

- **user\_name** ((str, optional). Default None) – user\_name of the database
- **password** ((str, optional). Default None) – password for connecting to the database
- **service\_name** ((str, optional). Default None) – service name of the Oracle DB instance
- **sid** ((str, optional). Default None) – Provide sid if service name is not available.
- **host** ((str, optional). Default None) – Database host name
- **port** ((str, optional). Default 1521) – Port number
- **dsn** ((str, optional). Default None) – dsn string for connecting with oracledb. Refer *cx\_Oracle* documentation
- **repository\_path** ((str, optional). Default None.) – Path to credentials repository. For more details refer *ads.database.connection*
- **repository\_key** ((str, optional). Default None.) – Configuration key for loading the right configuration from repository. For more details refer *ads.database.connection*
- **kwargs** – vault\_id: str. OCID of the vault where the secret is stored. Required for saving secret. key\_id: str. OCID of the key used for encrypting the secret. Required for saving secret. compartment\_id: str. OCID of the compartment where the vault is located. Required for saving secret. auth: dict. Dictionary returned from *ads.common.auth.api\_keys()* or *ads.common.auth.resource\_principal()*. By default, will follow what is set in *ads.set\_auth*. Use this attribute to override the default.

**decode()** → *OracleDBSecretKeeper*

Converts the content in *self.encoded* to *OracleDBSecret* and stores in *self.data*

**Returns**

Returns self object

**Return type**

*OracleDBSecretKeeper*

**18.1.1.21.7 ads.secrets.secrets module****class ads.secrets.secrets.Secret**

Bases: object

Base class

**serialize**(*self*) → dict

Serializes attributes as dictionary. Returns dictionary with the keys that are serializable.

**to\_dict**(*self*) → dict

returns dictionary with the keys that has *repr* set to True and the value is not None or empty

**export\_dict** -> dict

returns dictionary with the keys that has *repr* set to True

**export\_options** -> list

returns list of attributes with the fields that has *repr* set to True

**export\_dict**() → dict

Serializes attributes as dictionary.

**Returns**

returns dictionary of key/value pair where the value of the attribute is not None and the field does not have *repr* = *False*

**Return type**

dict

**export\_options**() → list

Returns list of attributes that have *repr*=*True*.

**Returns**

returns list of fields that does not have *repr*=*False*

**Return type**

list

**serialize**() → dict

Serializes attributes as dictionary. An attribute can be marked as not serializable by using *metadata* field of the *field* constructor provided by the *dataclasses* module.

**Returns**

returns dictionary of key/value pair where the value of the attribute is not None and not empty and the field does not have *metadata* = {"serializable":False}. Refer *dataclass* python documentation for more details about *metadata*

**Return type**

dict

**to\_dict**() → dict

Serializes attributes as dictionary. Returns only non empty attributes.

**Returns**

returns dictionary of key/value pair where the value of the attribute is not None or empty

**Return type**

dict

```
class ads.secrets.secrets.SecretKeeper(content: Optional[bytes] = None, encoded: Optional[str] = None,  
                                         secret_id: Optional[str] = None, export_prefix: str = "  
                                         export_env: bool = False, **kwargs)
```

Bases: [Vault](#), ContextDecorator

SecretKeeper defines APIs required to serialize and deserialize secrets. Services such as Database, Streaming, and Git require users to provide credentials. These credentials need to be safely accessed at runtime. OCI Vault provides a mechanism for safe storage and access. SecretKeeper uses OCI Vault as a backend to store and retrieve the credentials.

The exact data structure of the credentials varies from service to service.

**Parameters**

- **vault\_id**((*str*, *optional*)). *Default None* – ocid of the vault
- **key\_id**((*str*, *optional*)). *Default None* – ocid of the key that is used for encrypting the content
- **compartment\_id**((*str*, *optional*)). *Default None* – ocid of the compartment\_id where the vault resides. When available in environment variable - `NB_SESSION_COMPARTMENT_OCID`, will default to that.
- **secret\_client\_auth** ((*dict*, *optional*, *deprecated since 2.5.1*). *Default None.*) – deprecated since 2.5.1. Use *auth* instead
- **vault\_client\_auth** ((*dict*, *optional*, *deprecated since 2.5.1*). *Default None.*) – deprecated since 2.5.1. Use *auth* instead
- **auth**((*dict*, *optional*)) – Dictionary returned from `ads.common.auth.api_keys()` or `ads.common.auth.resource_principal()`. By default, will follow what is set in *ads.set\_auth*. Use this attribute to override the default.

**decode()** → [SecretKeeper](#)

Decodes the content in `self.encoded` and sets the value in `self.secret`.

**encode()**

Stores the secret in `self.secret` by calling *serialize* method on `self.data`. Stores base64 encoded string of `self.secret` in `self.encoded`.

```
export_vault_details(filepath: str, format: str = 'json', storage_options: Optional[dict] = None)
```

Save `secret_id` in a json file

**Parameters**

- **filepath**(*str*) – Filepath to save the file.
- **format**(*str*) – Default is *json*. Valid values:
  - *yaml* or *yml* - to store vault details in a yaml file
  - *json* - to store vault details in a json file
- **storage\_options**(*dict*, *optional.*) – `storage_options` dict as required by *fsspec* library

**Returns**

Returns None

**Return type**

None

**classmethod** `load_secret`(*source*: str, *format*: str = 'ocid', *export\_env*: bool = False, *export\_prefix*: str = "", *auth*=None, *storage\_options*: Optional[dict] = None, *\*\*kwargs*) → Union[dict, *SecretKeeper*]

Loads secret from vault using `secret_id`.

**Parameters**

- **source** (str) – Source could be one of the following:
  - OCID of the secret that has the secret content.
  - file path that is json or yaml format with the key - `secret_id: ocid1.vaultsecret.<unique_ID>`
- **format** (str) – Default is `ocid`. When `ocid`, the source must be a secret id Value values:
  - `ocid` - source is expected to be ocid of the secret
  - `yaml` or `yml` - source is expected to be a path to a valid yaml file
  - `json` - source is expected to be a path to a valid json file
- **export\_env** (str, Default False) – When set to true, the credentials will be exported to the environment variable. When `load_secret` is invoked using `with` statement, information exported as environment variable is unset before leaving the `with` scope
- **export\_prefix** (str, Default "") – Prefix to the environment variable that is exported.
- **auth** (dict, optional) – By default authentication will follow what is configured using `ads.set_auth` API. Accepts dict returned from `ads.common.auth.api_keys()` or `ads.common.auth.resource_principal()`.
- **storage\_options** (dict, optional) – `storage_options` dict as required by `fsspec` library
- **kwargs** – key word arguments accepted by the constructor of the class from which this method is invoked.

**Returns**

- *dict* – When called from within `with` block, Returns a dictionary containing the secret
- `ads.secrets.SecretKeeper` – When called without using `with` operator.

**Examples**

```
>>> from ads.secrets import APIKeySecretKeeper
>>> with APIKeySecretKeeper.load_secret(source="ocid1.vaultsecret.**<unique_ID>
→ **",
...                                     export_prefix="mykafka",
...                                     export_env=True
...                                     ) as apisecret:
...     import os
```

(continues on next page)

(continued from previous page)

```

...     print("Credentials inside environment variable:",
...           os.environ.get('mykafka.api_key'))
...     print("Credentials inside `apisecret` object: ", apisecret)
Credentials inside environment variable: <your api key>
Credentials inside `apisecret` object: {'api_key': 'your api key'}

>>> from ads.secrets import ADBSecretKeeper
>>> with ADBSecretKeeper.load_secret("ocid1.vaultsecret.**<unique_ID>**") as _
→ adw_creds2:
...     import pandas as pd
...     df2 = pd.DataFrame.ads.read_sql("select * from ATTRITION_DATA",
...                                     connection_parameters=adw_creds2)
...     print(df2.head(2))
          JOBFUNCTION ATTRITION
0  Product Management         No
1  Software Developer         No

```

```
required_keys = ['secret_id']
```

**save**(name: str, description: str, freeform\_tags: Optional[dict] = None, defined\_tags: Optional[dict] = None) → *SecretKeeper*

Saves credentials to Vault and returns self.

#### Parameters

- **name** (str) – Name of the secret when saved in the Vault.
- **description** (str) – Description of the secret when saved in the Vault.
- **freeform\_tags** (dict, optional) – freeform\_tags to be used for saving the secret in OCI console.
- **defined\_tags** (dict, optional) – Save the tags under predefined tags in OCI console.

#### Returns

Returns self object.

#### Return type

*SecretKeeper*

**to\_dict**() → dict

Returns dict of credentials retrieved from the vault or set through constructor arguments.

#### Returns

dict of credentials retrieved from the vault or set through constructor.

#### Return type

dict

#### 18.1.1.21.8 Module contents

#### 18.1.1.22 ads.telemetry package

##### 18.1.1.22.1 Submodules

##### 18.1.1.22.2 ads.telemetry.telemetry module

**class** ads.telemetry.telemetry.**Surface**(*value*)

Bases: Enum

An Enum class for labeling the surface where ADS is being used

**DATAFLOW** = 5

**DATASCIENCE\_JOB** = 2

**DATASCIENCE\_MODEL\_DEPLOYMENT** = 4

**DATASCIENCE\_NOTEBOOK** = 3

**OCI\_SERVICE** = 6

**WORKSTATION** = 1

**classmethod** surface()

ads.telemetry.telemetry.update\_oci\_client\_config(*config*={})

##### 18.1.1.22.3 Module contents

#### 18.1.1.23 ads.text\_dataset package

##### 18.1.1.23.1 Submodules

##### 18.1.1.23.2 ads.text\_dataset.backends module

**class** ads.text\_dataset.backends.**Base**

Bases: object

Base class for backends.

**convert\_to\_text**(*fhandler*: *OpenFile*, *dst\_path*: *str*, *fname*: *Optional[str]* = *None*, *storage\_options*: *Optional[Dict]* = *None*) → *str*

Convert input file to a text file

##### Parameters

- **fhandler** (*fsspec.core.OpenFile*) – a file handler returned by *fsspec*
- **dst\_path** (*str*) – local folder or cloud storage prefix to save converted text files
- **fname** (*str*, *optional*) – filename for converted output, relative to dirname or prefix, by default *None*
- **storage\_options** (*dict*, *optional*) – storage options for cloud storage



**Returns**

path to saved output

**Return type**

str

**get\_metadata**(*fhandler*: *OpenFile*) → Dict

Get metadata of a file.

**Parameters**

**fhandler** (*fsspec.core.OpenFile*) – a file handler returned by *fsspec*

**Returns**

dictionary of metadata

**Return type**

dict

**read\_line**(*fhandler*: *OpenFile*) → Generator[Union[str, List[str]], None, None]

Read lines from a file.

**Parameters**

**fhandler** (*fsspec.core.OpenFile*) – a file handler returned by *fsspec*

**Yields**

*Generator* – a generator that yields lines

**read\_text**(*fhandler*: *OpenFile*) → Generator[Union[str, List[str]], None, None]

Read entire file into a string.

**Parameters**

**fhandler** (*fsspec.core.OpenFile*) – a file handler returned by *fsspec*

**Yields**

*Generator* – a generator that yields text in the file

**class** `ads.text_dataset.backends.PDFPlumber`

Bases: [Base](#)

**convert\_to\_text**(*fhandler*, *dst\_path*, *fname=None*, *storage\_options=None*)

Convert input file to a text file

**Parameters**

- **fhandler** (*fsspec.core.OpenFile*) – a file handler returned by *fsspec*
- **dst\_path** (*str*) – local folder or cloud storage prefix to save converted text files
- **fname** (*str*, *optional*) – filename for converted output, relative to dirname or prefix, by default None
- **storage\_options** (*dict*, *optional*) – storage options for cloud storage

**Returns**

path to saved output

**Return type**

str

**get\_metadata**(*fhandler*)

Get metadata of a file.

**Parameters**

**fhandler** (*fsspec.core.OpenFile*) – a file handler returned by *fsspec*

**Returns**

dictionary of metadata

**Return type**

dict

**read\_line**(*fhandler*)

Read lines from a file.

**Parameters**

**fhandler** (*fsspec.core.OpenFile*) – a file handler returned by *fsspec*

**Yields**

*Generator* – a generator that yields lines

**read\_text**(*fhandler*)

Read entire file into a string.

**Parameters**

**fhandler** (*fsspec.core.OpenFile*) – a file handler returned by *fsspec*

**Yields**

*Generator* – a generator that yields text in the file

**class** `ads.text_dataset.backends.Tika`

Bases: *Base*

**convert\_to\_text**(*fhandler*, *dst\_path*, *fname=None*, *storage\_options=None*)

Convert input file to a text file

**Parameters**

- **fhandler** (*fsspec.core.OpenFile*) – a file handler returned by *fsspec*
- **dst\_path** (*str*) – local folder or cloud storage prefix to save converted text files
- **fname** (*str*, *optional*) – filename for converted output, relative to dirname or prefix, by default None
- **storage\_options** (*dict*, *optional*) – storage options for cloud storage

**Returns**

path to saved output

**Return type**

str

**detect\_encoding**(*fhandler: OpenFile*)

**get\_metadata**(*fhandler*)

Get metadata of a file.

**Parameters**

**fhandler** (*fsspec.core.OpenFile*) – a file handler returned by *fsspec*

**Returns**

dictionary of metadata

**Return type**

dict

**read\_line**(*fhandler*)

Read lines from a file.

**Parameters**

**fhandler** (*fsspec.core.OpenFile*) – a file handler returned by *fsspec*

**Yields**

*Generator* – a generator that yields lines

**read\_text**(*fhandler*)

Read entire file into a string.

**Parameters**

**fhandler** (*fsspec.core.OpenFile*) – a file handler returned by *fsspec*

**Yields**

*Generator* – a generator that yields text in the file

### 18.1.1.23.3 ads.text\_dataset.dataset module

**class** ads.text\_dataset.dataset.**DataLoader**(*engine: Optional[str] = None*)

Bases: object

DataLoader binds engine, FileProcessor and File handler(in this case it is fsspec) together to produce a dataframe of parsed text from files.

This class is expected to be used mainly from TextDatasetFactory class.

**processor**

processor that is used for loading data.

**Type**

*ads.text\_dataset.extractor.FileProcessor*

### Examples

```
>>> import oci
>>> from ads.text_dataset.dataset import TextDatasetFactory as textfactory
>>> from ads.text_dataset.options import Options
>>> df = textfactory.format('pdf').engine('pandas').read_line(
...     'oci://<bucket-name>@<namespace>/<path>/*.pdf',
...     storage_options={"config": oci.config.from_file(os.path.join("~/oci",
↪ "config"))},
... )
>>> data_gen = textfactory.format('pdf').option(Options.FILE_NAME).backend(
↪ 'pdfplumber').read_text(
...     'oci://<bucket-name>@<namespace>/<path>/*.pdf',
...     storage_options={"config": oci.config.from_file(os.path.join("~/oci",
↪ "config"))},
... )
>>> textfactory.format('docx').convert_to_text(
...     'oci://<bucket-name>@<namespace>/<path>/*.docx',
...     './extracted',
...     storage_options={"config": oci.config.from_file(os.path.join("~/oci",
↪ "config"))},
```

(continues on next page)

(continued from previous page)

```

... )
>>> textfactory.format('docx').convert_to_text(
...     'oci://<bucket-name>@<namespace>/<path>/*.docx',
...     'oci://<bucket-name>@<namespace>/<out_path>',
...     storage_options={"config": oci.config.from_file(os.path.join("~/oci",
↪ "config"))}),
... )
>>> meta_gen = textfactory.format('docx').metadata_schema(
...     'oci://<bucket-name>@<namespace>/papers/*.pdf',
...     storage_options={"config": oci.config.from_file(os.path.join("~/oci",
↪ "config"))}),
... )
>>> df = textfactory.format('pdf').engine('pandas').option(Options.FILE_METADATA, {
↪ 'extract': ['Author']}).read_text(
...     'oci://<bucket-name>@<namespace>/<path>/*.pdf',
...     storage_options={"config": oci.config.from_file(os.path.join("~/oci",
↪ "config"))}),
...     total_files=10,
... )
>>> df = textfactory.format('txt').engine('cudf').read_line(
...     'oci://<bucket-name>@<namespace>/<path>/*.log',
...     udf=r'^[(\S+)\s(\S+)\s(\d+)\s(\d+:\d+:\d+)\s(\d+)]\s(\S+)\s(\S+)\s(\S+)\s(\S+)',
↪ s(\S+)',
...     df_args={"columns": ["day", "month", "date", "time", "year", "type", "method",
↪ "status", "file"]},
...     n_lines_per_file=10,
... )

```

Initialize a DataLoader object.

#### Parameters

**engine** (*str*, *optional*) – dataframe engine, by default None.

#### Return type

None

**backend** (*backend: Union[[str](#), [Base](#)]*) → None

Set backend used for extracting text from files.

#### Parameters

**backend** ((*str* | *ads.text\_dataset.backends.Base*)) – backend for extracting text from raw files.

#### Return type

None

**convert\_to\_text** (*src\_path: str*, *dst\_path: str*, *encoding: str = 'utf-8'*, *storage\_options: Optional[Dict] = None*) → None

Convert files to plain text files.

#### Parameters

- **src\_path** (*str*) – path to source data file(s). can use glob pattern
- **dst\_path** (*str*) – local folder or cloud storage (e.g., OCI object storage) prefix to save converted text files
- **encoding** (*str*, *optional*) – encoding for files, by default utf-8

- **storage\_options** (*Dict*, *optional*) – storage options for cloud storage, by default *None*

**Return type**

None

**engine**(*eng: str*) → *None*

Set engine for dataloader. Can be pandas or cudf.

**Parameters****eng** (*str*) – name of engine**Return type**

None

**Raises****NotSupportedError** – raises error if engine passed in is not supported.**metadata\_all**(*path: str, storage\_options: Optional[Dict] = None, encoding: str = 'utf-8'*) → *Generator[Dict[str, Any], None, None]*

Get metadata of all files that matches the given path. Return a generator.

**Parameters**

- **path** (*str*) – path to data files. can use glob pattern.
- **storage\_options** (*Dict*, *optional*) – storage options for cloud storage, by default *None*
- **encoding** (*str*, *optional*) – encoding of files, by default 'utf-8'

**Returns**

generator of extracted metadata from files.

**Return type***Generator***metadata\_schema**(*path: str, n\_files: int = 1, storage\_options: Optional[Dict] = None, encoding: str = 'utf-8'*) → *List[str]*Get available fields in metadata by looking at the first *n\_files* that matches the given path.**Parameters**

- **path** (*str*) – path to data files. can have glob pattern
- **n\_files** (*int*, *optional*) – number of files to look up, default to be 1
- **storage\_options** (*dict*, *optional*) – storage options for cloud storage, by default *None*
- **encoding** (*str*, *optional*) – encoding of files, by default utf-8

**Returns**

list of available fields in metadata

**Return type***List[str]***option**(*opt: Options, spec: Optional[Any] = None*) → *None*

Set extraction options.

**Parameters**

- **opt** (*ads.text\_dataset.options.Options*) – an option defined in *ads.text\_dataset.options.Options*
- **spec** (*Any, optional*) – specifications that will be passed to option handler, by default *None*

**Return type**

*None*

**read\_line**(*path: str, udf: Union[str, Callable] = None, n\_lines\_per\_file: int = None, total\_lines: int = None, df\_args: Dict = None, storage\_options: Dict = None, encoding: str = 'utf-8'*) → *Union[Generator[Union[str, List[str]], None, None], DataFrame]*

Read each file into lines. If path matches multiple files, will combine lines from all files.

**Parameters**

- **path** (*str*) – path to data files. can have glob pattern.
- **udf** (*((callable | str), optional)*) – user defined function for processing each line, can be a callable or regex, by default *None*
- **n\_lines\_per\_file** (*int, optional*) – max number of lines read from each file, by default *None*
- **total\_lines** (*int, optional*) – max number of lines read from all files, by default *None*
- **df\_args** (*dict, optional*) – arguments passed to dataframe engine (e.g. pandas), by default *None*
- **storage\_options** (*dict, optional*) – storage options for cloud storage, by default *None*
- **encoding** (*str, optional*) – encoding of files, by default 'utf-8'

**Returns**

returns either a data generator or a dataframe.

**Return type**

(*Generator | DataFrame*)

**read\_text**(*path: str, udf: Union[str, Callable] = None, total\_files: int = None, storage\_options: Dict = None, df\_args: Dict = None, encoding: str = 'utf-8'*) → *Union[Generator[Union[str, List[str]], None, None], DataFrame]*

Read each file into a text string. If path matches multiple files, each file corresponds to one record.

**Parameters**

- **path** (*str*) – path to data files. can have glob pattern.
- **udf** (*((callable | str), optional)*) – user defined function for processing each line, can be a callable or regex, by default *None*
- **total\_files** (*int, optional*) – max number of files to read, by default *None*
- **df\_args** (*dict, optional*) – arguments passed to dataframe engine (e.g. pandas), by default *None*
- **storage\_options** (*dict, optional*) – storage options for cloud storage, by default *None*
- **encoding** (*str, optional*) – encoding of files, by default 'utf-8'

**Returns**

returns either a data generator or a dataframe.

**Return type**

(Generator | DataFrame)

**with\_processor**(*processor\_type: str*) → None

Set file processor.

**Parameters**

**processor\_type** (*str*) – type of processor, which corresponds to format of the file.

**Return type**

None

**class** `ads.text_dataset.dataset.TextDatasetFactory`

Bases: object

A class that generates a dataloader given a file format.

**static format**(*format\_name: str*) → *DataLoader*

Instantiates *DataLoader* class and seeds it with the right kind of *FileProcessor*. Eg. *PDFProcessor* for pdf. The *FileProcessorFactory* returns the processor based on the format Type.

**Parameters**

**format\_name** (*str*) – name of format

**Returns**

a *DataLoader* object.

**Return type**

*ads.text\_dataset.dataset.DataLoader*

#### 18.1.1.23.4 `ads.text_dataset.extractor` module

**class** `ads.text_dataset.extractor.FileProcessor`(*backend: Union[str, Base] = 'default'*)

Bases: object

Base class for all the file processor. Files are opened using *fsspec* library. The default implementation in the base class assumes text files.

This class is expected to be used inside *ads.text\_dataset.dataset.DataLoader*.

**backend**(*backend: Union[str, Base]*) → None

Set backend for file processor.

**Parameters**

**backend** (*ads.text\_dataset.backends.Base*) – a backend for file processor

**Return type**

None

**Raises**

*NotSupportedError* – when specified backend is not supported.

```
backend_map = {'default': <class 'ads.text_dataset.backends.Base'>, 'tika': <class
'ads.text_dataset.backends.Tika'>}
```

**convert\_to\_text**(*fhandler: OpenFile, dst\_path: str, fname: Optional[str] = None, storage\_options: Optional[Dict] = None*) → str

Convert input file to a text file.

**Parameters**

- **fhandler** (*fsspec.core.OpenFile*) – a file handler returned by *fsspec*
- **dst\_path** (*str*) – local folder or cloud storage (e.g. OCI object storage) prefix to save converted text files
- **fname** (*str, optional*) – filename for converted output, relative to dirname or prefix, by default None
- **storage\_options** (*dict, optional*) – storage options for cloud storage, by default None

**Returns**

path to saved output

**Return type**

str

**get\_metadata**(*fhandler: OpenFile*) → Dict

Get metadata of a file.

**Parameters**

**fhandler** (*fsspec.core.OpenFile*) – a file handler returned by *fsspec*

**Returns**

dictionary of metadata

**Return type**

dict

**read\_line**(*fhandler: OpenFile, \*\*format\_reader\_kwargs: Dict*) → Generator[Union[str, List[str]], None, None]

Yields lines from a file.

**Parameters**

**fhandler** (*fsspec.core.OpenFile*) – file handler returned by *fsspec*

**Returns**

a generator that yields lines from a file

**Return type**

Generator

**read\_text**(*fhandler: OpenFile, \*\*format\_reader\_kwargs: Dict*) → Generator[Union[str, List[str]], None, None]

Yield contents from the entire file.

**Parameters**

**fhandler** (*fsspec.core.OpenFile*) – a file handler returned by *fsspec*

**Returns**

a generator that yield text from a file

**Return type**

Generator



**class** `ads.text_dataset.extractor.FileProcessorFactory`Bases: `object`

Factory that manages all file processors. Provides functionality to get a processor corresponding to a given file type, or register custom processor for a specific file format.

**Examples**

```
>>> from ads.text_dataset.extractor import FileProcessor, FileProcessorFactory
>>> FileProcessorFactory.get_processor('pdf')
>>> class CustomProcessor(FileProcessor):
...     # custom logic here
...     pass
>>> FileProcessorFactory.register('new_format', CustomProcessor)
```

**static** `get_processor(format)`

```
processor_map = {'doc': <class 'ads.text_dataset.extractor.WordProcessor'>, 'docx':
<class 'ads.text_dataset.extractor.WordProcessor'>, 'pdf': <class
'ads.text_dataset.extractor.PDFProcessor'>, 'txt': <class
'ads.text_dataset.extractor.FileProcessor'>}
```

**classmethod** `register(fmt: str, processor: FileProcessor) → None`

Register custom file processor for a file format.

**Parameters**

- **fmt** (*str*) – file format
- **processor** (*FileProcessor*) – custom processor

**Raises**

**TypeError** – raised when processor is not a subclass of *FileProcessor*.

**class** `ads.text_dataset.extractor.PDFProcessor(backend: Union[str, Base] = 'default')`Bases: `FileProcessor`

Extracts text content from PDF

```
backend_map = {'default': <class 'ads.text_dataset.backends.Tika'>, 'pdfplumber':
<class 'ads.text_dataset.backends.PDFPlumber'>, 'tika': <class
'ads.text_dataset.backends.Tika'>}
```

**class** `ads.text_dataset.extractor.WordProcessor(backend: Union[str, Base] = 'default')`Bases: `FileProcessor`

Extracts text content from doc or docx format.

```
backend_map = {'default': <class 'ads.text_dataset.backends.Tika'>, 'tika': <class
'ads.text_dataset.backends.Tika'>}
```

#### 18.1.1.23.5 ads.text\_dataset.options module

```
class ads.text_dataset.options.FileOption(dataloader: ads.text_dataset.dataset.DataLoader)
    Bases: OptionHandler
    handle(fhandler: OpenFile, spec: Any) → Any

class ads.text_dataset.options.MetadataOption(dataloader: ads.text_dataset.dataset.DataLoader)
    Bases: OptionHandler
    handle(fhandler: OpenFile, spec: Dict) → List

class ads.text_dataset.options.OptionFactory
    Bases: object
    static option_handler(option: Options) → OptionHandler

    option_handlers = {<Options.FILE_NAME: 1>: <class
'ads.text_dataset.options.FileOption'>, <Options.FILE_METADATA: 2>: <class
'ads.text_dataset.options.MetadataOption'>}}

    classmethod register_option(option: Options, handler) → None

class ads.text_dataset.options.OptionHandler(dataloader: ads.text_dataset.dataset.DataLoader)
    Bases: object
    handle(fhandler: OpenFile, spec: Any) → Any

class ads.text_dataset.options.Options(value)
    Bases: Enum
    An enumeration.
    FILE_METADATA = 2
    FILE_NAME = 1
```

#### 18.1.1.23.6 ads.text\_dataset.udfs module

```
class ads.text_dataset.udfs.UDF
    Bases: object
    static from_regex(regex: str) → Callable
```

#### 18.1.1.23.7 ads.text\_dataset.utils module

```
exception ads.text_dataset.utils.NotSupportedError
    Bases: Exception

class ads.text_dataset.utils.PY4JGateway
    Bases: object

ads.text_dataset.utils.experimental(cls)
```

### 18.1.1.23.8 Module contents

### 18.1.1.24 ads.type\_discovery package

#### 18.1.1.24.1 Submodules

#### 18.1.1.24.2 ads.type\_discovery.abstract\_detector module

**class** ads.type\_discovery.abstract\_detector.**AbstractTypeDiscoveryDetector**

Bases: object

**abstract discover**(*name, series*)

**class** ads.type\_discovery.abstract\_detector.**DiscreteDiscoveryDetector**

Bases: *AbstractTypeDiscoveryDetector*

**abstract discover**(*name, series*)

#### 18.1.1.24.3 ads.type\_discovery.constant\_detector module

**class** ads.type\_discovery.constant\_detector.**ConstantDetector**

Bases: *AbstractTypeDiscoveryDetector*

**discover**(*name, series*)

**is\_constant**(*name, values*)

#### 18.1.1.24.4 ads.type\_discovery.continuous\_detector module

**class** ads.type\_discovery.continuous\_detector.**ContinuousDetector**

Bases: *AbstractTypeDiscoveryDetector*

**discover**(*name, series*)

#### 18.1.1.24.5 ads.type\_discovery.credit\_card\_detector module

**Note:** There's an opportunity here to generate a new feature, credit card numbers are not predictive because they don't generalize, however, if the feature is replaced by the type of card that might be predictive.

- Visa: `^4[0-9]{12}([0-9]{3})?$` All Visa card numbers start with a 4. New cards have 16 digits. Old cards have 13.
- **MasterCard:** `^(?:5[1-5][0-9]{2}|222[1-9]|22[3-9][0-9]|2[3-6][0-9]{2}|27[01][0-9]|2720)[0-9]{12}$`  
**MasterCard numbers**  
either start with the numbers 51 through 55 or with the numbers 2221 through 2720. All have 16 digits.
- American Express: `^3[47][0-9]{13}$` American Express card numbers start with 34 or 37 and have 15 digits.
- **Diners Club:** `^3(?:0[0-5]|[68][0-9])[0-9]{11}$` **Diners Club card numbers begin with 300 through 305, 36 or 38.**  
All have 14 digits. There are Diners Club cards that begin with 5 and have 16 digits. These are a joint venture between Diners Club and MasterCard, and should be processed like a MasterCard.

- Discover: `^6(?:011|5[0-9]{2})[0-9]{12}$` Discover card numbers begin with 6011 or 65. All have 16 digits.
  - JCB: `^(?:2131|1800|35d{3})d{11}$` JCB cards beginning with 2131 or 1800 have 15 digits. JCB cards beginning with 35 have 16 digits.
- 

**class** `ads.type_discovery.credit_card_detector.CreditCardDetector`

Bases: *AbstractTypeDiscoveryDetector*

**discover**(*name, series*)

**is\_credit\_card**(*name, values*)

**is\_luhn\_valid**(*card\_number*)

**luhn\_checksum**(*card\_number*)

#### 18.1.1.24.6 `ads.type_discovery.datetime_detector` module

**class** `ads.type_discovery.datetime_detector.DateTimeDetector`

Bases: *AbstractTypeDiscoveryDetector*

**discover**(*name, series*)

#### 18.1.1.24.7 `ads.type_discovery.discrete_detector` module

**class** `ads.type_discovery.discrete_detector.DiscreteDetector`

Bases: *DiscreteDiscoveryDetector*

**discover**(*name, series*)

#### 18.1.1.24.8 `ads.type_discovery.document_detector` module

**class** `ads.type_discovery.document_detector.DocumentDetector`

Bases: *AbstractTypeDiscoveryDetector*

**cjk\_string**(*document*)

**discover**(*name, series*)

**html\_document**(*document*)

#### 18.1.1.24.9 `ads.type_discovery.ip_detector` module

**class** `ads.type_discovery.ip_detector.IPDetector`

Bases: *AbstractTypeDiscoveryDetector*

**discover**(*name, series*)

**18.1.1.24.10 ads.type\_discovery.latlon\_detector module****class** ads.type\_discovery.latlon\_detector.LatLonDetectorBases: *AbstractTypeDiscoveryDetector***discover**(*name*, *series*)**static extract\_x\_y**(*gis\_series*)

takes a GIS series and parses it into a new dataframe with X (longitude) and Y (latitude) columns.

**is\_lat\_lon**(*name*, *values*)**18.1.1.24.11 ads.type\_discovery.phone\_number\_detector module****class** ads.type\_discovery.phone\_number\_detector.PhoneNumberDetectorBases: *AbstractTypeDiscoveryDetector***discover**(*name*, *series*)**is\_phone\_number**(*name*, *values*)**18.1.1.24.12 ads.type\_discovery.type\_discovery\_driver module****class** ads.type\_discovery.type\_discovery\_driver.TypeDiscoveryDriver

Bases: object

**discover**(*name*: str, *s*: Series, *is\_target*: bool = False)

return the type of series

**Parameters**

- **name** (*type*) – variable name to discover.
- **s** (*type*) – series of values to ‘type’
- **is\_target** (*type*) – when true the rules differ, any continuous is continuous regardless of other rules

**Returns**

one of:

ConstantDetector, DocumentDetector, ZipCodeDetector, LatLonDetector, CreditCardDetector, PhoneNumberDetector, DateTimeDetector, DiscreteDetector, ContinuousDetector,

**Return type**

type

#### 18.1.1.24.13 ads.type\_discovery.typed\_feature module

```
class ads.type_discovery.typed_feature.AddressTypedFeature(name, meta_data)
    Bases: TypedFeature
    static build(name, series)

class ads.type_discovery.typed_feature.CategoricalTypedFeature(name, meta_data)
    Bases: DiscreteTypedFeature
    static build(name, series)

class ads.type_discovery.typed_feature.ConstantTypedFeature(name, meta_data)
    Bases: TypedFeature
    static build(name, series)

class ads.type_discovery.typed_feature.ContinuousTypedFeature(name, meta_data)
    Bases: TypedFeature
    static build(name, series)

class ads.type_discovery.typed_feature.CreditCardTypedFeature(name, meta_data)
    Bases: TypedFeature
    static build(name, series)

class ads.type_discovery.typed_feature.DateTimeTypedFeature(name, meta_data)
    Bases: TypedFeature
    static build(name, series)

class ads.type_discovery.typed_feature.DiscreteTypedFeature(name, meta_data)
    Bases: TypedFeature

class ads.type_discovery.typed_feature.DocumentTypedFeature(name, meta_data)
    Bases: TypedFeature
    static build(name, series, is_cjk, is_html)
    static corpus_processor(series)
    static sub_vectorization(feature_name, series, min_df=0.0, max_df=1.0, min_tf=2)
    static vectorization(feature_name, series, mean_document_length)

class ads.type_discovery.typed_feature.GISTypedFeature(name, meta_data)
    Bases: TypedFeature
    static build(name, series, samples)

class ads.type_discovery.typed_feature.IPAddressTypedFeature(name, meta_data)
    Bases: TypedFeature
    static build(name, series)

class ads.type_discovery.typed_feature.OrdinalTypedFeature(name, meta_data)
    Bases: DiscreteTypedFeature
```

```
static build(name, series)
```

```
class ads.type_discovery.typed_feature.PhoneNumberTypedFeature(name, meta_data)
```

```
Bases: TypedFeature
```

```
static build(name, series)
```

```
class ads.type_discovery.typed_feature.TypedFeature(name, meta_data)
```

```
Bases: Bunch
```

```
static build(name, series)
```

```
class ads.type_discovery.typed_feature.UnknownTypedFeature(name, meta_data)
```

```
Bases: TypedFeature
```

```
static build(name, series)
```

```
class ads.type_discovery.typed_feature.ZipcodeTypedFeature(name, meta_data)
```

```
Bases: TypedFeature
```

```
static build(name, series)
```

#### 18.1.1.24.14 ads.type\_discovery.unknown\_detector module

```
class ads.type_discovery.unknown_detector.UnknownDetector
```

```
Bases: AbstractTypeDiscoveryDetector
```

```
discover(name, series)
```

#### 18.1.1.24.15 ads.type\_discovery.zipcode\_detector module

```
class ads.type_discovery.zipcode_detector.ZipCodeDetector
```

```
Bases: AbstractTypeDiscoveryDetector
```

```
discover(name, series)
```

#### 18.1.1.24.16 Module contents

#### 18.1.1.25 ads.vault package

##### 18.1.1.25.1 Submodules

##### 18.1.1.25.2 ads.vault.vault module

```
class ads.vault.vault.Vault(vault_id: Optional[str] = None, key_id: Optional[str] = None,
                             compartment_id=None, secret_client_auth=None, vault_client_auth=None,
                             auth=None)
```

```
Bases: object
```

```
Parameters
```

- **vault\_id**((str, optional). Default None) – ocid of the vault

- **key\_id** ((*str*, *optional*)). *Default None*) – ocid of the key that is used for encrypting the content
- **compartment\_id** ((*str*, *optional*)). *Default None*) – ocid of the compartment\_id where the vault resides. When available in environment variable - *NB\_SESSION\_COMPARTMENT\_OCID*, will default to that.
- **secret\_client\_auth** ((*dict*, *optional*, *deprecated since 2.5.1*). *Default None.*) – deprecated since 2.5.1. Use *auth* instead
- **vault\_client\_auth** ((*dict*, *optional*, *deprecated since 2.5.1*). *Default None.*) – deprecated since 2.5.1. Use *auth* instead
- **auth** ((*dict*, *optional*)) – Dictionary returned from *ads.common.auth.api\_keys()* or *ads.common.auth.resource\_principal()*. By default, will follow what is set in *ads.set\_auth*. Use this attribute to override the default.

**create\_secret**(*value: dict*, *secret\_name: Optional[str] = None*, *description: Optional[str] = None*, *encode=True*, *freeform\_tags: Optional[dict] = None*, *defined\_tags: Optional[dict] = None*) → *str*

Saves value into vault as a secret.

#### Parameters

- **value** (*dict*) – The value to store as a secret.
- **secret\_name** (*str*, *optional*) – The name of the secret.
- **description** (*str*, *optional*) – The description of the secret.
- **encode** ((*bool*, *optional*). *Default True*) – Whether to encode using the default encoding.
- **freeform\_tags** ((*dict*, *optional*). *Default None*) – *freeform\_tags* as defined by the oci sdk
- **defined\_tags** ((*dict*, *optional*). *Default None*) – *defined\_tags* as defined by the oci sdk

#### Return type

The secret ocid that correspond to the value saved as a secret into vault.

**get\_secret**(*secret\_id: str*, *decoded=True*) → *dict*

Retrieve secret content based on the secret ocid provided

#### Parameters

- **secret\_id** (*str*) – The secret ocid.
- **decoded** ((*bool*, *optional*). *Default True*) – Whether to decode the content that is retrieved from vault service using the default decoder.

#### Return type

The secret content as a dictionary.

**update\_secret**(*secret\_id: str*, *secret\_content: dict*, *encode: bool = True*) → *str*

Updates content of a secret.

#### Parameters

- **secret\_id** (*str*) – The secret id where the stored secret will be updated.
- **secret\_content** (*dict*,) – The updated content.



- **encode** ((*bool*, optional). Default *True*) – Whether to encode the `secret_content` using default encoding

**Return type**

The secret ocid with updated content.

**18.1.1.25.3 Module contents****18.1.2 Submodules****18.1.3 ads.cli module****18.1.4 ads.config module**

`ads.config.export(uri: Optional[str] = '~/.ads/config', auth: Optional[Dict] = None, force_overwrite: Optional[bool] = False) → Config`

Exports the ADS config.

**Parameters**

- **uri** ((*str*, optional). Defaults to `~/.ads/config`.) – The path to the config file. Can be local or Object Storage file.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate `IdentityClient` object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Overwrites the config if exists.

**Returns**

The ADS config object.

**Return type**

`ads.Config`

`ads.config.load(uri: Optional[str] = '~/.ads/config', auth: Optional[Dict] = None, force_overwrite: Optional[bool] = False) → Config`

Imports the ADS config.

The config will be imported from the URI and saved the `~/.ads/config`.

**Parameters**

- **uri** ((*str*, optional). Defaults to `~/.ads/config`.) – The path where the config file needs to be saved. Can be local or Object Storage file.
- **auth** ((*Dict*, optional). Defaults to *None*.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate `IdentityClient` object.
- **force\_overwrite** ((*bool*, optional). Defaults to *False*.) – Overwrites the config if exists.

**Returns**

The ADS config object.

**Return type**`ads.Config`

`ads.config.open(uri: Optional[str] = '~/.ads/config', profile: Optional[str] = 'DEFAULT', mode: Optional[str] = 'r', auth: Dict = None)`

Context manager helping to read and write config files.

**Parameters**

- **uri** ((str, optional). Defaults to `~/.ads/config`.) – The path to the config file. Can be local or Object Storage file.
- **profile** ((str, optional). Defaults to `DEFAULT`) – The name of the profile to be loaded.
- **mode** ((str, optional). Defaults to `r`.) – The config mode. Supported values: ['r', 'w']
- **auth** ((Dict, optional). Defaults to `None`.) – The default authentication is set using `ads.set_auth` API. If you need to override the default, use the `ads.common.auth.api_keys` or `ads.common.auth.resource_principal` to create appropriate authentication signer and kwargs required to instantiate `IdentityClient` object.

**Yields**

`ConfigSection` – The config section object.

## 18.1.5 Module contents

`ads.getLogger(name='ads')`

`ads.hello()`

Imports Pandas, sets the documentation mode, and prints a fancy “Hello”.

`ads.set_debug_mode(mode=True)`

Enable/disable printing stack traces on notebook.

**Parameters**

**mode** (bool (default True)) – Enable/disable print stack traces on notebook

`ads.set_documentation_mode(mode=False)`

This method is deprecated and will be removed in future releases. Enable/disable printing user tips on notebook.

**Parameters**

**mode** (bool (default False)) – Enable/disable print user tips on notebook

`ads.set_expert_mode()`

This method is deprecated and will be removed in future releases. Enables the debug and documentation mode for expert users all in one method.

---

## Oracle Accelerated Data Science (ADS) SDK

The Oracle Accelerated Data Science (ADS) SDK is maintained by the Oracle Cloud Infrastructure Data Science service team. It speeds up common data science activities by providing tools that automate and/or simplify common data science tasks, along with providing a data scientist friendly pythonic interface to Oracle Cloud Infrastructure (OCI) services, most notably OCI Data Science, Data Flow, Object Storage, and the Autonomous Database. ADS gives you an interface to manage the lifecycle of machine learning models, from data acquisition to model evaluation, interpretation, and model deployment.

With ADS you can:

- Read datasets from Oracle Object Storage, Oracle RDBMS (ATP/ADW/On-prem), AWS S3, and other sources into Pandas dataframes.

- Easily compute summary statistics on your dataframes and perform data profiling.
  - Tune models using hyperparameter optimization with the ADSTuner tool.
  - Generate detailed evaluation reports of your model candidates with the ADSEvaluator module.
  - Save machine learning models to the OCI Data Science Models.
  - Deploy those models as HTTPS endpoints with Model Deployment.
  - Launch distributed ETL, data processing, and model training jobs in Spark with OCI Data Flow.
  - Train machine learning models in OCI Data Science Jobs.
  - Manage the lifecycle of conda environments through the ads conda command line interface (CLI).
  - Distributed Training with PyTorch, Horovod and Dask
- 

---

## Installation

```
python3 -m pip install oracle-ads
```

---

---

## Source Code

<https://github.com/oracle/accelerated-data-science>

---

```
>>> import ads
>>> ads.hello()
```

```
  0  o-o  o-o
 / \ | \ |
o---o|  0 o-o
|  || /   |
o  oo-o o--o
```

```
ADS SDK version: X.Y.Z
Pandas version: x.y.z
Debug mode: False
```



## ADDITIONAL DOCUMENTATION

- [OCI Data Science and AI services Examples](#)
- [Oracle AI & Data Science Blog](#)
- [OCI Documentation](#)



## EXAMPLES

### 20.1 Load data from Object Storage

```
import ads
import oci
import pandas as pd

ads.set_auth(
    auth="api_key", oci_config_location=oci.config.DEFAULT_LOCATION, profile="DEFAULT"
)
bucket_name = "<bucket_name>"
path = "<path>"
namespace = "<namespace>"
df = pd.read_csv(
    f"oci://{bucket_name}@{namespace}/{path}", storage_options=ads.auth.default_signer()
)
```

### 20.2 Load data from Autonomous DB

This example uses SQL injection safe binding variables.

```
import ads
import pandas as pd

connection_parameters = {
    "user_name": "<user_name>",
    "password": "<password>",
    "service_name": "<tns_name>",
    "wallet_location": "<file_path>",
}

df = pd.DataFrame.ads.read_sql(
    """
    SELECT *
    FROM SH.SALES
    WHERE ROWNUM <= :max_rows
    """,
    bind_variables={ "max_rows" : 100 },
```

(continues on next page)

(continued from previous page)

```
connection_parameters=connection_parameters,  
)
```

## 20.3 More Examples

See *quick start* guide for more examples



## CONTRIBUTING

This project welcomes contributions from the community. Before submitting a pull request, please review our contribution guide [CONTRIBUTING.md](#).

Find Getting Started instructions for developers in [README-development.md](#)



## **SECURITY**

Consult the security guide [SECURITY.md](#) for our responsible security vulnerability disclosure process.



---

CHAPTER  
**TWENTYTHREE**

---

**LICENSE**

Copyright (c) 2020, 2022 Oracle and/or its affiliates. Licensed under the [Universal Permissive License v1.0](#)



## PYTHON MODULE INDEX

### a

- ads, 1556
- ads.bds, 542
- ads.bds.auth, 539
- ads.bds.big\_data\_service, 540
- ads.catalog, 555
- ads.catalog.model, 542
- ads.catalog.notebook, 549
- ads.catalog.project, 552
- ads.catalog.summary, 555
- ads.common, 629
- ads.common.artifact, 555
- ads.common.auth, 560
- ads.common.base\_properties, 571
- ads.common.card\_identifier, 573
- ads.common.config, 573
- ads.common.data, 579
- ads.common.data\_serializer, 581
- ads.common.decorator, 560
- ads.common.decorator.argument\_to\_case, 556
- ads.common.decorator.deprecate, 556
- ads.common.decorator.runtime\_dependency, 557
- ads.common.decorator.utils, 559
- ads.common.error, 581
- ads.common.extended\_enum, 581
- ads.common.function, 560
- ads.common.function.fn\_util, 560
- ads.common.ipython, 582
- ads.common.model, 582
- ads.common.model\_artifact, 585
- ads.common.model\_export\_util, 592
- ads.common.model\_introspect, 594
- ads.common.model\_metadata, 597
- ads.common.model\_metadata\_mixin, 597
- ads.common.object\_storage\_details, 598
- ads.common.oci\_client, 599
- ads.common.oci\_datascience, 600
- ads.common.oci\_logging, 601
- ads.common.oci\_mixin, 607
- ads.common.oci\_resource, 614
- ads.common.serializer, 616
- ads.common.utils, 620
- ads.common.word\_lists, 629
- ads.config, 1555
- ads.data\_labeling, 673
- ads.data\_labeling.boundingbox, 664
- ads.data\_labeling.constants, 667
- ads.data\_labeling.data\_labeling\_service, 667
- ads.data\_labeling.interface, 630
- ads.data\_labeling.interface.loader, 629
- ads.data\_labeling.interface.parser, 629
- ads.data\_labeling.interface.reader, 630
- ads.data\_labeling.loader, 633
- ads.data\_labeling.loader.file\_loader, 630
- ads.data\_labeling.metadata, 669
- ads.data\_labeling.mixin, 636
- ads.data\_labeling.mixin.data\_labeling, 633
- ads.data\_labeling.ner, 671
- ads.data\_labeling.parser, 644
- ads.data\_labeling.parser.dls\_record\_parser, 636
- ads.data\_labeling.parser.export\_metadata\_parser, 640
- ads.data\_labeling.parser.export\_record\_parser, 640
- ads.data\_labeling.reader, 659
- ads.data\_labeling.reader.dataset\_reader, 644
- ads.data\_labeling.reader.dls\_record\_reader, 651
- ads.data\_labeling.reader.export\_record\_reader, 652
- ads.data\_labeling.reader.jsonl\_reader, 653
- ads.data\_labeling.reader.metadata\_reader, 654
- ads.data\_labeling.reader.record\_reader, 656
- ads.data\_labeling.record, 672
- ads.data\_labeling.visualizer, 664
- ads.data\_labeling.visualizer.image\_visualizer, 659
- ads.data\_labeling.visualizer.text\_visualizer, 662
- ads.database, 674
- ads.database.connection, 673
- ads.dataflow, 682
- ads.dataflow.dataflow, 674

`ads.dataflow.dataflowssummary`, 682  
`ads.dataset`, 721  
`ads.dataset.classification_dataset`, 682  
`ads.dataset.correlation`, 686  
`ads.dataset.correlation_plot`, 686  
`ads.dataset.dataframe_transformer`, 688  
`ads.dataset.dataset`, 689  
`ads.dataset.dataset_browser`, 700  
`ads.dataset.dataset_with_target`, 703  
`ads.dataset.exception`, 708  
`ads.dataset.factory`, 708  
`ads.dataset.feature_engineering_transformer`, 713  
`ads.dataset.feature_selection`, 713  
`ads.dataset.forecasting_dataset`, 714  
`ads.dataset.helper`, 714  
`ads.dataset.label_encoder`, 717  
`ads.dataset.pipeline`, 717  
`ads.dataset.plot`, 717  
`ads.dataset.progress`, 718  
`ads.dataset.recommendation`, 718  
`ads.dataset.recommendation_transformer`, 718  
`ads.dataset.regression_dataset`, 719  
`ads.dataset.sampled_dataset`, 719  
`ads.dataset.target`, 720  
`ads.dataset.timeseries`, 721  
`ads.dbmixin`, 723  
`ads.dbmixin.db_pandas_accessor`, 721  
`ads.environment`, 723  
`ads.evaluations`, 738  
`ads.evaluations.evaluation_plot`, 723  
`ads.evaluations.evaluator`, 725  
`ads.evaluations.statistical_metrics`, 737  
`ads.experiments`, 741  
`ads.feature_engineering`, 854  
`ads.feature_engineering.accessor`, 756  
`ads.feature_engineering.accessor.dataframe_accessor`, 747  
`ads.feature_engineering.accessor.mixin`, 747  
`ads.feature_engineering.accessor.mixin.correlation`, 741  
`ads.feature_engineering.accessor.mixin.eda_mixin`, 741  
`ads.feature_engineering.accessor.mixin.eda_mixin.features`, 744  
`ads.feature_engineering.accessor.mixin.feature_accessor`, 745  
`ads.feature_engineering.accessor.mixin.utils`, 747  
`ads.feature_engineering.accessor.series_accessor`, 752  
`ads.feature_engineering.adsimage`, 761  
`ads.feature_engineering.adsimage.image`, 756  
`ads.feature_engineering.adsimage.image_reader`, 759  
`ads.feature_engineering.adsimage.interface`, 756  
`ads.feature_engineering.adsimage.interface.reader`, 756  
`ads.feature_engineering.adsstring`, 764  
`ads.feature_engineering.adsstring.common_regex_mixin`, 762  
`ads.feature_engineering.adsstring.oci_language`, 761  
`ads.feature_engineering.adsstring.parsers`, 762  
`ads.feature_engineering.adsstring.parsers.base`, 761  
`ads.feature_engineering.adsstring.parsers.spacy_parser`, 761  
`ads.feature_engineering.adsstring.string`, 762  
`ads.feature_engineering.dataset`, 764  
`ads.feature_engineering.dataset.zip_code_data`, 764  
`ads.feature_engineering.exceptions`, 839  
`ads.feature_engineering.feature_type`, 837  
`ads.feature_engineering.feature_type.address`, 785  
`ads.feature_engineering.feature_type.adsstring`, 777  
`ads.feature_engineering.feature_type.adsstring.common_regex_mixin`, 766  
`ads.feature_engineering.feature_type.adsstring.oci_language`, 768  
`ads.feature_engineering.feature_type.adsstring.parsers`, 766  
`ads.feature_engineering.feature_type.adsstring.parsers.base`, 765  
`ads.feature_engineering.feature_type.adsstring.parsers.spacy_parser`, 769  
`ads.feature_engineering.feature_type.adsstring.string`, 769  
`ads.feature_engineering.feature_type.base`, 788  
`ads.feature_engineering.feature_type.boolean`, 789  
`ads.feature_engineering.feature_type.category`, 792  
`ads.feature_engineering.feature_type.constant`, 794  
`ads.feature_engineering.feature_type.continuous`, 796  
`ads.feature_engineering.feature_type.creditcard`, 798  
`ads.feature_engineering.feature_type.datetime`, 803  
`ads.feature_engineering.feature_type.discrete`,



[805](#)  
[ads.feature\\_engineering.feature\\_type.document](#), [807](#)  
[ads.feature\\_engineering.feature\\_type.gis](#), [808](#)  
[ads.feature\\_engineering.feature\\_type.handler](#), [785](#)  
[ads.feature\\_engineering.feature\\_type.handler.feature\\_validator](#), [777](#)  
[ads.feature\\_engineering.feature\\_type.handler.feature\\_validation](#), [781](#)  
[ads.feature\\_engineering.feature\\_type.handler.warnings](#), [784](#)  
[ads.feature\\_engineering.feature\\_type.integer](#), [812](#)  
[ads.feature\\_engineering.feature\\_type.ip\\_address](#), [814](#)  
[ads.feature\\_engineering.feature\\_type.ip\\_address.v4](#), [816](#)  
[ads.feature\\_engineering.feature\\_type.ip\\_address.v6](#), [819](#)  
[ads.feature\\_engineering.feature\\_type.lat\\_long](#), [821](#)  
[ads.feature\\_engineering.feature\\_type.object](#), [825](#)  
[ads.feature\\_engineering.feature\\_type.ordinal](#), [826](#)  
[ads.feature\\_engineering.feature\\_type.phone\\_number](#), [828](#)  
[ads.feature\\_engineering.feature\\_type.string](#), [830](#)  
[ads.feature\\_engineering.feature\\_type.text](#), [832](#)  
[ads.feature\\_engineering.feature\\_type.unknown](#), [834](#)  
[ads.feature\\_engineering.feature\\_type.zip\\_code](#), [835](#)  
[ads.feature\\_engineering.feature\\_type\\_manager](#), [839](#)  
[ads.feature\\_engineering.schema](#), [843](#)  
[ads.feature\\_engineering.utils](#), [853](#)  
[ads.hpo](#), [873](#)  
[ads.hpo.ads\\_search\\_space](#), [854](#)  
[ads.hpo.distributions](#), [856](#)  
[ads.hpo.objective](#), [859](#)  
[ads.hpo.search\\_cv](#), [859](#)  
[ads.hpo.stopping\\_criterion](#), [871](#)  
[ads.hpo.tuner\\_artifact](#), [871](#)  
[ads.hpo.utils](#), [872](#)  
[ads.hpo.validation](#), [872](#)  
[ads.hpo.visualization](#), [854](#)  
[ads.jobs](#), [945](#)  
[ads.jobs.ads\\_job](#), [926](#)  
[ads.jobs.builders](#), [920](#)  
[ads.jobs.builders.base](#), [919](#)  
[ads.jobs.builders.infrastructure](#), [901](#)  
[ads.jobs.builders.infrastructure.base](#), [873](#)  
[ads.jobs.builders.infrastructure.dataflow](#), [875](#)  
[ads.jobs.builders.infrastructure.dsc\\_job](#), [884](#)  
[ads.jobs.builders.infrastructure.dsc\\_job\\_runtime](#), [885](#)  
[ads.jobs.builders.infrastructure.utils](#), [901](#)  
[ads.jobs.builders.runtimes](#), [919](#)  
[ads.jobs.builders.runtimes.artifact](#), [901](#)  
[ads.jobs.builders.runtimes.base](#), [903](#)  
[ads.jobs.builders.runtimes.container\\_runtime](#), [906](#)  
[ads.jobs.builders.runtimes.python\\_runtime](#), [908](#)  
[ads.jobs.cli](#), [935](#)  
[ads.jobs.env\\_var\\_parser](#), [935](#)  
[ads.jobs.extension](#), [935](#)  
[ads.jobs.schema](#), [922](#)  
[ads.jobs.schema.validator](#), [920](#)  
[ads.jobs.serializer](#), [936](#)  
[ads.jobs.templates](#), [926](#)  
[ads.jobs.templates.container](#), [922](#)  
[ads.jobs.templates.driver\\_notebook](#), [922](#)  
[ads.jobs.templates.driver\\_oci](#), [923](#)  
[ads.jobs.templates.driver\\_python](#), [925](#)  
[ads.jobs.utils](#), [938](#)  
[ads.model](#), [1362](#)  
[ads.model.artifact](#), [1296](#)  
[ads.model.artifact\\_downloader](#), [1299](#)  
[ads.model.artifact\\_uploader](#), [1300](#)  
[ads.model.base\\_properties](#), [1301](#)  
[ads.model.common](#), [1053](#)  
[ads.model.common.utils](#), [1052](#)  
[ads.model.deployment](#), [1078](#)  
[ads.model.deployment.common](#), [1056](#)  
[ads.model.deployment.common.progress\\_bar](#), [1053](#)  
[ads.model.deployment.common.utils](#), [1054](#)  
[ads.model.deployment.model\\_deployer](#), [1056](#)  
[ads.model.deployment.model\\_deployment](#), [1061](#)  
[ads.model.deployment.model\\_deployment\\_properties](#), [1074](#)  
[ads.model.extractor](#), [1088](#)  
[ads.model.extractor.keras\\_extractor](#), [1078](#)  
[ads.model.extractor.lightgbm\\_extractor](#), [1079](#)  
[ads.model.extractor.model\\_info\\_extractor](#), [1080](#)  
[ads.model.extractor.model\\_info\\_extractor\\_factory](#), [1082](#)  
[ads.model.extractor.pytorch\\_extractor](#), [1082](#)  
[ads.model.extractor.sklearn\\_extractor](#), [1083](#)  
[ads.model.extractor.spark\\_extractor](#), [1084](#)

[ads.model.extractor.tensorflow\\_extractor](#), 1086  
[ads.model.extractor.xgboost\\_extractor](#), 1087  
[ads.model.framework](#), 1282  
[ads.model.framework.huggingface\\_model](#), 1088  
[ads.model.framework.lightgbm\\_model](#), 1119  
[ads.model.framework.pytorch\\_model](#), 1146  
[ads.model.framework.sklearn\\_model](#), 1173  
[ads.model.framework.spark\\_model](#), 1201  
[ads.model.framework.tensorflow\\_model](#), 1228  
[ads.model.framework.xgboost\\_model](#), 1255  
[ads.model.generic\\_model](#), 1303  
[ads.model.model\\_artifact\\_boilerplate](#), 1283  
[ads.model.model\\_artifact\\_boilerplate.artifact\\_introspection](#), 1283  
[ads.model.model\\_artifact\\_boilerplate.artifact\\_introspection\\_test.model\\_artifact\\_validate](#), 1282  
[ads.model.model\\_introspect](#), 1331  
[ads.model.model\\_metadata](#), 1334  
[ads.model.model\\_metadata\\_mixin](#), 1352  
[ads.model.model\\_properties](#), 1353  
[ads.model.model\\_version\\_set](#), 1354  
[ads.model.runtime](#), 1287  
[ads.model.runtime.env\\_info](#), 1283  
[ads.model.runtime.model\\_deployment\\_details](#), 1285  
[ads.model.runtime.model\\_provenance\\_details](#), 1285  
[ads.model.runtime.runtime\\_info](#), 1286  
[ads.model.runtime.utils](#), 1286  
[ads.model.service](#), 1295  
[ads.model.service.oci\\_datascience\\_model](#), 1287  
[ads.model.service.oci\\_datascience\\_model\\_version\\_set](#), 1293  
[ads.model.transformer](#), 1296  
[ads.model.transformer.onnx\\_transformer](#), 1295  
[ads.model\\_artifact\\_boilerplate](#), 1465  
[ads.model\\_artifact\\_boilerplate.artifact\\_introspection](#), 1465  
[ads.model\\_artifact\\_boilerplate.artifact\\_introspection\\_test.model\\_artifact\\_validate](#), 1464  
[ads.mysqlldb](#), 1465  
[ads.opctl](#), 1480  
[ads.opctl.backend](#), 1469  
[ads.opctl.backend.ads\\_dataflow](#), 1466  
[ads.opctl.backend.ads\\_ml\\_job](#), 1466  
[ads.opctl.backend.ads\\_ml\\_pipeline](#), 1467  
[ads.opctl.backend.base](#), 1468  
[ads.opctl.conda](#), 1470  
[ads.opctl.conda.cli](#), 1469  
[ads.opctl.conda.cmds](#), 1469  
[ads.opctl.conda.multipart\\_uploader](#), 1469  
[ads.opctl.config](#), 1474  
[ads.opctl.config.base](#), 1471  
[ads.opctl.config.diagnostics](#), 1470  
[ads.opctl.config.merger](#), 1472  
[ads.opctl.config.resolver](#), 1472  
[ads.opctl.config.utils](#), 1473  
[ads.opctl.config.validator](#), 1473  
[ads.opctl.config.versioner](#), 1473  
[ads.opctl.config.yaml\\_parsers](#), 1471  
[ads.opctl.config.yaml\\_parsers.base](#), 1471  
[ads.opctl.config.yaml\\_parsers.distributed](#), 1471  
[ads.opctl.config.yaml\\_parsers.distributed.yaml\\_parser](#), 1470  
[ads.opctl.constants](#), 1478  
[ads.opctl.diagnostics](#), 1474  
[ads.opctl.diagnostics.requirement\\_exception](#), 1474  
[ads.opctl.introspection\\_test.model\\_artifact\\_validate](#), 1471  
[ads.opctl.distributed](#), 1477  
[ads.opctl.distributed.certificates](#), 1477  
[ads.opctl.distributed.common](#), 1477  
[ads.opctl.distributed.common.abstract\\_cluster\\_provider](#), 1474  
[ads.opctl.distributed.common.abstract\\_framework\\_spec\\_builder](#), 1476  
[ads.opctl.distributed.common.cluster\\_config\\_helper](#), 1476  
[ads.opctl.distributed.common.cluster\\_provider\\_factory](#), 1477  
[ads.opctl.distributed.common.cluster\\_runner](#), 1477  
[ads.opctl.spark](#), 1478  
[ads.opctl.spark.cli](#), 1477  
[ads.opctl.spark.cmds](#), 1477  
[ads.opctl.spec](#), 1478  
[ads.opctl.spec.utils](#), 1478  
[ads.opctl.utils](#), 1479  
[ads.oracledb](#), 1480  
[ads.pipeline](#), 1520  
[ads.pipeline.ads\\_pipeline](#), 1487  
[ads.pipeline.ads\\_pipeline\\_run](#), 1508  
[ads.pipeline.ads\\_pipeline\\_test.model\\_artifact\\_validate](#), 1508  
[ads.pipeline.builders](#), 1481  
[ads.pipeline.builders.infrastructure](#), 1481  
[ads.pipeline.builders.infrastructure.custom\\_script](#), 1480  
[ads.pipeline.cli](#), 1520  
[ads.pipeline.extension](#), 1520  
[ads.pipeline.schema](#), 1481  
[ads.pipeline.visualizer](#), 1487  
[ads.pipeline.visualizer.base](#), 1481  
[ads.pipeline.visualizer.graph\\_renderer](#), 1485  
[ads.pipeline.visualizer.text\\_renderer](#), 1487  
[ads.secrets](#), 1538  
[ads.secrets.adb](#), 1520  
[ads.secrets.auth\\_token](#), 1524

- ads.secrets.big\_data\_service, 1525
- ads.secrets.mysqlldb, 1530
- ads.secrets.oracledb, 1532
- ads.secrets.secrets, 1534
- ads.telemetry, 1538
- ads.telemetry.telemetry, 1538
- ads.text\_dataset, 1549
- ads.text\_dataset.backends, 1538
- ads.text\_dataset.dataset, 1541
- ads.text\_dataset.extractor, 1545
- ads.text\_dataset.options, 1548
- ads.text\_dataset.udfs, 1548
- ads.text\_dataset.utils, 1548
- ads.type\_discovery, 1553
- ads.type\_discovery.abstract\_detector, 1549
- ads.type\_discovery.constant\_detector, 1549
- ads.type\_discovery.continuous\_detector, 1549
- ads.type\_discovery.credit\_card\_detector, 1549
- ads.type\_discovery.datetime\_detector, 1550
- ads.type\_discovery.discrete\_detector, 1550
- ads.type\_discovery.document\_detector, 1550
- ads.type\_discovery.ip\_detector, 1550
- ads.type\_discovery.latlon\_detector, 1551
- ads.type\_discovery.phone\_number\_detector, 1551
- ads.type\_discovery.type\_discovery\_driver, 1551
- ads.type\_discovery.typed\_feature, 1552
- ads.type\_discovery.unknown\_detector, 1553
- ads.type\_discovery.zipcode\_detector, 1553
- ads.vault, 1555
- ads.vault.vault, 1553



## Symbols

**\_\_enter\_\_()** (*ads.model.deployment.common.progress\_bar.ProgressBar* method), 1053  
**\_\_enter\_\_()** (*ads.model.deployment.common.progress\_bar.TqdmProgressBar* method), 1053  
**\_\_exit\_\_()** (*ads.model.deployment.common.progress\_bar.ProgressBar* method), 1053  
**\_\_exit\_\_()** (*ads.model.deployment.common.progress\_bar.TqdmProgressBar* method), 1054  
**\_\_init\_\_()** (*ads.model.deployment.common.progress\_bar.TqdmProgressBar* method), 1054  
**\_read\_from\_file()** (*ads.common.serializer.Serializable* method), 617  
**\_write\_to\_file()** (*ads.common.serializer.Serializable* method), 617

## A

**absa** (*ads.feature\_engineering.feature\_type.adsstring.oci\_language* property), 768  
**AbstractFrameworkSpecBuilder** (class in *ads.opctl.distributed.common.abstract\_framework\_spec\_builder*), 1476  
**AbstractTypeDiscoveryDetector** (class in *ads.type\_discovery.abstract\_detector*), 1549  
**ACCEPTED** (*ads.pipeline.visualizer.base.StepStatus* attribute), 1485  
**ACCESS** (*ads.model.deployment.model\_deployment.ModelDeploymentLogType* attribute), 1073  
**access\_log** (*ads.model.deployment.model\_deployment.ModelDeployment* property), 1064  
**access\_log** (*ads.model.ModelDeployment* property), 1420  
**activate()** (*ads.catalog.model.Model* method), 543  
**activate()** (*ads.model.deployment.model\_deployment.ModelDeployment* method), 1063, 1065  
**activate()** (*ads.model.ModelDeployment* method), 1418, 1420  
**activate()** (*ads.opctl.backend.base.Backend* method), 1468  
**ACTIVE** (*ads.model.deployment.common.utils.State* attribute), 1055  
**ADBSecret** (class in *ads.secrets.adb*), 1520  
**ADBSecretKeeper** (class in *ads.secrets.adb*), 1520  
**add()** (*ads.dataset.pipeline.TransformerPipeline* method), 717  
**add()** (*ads.feature\_engineering.schema.Schema* method), 847, 849  
**add()** (*ads.model.model\_metadata.ModelCustomMetadata* method), 1337, 1338  
**add\_metric()** (*ads.evaluations.evaluator.Evaluator* method), 733  
**add\_metrics()** (*ads.evaluations.evaluator.ADSEvaluator* method), 726, 728  
**add\_model()** (*ads.evaluations.evaluator.Evaluator* method), 733  
**add\_models()** (*ads.evaluations.evaluator.ADSEvaluator* method), 726, 728  
**add\_models()** (*ads.evaluations.evaluator.Evaluator* method), 734  
**add\_plot()** (*ads.evaluations.evaluator.Evaluator* method), 733  
**address** (*ads.feature\_engineering.adsstring.common\_regex\_mixin.CommonRegexMixin* property), 763  
**address** (*ads.feature\_engineering.feature\_type.adsstring.common\_regex\_mixin.CommonRegexMixin* property), 767  
**Address** (class in *ads.feature\_engineering.feature\_type.address*), 785  
**AddressTypedFeature** (class in *ads.type\_discovery.typed\_feature*), 1552  
**adjective** (*ads.feature\_engineering.adsstring.parsers.base.Parser* property), 761  
**adjective** (*ads.feature\_engineering.adsstring.parsers.spacy\_parser.SpacyParser* property), 761  
**adjective** (*ads.feature\_engineering.feature\_type.adsstring.parsers.base.Parser* property), 765  
**adjective** (*ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser.SpacyParser* property), 765  
**ads** module, 1556  
**ads.bds** module, 542  
**ads.bds.auth** module, 539  
**ads.bds.big\_data\_service**

- module, [540](#)
- ads.catalog
  - module, [555](#)
- ads.catalog.model
  - module, [542](#)
- ads.catalog.notebook
  - module, [549](#)
- ads.catalog.project
  - module, [552](#)
- ads.catalog.summary
  - module, [555](#)
- ads.common
  - module, [629](#)
- ads.common.artifact
  - module, [555](#)
- ads.common.auth
  - module, [560](#)
- ads.common.base\_properties
  - module, [571](#)
- ads.common.card\_identifier
  - module, [573](#)
- ads.common.config
  - module, [573](#)
- ads.common.data
  - module, [579](#)
- ads.common.data\_serializer
  - module, [581](#)
- ads.common.decorator
  - module, [560](#)
- ads.common.decorator.argument\_to\_case
  - module, [556](#)
- ads.common.decorator.deprecate
  - module, [556](#)
- ads.common.decorator.runtime\_dependency
  - module, [557](#)
- ads.common.decorator.utils
  - module, [559](#)
- ads.common.error
  - module, [581](#)
- ads.common.extended\_enum
  - module, [581](#)
- ads.common.function
  - module, [560](#)
- ads.common.function.fn\_util
  - module, [560](#)
- ads.common.ipython
  - module, [582](#)
- ads.common.model
  - module, [582](#)
- ads.common.model\_artifact
  - module, [585](#)
- ads.common.model\_export\_util
  - module, [592](#)
- ads.common.model\_introspect
  - module, [594](#)
- ads.common.model\_metadata
  - module, [597](#)
- ads.common.model\_metadata\_mixin
  - module, [597](#)
- ads.common.object\_storage\_details
  - module, [598](#)
- ads.common.oci\_client
  - module, [599](#)
- ads.common.oci\_datascience
  - module, [600](#)
- ads.common.oci\_logging
  - module, [601](#)
- ads.common.oci\_mixin
  - module, [607](#)
- ads.common.oci\_resource
  - module, [614](#)
- ads.common.serializer
  - module, [616](#)
- ads.common.utils
  - module, [620](#)
- ads.common.word\_lists
  - module, [629](#)
- ads.config
  - module, [1555](#)
- ads.data\_labeling
  - module, [673](#)
- ads.data\_labeling.boundingBox
  - module, [664](#)
- ads.data\_labeling.constants
  - module, [667](#)
- ads.data\_labeling.data\_labeling\_service
  - module, [667](#)
- ads.data\_labeling.interface
  - module, [630](#)
- ads.data\_labeling.interface.loader
  - module, [629](#)
- ads.data\_labeling.interface.parser
  - module, [629](#)
- ads.data\_labeling.interface.reader
  - module, [630](#)
- ads.data\_labeling.loader
  - module, [633](#)
- ads.data\_labeling.loader.file\_loader
  - module, [630](#)
- ads.data\_labeling.metadata
  - module, [669](#)
- ads.data\_labeling.mixin
  - module, [636](#)
- ads.data\_labeling.mixin.data\_labeling
  - module, [633](#)
- ads.data\_labeling.ner
  - module, [671](#)
- ads.data\_labeling.parser

module, 644	module, 703
ads.data_labeling.parser.dls_record_parser	ads.dataset.exception
module, 636	module, 708
ads.data_labeling.parser.export_metadata_parser	ads.dataset.factory
module, 640	module, 708
ads.data_labeling.parser.export_record_parser	ads.dataset.feature_engineering_transformer
module, 640	module, 713
ads.data_labeling.reader	ads.dataset.feature_selection
module, 659	module, 713
ads.data_labeling.reader.dataset_reader	ads.dataset.forecasting_dataset
module, 644	module, 714
ads.data_labeling.reader.dls_record_reader	ads.dataset.helper
module, 651	module, 714
ads.data_labeling.reader.export_record_reader	ads.dataset.label_encoder
module, 652	module, 717
ads.data_labeling.reader.jsonl_reader	ads.dataset.pipeline
module, 653	module, 717
ads.data_labeling.reader.metadata_reader	ads.dataset.plot
module, 654	module, 717
ads.data_labeling.reader.record_reader	ads.dataset.progress
module, 656	module, 718
ads.data_labeling.record	ads.dataset.recommendation
module, 672	module, 718
ads.data_labeling.visualizer	ads.dataset.recommendation_transformer
module, 664	module, 718
ads.data_labeling.visualizer.image_visualizer	ads.dataset.regression_dataset
module, 659	module, 719
ads.data_labeling.visualizer.text_visualizer	ads.dataset.sampled_dataset
module, 662	module, 719
ads.database	ads.dataset.target
module, 674	module, 720
ads.database.connection	ads.dataset.timeseries
module, 673	module, 721
ads.dataflow	ads.dbmixin
module, 682	module, 723
ads.dataflow.dataflow	ads.dbmixin.db_pandas_accessor
module, 674	module, 721
ads.dataflow.dataflowschema	ads.environment
module, 682	module, 723
ads.dataset	ads.evaluations
module, 721	module, 738
ads.dataset.classification_dataset	ads.evaluations.evaluation_plot
module, 682	module, 723
ads.dataset.correlation	ads.evaluations.evaluator
module, 686	module, 725
ads.dataset.correlation_plot	ads.evaluations.statistical_metrics
module, 686	module, 737
ads.dataset.dataframe_transformer	ads.experiments
module, 688	module, 741
ads.dataset.dataset	ads.feature_engineering
module, 689	module, 854
ads.dataset.dataset_browser	ads.feature_engineering.accessor
module, 700	module, 756
ads.dataset.dataset_with_target	ads.feature_engineering.accessor.dataframe_accessor

module, 747	module, 768
ads.feature_engineering.accessor.mixin	ads.feature_engineering.feature_type.adsstring.parsers
module, 747	module, 766
ads.feature_engineering.accessor.mixin.correlation	ads.feature_engineering.feature_type.adsstring.parsers.base
module, 741	module, 765
ads.feature_engineering.accessor.mixin.eda_mixin	ads.feature_engineering.feature_type.adsstring.parsers.space
module, 741	module, 765
ads.feature_engineering.accessor.mixin.eda_mixin.features	ads.feature_engineering.feature_type.adsstring.string
module, 744	module, 769
ads.feature_engineering.accessor.mixin.feature_type.mixin	ads.feature_engineering.feature_type.base
module, 745	module, 788
ads.feature_engineering.accessor.mixin.utils	ads.feature_engineering.feature_type.boolean
module, 747	module, 789
ads.feature_engineering.accessor.series_accessor	ads.feature_engineering.feature_type.category
module, 752	module, 792
ads.feature_engineering.adsimage	ads.feature_engineering.feature_type.constant
module, 761	module, 794
ads.feature_engineering.adsimage.image	ads.feature_engineering.feature_type.continuous
module, 756	module, 796
ads.feature_engineering.adsimage.image_reader	ads.feature_engineering.feature_type.creditcard
module, 759	module, 798
ads.feature_engineering.adsimage.interface	ads.feature_engineering.feature_type.datetime
module, 756	module, 803
ads.feature_engineering.adsimage.interface.reader	ads.feature_engineering.feature_type.discrete
module, 756	module, 805
ads.feature_engineering.adsstring	ads.feature_engineering.feature_type.document
module, 764	module, 807
ads.feature_engineering.adsstring.common_regex	ads.feature_engineering.feature_type.gis
module, 762	module, 808
ads.feature_engineering.adsstring.oci_languages	ads.feature_engineering.feature_type.handler
module, 761, 764	module, 785
ads.feature_engineering.adsstring.parsers	ads.feature_engineering.feature_type.handler.feature_validation
module, 762	module, 777
ads.feature_engineering.adsstring.parsers.base	ads.feature_engineering.feature_type.handler.feature_warnings
module, 761	module, 781
ads.feature_engineering.adsstring.parsers.space	ads.feature_engineering.feature_type.handler.warnings
module, 761	module, 784
ads.feature_engineering.adsstring.string	ads.feature_engineering.feature_type.integer
module, 762, 764	module, 812
ads.feature_engineering.dataset	ads.feature_engineering.feature_type.ip_address
module, 764	module, 814
ads.feature_engineering.dataset.zip_code_data	ads.feature_engineering.feature_type.ip_address_v4
module, 764	module, 816
ads.feature_engineering.exceptions	ads.feature_engineering.feature_type.ip_address_v6
module, 839	module, 819
ads.feature_engineering.feature_type	ads.feature_engineering.feature_type.lat_long
module, 837	module, 821
ads.feature_engineering.feature_type.address	ads.feature_engineering.feature_type.object
module, 785	module, 825
ads.feature_engineering.feature_type.adsstring	ads.feature_engineering.feature_type.ordinal
module, 777	module, 826
ads.feature_engineering.feature_type.adsstring.common_regex	ads.feature_engineering.feature_type.phone_number
module, 766	module, 828
ads.feature_engineering.feature_type.adsstring.oci_languages	ads.feature_engineering.feature_type.string



module, 830	module, 919
ads.feature_engineering.feature_type.text	ads.jobs.builders.runtimes.artifact
module, 832	module, 901
ads.feature_engineering.feature_type.unknown	ads.jobs.builders.runtimes.base
module, 834	module, 903
ads.feature_engineering.feature_type.zip_code	ads.jobs.builders.runtimes.container_runtime
module, 835	module, 906
ads.feature_engineering.feature_type_manager	ads.jobs.builders.runtimes.python_runtime
module, 839	module, 908
ads.feature_engineering.schema	ads.jobs.cli
module, 843	module, 935
ads.feature_engineering.utils	ads.jobs.env_var_parser
module, 853	module, 935
ads.hpo	ads.jobs.extension
module, 873	module, 935
ads.hpo.ads_search_space	ads.jobs.schema
module, 854	module, 922
ads.hpo.distributions	ads.jobs.schema.validator
module, 856	module, 920
ads.hpo.objective	ads.jobs.serializer
module, 859	module, 936
ads.hpo.search_cv	ads.jobs.templates
module, 859	module, 926
ads.hpo.stopping_criterion	ads.jobs.templates.container
module, 871	module, 922
ads.hpo.tuner_artifact	ads.jobs.templates.driver_notebook
module, 871	module, 922
ads.hpo.utils	ads.jobs.templates.driver_oci
module, 872	module, 923
ads.hpo.validation	ads.jobs.templates.driver_python
module, 872	module, 925
ads.hpo.visualization	ads.jobs.utils
module, 854	module, 938
ads.jobs	ads.model
module, 945	module, 1362
ads.jobs.ads_job	ads.model.artifact
module, 926	module, 1296
ads.jobs.builders	ads.model.artifact_downloader
module, 920	module, 1299
ads.jobs.builders.base	ads.model.artifact_uploader
module, 919	module, 1300
ads.jobs.builders.infrastructure	ads.model.base_properties
module, 901	module, 1301
ads.jobs.builders.infrastructure.base	ads.model.common
module, 873	module, 1053
ads.jobs.builders.infrastructure.dataflow	ads.model.common.utils
module, 875	module, 1052
ads.jobs.builders.infrastructure.dsc_job	ads.model.deployment
module, 884	module, 1078
ads.jobs.builders.infrastructure.dsc_job_runtime	ads.model.deployment.common
module, 895	module, 1056
ads.jobs.builders.infrastructure.utils	ads.model.deployment.common.progress_bar
module, 901	module, 1053
ads.jobs.builders.runtimes	ads.model.deployment.common.utils

module, 1054	module, 1334
ads.model.deployment.model_deployer module, 1056	ads.model.model_metadata_mixin module, 1352
ads.model.deployment.model_deployment module, 1061	ads.model.model_properties module, 1353
ads.model.deployment.model_deployment_properties module, 1074	ads.model.model_version_set module, 1354
ads.model.extractor module, 1088	ads.model.runtime module, 1287
ads.model.extractor.keras_extractor module, 1078	ads.model.runtime.env_info module, 1283
ads.model.extractor.lightgbm_extractor module, 1079	ads.model.runtime.model_deployment_details module, 1285
ads.model.extractor.model_info_extractor module, 1080	ads.model.runtime.model_provenance_details module, 1285
ads.model.extractor.model_info_extractor_factory module, 1082	ads.model.runtime.runtime_info module, 1286
ads.model.extractor.pytorch_extractor module, 1082	ads.model.runtime.utils module, 1286
ads.model.extractor.sklearn_extractor module, 1083	ads.model.service module, 1295
ads.model.extractor.spark_extractor module, 1084	ads.model.service.oci_datascience_model module, 1287
ads.model.extractor.tensorflow_extractor module, 1086	ads.model.service.oci_datascience_model_version_set module, 1293
ads.model.extractor.xgboost_extractor module, 1087	ads.model.transformer module, 1296
ads.model.framework module, 1282	ads.model.transformer.onnx_transformer module, 1295
ads.model.framework.huggingface_model module, 1088	ads.model_artifact_boilerplate module, 1465
ads.model.framework.lightgbm_model module, 1119	ads.model_artifact_boilerplate.artifact_introspection_test module, 1465
ads.model.framework.pytorch_model module, 1146	ads.model_artifact_boilerplate.artifact_introspection_test module, 1464
ads.model.framework.sklearn_model module, 1173	ads.mysqlldb module, 1465
ads.model.framework.spark_model module, 1201	ads.opctl module, 1480
ads.model.framework.tensorflow_model module, 1228	ads.opctl.backend module, 1469
ads.model.framework.xgboost_model module, 1255	ads.opctl.backend.ads_dataflow module, 1466
ads.model.generic_model module, 1303	ads.opctl.backend.ads_ml_job module, 1466
ads.model.model_artifact_boilerplate module, 1283	ads.opctl.backend.ads_ml_pipeline module, 1467
ads.model.model_artifact_boilerplate.artifact_introspection_test module, 1283	ads.opctl.backend.ads_ml_pipeline module, 1468
ads.model.model_artifact_boilerplate.artifact_introspection_test module, 1282	ads.opctl.backend.ads_ml_pipeline module, 1470
ads.model.model_introspect module, 1331	ads.opctl.conda.cli module, 1469
ads.model.model_metadata	ads.opctl.conda.cmds

module, 1469	module, 1477
ads.opctl.conda.multipart_uploader	ads.opctl.spec
module, 1469	module, 1478
ads.opctl.config	ads.opctl.spec.utils
module, 1474	module, 1478
ads.opctl.config.base	ads.opctl.utils
module, 1471	module, 1479
ads.opctl.config.diagnostics	ads.oracledb
module, 1470	module, 1480
ads.opctl.config.merger	ads.pipeline
module, 1472	module, 1520
ads.opctl.config.resolver	ads.pipeline.ads_pipeline
module, 1472	module, 1487
ads.opctl.config.utils	ads.pipeline.ads_pipeline_run
module, 1473	module, 1508
ads.opctl.config.validator	ads.pipeline.ads_pipeline_step
module, 1473	module, 1513
ads.opctl.config.versioner	ads.pipeline.builders
module, 1473	module, 1481
ads.opctl.config.yaml_parsers	ads.pipeline.builders.infrastructure
module, 1471	module, 1481
ads.opctl.config.yaml_parsers.base	ads.pipeline.builders.infrastructure.custom_script
module, 1471	module, 1480
ads.opctl.config.yaml_parsers.distributed	ads.pipeline.cli
module, 1471	module, 1520
ads.opctl.config.yaml_parsers.distributed.yaml_parser	ads.pipeline.extension
module, 1470	module, 1520
ads.opctl.constants	ads.pipeline.schema
module, 1478	module, 1481
ads.opctl.diagnostics	ads.pipeline.visualizer
module, 1474	module, 1487
ads.opctl.diagnostics.requirement_exception	ads.pipeline.visualizer.base
module, 1474	module, 1481
ads.opctl.distributed	ads.pipeline.visualizer.graph_renderer
module, 1477	module, 1485
ads.opctl.distributed.certificates	ads.pipeline.visualizer.text_renderer
module, 1477	module, 1487
ads.opctl.distributed.common	ads.secrets
module, 1477	module, 1538
ads.opctl.distributed.common.abstract_cluster_provider	ads.secrets.adb
module, 1474	module, 1520
ads.opctl.distributed.common.abstract_framework_builder	ads.spec.builder
module, 1476	ads.spec.builder.token
ads.opctl.distributed.common.cluster_config_helper	ads.secrets.big_data_service
module, 1476	module, 1525
ads.opctl.distributed.common.cluster_provider_factory	ads.secrets.mysqladb
module, 1477	module, 1530
ads.opctl.distributed.common.cluster_runner	ads.secrets.oracledb
module, 1477	module, 1532
ads.opctl.spark	ads.secrets.secrets
module, 1478	module, 1534
ads.opctl.spark.cli	ads.telemetry
module, 1477	module, 1538
ads.opctl.spark.cmds	ads.telemetry.telemetry

- module, 1538
- ads.text\_dataset
  - module, 1549
- ads.text\_dataset.backends
  - module, 1538
- ads.text\_dataset.dataset
  - module, 1541
- ads.text\_dataset.extractor
  - module, 1545
- ads.text\_dataset.options
  - module, 1548
- ads.text\_dataset.udfs
  - module, 1548
- ads.text\_dataset.utils
  - module, 1548
- ads.type\_discovery
  - module, 1553
- ads.type\_discovery.abstract\_detector
  - module, 1549
- ads.type\_discovery.constant\_detector
  - module, 1549
- ads.type\_discovery.continuous\_detector
  - module, 1549
- ads.type\_discovery.credit\_card\_detector
  - module, 1549
- ads.type\_discovery.datetime\_detector
  - module, 1550
- ads.type\_discovery.discrete\_detector
  - module, 1550
- ads.type\_discovery.document\_detector
  - module, 1550
- ads.type\_discovery.ip\_detector
  - module, 1550
- ads.type\_discovery.latlon\_detector
  - module, 1551
- ads.type\_discovery.phone\_number\_detector
  - module, 1551
- ads.type\_discovery.type\_discovery\_driver
  - module, 1551
- ads.type\_discovery.typed\_feature
  - module, 1552
- ads.type\_discovery.unknown\_detector
  - module, 1553
- ads.type\_discovery.zipcode\_detector
  - module, 1553
- ads.vault
  - module, 1555
- ads.vault.vault
  - module, 1553
- ADSDData (class in ads.common.data), 579
- ADSDDataFrameAccessor (class in ads.feature\_engineering.accessor.dataframe\_accessor), 748
- ADSDataset (class in ads.dataset.dataset), 689
- ADSDatasetWithTarget (class in ads.dataset.dataset\_with\_target), 703
- ADSEvaluator (class in ads.evaluations.evaluator), 725
- ADSEvaluator.EvaluationMetrics (class in ads.evaluations.evaluator), 727
- ADSExecutePreprocessor (class in ads.jobs.templates.driver\_notebook), 922
- ADSFeatureTypesMixin (class in ads.feature\_engineering.accessor.mixin.feature\_types\_mixin), 746
- ADSHiveConnection (class in ads.bds.big\_data\_service), 540
- ADSImage (class in ads.feature\_engineering.adsimage.image), 756
- ADSImageReader (class in ads.feature\_engineering.adsimage.image\_reader), 759
- ADSModel (class in ads.common.model), 582
- ADSSeriesAccessor (class in ads.feature\_engineering.accessor.series\_accessor), 753
- ADSSeriesValidator (class in ads.feature\_engineering.accessor.series\_accessor), 755
- ADSString (class in ads.feature\_engineering.feature\_type.adsstring.string), 769
- ADSTuner (class in ads.hpo.search\_cv), 859
- adverb(ads.feature\_engineering.adsstring.parsers.base.Parser property), 761
- adverb(ads.feature\_engineering.adsstring.parsers.spacy\_parser.SpacyParser property), 761
- adverb(ads.feature\_engineering.feature\_type.adsstring.parsers.base.Parser property), 765
- adverb(ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser property), 765
- ai\_language(ads.common.oci\_client.OCIClientFactory property), 600
- algorithm(ads.model.AutoMLModel attribute), 1362
- algorithm(ads.model.extractor.keras\_extractor.KerasExtractor property), 1078
- algorithm(ads.model.extractor.lightgbm\_extractor.LightgbmExtractor property), 1080
- algorithm(ads.model.extractor.pytorch\_extractor.PyTorchExtractor property), 1083
- algorithm(ads.model.extractor.sklearn\_extractor.SklearnExtractor property), 1084
- algorithm(ads.model.extractor.spark\_extractor.SparkExtractor property), 1085
- algorithm(ads.model.extractor.tensorflow\_extractor.TensorflowExtractor property), 1086
- algorithm(ads.model.extractor.xgboost\_extractor.XgboostExtractor property), 1087
- algorithm(ads.model.framework.huggingface\_model.HuggingFacePipeline attribute), 1088

`algorithm(ads.model.framework.lightgbm_model.LightGBMModel attribute), 1119`  
`algorithm(ads.model.framework.pytorch_model.PyTorchModel attribute), 1146`  
`algorithm(ads.model.framework.sklearn_model.SklearnModel attribute), 1173`  
`algorithm(ads.model.framework.spark_model.SparkPipelineModel attribute), 1201`  
`algorithm(ads.model.framework.tensorflow_model.TensorFlowModel attribute), 1228`  
`algorithm(ads.model.framework.xgboost_model.XGBoostModel attribute), 1255`  
`algorithm(ads.model.generic_model.GenericModel attribute), 1306`  
`algorithm(ads.model.GenericModel attribute), 1377`  
`algorithm(ads.model.HuggingFacePipelineModel attribute), 1400`  
`algorithm(ads.model.LightGBMModel attribute), 1408`  
`ALGORITHM(ads.model.model_metadata.MetadataTaxonomyKeys attribute), 1336`  
`algorithm(ads.model.PyTorchModel attribute), 1441`  
`algorithm(ads.model.SklearnModel attribute), 1445`  
`algorithm(ads.model.SparkPipelineModel attribute), 1450`  
`algorithm(ads.model.TensorFlowModel attribute), 1454`  
`algorithm(ads.model.XGBoostModel attribute), 1459`  
`algorithm()(ads.model.extractor.lightgbm_extractor.LightGBMExtractor method), 1079`  
`algorithm()(ads.model.extractor.model_info_extractor.ModelInfoExtractor method), 1080, 1081`  
`algorithm()(ads.model.extractor.pytorch_extractor.PyTorchExtractor method), 1082`  
`algorithm()(ads.model.extractor.sklearn_extractor.SklearnExtractor method), 1084`  
`algorithm()(ads.model.extractor.spark_extractor.SparkExtractor method), 1085`  
`algorithm()(ads.model.extractor.tensorflow_extractor.TensorflowExtractor method), 1086`  
`algorithm()(ads.model.extractor.xgboost_extractor.XgboostExtractor method), 1087`  
`annotation(ads.data_labeling.reader.dls_record_reader.OCISummary attribute), 651`  
`annotation(ads.data_labeling.record.Record attribute), 672`  
`annotation_type(ads.data_labeling.metadata.Metadata attribute), 669, 670`  
`AnnotationNotFoundError, 636`  
`annotations(ads.data_labeling.reader.dls_record_reader.OCISummary attribute), 651`  
`AnnotationType(class in ads.data_labeling.constants), 667`  
`ANOMALY_DETECTION(ads.model.model_metadata.UseCaseTypes attribute), 1351`  
`API_KEY(ads.common.auth.AuthType attribute), 564`  
`api_keys()(in module ads.common.auth), 566`  
`APIKey(class in ads.common.auth), 560`  
`application(ads.jobs.builders.infrastructure.dataflow.DataFlowLogs application_id(ads.jobs.DataFlowRun property), 971`  
`application_log_config(ads.jobs.DataFlowRun property), 971`  
`application_log_config(ads.jobs.utils.DataFlowConfig property), 939`  
`apply()(ads.opctl.backend.ads_dataflow.DataFlowBackend method), 1466`  
`apply()(ads.opctl.backend.ads_ml_job.MLJobBackend method), 1466`  
`apply()(ads.opctl.backend.ads_ml_pipeline.PipelineBackend method), 1467`  
`apply()(ads.opctl.backend.base.Backend method), 1468`  
`archive_bucket(ads.jobs.builders.runtimes.python_runtime.DataFlowRuntime property), 910`  
`archive_bucket(ads.jobs.DataFlowNotebookRuntime property), 961`  
`archive_bucket(ads.jobs.DataFlowRuntime property), 983`  
`archive_bucket(ads.jobs.utils.DataFlowConfig property), 939`  
`archive_uri(ads.jobs.builders.runtimes.python_runtime.DataFlowRuntime property), 910`  
`archive_uri(ads.jobs.DataFlowNotebookRuntime property), 961`  
`archive_uri(ads.jobs.DataFlowRun property), 971`  
`archive_uri(ads.jobs.DataFlowRuntime property), 983`  
`archive_uri(ads.jobs.utils.DataFlowConfig property), 939`  
`AREA_DARK(ads.feature_engineering.utils.SchemeNeutral attribute), 853`  
`AREA_DARK(ads.feature_engineering.utils.SchemeTeal attribute), 853`  
`AREA_LIGHT(ads.feature_engineering.utils.SchemeNeutral attribute), 853`  
`AREA_LIGHT(ads.feature_engineering.utils.SchemeTeal attribute), 853`  
`args(ads.jobs.builders.runtimes.base.Runtime property), 903`  
`args(ads.jobs.ContainerRuntime property), 946`  
`args(ads.jobs.DataFlowNotebookRuntime property), 983`  
`args(ads.jobs.DataFlowRuntime property), 1010`  
`args(ads.jobs.GitPythonRuntime property), 1028`  
`args(ads.jobs.NotebookRuntime property), 1036`  
`args(ads.jobs.PythonRuntime property), 1045`  
`args(ads.jobs.ScriptRuntime property), 1045`



[argument](#) (*ads.pipeline.ads\_pipeline.Pipeline* attribute), 1492  
[argument](#) (*ads.pipeline.ads\_pipeline.Pipeline* property), 1497  
[argument](#) (*ads.pipeline.ads\_pipeline\_step.PipelineStep* attribute), 1514  
[argument](#) (*ads.pipeline.ads\_pipeline\_step.PipelineStep* property), 1516  
[argument\\_to\\_case\(\)](#) (in module *ads.common.decorator.argument\_to\_case*), 556  
[ArgumentCase](#) (class in *ads.common.decorator.argument\_to\_case*), 556  
[arguments](#) (*ads.jobs.DataFlowRun* property), 971  
[arguments](#) (*ads.jobs.utils.DataFlowConfig* property), 939  
[ArtifactFolderStructureError](#), 1296  
[artifact](#) (*ads.jobs.builders.infrastructure.dsc\_job.DSCJob* property), 885  
[artifact](#) (*ads.model.DataScienceModel* attribute), 1366  
[artifact](#) (*ads.model.DataScienceModel* property), 1369  
[Artifact](#) (class in *ads.jobs.builders.runtimes.artifact*), 901  
[artifact\\_dir](#) (*ads.common.model\_artifact.ModelArtifact* attribute), 585  
[artifact\\_dir](#) (*ads.model.AutoMLModel* attribute), 1362  
[artifact\\_dir](#) (*ads.model.framework.huggingface\_model.HuggingFacePipelineModel* attribute), 1088  
[artifact\\_dir](#) (*ads.model.framework.lightgbm\_model.LightGBMModel* attribute), 1119  
[artifact\\_dir](#) (*ads.model.framework.pytorch\_model.PyTorchModel* method), 689  
[artifact\\_dir](#) (*ads.model.framework.pytorch\_model.PyTorchModel* attribute), 1146  
[artifact\\_dir](#) (*ads.model.framework.sklearn\_model.SklearnModel* attribute), 1173  
[artifact\\_dir](#) (*ads.model.framework.spark\_model.SparkPipelineModel* attribute), 1201  
[artifact\\_dir](#) (*ads.model.framework.tensorflow\_model.TensorFlowModel* attribute), 1228  
[artifact\\_dir](#) (*ads.model.framework.xgboost\_model.XGBoostModel* attribute), 1255  
[artifact\\_dir](#) (*ads.model.generic\_model.GenericModel* attribute), 1306  
[artifact\\_dir](#) (*ads.model.GenericModel* attribute), 1377  
[artifact\\_dir](#) (*ads.model.HuggingFacePipelineModel* attribute), 1401  
[artifact\\_dir](#) (*ads.model.LightGBMModel* attribute), 1408  
[artifact\\_dir](#) (*ads.model.model\_metadata.ModelProvenanceMetadata* attribute), 1347  
[artifact\\_dir](#) (*ads.model.PyTorchModel* attribute), 1441  
[artifact\\_dir](#) (*ads.model.SklearnModel* attribute), 1445  
[artifact\\_dir](#) (*ads.model.SparkPipelineModel* attribute), 1450  
[artifact\\_dir](#) (*ads.model.TensorFlowModel* attribute), 1455  
[artifact\\_dir](#) (*ads.model.XGBoostModel* attribute), 1459  
[artifact\\_directory](#) (*ads.model.runtime.model\_provenance\_details.TrainingDetails* attribute), 1285  
[ARTIFACT\\_TEST\\_RESULT](#) (*ads.model.model\_metadata.MetadataTaxonomyKeys* attribute), 1336  
[ArtifactDownloader](#) (class in *ads.model.artifact\_downloader*), 1299  
[ArtifactNestedFolderError](#), 1296  
[ArtifactRequiredFilesError](#), 1296  
[ArtifactUploader](#) (class in *ads.model.artifact\_uploader*), 1300  
[ASC](#) (*ads.common.oci\_logging.SortOrder* attribute), 607  
[assert\\_is\\_estimator\(\)](#) (in module *ads.hpo.validation*), 872  
[assert\\_model\\_is\\_supported\(\)](#) (in module *ads.hpo.validation*), 872  
[assert\\_path\\_not\\_dirty\(\)](#) (*ads.model.model\_metadata.ModelProvenanceMetadata* method), 1347  
[assert\\_strategy\\_valid\(\)](#) (in module *ads.hpo.validation*), 872  
[assert\\_tuner\\_is\\_fitted\(\)](#) (in module *ads.hpo.validation*), 872  
[assign\\_column\(\)](#) (*ads.dataset.dataset.ADSDataset* method), 689  
[assign\\_issuer\(\)](#) (in module *ads.feature\_engineering.utils*), 853  
[astype\(\)](#) (*ads.dataset.dataset.ADSDataset* method), 689  
[ATTENTION](#) (*ads.common.decorator.deprecate.TARGET\_TYPE* attribute), 556  
[AttributeError](#) (class in *ads.feature\_engineering.schema*), 843  
[attribute\\_map](#) (*ads.jobs.ads\_job.Job* attribute), 928  
[attribute\\_map](#) (*ads.jobs.builders.base.Builder* attribute), 919  
[attribute\\_map](#) (*ads.jobs.builders.infrastructure.dataflow.DataFlow* attribute), 875  
[attribute\\_map](#) (*ads.jobs.builders.infrastructure.dsc\_job.DataScienceJob* attribute), 887  
[attribute\\_map](#) (*ads.jobs.builders.runtimes.base.Runtime* attribute), 903  
[attribute\\_map](#) (*ads.jobs.builders.runtimes.container\_runtime.ContainerRuntime* attribute), 907  
[attribute\\_map](#) (*ads.jobs.builders.runtimes.python\_runtime.CondaRuntime* attribute), 907

- [attribute\), 908](#)
  - [attribute\\_map\(ads.jobs.builders.runtimes.python\\_runtime attribute\), 910](#)
  - [attribute\\_map\(ads.jobs.builders.runtimes.python\\_runtime attribute\), 913](#)
  - [attribute\\_map\(ads.jobs.builders.runtimes.python\\_runtime attribute\), 915](#)
  - [attribute\\_map\(ads.jobs.builders.runtimes.python\\_runtime attribute\), 917](#)
  - [attribute\\_map\(ads.jobs.builders.runtimes.python\\_runtime attribute\), 918](#)
  - [attribute\\_map\(ads.jobs.ContainerRuntime attribute\), 946](#)
  - [attribute\\_map\(ads.jobs.DataFlow attribute\), 952](#)
  - [attribute\\_map\(ads.jobs.DataFlowNotebookRuntime attribute\), 961](#)
  - [attribute\\_map\(ads.jobs.DataFlowRuntime attribute\), 983](#)
  - [attribute\\_map\(ads.jobs.DataScienceJob attribute\), 992](#)
  - [attribute\\_map\(ads.jobs.GitPythonRuntime attribute\), 1010](#)
  - [attribute\\_map\(ads.jobs.Job attribute\), 1020](#)
  - [attribute\\_map\(ads.jobs.NotebookRuntime attribute\), 1028](#)
  - [attribute\\_map\(ads.jobs.PythonRuntime attribute\), 1036](#)
  - [attribute\\_map\(ads.jobs.ScriptRuntime attribute\), 1045](#)
  - [attribute\\_map\(ads.model.DataScienceModel attribute\), 1369](#)
  - [attribute\\_map\(ads.model.deployment.model\\_deployment attribute\), 1065](#)
  - [attribute\\_map\(ads.model.model\\_version\\_set.ModelVersionSet attribute\), 1356](#)
  - [attribute\\_map\(ads.model.ModelDeployment attribute\), 1420](#)
  - [attribute\\_map\(ads.model.ModelVersionSet attribute\), 1436](#)
  - [auth\(ads.common.object\\_storage\\_details.ObjectStorageDetails attribute\), 598](#)
  - [auth\(ads.common.oci\\_mixin.OCIClientMixin property\), 608](#)
  - [auth\(ads.jobs.DataFlowRun property\), 972](#)
  - [auth\(ads.jobs.DataScienceJobRun property\), 1001](#)
  - [auth\(ads.model.AutoMLModel attribute\), 1362](#)
  - [auth\(ads.model.framework.huggingface\\_model.HuggingFacePipelineModel attribute\), 1088](#)
  - [auth\(ads.model.framework.lightgbm\\_model.LightGBMModel attribute\), 1119](#)
  - [auth\(ads.model.framework.pytorch\\_model.PyTorchModel attribute\), 1146](#)
  - [auth\(ads.model.framework.sklearn\\_model.SklearnModel attribute\), 1173](#)
  - [auth\(ads.model.framework.spark\\_model.SparkPipelineModel attribute\), 1201](#)
  - [auth\(ads.model.framework.tensorflow\\_model.TensorFlowModel attribute\), 1228](#)
  - [auth\(ads.model.framework.xgboost\\_model.XGBoostModel attribute\), 1255](#)
  - [auth\(ads.model.generic\\_model.GenericModel attribute\), 1306](#)
  - [auth\(ads.model.generic\\_model.GenericModel attribute\), 1377](#)
  - [auth\(ads.model.HuggingFacePipelineModel attribute\), 1408](#)
  - [auth\(ads.model.LightGBMModel attribute\), 1408](#)
  - [auth\(ads.model.PyTorchModel attribute\), 1441](#)
  - [auth\(ads.model.SklearnModel attribute\), 1446](#)
  - [auth\(ads.model.SparkPipelineModel attribute\), 1450](#)
  - [auth\(ads.model.TensorFlowModel attribute\), 1455](#)
  - [auth\(ads.model.XGBoostModel attribute\), 1459](#)
  - [auth\(ads.secrets.big\\_data\\_service.BDSSecretKeeper attribute\), 1528](#)
  - [auth\\_token\(ads.secrets.auth\\_token.AuthToken attribute\), 1524](#)
  - [AuthContext\(class in ads.common.auth\), 561](#)
  - [AuthFactory\(class in ads.common.auth\), 562](#)
  - [AuthSignerGenerator\(class in ads.common.auth\), 563](#)
  - [AuthState\(class in ads.common.auth\), 563](#)
  - [AuthToken\(class in ads.secrets.auth\\_token\), 1524](#)
  - [AuthTokenSecretKeeper\(class in ads.secrets.auth\\_token\), 1524](#)
  - [AuthType\(class in ads.common.auth\), 564](#)
  - [auto\\_transform\(\)\(ads.dataset.classification\\_dataset.BinaryTextClassificationDataset method\), 683](#)
  - [auto\\_transform\(\)\(ads.dataset.classification\\_dataset.ClassificationDataset method\), 683](#)
  - [auto\\_transform\(\)\(ads.dataset.classification\\_dataset.MultiClassTextClassificationDataset method\), 686](#)
  - [auto\\_transform\(\)\(ads.dataset.dataset\\_with\\_target.ADSDatasetWithTarget method\), 703](#)
  - [AutoMLModel\(class in ads.model\), 1362](#)
  - [AVAILABLE\(ads.model.generic\\_model.ModelState attribute\), 1330](#)
  - [AVAILABLE\(ads.model.ModelState attribute\), 1434](#)
- ## B
- [Backend\(class in ads.opctl.backend.base\), 1468](#)
  - [backend\(\)\(ads.text\\_dataset.dataset.DataLoader method\), 1542](#)
  - [backend\(\)\(ads.text\\_dataset.extractor.FileProcessor method\), 1545](#)
  - [backend\\_map\(ads.text\\_dataset.extractor.FileProcessor attribute\), 1545](#)
  - [backend\\_map\(ads.text\\_dataset.extractor.PDFProcessor attribute\), 1547](#)
  - [backend\\_map\(ads.text\\_dataset.extractor.WordProcessor attribute\), 1547](#)
  - [BACKEND\\_NAME\(class in ads.opctl.constants\), 1478](#)

BACKGROUND\_DARK (*ads.feature\_engineering.utils.SchemeNeutral* property), 765  
     *attribute*), 853      BINARY\_CLASSIFICATION  
 BACKGROUND\_DARK (*ads.feature\_engineering.utils.SchemeTeal* (*ads.common.utils.ml\_task\_types* attribute),  
     *attribute*), 853      626  
 BACKGROUND\_LIGHT (*ads.feature\_engineering.utils.SchemeNeutral* BINARY\_CLASSIFICATION  
     *attribute*), 853      (*ads.model.model\_metadata.UseCaseType*  
 BACKGROUND\_LIGHT (*ads.feature\_engineering.utils.SchemeTeal* attribute), 1351  
     *attribute*), 853      BINARY\_TEXT\_CLASSIFICATION  
 Base (class in *ads.text\_dataset.backends*), 1538      (*ads.common.utils.ml\_task\_types* attribute),  
 baseline (*ads.evaluations.evaluation\_plot.EvaluationPlot* 627  
     *attribute*), 723, 724      BinaryClassificationDataset (class in  
 baseline\_kwargs (*ads.evaluations.evaluation\_plot.EvaluationPlot* *ads.dataset.classification\_dataset*), 682  
     *attribute*), 723, 724      BinaryTextClassificationDataset (class in  
 BaseProperties (class in *ads.common.base\_properties*), 571      *ads.dataset.classification\_dataset*), 683  
 BaseProperties (class in *ads.model.base\_properties*),  
     1301      block\_storage\_size (*ads.jobs.builders.infrastructure.dsc\_job.DataScience*  
     property), 888  
 BaseSchemaLoader (class in *ads.feature\_engineering.schema*), 845      block\_storage\_size (*ads.jobs.DataScienceJob* prop-  
     erty), 992  
 basic\_configuration()      block\_storage\_size\_in\_gbs  
     (*ads.opctl.distributed.common.abstract\_cluster\_provider.ClusterProvider*  
     method), 1474      492  
 batch\_convert\_case() (in module *ads.common.utils*),      block\_storage\_size\_in\_gbs  
     620      (*ads.pipeline.ads\_pipeline.Pipeline* property),  
     1497  
 BDS (*ads.common.decorator.runtime\_dependency.OptionalDecoratorHeatMap* (class in *ads.dataset.correlation\_plot*),  
     *attribute*), 557      686  
 BDSSecret (class in *ads.secrets.big\_data\_service*), 1525      Boolean (class in *ads.feature\_engineering.feature\_type.boolean*),  
 BDSSecretKeeper (class in *ads.secrets.big\_data\_service*), 1526      789  
 before\_get() (*ads.jobs.env\_var\_parser.EnvVarInterpolation* attribute), 557  
     method), 935      bottom\_left (*ads.data\_labeling.boundingBox.BoundingBoxItem*  
 before\_read() (*ads.jobs.env\_var\_parser.EnvVarInterpolation* attribute), 665  
     method), 935      bottom\_right (*ads.data\_labeling.boundingBox.BoundingBoxItem*  
 before\_set() (*ads.jobs.env\_var\_parser.EnvVarInterpolation* attribute), 665  
     method), 935      BOUNDING\_BOX (*ads.data\_labeling.constants.AnnotationType*  
 before\_write() (*ads.jobs.env\_var\_parser.EnvVarInterpolation* attribute), 667  
     method), 935      BoundingBoxItem (class in  
     *ads.data\_labeling.boundingBox*), 664  
 BERT (*ads.model.model\_metadata.Framework* attribute),  
     1334      BoundingBoxItems (class in  
     *ads.data\_labeling.boundingBox*), 666  
 best\_index (*ads.hpo.search\_cv.ADSTuner* property),  
     860      BoundingBoxRecordParser (class in  
     *ads.data\_labeling.parser.export\_record\_parser*),  
     640  
 best\_params (*ads.hpo.search\_cv.ADSTuner* property),  
     860      boxes (*ads.data\_labeling.visualizer.image\_visualizer.LabeledImageItem*  
     attribute), 660  
 best\_score (*ads.hpo.search\_cv.ADSTuner* property),  
     860      branch (*ads.jobs.builders.runtimes.python\_runtime.GitPythonRuntime*  
     property), 913  
 best\_scores() (*ads.hpo.search\_cv.ADSTuner* method),  
     860      branch (*ads.jobs.GitPythonRuntime* property), 1010  
 bigram (*ads.feature\_engineering.adsstring.parsers.base.Parser* attribute), 761      bucket (*ads.common.object\_storage\_details.ObjectStorageDetails*  
     property), 761      598, 599  
 bigram (*ads.feature\_engineering.adsstring.parsers.spacy\_parser.SpacyParser*  
     property), 761      bucket\_uri (*ads.model.model\_properties.ModelProperties*  
     property), 1353  
 bigram (*ads.feature\_engineering.feature\_type.adsstring.parsers.base.Parser*  
     property), 765      bucket\_uri (*ads.model.ModelProperties* attribute),  
     492  
 bigram (*ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser.SpacyParser*



build() (*ads.common.data.ADSDData* static method), 579  
 build() (*ads.jobs.ads\_job.Job* method), 928  
 build() (*ads.jobs.builders.infrastructure.dsc\_job.DataScienceJob* method), 888  
 build() (*ads.jobs.builders.runtimes.artifact.Artifact* method), 902  
 build() (*ads.jobs.builders.runtimes.artifact.GitPythonArtifact* method), 902  
 build() (*ads.jobs.builders.runtimes.artifact.NotebookArtifact* method), 902  
 build() (*ads.jobs.builders.runtimes.artifact.PythonArtifact* method), 903  
 build() (*ads.jobs.builders.runtimes.artifact.ScriptArtifact* method), 903  
 build() (*ads.jobs.DataScienceJob* method), 992  
 build() (*ads.jobs.Job* method), 1020  
 build() (*ads.model.deployment.model\_deployment\_properties.ModelDeploymentProperties* method), 1075, 1076  
 build() (*ads.model.ModelDeploymentProperties* method), 1429, 1430  
 build() (*ads.type\_discovery.typed\_feature.AddressTypedFeature* static method), 1552  
 build() (*ads.type\_discovery.typed\_feature.CategoricalTypedFeature* static method), 1552  
 build() (*ads.type\_discovery.typed\_feature.ConstantTypedFeature* static method), 1552  
 build() (*ads.type\_discovery.typed\_feature.ContinuousTypedFeature* static method), 1552  
 build() (*ads.type\_discovery.typed\_feature.CreditCardTypedFeature* static method), 1552  
 build() (*ads.type\_discovery.typed\_feature.DateTimeTypedFeature* static method), 1552  
 build() (*ads.type\_discovery.typed\_feature.DocumentTypedFeature* static method), 1552  
 build() (*ads.type\_discovery.typed\_feature.GISTypedFeature* static method), 1552  
 build() (*ads.type\_discovery.typed\_feature.IPAddressTypedFeature* static method), 1552  
 build() (*ads.type\_discovery.typed\_feature.OrdinalTypedFeature* static method), 1552  
 build() (*ads.type\_discovery.typed\_feature.PhoneNumberTypedFeature* static method), 1553  
 build() (*ads.type\_discovery.typed\_feature.TypedFeature* static method), 1553  
 build() (*ads.type\_discovery.typed\_feature.UnknownTypedFeature* static method), 1553  
 build() (*ads.type\_discovery.typed\_feature.ZipcodeTypedFeature* static method), 1553  
 build\_ads\_pipeline() (*ads.pipeline.ads\_pipeline.DataSciencePipeline* method), 1487  
 build\_ads\_pipeline\_step() (*ads.pipeline.ads\_pipeline.DataSciencePipeline* method), 1487  
 build\_image() (in module *ads.opctl.utils*), 1479  
 Builder (class in *ads.jobs.builders.base*), 919  
 bulk\_load() (*ads.data\_labeling.loader.file\_loader.FileLoader* method), 630

## C

calculate\_cost() (*ads.evaluations.evaluator.ADSEvaluator* method), 726, 728  
 calculate\_sample\_size() (in module *ads.dataset.helper*), 714  
 call() (*ads.dataset.dataset.ADSDataset* method), 690  
 camel\_to\_snake() (in module *ads.common.utils*), 621  
 cancel() (*ads.jobs.builders.infrastructure.base.RunInstance* method), 874  
 cancel() (*ads.jobs.builders.infrastructure.dataflow.DataFlowRun* method), 882  
 cancel() (*ads.jobs.builders.infrastructure.dsc\_job.DataScienceJobRun* method), 894  
 cancel() (*ads.jobs.DataFlowRun* method), 972  
 cancel() (*ads.jobs.DataScienceJobRun* method), 1001  
 cancel() (*ads.opctl.backend.ads\_dataflow.DataFlowBackend* method), 1466  
 cancel() (*ads.opctl.backend.ads\_ml\_job.MLJobBackend* method), 1466  
 cancel() (*ads.opctl.backend.ads\_ml\_pipeline.PipelineBackend* method), 1467  
 cancel() (*ads.opctl.backend.base.Backend* method), 1468  
 cancel() (*ads.pipeline.ads\_pipeline\_run.PipelineRun* method), 1508, 1509  
 CANCELED (in module *ads.pipeline.visualizer.base.StepStatus* attribute), 1485  
 CANCELING (in module *ads.pipeline.visualizer.base.StepStatus* attribute), 1485  
 capitalize() (*ads.feature\_engineering.feature\_type.adsstring.string.ADSStr* method), 769  
 card\_identify (class in *ads.common.card\_idenfier*), 573  
 case (in module *ads.common.model\_introspect.PrintItem* attribute), 596  
 case (in module *ads.common.model\_introspect.PrintItem* attribute), 1333  
 casefold() (*ads.feature\_engineering.feature\_type.adsstring.string.ADSStr* method), 769  
 cat\_vs\_cat() (in module *ads.feature\_engineering.accessor.mixin.correlation*), 741  
 cat\_vs\_cont() (in module *ads.feature\_engineering.accessor.mixin.correlation*), 741  
 CategoricalDistribution (class in *ads.hpo.distributions*), 856

CategoricalTypedFeature (class in [939](#)  
[ads.type\\_discovery.typed\\_feature](#)), [1552](#) class\_or\_instance\_method (class in  
 CATEGORY (ads.model.model\_metadata.MetadataCustomPrintColumnads.common.decorator.utils), [559](#)  
 attribute), [1335](#) classes (ads.common.auth.AuthFactory attribute), [563](#)  
 category (ads.model.model\_metadata.ModelCustomMetadataclasses (ads.evaluations.statistical\_metrics.ModelEvaluator  
 attribute), [1340](#) attribute), [737](#)  
 category (ads.model.model\_metadata.ModelCustomMetadataClassificationDataset (class in  
 property), [1341](#) ads.dataset.classification\_dataset), [683](#)  
 Category (class in ads.feature\_engineering.feature\_type.categoryclear() (ads.common.config.ConfigSection method),  
[792](#) [576](#)  
 center() (ads.feature\_engineering.feature\_type.adsstring.string() (ads.model.model\_metadata.ModelCustomMetadata  
 method), [769](#) method), [1337](#), [1338](#)  
 CHANGE (ads.common.config.EventType attribute), [577](#) client (ads.common.oci\_datascience.OCIDataScienceMixin  
 ChangesNotCommitted, [581](#) property), [601](#)  
 check\_cluster\_status() client (ads.common.oci\_logging.OCILoggingModelMixin  
 (ads.opctl.distributed.common.abstract\_cluster\_provider.ClusterProvider), [1467](#)  
 method), [1475](#) client (ads.common.oci\_mixin.OCIClientMixin prop-  
 erty), [608](#)  
 check\_compartment\_id() client (ads.jobs.builders.infrastructure.dataflow.DataFlowApp  
 (ads.common.oci\_mixin.OCIModelMixin static method), [610](#) property), [881](#)  
 check\_compartment\_id() (ads.jobs.DataFlowRun client (ads.jobs.builders.infrastructure.dataflow.DataFlowRun  
 static method), [972](#) property), [882](#)  
 check\_compartment\_id() client (ads.jobs.DataFlowRun property), [972](#)  
 (ads.jobs.DataScienceJobRun static method), client (ads.jobs.DataScienceJobRun property), [1002](#)  
[1002](#) client\_composite (ads.common.oci\_datascience.OCIDataScienceMixin  
 property), [601](#)  
 check\_for\_model\_id() (in module client\_composite (ads.jobs.DataScienceJobRun prop-  
 ads.model.service.oci\_datascience\_model), erty), [1002](#)  
[1292](#) CLIENT\_LIBRARY (ads.model.model\_metadata.MetadataCustomKeys  
 check\_mandatory\_files() (in module ads.model.model\_metadata.MetadataCustomKeys  
 ads.model.model\_artifact\_boilerplate.artifact\_introspection\_test.model\_artifact\_validate),  
[1282](#) clientprovider (ads.bds.big\_data\_service.HiveConnectionFactory  
 attribute), [542](#)  
 check\_mandatory\_files() (in module ads.model\_artifact\_boilerplate.artifact\_introspection\_test.model\_artifact\_validate),  
[1464](#) ClusterConfigToJobSpecConverter (class in  
 ads.opctl.distributed.common.cluster\_config\_helper),  
[1476](#)  
 check\_runtime\_yaml() (in module ads.model.model\_artifact\_boilerplate.artifact\_introspection\_test.model\_artifact\_validate),  
[1282](#) CLUSTERING (ads.model.model\_metadata.MetadataCustomKeys  
 attribute), [1351](#)  
 check\_runtime\_yaml() (in module ClusterProvider (class in  
 ads.model\_artifact\_boilerplate.artifact\_introspection\_test.model\_artifact\_validate),  
[1464](#) [1474](#)  
 check\_score\_file() (in module ClusterProviderFactory (class in  
 ads.model.model\_artifact\_boilerplate.artifact\_introspection\_test.model\_artifact\_validate),  
[1282](#) [1477](#)  
 check\_score\_file() (in module ClusterRunner (class in  
 ads.model\_artifact\_boilerplate.artifact\_introspection\_test.model\_artifact\_validate),  
[1464](#) [1477](#)  
 checkout\_code() (ads.jobs.templates.driver\_oci.GitManager (ads.jobs.builders.runtimes.container\_runtime.ContainerRuntime  
 method), [925](#) property), [907](#)  
 cjk\_string() (ads.type\_discovery.document\_detector.DocumentDetector (ads.jobs.builders.runtimes.container\_runtime.ContainerRuntime  
 method), [1550](#) property), [946](#)  
 CLASS (ads.common.decorator.deprecate.TARGET\_TYPE CMD\_DELIMITER (ads.jobs.builders.infrastructure.dsc\_job\_runtime.Contain-  
 attribute), [556](#) attribute), [896](#)  
 class\_name (ads.jobs.DataFlowRun property), [972](#) color\_wheel (ads.evaluations.evaluation\_plot.EvaluationPlot  
 attribute), [723](#), [724](#)  
 class\_name (ads.jobs.utils.DataFlowConfig property), colors (ads.data\_labeling.visualizer.image\_visualizer.RenderOptions



`config` (*ads.model.deployment.model\_deployment.ModelDeployment* attribute), 1061  
`config` (*ads.model.ModelDeployer* attribute), 1413  
`config` (*ads.model.ModelDeployment* attribute), 1416  
`Config` (class in *ads.common.config*), 573  
`ConfigMerger` (class in *ads.opctl.config.merger*), 1472  
`ConfigProcessor` (class in *ads.opctl.config.base*), 1471  
`ConfigResolver` (class in *ads.opctl.config.resolver*), 1472  
`ConfigSection` (class in *ads.common.config*), 576  
`configuration` (*ads.jobs.builders.runtimes.python\_runtime.CONST\_BLOCK\_STORAGE* attribute), 910  
`configuration` (*ads.jobs.DataFlowNotebookRuntime* property), 961  
`configuration` (*ads.jobs.DataFlowRun* property), 973  
`configuration` (*ads.jobs.DataFlowRuntime* property), 984  
`configuration` (*ads.jobs.utils.DataFlowConfig* property), 940  
`configuration()` (*ads.opctl.distributed.common.abstract\_cluster\_provider.ClusterProvider* method), 1475  
`configure_plotting()` (in module *ads.common.ipython*), 582  
`ConfigValidator` (class in *ads.opctl.config.validator*), 1473  
`ConfigVersioner` (class in *ads.opctl.config.versioner*), 1473  
`conflict_strategy` (*ads.common.model\_artifact.ModelArtifact* attribute), 585  
`ConflictStrategy` (class in *ads.common.model\_artifact*), 585  
`connect()` (*ads.database.connection.Connector* method), 673  
`ConnectionFactory` (class in *ads.dbmixin.db\_pandas\_accessor*), 721  
`connectionprovider` (*ads.dbmixin.db\_pandas\_accessor.CONST\_BLOCK\_STORAGE* attribute), 721  
`Connector` (class in *ads.database.connection*), 673  
`CONS_COMPARTMENT_ID` (*ads.common.oci\_mixin.OCIModelMixin* attribute), 610  
`CONS_COMPARTMENT_ID` (*ads.jobs.DataFlowRun* attribute), 970  
`CONS_COMPARTMENT_ID` (*ads.jobs.DataScienceJobRun* attribute), 1001  
`ConsolidatedLog` (class in *ads.common.oci\_logging*), 601  
`CONST_ARCHIVE_BUCKET` (*ads.jobs.builders.runtimes.python\_runtime.DataFlowRuntime* attribute), 910  
`CONST_ARCHIVE_BUCKET` (*ads.jobs.DataFlowNotebookRuntime* attribute), 960  
`CONST_ARCHIVE_BUCKET` (*ads.jobs.DataFlowRuntime* attribute), 983  
`CONST_ARGS` (*ads.jobs.builders.runtimes.base.Runtime* attribute), 903  
`CONST_ARGS` (*ads.jobs.ContainerRuntime* attribute), 946  
`CONST_ARGS` (*ads.jobs.DataFlowNotebookRuntime* attribute), 960  
`CONST_ARGS` (*ads.jobs.DataFlowRuntime* attribute), 983  
`CONST_ARGS` (*ads.jobs.GitPythonRuntime* attribute), 1009  
`CONST_ARGS` (*ads.jobs.NotebookRuntime* attribute), 1027  
`CONST_ARGS` (*ads.jobs.PythonRuntime* attribute), 1036  
`CONST_ARGS` (*ads.jobs.ScriptRuntime* attribute), 1045  
`CONST_ARTIFACT` (*ads.model.DataScienceModel* attribute), 1062  
`CONST_BLOCK_STORAGE` (*ads.jobs.builders.infrastructure.dsc\_job.DataScienceJob* attribute), 887  
`CONST_BLOCK_STORAGE` (*ads.jobs.DataScienceJob* attribute), 991  
`CONST_BLOCK_STORAGE_SIZE` (*ads.pipeline.ads\_pipeline.Pipeline* attribute), 1495  
`CONST_BRANCH` (*ads.jobs.builders.runtimes.python\_runtime.GitPythonRuntime* attribute), 913  
`CONST_BRANCH` (*ads.jobs.GitPythonRuntime* attribute), 1009  
`CONST_BUCKET_URI` (*ads.jobs.builders.infrastructure.dataflow.DataFlow* attribute), 875  
`CONST_BUCKET_URI` (*ads.jobs.DataFlow* attribute), 952  
`CONST_CMD` (*ads.jobs.builders.runtimes.container\_runtime.ContainerRuntime* attribute), 907  
`CONST_CMD` (*ads.jobs.ContainerRuntime* attribute), 946  
`CONST_CODE_ENTRYPOINT` (*ads.jobs.builders.infrastructure.dsc\_job\_runtime.PythonRuntime* attribute), 899  
`CONST_COMMAND_LINE_ARGUMENTS` (*ads.pipeline.ads\_pipeline.Pipeline* attribute), 1495  
`CONST_COMMAND_LINE_ARGUMENTS` (*ads.pipeline.ads\_pipeline\_step.PipelineStep* attribute), 1516  
`CONST_COMMIT` (*ads.jobs.builders.runtimes.python\_runtime.GitPythonRuntime* attribute), 913  
`CONST_COMMIT` (*ads.jobs.GitPythonRuntime* attribute), 1009  
`CONST_COMPARTMENT_ID` (*ads.jobs.builders.infrastructure.dataflow.DataFlow* attribute), 875



CONST_COMPARTMENT_ID ( <i>ads.jobs.builders.infrastructure.dsc_job.DataScienceJob</i> attribute), 887	tribute), 1009
CONST_COMPARTMENT_ID ( <i>ads.jobs.DataFlow</i> attribute), 952	CONST_CONDA_REGION ( <i>ads.jobs.NotebookRuntime</i> attribute), 1027
CONST_COMPARTMENT_ID ( <i>ads.jobs.DataScienceJob</i> attribute), 991	CONST_CONDA_REGION ( <i>ads.jobs.PythonRuntime</i> attribute), 1036
CONST_COMPARTMENT_ID ( <i>ads.model.DataScienceModel</i> attribute), 1369	CONST_CONDA_REGION ( <i>ads.jobs.ScriptRuntime</i> attribute), 1045
CONST_COMPARTMENT_ID ( <i>ads.model.model_version_set.ModelVersionSet</i> attribute), 1356	CONST_CONDA_SLUG ( <i>ads.jobs.builders.infrastructure.dsc_job_runtime.Con</i> attribute), 896
CONST_COMPARTMENT_ID ( <i>ads.model.ModelVersionSet</i> attribute), 1436	CONST_CONDA_SLUG ( <i>ads.jobs.builders.runtimes.python_runtime.CondaRun</i> attribute), 908
CONST_COMPARTMENT_ID ( <i>ads.pipeline.ads_pipeline.Pipeline</i> attribute), 1495	CONST_CONDA_SLUG ( <i>ads.jobs.DataFlowNotebookRuntime</i> attribute), 960
CONST_CONDA ( <i>ads.jobs.builders.runtimes.python_runtime.CondaRuntime</i> attribute), 908	CONST_CONDA_SLUG ( <i>ads.jobs.DataFlowRuntime</i> attribute), 983
CONST_CONDA ( <i>ads.jobs.DataFlowNotebookRuntime</i> attribute), 960	CONST_CONDA_SLUG ( <i>ads.jobs.GitPythonRuntime</i> attribute), 1009
CONST_CONDA ( <i>ads.jobs.DataFlowRuntime</i> attribute), 983	CONST_CONDA_SLUG ( <i>ads.jobs.NotebookRuntime</i> attribute), 1027
CONST_CONDA ( <i>ads.jobs.GitPythonRuntime</i> attribute), 1009	CONST_CONDA_SLUG ( <i>ads.jobs.PythonRuntime</i> attribute), 1036
CONST_CONDA ( <i>ads.jobs.NotebookRuntime</i> attribute), 1027	CONST_CONDA_SLUG ( <i>ads.jobs.ScriptRuntime</i> attribute), 1045
CONST_CONDA ( <i>ads.jobs.PythonRuntime</i> attribute), 1036	CONST_CONDA_TYPE ( <i>ads.jobs.builders.infrastructure.dsc_job_runtime.Con</i> attribute), 896
CONST_CONDA ( <i>ads.jobs.ScriptRuntime</i> attribute), 1045	CONST_CONDA_TYPE ( <i>ads.jobs.builders.runtimes.python_runtime.CondaRun</i> attribute), 908
CONST_CONDA_AUTH_TYPE ( <i>ads.jobs.builders.runtimes.python_runtime.DataFlowRuntime</i> attribute), 910	CONST_CONDA_TYPE ( <i>ads.jobs.DataFlowNotebookRuntime</i> attribute), 960
CONST_CONDA_AUTH_TYPE ( <i>ads.jobs.DataFlowNotebookRuntime</i> attribute), 960	CONST_CONDA_TYPE ( <i>ads.jobs.DataFlowRuntime</i> attribute), 983
CONST_CONDA_AUTH_TYPE ( <i>ads.jobs.DataFlowRuntime</i> attribute), 983	CONST_CONDA_TYPE ( <i>ads.jobs.GitPythonRuntime</i> attribute), 1009
CONST_CONDA_BUCKET ( <i>ads.jobs.builders.infrastructure.dsc_job_runtime.CondaRuntime</i> attribute), 896	CONST_CONDA_TYPE ( <i>ads.jobs.NotebookRuntime</i> attribute), 1027
CONST_CONDA_NAMESPACE ( <i>ads.jobs.builders.infrastructure.dsc_job_runtime.CondaRuntime</i> attribute), 896	CONST_CONDA_TYPE ( <i>ads.jobs.PythonRuntime</i> attribute), 1036
CONST_CONDA_OBJ_NAME ( <i>ads.jobs.builders.infrastructure.dsc_job_runtime.CondaRuntime</i> attribute), 896	CONST_CONDA_TYPE_CUSTOM ( <i>ads.jobs.DataFlowNotebookRuntime</i> attribute), 960
CONST_CONDA_REGION ( <i>ads.jobs.builders.infrastructure.dsc_job_runtime.CondaRuntime</i> attribute), 896	CONST_CONDA_TYPE_CUSTOM ( <i>ads.jobs.DataFlowRuntime</i> attribute), 983
CONST_CONDA_REGION ( <i>ads.jobs.builders.runtimes.python_runtime.CondaRuntime</i> attribute), 908	CONST_CONDA_TYPE_CUSTOM ( <i>ads.jobs.GitPythonRuntime</i> attribute), 1009
CONST_CONDA_REGION ( <i>ads.jobs.DataFlowNotebookRuntime</i> attribute), 960	CONST_CONDA_TYPE_CUSTOM ( <i>ads.jobs.NotebookRuntime</i> attribute), 1027
CONST_CONDA_REGION ( <i>ads.jobs.DataFlowRuntime</i> attribute), 983	CONST_CONDA_TYPE_CUSTOM ( <i>ads.jobs.PythonRuntime</i> attribute), 1036
CONST_CONDA_REGION ( <i>ads.jobs.GitPythonRuntime</i> attribute), 1009	CONST_CONDA_TYPE_CUSTOM ( <i>ads.jobs.ScriptRuntime</i> attribute), 1045

attribute), 1045  
 CONST\_CONDA\_TYPE\_SERVICE (ads.jobs.builders.runtimes.python\_runtime.ContainerRuntime attribute), 896  
 attribute), 908  
 CONST\_CONDA\_TYPE\_SERVICE (ads.jobs.DataFlowNotebookRuntime attribute), 960  
 CONST\_CONDA\_TYPE\_SERVICE (ads.jobs.DataFlowRuntime attribute), 983  
 CONST\_CONDA\_TYPE\_SERVICE (ads.jobs.GitPythonRuntime attribute), 1009  
 CONST\_CONDA\_TYPE\_SERVICE (ads.jobs.NotebookRuntime attribute), 1027  
 CONST\_CONDA\_TYPE\_SERVICE (ads.jobs.PythonRuntime attribute), 1036  
 CONST\_CONDA\_TYPE\_SERVICE (ads.jobs.ScriptRuntime attribute), 1045  
 CONST\_CONDA\_URI (ads.jobs.builders.runtimes.python\_runtime.ContainerRuntime attribute), 908  
 CONST\_CONDA\_URI (ads.jobs.DataFlowNotebookRuntime attribute), 960  
 CONST\_CONDA\_URI (ads.jobs.DataFlowRuntime attribute), 983  
 CONST\_CONDA\_URI (ads.jobs.GitPythonRuntime attribute), 1009  
 CONST\_CONDA\_URI (ads.jobs.NotebookRuntime attribute), 1027  
 CONST\_CONDA\_URI (ads.jobs.PythonRuntime attribute), 1036  
 CONST\_CONDA\_URI (ads.jobs.ScriptRuntime attribute), 1045  
 CONST\_CONFIG (ads.jobs.builders.infrastructure.dataflow.DataFlow attribute), 875  
 CONST\_CONFIG (ads.jobs.DataFlow attribute), 952  
 CONST\_CONFIGURATION (ads.jobs.builders.runtimes.python\_runtime.DataFlowRuntime attribute), 910  
 CONST\_CONFIGURATION (ads.jobs.DataFlowNotebookRuntime attribute), 960  
 CONST\_CONFIGURATION (ads.jobs.DataFlowRuntime attribute), 983  
 CONST\_CONFIGURATION\_DETAILS (ads.pipeline.ads\_pipeline.Pipeline attribute), 1495  
 CONST\_CONFIGURATION\_OVERRIDE\_DETAILS (ads.pipeline.ads\_pipeline.Pipeline attribute), 1495  
 CONST\_CONTAINER\_CMD (ads.jobs.builders.infrastructure.dsc\_job\_runtime.ContainerRuntimeHandler attribute), 896  
 CONST\_CONTAINER\_ENTRYPPOINT (ads.jobs.builders.infrastructure.dsc\_job\_runtime.ContainerRuntimeHandler attribute), 896  
 CONST\_CONTAINER\_IMAGE (ads.jobs.builders.infrastructure.dsc\_job\_runtime.ContainerRuntimeHandler attribute), 896  
 CONST\_CREATED\_BY (ads.model.deployment.model\_deployment.ModelDeployment attribute), 1064  
 CONST\_CREATED\_BY (ads.model.ModelDeployment attribute), 1419  
 CONST\_CREATED\_BY (ads.pipeline.ads\_pipeline.Pipeline attribute), 1495  
 CONST\_CUSTOM\_METADATA (ads.model.DataScienceModel attribute), 1369  
 CONST\_DAG (ads.pipeline.ads\_pipeline.Pipeline attribute), 1495  
 CONST\_DEFAULT\_BLOCK\_STORAGE\_SIZE (ads.jobs.builders.infrastructure.dsc\_job.DSCJob attribute), 885  
 CONST\_DEFINED\_METADATA (ads.model.DataScienceModel attribute), 1369  
 CONST\_DEFINED\_TAG (ads.model.DataScienceModel attribute), 1369  
 CONST\_DEFINED\_TAG (ads.model.deployment.model\_deployment.ModelDeployment attribute), 1064  
 CONST\_DEFINED\_TAG (ads.model.model\_version\_set.ModelVersionSet attribute), 1356  
 CONST\_DEFINED\_TAG (ads.model.ModelDeployment attribute), 1419  
 CONST\_DEFINED\_TAG (ads.model.ModelVersionSet attribute), 1436  
 CONST\_DEFINED\_TAGS (ads.pipeline.ads\_pipeline.Pipeline attribute), 1495  
 CONST\_DEPENDS\_ON (ads.pipeline.ads\_pipeline\_step.PipelineStep attribute), 1516  
 CONST\_DESCRIPTION (ads.model.DataScienceModel attribute), 1369  
 CONST\_DESCRIPTION (ads.model.deployment.model\_deployment.ModelDeployment attribute), 1064  
 CONST\_DESCRIPTION (ads.model.model\_version\_set.ModelVersionSet attribute), 1356  
 CONST\_DESCRIPTION (ads.model.ModelDeployment attribute), 1419  
 CONST\_DESCRIPTION (ads.model.ModelVersionSet attribute), 1436  
 CONST\_DESCRIPTION (ads.pipeline.ads\_pipeline.Pipeline attribute), 1496  
 CONST\_DESCRIPTION (ads.pipeline.ads\_pipeline\_step.PipelineStep attribute), 1516  
 CONST\_DISPLAY\_NAME (ads.jobs.builders.infrastructure.dsc\_job.DataScienceJob attribute), 887  
 CONST\_DISPLAY\_NAME (ads.jobs.DataScienceJob attribute), 991  
 CONST\_DISPLAY\_NAME (ads.model.DataScienceModel attribute), 1369

CONST\_DISPLAY\_NAME (ads.model.deployment.model\_deployment attribute), 1064  
 CONST\_DISPLAY\_NAME (ads.model.ModelDeployment attribute), 1419  
 CONST\_DISPLAY\_NAME (ads.pipeline.ads\_pipeline.Pipeline attribute), 1496  
 CONST\_DRIVER\_NOTEBOOK (ads.jobs.builders.runtimes.artifact.Artifact attribute), 902  
 CONST\_DRIVER\_SCRIPT (ads.jobs.builders.runtimes.artifact.GitPythonArtifact attribute), 902  
 CONST\_DRIVER\_SCRIPT (ads.jobs.builders.runtimes.artifact.NotebookArtifact attribute), 902  
 CONST\_DRIVER\_SCRIPT (ads.jobs.builders.runtimes.artifact.PythonArtifact attribute), 903  
 CONST\_DRIVER\_SHAPE (ads.jobs.builders.infrastructure.dataflow.DataFlow attribute), 875  
 CONST\_DRIVER\_SHAPE (ads.jobs.DataFlow attribute), 952  
 CONST\_DRIVER\_SHAPE\_CONFIG (ads.jobs.builders.infrastructure.dataflow.DataFlow attribute), 875  
 CONST\_DRIVER\_SHAPE\_CONFIG (ads.jobs.DataFlow attribute), 952  
 CONST\_DRIVER\_UTILS (ads.jobs.builders.runtimes.artifact.Artifact attribute), 902  
 CONST\_ENABLE\_AUTO\_LOG\_CREATION (ads.pipeline.ads\_pipeline.Pipeline attribute), 1496  
 CONST\_ENABLE\_LOGGING (ads.pipeline.ads\_pipeline.Pipeline attribute), 1496  
 CONST\_ENABLE\_SERVICE\_LOG (ads.pipeline.ads\_pipeline.Pipeline attribute), 1496  
 CONST\_ENTRY\_FUNCTION (ads.jobs.builders.infrastructure.dsc\_job\_runtime.PythonRuntimeHandler attribute), 898  
 CONST\_ENTRY\_FUNCTION (ads.jobs.builders.infrastructure.dsc\_job\_runtime.PythonRuntimeHandler attribute), 899  
 CONST\_ENTRY\_FUNCTION (ads.jobs.GitPythonRuntime attribute), 1009  
 CONST\_ENTRY\_FUNCTION (ads.jobs.PythonRuntime attribute), 1036  
 CONST\_ENTRYPOINT (ads.jobs.builders.infrastructure.dsc\_job\_runtime.GitPythonRuntimeHandler attribute), 898  
 CONST\_ENTRYPOINT (ads.jobs.builders.infrastructure.dsc\_job\_runtime.PythonRuntimeHandler attribute), 898  
 CONST\_ENTRYPOINT (ads.jobs.builders.infrastructure.dsc\_job\_runtime.ScriptRuntimeHandler attribute), 900  
 CONST\_ENTRYPOINT (ads.jobs.builders.runtimes.container\_runtime.ContainerRuntime attribute), 907  
 CONST\_ENTRYPOINT (ads.jobs.builders.runtimes.python\_runtime.NotebookRuntime attribute), 914  
 CONST\_ENTRYPOINT (ads.jobs.builders.runtimes.python\_runtime.ScriptRuntime attribute), 918  
 CONST\_ENTRYPOINT (ads.jobs.ContainerRuntime attribute), 946  
 CONST\_ENTRYPOINT (ads.jobs.DataFlowNotebookRuntime attribute), 960  
 CONST\_ENTRYPOINT (ads.jobs.GitPythonRuntime attribute), 1009  
 CONST\_ENTRYPOINT (ads.jobs.NotebookRuntime attribute), 1027  
 CONST\_ENTRYPOINT (ads.jobs.PythonRuntime attribute), 1036  
 CONST\_ENTRYPOINT (ads.jobs.ScriptRuntime attribute), 1045  
 CONST\_ENV\_VAR (ads.jobs.builders.runtimes.base.Runtime attribute), 903  
 CONST\_ENV\_VAR (ads.jobs.ContainerRuntime attribute), 946  
 CONST\_ENV\_VAR (ads.jobs.DataFlowNotebookRuntime attribute), 960  
 CONST\_ENV\_VAR (ads.jobs.DataFlowRuntime attribute), 983  
 CONST\_ENV\_VAR (ads.jobs.GitPythonRuntime attribute), 1009  
 CONST\_ENV\_VAR (ads.jobs.NotebookRuntime attribute), 1027  
 CONST\_ENV\_VAR (ads.jobs.PythonRuntime attribute), 1036  
 CONST\_ENV\_VAR (ads.jobs.ScriptRuntime attribute), 1045  
 CONST\_ENVIRONMENT\_VARIABLES (ads.pipeline.ads\_pipeline.Pipeline attribute), 1496  
 CONST\_ENVIRONMENT\_VARIABLES (ads.pipeline.ads\_pipeline\_step.PipelineStep attribute), 1516  
 CONST\_EXCLUDE\_TAG (ads.jobs.builders.runtimes.python\_runtime.NotebookRuntime attribute), 915  
 CONST\_EXCLUDE\_TAG (ads.jobs.DataFlowNotebookRuntime attribute), 960  
 CONST\_EXCLUDE\_TAG (ads.jobs.NotebookRuntime attribute), 1027  
 CONST\_EXCLUDE\_TAGS (ads.jobs.builders.infrastructure.dsc\_job\_runtime.PythonRuntimeHandler attribute), 899  
 CONST\_EXECUTE (ads.jobs.builders.infrastructure.dataflow.DataFlow attribute), 952  
 CONST\_EXECUTE (ads.jobs.DataFlow attribute), 952  
 CONST\_EXECUTOR\_SHAPE (ads.jobs.builders.infrastructure.dataflow.DataFlow attribute), 952  
 CONST\_EXECUTOR\_SHAPE (ads.jobs.DataFlow attribute), 952

952	CONST_IMAGE (ads.jobs.ContainerRuntime attribute), 907	CONST_IMAGE (ads.jobs.ContainerRuntime attribute), 946
CONST_EXECUTOR_SHAPE_CONFIG (ads.jobs.builders.infrastructure.dataflow.DataFlow attribute), 875		CONST_INFRA_CONFIG_DETAILS (ads.pipeline.ads_pipeline.Pipeline attribute), 1496
CONST_EXECUTOR_SHAPE_CONFIG (ads.jobs.DataFlow attribute), 952		CONST_INFRASTRUCTURE (ads.model.deployment.model_deployment.ModelDeployment attribute), 1064
CONST_FREEFORM_TAG (ads.model.DataScienceModel attribute), 1369		CONST_INFRASTRUCTURE (ads.model.ModelDeployment attribute), 1420
CONST_FREEFORM_TAG (ads.model.deployment.model_deployment.ModelDeployment attribute), 1064		CONST_INFRASTRUCTURE (ads.pipeline.ads_pipeline_step.PipelineStep attribute), 1516
CONST_FREEFORM_TAG (ads.model.model_version_set.ModelVersionSet attribute), 1356		CONST_INPUT_SCHEMA (ads.model.DataScienceModel attribute), 1369
CONST_FREEFORM_TAG (ads.model.ModelDeployment attribute), 1419		CONST_JOB_ENTRYPOINT (ads.jobs.builders.infrastructure.dsc_job_runtime.GitPythonRuntime attribute), 898
CONST_FREEFORM_TAG (ads.model.ModelVersionSet attribute), 1436		CONST_JOB_ENTRYPOINT (ads.jobs.builders.infrastructure.dsc_job_runtime.PythonRuntime attribute), 899
CONST_FREEFROM_TAGS (ads.pipeline.ads_pipeline.Pipeline attribute), 1496		CONST_JOB_ID (ads.pipeline.ads_pipeline_step.PipelineStep attribute), 1516
CONST_GIT_BRANCH (ads.jobs.builders.infrastructure.dsc_job_runtime.GitPythonRuntime attribute), 898		CONST_JOB_INFRA (ads.jobs.DataScienceJob attribute), 887
CONST_GIT_CODE_DIR (ads.jobs.builders.infrastructure.dsc_job_runtime.GitPythonRuntime attribute), 898		CONST_JOB_INFRA (ads.jobs.DataScienceJob attribute), 887
CONST_GIT_COMMIT (ads.jobs.builders.infrastructure.dsc_job_runtime.GitPythonRuntime attribute), 898		CONST_JOB_INFRA (ads.jobs.DataScienceJob attribute), 887
CONST_GIT_SSH_SECRET_ID (ads.jobs.builders.infrastructure.dsc_job_runtime.GitPythonRuntime attribute), 898		CONST_JOB_INFRA (ads.jobs.DataScienceJob attribute), 887
CONST_GIT_SSH_SECRET_ID (ads.jobs.builders.runtimes.python_runtime.GitPythonRuntime attribute), 913		CONST_JOB_INFRA (ads.jobs.DataScienceJob attribute), 887
CONST_GIT_SSH_SECRET_ID (ads.jobs.GitPythonRuntime attribute), 1009		CONST_JOB_INFRA (ads.jobs.DataScienceJob attribute), 887
CONST_GIT_URL (ads.jobs.builders.infrastructure.dsc_job_runtime.GitPythonRuntime attribute), 898		CONST_KIND (ads.pipeline.ads_pipeline_step.PipelineStep attribute), 1516
CONST_GIT_URL (ads.jobs.builders.runtimes.python_runtime.GitPythonRuntime attribute), 913		CONST_LANGUAGE (ads.jobs.builders.infrastructure.dataflow.DataFlow attribute), 875
CONST_GIT_URL (ads.jobs.GitPythonRuntime attribute), 1009		CONST_LANGUAGE (ads.jobs.DataFlow attribute), 952
CONST_ID (ads.jobs.builders.infrastructure.dataflow.DataFlow attribute), 875		CONST_LIFECYCLE_DETAILS (ads.model.deployment.model_deployment.ModelDeployment attribute), 1064
CONST_ID (ads.jobs.DataFlow attribute), 952		CONST_LIFECYCLE_DETAILS (ads.model.ModelDeployment attribute), 1420
CONST_ID (ads.model.DataScienceModel attribute), 1369		CONST_LIFECYCLE_STATE (ads.model.deployment.model_deployment.ModelDeployment attribute), 1064
CONST_ID (ads.model.deployment.model_deployment.ModelDeployment attribute), 1064		CONST_LIFECYCLE_STATE (ads.model.ModelDeployment attribute), 1420
CONST_ID (ads.model.model_version_set.ModelVersionSet attribute), 1356		CONST_LOG_CONFIGURATION_DETAILS (ads.pipeline.ads_pipeline.Pipeline attribute), 1496
CONST_ID (ads.model.ModelDeployment attribute), 1419		CONST_LOG_CONFIGURATION_OVERRIDE_DETAILS (ads.pipeline.ads_pipeline.Pipeline attribute), 1496
CONST_ID (ads.model.ModelVersionSet attribute), 1436		
CONST_ID (ads.pipeline.ads_pipeline.Pipeline attribute), 1496		
CONST_IMAGE (ads.jobs.builders.runtimes.container_runtime.ContainerRuntime attribute), 907		



CONST_LOG_GROUP_ID ( <i>ads.jobs.builders.infrastructure.dsc_job.DataScienceJob</i> attribute), 887	CONST_MODEL_DEPLOYMENT_URL ( <i>ads.model.ModelDeployment</i> attribute), 1420
CONST_LOG_GROUP_ID ( <i>ads.jobs.DataScienceJob</i> attribute), 991	CONST_MODEL_VERSION_LABEL ( <i>ads.model.DataScienceModel</i> attribute), 1369
CONST_LOG_GROUP_ID ( <i>ads.pipeline.ads_pipeline.Pipeline</i> attribute), 1496	CONST_MODEL_VERSION_SET_ID ( <i>ads.model.DataScienceModel</i> attribute), 1369
CONST_LOG_ID ( <i>ads.jobs.builders.infrastructure.dsc_job.DataScienceJob</i> attribute), 887	CONST_NAME ( <i>ads.model.model_version_set.ModelVersionSet</i> attribute), 1356
CONST_LOG_ID ( <i>ads.jobs.DataScienceJob</i> attribute), 991	CONST_NAME ( <i>ads.model.ModelVersionSet</i> attribute), 1436
CONST_LOG_ID ( <i>ads.pipeline.ads_pipeline.Pipeline</i> attribute), 1496	CONST_NAME ( <i>ads.pipeline.ads_pipeline_step.PipelineStep</i> attribute), 1516
CONST_MAXIMUM_RUNTIME_IN_MINUTES ( <i>ads.jobs.builders.runtimes.base.Runtime</i> attribute), 903	CONST_NOTEBOOK_ENCODING ( <i>ads.jobs.builders.infrastructure.dsc_job_runtime.NotebookRuntime</i> attribute), 899
CONST_MAXIMUM_RUNTIME_IN_MINUTES ( <i>ads.jobs.ContainerRuntime</i> attribute), 946	CONST_NOTEBOOK_ENCODING ( <i>ads.jobs.builders.runtimes.python_runtime.NotebookRuntime</i> attribute), 915
CONST_MAXIMUM_RUNTIME_IN_MINUTES ( <i>ads.jobs.DataFlowNotebookRuntime</i> attribute), 960	CONST_NOTEBOOK_ENCODING ( <i>ads.jobs.DataFlowNotebookRuntime</i> attribute), 960
CONST_MAXIMUM_RUNTIME_IN_MINUTES ( <i>ads.jobs.DataFlowRuntime</i> attribute), 983	CONST_NOTEBOOK_ENCODING ( <i>ads.jobs.NotebookRuntime</i> attribute), 1027
CONST_MAXIMUM_RUNTIME_IN_MINUTES ( <i>ads.jobs.GitPythonRuntime</i> attribute), 1009	CONST_NOTEBOOK_NAME ( <i>ads.jobs.builders.infrastructure.dsc_job_runtime.NotebookRuntime</i> attribute), 899
CONST_MAXIMUM_RUNTIME_IN_MINUTES ( <i>ads.jobs.NotebookRuntime</i> attribute), 1027	CONST_NOTEBOOK_PATH ( <i>ads.jobs.builders.runtimes.python_runtime.NotebookRuntime</i> attribute), 915
CONST_MAXIMUM_RUNTIME_IN_MINUTES ( <i>ads.jobs.PythonRuntime</i> attribute), 1036	CONST_NOTEBOOK_PATH ( <i>ads.jobs.DataFlowNotebookRuntime</i> attribute), 960
CONST_MAXIMUM_RUNTIME_IN_MINUTES ( <i>ads.jobs.ScriptRuntime</i> attribute), 1045	CONST_NOTEBOOK_PATH ( <i>ads.jobs.NotebookRuntime</i> attribute), 1027
CONST_MAXIMUM_RUNTIME_IN_MINUTES ( <i>ads.pipeline.ads_pipeline.Pipeline</i> attribute), 1496	CONST_NUM_EXECUTORS ( <i>ads.jobs.builders.infrastructure.dataflow.DataFlow</i> attribute), 875
CONST_MAXIMUM_RUNTIME_IN_MINUTES ( <i>ads.pipeline.ads_pipeline_step.PipelineStep</i> attribute), 1516	CONST_NUM_EXECUTORS ( <i>ads.jobs.DataFlow</i> attribute), 952
CONST_MEMORY_IN_GBS ( <i>ads.jobs.builders.infrastructure.dataflow.DataFlow</i> attribute), 875	CONST_OCPUS ( <i>ads.jobs.builders.infrastructure.dataflow.DataFlow</i> attribute), 875
CONST_MEMORY_IN_GBS ( <i>ads.jobs.builders.infrastructure.dsc_job.DataScienceJob</i> attribute), 887	CONST_OCPUS ( <i>ads.jobs.builders.infrastructure.dsc_job.DataScienceJob</i> attribute), 887
CONST_MEMORY_IN_GBS ( <i>ads.jobs.DataFlow</i> attribute), 952	CONST_OCPUS ( <i>ads.jobs.DataFlow</i> attribute), 952
CONST_MEMORY_IN_GBS ( <i>ads.jobs.DataScienceJob</i> attribute), 991	CONST_OCPUS ( <i>ads.jobs.DataScienceJob</i> attribute), 991
CONST_MEMORY_IN_GBS ( <i>ads.pipeline.ads_pipeline.Pipeline</i> attribute), 1496	CONST_OCPUS ( <i>ads.pipeline.ads_pipeline.Pipeline</i> attribute), 1496
CONST_METASTORE_ID ( <i>ads.jobs.builders.infrastructure.dataflow.DataFlow</i> attribute), 875	CONST_OUTPUT_DIR ( <i>ads.jobs.builders.infrastructure.dsc_job_runtime.GitRuntime</i> attribute), 898
CONST_METASTORE_ID ( <i>ads.jobs.DataFlow</i> attribute), 952	CONST_OUTPUT_DIR ( <i>ads.jobs.builders.infrastructure.dsc_job_runtime.PythonRuntime</i> attribute), 898
CONST_MODEL_DEPLOYMENT_URL ( <i>ads.model.deployment.model_deployment.ModelDeployment</i> attribute), 1420	

<i>attribute</i> ), 899	CONST_PROJECT_ID ( <i>ads.pipeline.ads_pipeline.Pipeline</i> <i>attribute</i> ), 1496
CONST_OUTPUT_DIR ( <i>ads.jobs.GitPythonRuntime</i> <i>attribute</i> ), 1009	CONST_PROVENANCE_METADATA ( <i>ads.model.DataScienceModel</i> <i>attribute</i> ), 1369
CONST_OUTPUT_DIR ( <i>ads.jobs.PythonRuntime</i> <i>attribute</i> ), 1036	CONST_PYTHON_PATH ( <i>ads.jobs.builders.infrastructure.dsc_job_runtime.GitPythonRuntime</i> <i>attribute</i> ), 898
CONST_OUTPUT_SCHEMA ( <i>ads.model.DataScienceModel</i> <i>attribute</i> ), 1369	CONST_PYTHON_PATH ( <i>ads.jobs.builders.infrastructure.dsc_job_runtime.PythonRuntime</i> <i>attribute</i> ), 899
CONST_OUTPUT_URI ( <i>ads.jobs.builders.infrastructure.dsc_job_runtime.DataFlowRuntime</i> <i>attribute</i> ), 898	CONST_PYTHON_PATH ( <i>ads.jobs.GitPythonRuntime</i> <i>attribute</i> ), 1009
CONST_OUTPUT_URI ( <i>ads.jobs.builders.infrastructure.dsc_job_runtime.DataFlowRuntime</i> <i>attribute</i> ), 899	CONST_PYTHON_PATH ( <i>ads.jobs.PythonRuntime</i> <i>attribute</i> ), 1036
CONST_OUTPUT_URI ( <i>ads.jobs.builders.infrastructure.dsc_job_runtime.DataFlowRuntime</i> <i>attribute</i> ), 899	CONST_RUNTIME ( <i>ads.model.deployment.model_deployment.ModelDeployment</i> <i>attribute</i> ), 1064
CONST_OUTPUT_URI ( <i>ads.jobs.builders.runtimes.python_runtime.DataFlowRuntime</i> <i>attribute</i> ), 915	CONST_RUNTIME ( <i>ads.model.ModelDeployment</i> <i>attribute</i> ), 1420
CONST_OUTPUT_URI ( <i>ads.jobs.DataFlowNotebookRuntime</i> <i>attribute</i> ), 960	CONST_RUNTIME ( <i>ads.pipeline.ads_pipeline_step.PipelineStep</i> <i>attribute</i> ), 1516
CONST_OUTPUT_URI ( <i>ads.jobs.GitPythonRuntime</i> <i>attribute</i> ), 1009	CONST_SCRIPT_BUCKET ( <i>ads.jobs.builders.runtimes.python_runtime.DataFlowRuntime</i> <i>attribute</i> ), 910
CONST_OUTPUT_URI ( <i>ads.jobs.NotebookRuntime</i> <i>attribute</i> ), 1027	CONST_SCRIPT_BUCKET ( <i>ads.jobs.DataFlowNotebookRuntime</i> <i>attribute</i> ), 961
CONST_OUTPUT_URI ( <i>ads.jobs.PythonRuntime</i> <i>attribute</i> ), 1036	CONST_SCRIPT_BUCKET ( <i>ads.jobs.DataFlowRuntime</i> <i>attribute</i> ), 983
CONST_OUTPUT_URI_ALT ( <i>ads.jobs.builders.runtimes.python_runtime.NotebookRuntime</i> <i>attribute</i> ), 915	CONST_SCRIPT_PATH ( <i>ads.jobs.builders.runtimes.python_runtime.DataFlowRuntime</i> <i>attribute</i> ), 910
CONST_OUTPUT_URI_ALT ( <i>ads.jobs.DataFlowNotebookRuntime</i> <i>attribute</i> ), 960	CONST_SCRIPT_PATH ( <i>ads.jobs.builders.runtimes.python_runtime.ScriptRuntime</i> <i>attribute</i> ), 918
CONST_OUTPUT_URI_ALT ( <i>ads.jobs.NotebookRuntime</i> <i>attribute</i> ), 1027	CONST_SCRIPT_PATH ( <i>ads.jobs.DataFlowNotebookRuntime</i> <i>attribute</i> ), 961
CONST_OVERWRITE ( <i>ads.jobs.builders.runtimes.python_runtime.DataFlowRuntime</i> <i>attribute</i> ), 910	CONST_SCRIPT_PATH ( <i>ads.jobs.DataFlowRuntime</i> <i>attribute</i> ), 983
CONST_OVERWRITE ( <i>ads.jobs.DataFlowNotebookRuntime</i> <i>attribute</i> ), 961	CONST_SCRIPT_PATH ( <i>ads.jobs.PythonRuntime</i> <i>attribute</i> ), 1036
CONST_OVERWRITE ( <i>ads.jobs.DataFlowRuntime</i> <i>attribute</i> ), 983	CONST_SCRIPT_PATH ( <i>ads.jobs.ScriptRuntime</i> <i>attribute</i> ), 1045
CONST_PIPELINE_ID ( <i>ads.pipeline.ads_pipeline.Pipeline</i> <i>attribute</i> ), 1496	CONST_SERVICE ( <i>ads.pipeline.ads_pipeline.Pipeline</i> <i>attribute</i> ), 1496
CONST_PRIVATE_ENDPOINT_ID ( <i>ads.jobs.builders.infrastructure.dataflow.DataFlow</i> <i>attribute</i> ), 875	CONST_SERVICE_LOG_CATEGORY ( <i>ads.pipeline.ads_pipeline.Pipeline</i> <i>attribute</i> ), 1496
CONST_PRIVATE_ENDPOINT_ID ( <i>ads.jobs.DataFlow</i> <i>attribute</i> ), 952	CONST_SERVICE_LOG_ID ( <i>ads.pipeline.ads_pipeline.Pipeline</i> <i>attribute</i> ), 1496
CONST_PROJECT_ID ( <i>ads.jobs.builders.infrastructure.dsc_job_runtime.DataScienceJob</i> <i>attribute</i> ), 887	CONST_SHAPE_CONFIG_DETAILS ( <i>ads.jobs.builders.infrastructure.dsc_job.DataScienceJob</i> <i>attribute</i> ), 887
CONST_PROJECT_ID ( <i>ads.jobs.DataScienceJob</i> <i>attribute</i> ), 991	CONST_SHAPE_CONFIG_DETAILS ( <i>ads.jobs.DataScienceJob</i> <i>attribute</i> ), 992
CONST_PROJECT_ID ( <i>ads.model.DataScienceModel</i> <i>attribute</i> ), 1369	CONST_SHAPE_CONFIG_DETAILS ( <i>ads.pipeline.ads_pipeline.Pipeline</i> <i>attribute</i> ),
CONST_PROJECT_ID ( <i>ads.model.model_version_set.ModelVersionSet</i> <i>attribute</i> ), 1356	
CONST_PROJECT_ID ( <i>ads.model.ModelVersionSet</i> <i>attribute</i> ), 1436	

- 1496
- CONST\_SHAPE\_NAME (*ads.jobs.builders.infrastructure.dsc\_job\_runtime* attribute), 887
- CONST\_SHAPE\_NAME (*ads.jobs.DataScienceJob* attribute), 992
- CONST\_SHAPE\_NAME (*ads.pipeline.ads\_pipeline.Pipeline* attribute), 1496
- CONST\_SKIP\_METADATA (*ads.jobs.builders.infrastructure.dsc\_job\_runtime* attribute), 898
- CONST\_SKIP\_METADATA (*ads.jobs.builders.runtimes.python\_runtime.GitPythonRuntime* attribute), 913
- CONST\_SKIP\_METADATA (*ads.jobs.GitPythonRuntime* attribute), 1009
- CONST\_SOURCE (*ads.jobs.builders.runtimes.python\_runtime.NotebookRuntime* attribute), 915
- CONST\_SOURCE (*ads.jobs.DataFlowNotebookRuntime* attribute), 961
- CONST\_SOURCE (*ads.jobs.NotebookRuntime* attribute), 1027
- CONST\_SPARK\_VERSION (*ads.jobs.builders.infrastructure.dataflow.DataFlow* attribute), 875
- CONST\_SPARK\_VERSION (*ads.jobs.DataFlow* attribute), 952
- CONST\_STEP\_CONFIG\_DETAILS (*ads.pipeline.ads\_pipeline\_step.PipelineStep* attribute), 1516
- CONST\_STEP\_DETAILS (*ads.pipeline.ads\_pipeline.Pipeline* attribute), 1496
- CONST\_STEP\_INFRA\_CONFIG\_DETAILS (*ads.pipeline.ads\_pipeline\_step.PipelineStep* attribute), 1516
- CONST\_STEP\_OVERRIDE\_DETAILS (*ads.pipeline.ads\_pipeline.Pipeline* attribute), 1496
- CONST\_SUBNET\_ID (*ads.jobs.builders.infrastructure.dsc\_job.DataScienceJob* attribute), 887
- CONST\_SUBNET\_ID (*ads.jobs.DataScienceJob* attribute), 992
- CONST\_SYSTEM\_TAGS (*ads.pipeline.ads\_pipeline.Pipeline* attribute), 1496
- CONST\_TAG (*ads.jobs.builders.runtimes.base.Runtime* attribute), 903
- CONST\_TAG (*ads.jobs.ContainerRuntime* attribute), 946
- CONST\_TAG (*ads.jobs.DataFlowNotebookRuntime* attribute), 961
- CONST\_TAG (*ads.jobs.DataFlowRuntime* attribute), 983
- CONST\_TAG (*ads.jobs.GitPythonRuntime* attribute), 1009
- CONST\_TAG (*ads.jobs.NotebookRuntime* attribute), 1027
- CONST\_TAG (*ads.jobs.PythonRuntime* attribute), 1036
- CONST\_TAG (*ads.jobs.ScriptRuntime* attribute), 1045
- CONST\_TIME\_CREATED (*ads.model.deployment.model\_deployment* attribute), 1064
- CONST\_TIME\_CREATED (*ads.model.ModelDeployment* attribute), 1420
- CONST\_TYPE (*ads.pipeline.ads\_pipeline.Pipeline* attribute), 1496
- CONST\_WAREHOUSE\_BUCKET\_URI (*ads.jobs.builders.infrastructure.dataflow.DataFlow* attribute), 875
- CONST\_WAREHOUSE\_BUCKET\_URI (*ads.jobs.DataFlow* attribute), 952
- CONST\_WORKING\_DIR (*ads.jobs.builders.infrastructure.dsc\_job\_runtime.GitPythonRuntime* attribute), 898
- CONST\_WORKING\_DIR (*ads.jobs.builders.infrastructure.dsc\_job\_runtime.PythonRuntime* attribute), 899
- CONST\_WORKING\_DIR (*ads.jobs.GitPythonRuntime* attribute), 1009
- CONST\_WORKING\_DIR (*ads.jobs.PythonRuntime* attribute), 1036
- Constant (class in *ads.feature\_engineering.feature\_type.constant*), 794
- ConstantDetector (class in *ads.type\_discovery.constant\_detector*), 1549
- ConstantTypedFeature (class in *ads.type\_discovery.typed\_feature*), 1552
- constraints (*ads.feature\_engineering.schema.Domain* attribute), 845
- cont\_vs\_cont() (in module *ads.feature\_engineering.accessor.mixin.correlation*), 741
- CONTAINER (*ads.model.generic\_model.ModelDeploymentRuntimeType* attribute), 1330
- ContainerRuntime (class in *ads.jobs*), 945
- ContainerRuntime (class in *ads.jobs.builders.runtimes.container\_runtime*), 906
- ContainerRuntimeHandler (class in *ads.jobs.builders.infrastructure.dsc\_job\_runtime*), 896
- content (*ads.data\_labeling.record.Record* attribute), 672
- Continuous (class in *ads.feature\_engineering.feature\_type.continuous*), 796
- ContinuousDetector (class in *ads.type\_discovery.continuous\_detector*), 1549
- ContinuousTypedFeature (class in *ads.type\_discovery.typed\_feature*), 1552
- convert() (*ads.jobs.builders.runtimes.python\_runtime.DataFlowNotebookRuntime* method), 909
- convert() (*ads.jobs.builders.runtimes.python\_runtime.DataFlowRuntime* method), 910
- convert() (*ads.jobs.DataFlowNotebookRuntime* method), 961
- convert() (*ads.jobs.DataFlowRuntime* method), 984

`convert_columns()` (in module `ads.dataset.helper`), 715  
`convert_dataframe_schema()` (`ads.common.model.ADSModel` static method), 582  
`CONVERT_KEYS_TO_LOWER` (`ads.common.serializer.SideEffect` attribute), 620  
`CONVERT_KEYS_TO_UPPER` (`ads.common.serializer.SideEffect` attribute), 620  
`convert_notebook()` (in module `ads.opctl.config.utils`), 1473  
`convert_to_html()` (in module `ads.dataset.helper`), 715  
`convert_to_text()` (`ads.text_dataset.backends.Base` method), 1538  
`convert_to_text()` (`ads.text_dataset.backends.PDFPlumber` method), 1539  
`convert_to_text()` (`ads.text_dataset.backends.Tika` method), 1540  
`convert_to_text()` (`ads.text_dataset.dataset.DataLoader` method), 1542  
`convert_to_text()` (`ads.text_dataset.extractor.FileProcessor` method), 1545  
`convert_to_text_classification()` (`ads.dataset.classification_dataset.ClassificationDataset` method), 684  
`copy()` (`ads.common.config.ConfigSection` method), 576  
`copy_file()` (in module `ads.common.utils`), 621  
`copy_from_uri()` (`ads.jobs.builders.runtimes.artifact.Artifact` static method), 902  
`copy_from_uri()` (in module `ads.common.utils`), 621  
`core_site()` (in module `ads.opctl.spark.cmds`), 1477  
`corpus_processor()` (`ads.type_discovery.typed_feature.DocumentTypedFeature` static method), 1552  
`corr()` (`ads.dataset.dataset.ADSDataset` method), 690  
`correlation_ratio()` (`ads.feature_engineering.accessor.mixin.eda_mixin.EDAMixin` method), 741  
`correlation_ratio_plot()` (`ads.feature_engineering.accessor.mixin.eda_mixin.EDAMixin` method), 742  
`count()` (`ads.feature_engineering.feature_type.adsstring.string.ADSString` method), 770  
`cramersv()` (`ads.feature_engineering.accessor.mixin.eda_mixin.EDAMixin` method), 742  
`cramersv_plot()` (`ads.feature_engineering.accessor.mixin.eda_mixin.EDAMixin` method), 742  
`CREATE` (`ads.common.model_artifact.ConflictStrategy` attribute), 585  
`create` (`ads.common.model_artifact.ModelArtifact` attribute), 586  
`create()` (`ads.common.oci_logging.OCILoggingModelMixin` method), 607  
`create()` (`ads.jobs.ads_job.Job` method), 928  
`create()` (`ads.jobs.builders.infrastructure.base.Infrastructure` method), 873  
`create()` (`ads.jobs.builders.infrastructure.base.RunInstance` method), 874  
`create()` (`ads.jobs.builders.infrastructure.dataflow.DataFlow` method), 875  
`create()` (`ads.jobs.builders.infrastructure.dataflow.DataFlowApp` method), 881  
`create()` (`ads.jobs.builders.infrastructure.dataflow.DataFlowRun` method), 882  
`create()` (`ads.jobs.builders.infrastructure.dsc_job.DataScienceJob` method), 888  
`create()` (`ads.jobs.builders.infrastructure.dsc_job.DataScienceJobRun` method), 894  
`create()` (`ads.jobs.builders.infrastructure.dsc_job.DSCJob` method), 885  
`create()` (`ads.jobs.DataFlow` method), 952  
`create()` (`ads.jobs.DataFlowRun` method), 973  
`create()` (`ads.jobs.DataScienceJob` method), 992  
`create()` (`ads.jobs.DataScienceJobRun` method), 1002  
`create()` (`ads.jobs.Job` method), 1020  
`create()` (`ads.model.DataScienceModel` method), 1367, 1370  
`create()` (`ads.model.model_version_set.ModelVersionSet` method), 1355, 1357  
`create()` (`ads.model.ModelVersionSet` method), 1435, 1436  
`create()` (`ads.model.service.oci_datascience_model.OCIDataScienceModel` method), 1288, 1289  
`create()` (`ads.model.service.oci_datascience_model_version_set.DataScienceModelVersionSet` method), 1294  
`create()` (`ads.pipeline.ads_pipeline.DataSciencePipeline` method), 1488  
`create()` (`ads.pipeline.ads_pipeline.Pipeline` method), 1494, 1497  
`create()` (`ads.pipeline.ads_pipeline_run.PipelineRun` method), 1508, 1509  
`create()` (in module `ads.opctl.conda.cmds`), 1469  
`create_app()` (`ads.dataflow.dataflow.DataFlow` method), 674  
`create_async()` (`ads.common.oci_logging.OCILog` method), 603  
`create_async()` (`ads.common.oci_logging.OCILoggingModelMixin` method), 607  
`create_async()` (`ads.common.oci_logging.OCILogGroup` method), 606  
`create_client()` (`ads.common.oci_client.OCIClientFactory` method), 600  
`create_instance()` (`ads.common.oci_mixin.OCIClientMixin` class method), 608  
`create_instance()` (`ads.jobs.DataFlowRun` class method), 973



create\_instance() (*ads.jobs.DataScienceJobRun* class method), 1002  
 create\_log() (*ads.common.oci\_logging.OCILogGroup* method), 606  
 create\_model\_artifact() (*ads.model.service.oci\_datascience\_model.OCIDataScienceModel* method), 1288, 1289  
 create\_model\_provenance() (*ads.model.service.oci\_datascience\_model.OCIDataScienceModel* method), 1288, 1289  
 create\_notebook\_session() (*ads.catalog.notebook.NotebookCatalog* method), 549  
 create\_project() (*ads.catalog.project.ProjectCatalog* method), 552  
 create\_secret() (*ads.vault.vault.Vault* method), 1554  
 create\_signer() (*ads.common.auth.APIKey* method), 561  
 create\_signer() (*ads.common.auth.AuthSignerGenerator* method), 563  
 create\_signer() (*ads.common.auth.InstancePrincipal* method), 564  
 create\_signer() (*ads.common.auth.ResourcePrincipal* method), 565  
 create\_signer() (in module *ads.common.auth*), 566  
 create\_step\_artifact() (*ads.pipeline.ads\_pipeline.DataSciencePipeline* method), 1488  
 create\_sync\_script() (*ads.opctl.distributed.common.abstract\_cluster\_provider* static method), 1475  
 created\_by (*ads.jobs.DataScienceJobRun* property), 1002  
 created\_by (*ads.model.deployment.model\_deployment.ModelDeployment* attribute), 1061  
 created\_by (*ads.model.deployment.model\_deployment.ModelDeployment* property), 1065  
 created\_by (*ads.model.ModelDeployment* attribute), 1417  
 created\_by (*ads.model.ModelDeployment* property), 1420  
 created\_by (*ads.pipeline.ads\_pipeline.Pipeline* attribute), 1491  
 created\_by (*ads.pipeline.ads\_pipeline.Pipeline* property), 1497  
 CREATING (*ads.model.deployment.common.utils.State* attribute), 1055  
 CredentialManager (class in *ads.jobs.templates.driver\_oci*), 924  
 credit\_card (*ads.feature\_engineering.adsstring.common\_regex\_mixin.CommonRegexMixin* property), 763  
 credit\_card (*ads.feature\_engineering.feature\_type.adsstring.common\_regex\_mixin.CommonRegexMixin* property), 767  
 CreditCard (class in *ads.feature\_engineering.feature\_type.creditcard*), 798  
 CreditCardDetector (class in *ads.type\_discovery.credit\_card\_detector*), 1550  
 CreditCardTypedFeature (class in *ads.type\_discovery.typed\_feature*), 1552  
 CUML (*ads.model.model\_metadata.Framework* attribute), 1334  
 CUSTOM\_LOG (*ads.pipeline.ads\_pipeline\_run.LogType* attribute), 1508  
 custom\_logging (*ads.pipeline.ads\_pipeline\_run.PipelineRun* attribute), 1508  
 custom\_logging (*ads.pipeline.ads\_pipeline\_run.PipelineRun* property), 1509  
 custom\_metadata\_list (*ads.model.DataScienceModel* attribute), 1366  
 custom\_metadata\_list (*ads.model.DataScienceModel* property), 1370  
 CUSTOM\_SCRIPT (*ads.pipeline.ads\_pipeline\_run.StepType* attribute), 1513  
 CUSTOM\_SCRIPT (*ads.pipeline.visualizer.base.StepKind* attribute), 1485  
 CustomFormatReaders (class in *ads.dataset.factory*), 708  
 CustomScriptStep (class in *ads.pipeline.builders.infrastructure.custom\_script*), 1480

## D

dag\_details (*ads.pipeline.ads\_pipeline.Pipeline* attribute), 1491  
 dag\_details (*ads.pipeline.ads\_pipeline.Pipeline* property), 1497  
 data (*ads.common.data\_serializer.InputDataSerializer* property), 581  
 DATA (*ads.common.decorator.runtime\_dependency.OptionalDependency* attribute), 557  
 data\_labeling\_cp (*ads.common.oci\_client.OCIClientFactory* property), 600  
 data\_labeling\_dp (*ads.common.oci\_client.OCIClientFactory* property), 600  
 data\_read\_in\_bytes (*ads.jobs.DataFlowRun* property), 973  
 data\_science (*ads.common.oci\_client.OCIClientFactory* property), 600  
 data\_science\_env (*ads.common.model\_artifact.ModelArtifact* attribute), 586  
 data\_type (*ads.common.data\_serializer.InputDataSerializer* property), 581  
 data\_written\_in\_bytes (*ads.jobs.DataFlowRun* property), 973  
 database (*ads.secrets.mysql\_db.MySQLDBSecret* attribute), 1540  
 DataClassSerializable (class in *ads.common.serializer*), 616

`dataflow` (*ads.common.oci\_client.OCIClientFactory* property), 600  
`DATAFLOW` (*ads.opctl.constants.BACKEND\_NAME* attribute), 1478  
`DATAFLOW` (*ads.telemetry.telemetry.Surface* attribute), 1538  
`DataFlow` (class in *ads.dataflow.dataflow*), 674  
`DataFlow` (class in *ads.jobs*), 952  
`DataFlow` (class in *ads.jobs.builders.infrastructure.dataflow*), 875  
`dataflow()` (in module *ads.jobs.extension*), 935  
`dataflow_job()` (*ads.jobs.ads\_job.Job* static method), 928  
`dataflow_job()` (*ads.jobs.Job* static method), 1020  
`dataflow_log()` (in module *ads.jobs.extension*), 935  
`dataflow_run()` (in module *ads.jobs.extension*), 935  
`DataFlowApp` (class in *ads.dataflow.dataflow*), 677  
`DataFlowApp` (class in *ads.jobs.builders.infrastructure.dataflow*), 880  
`DataFlowBackend` (class in *ads.opctl.backend.ads\_dataflow*), 1466  
`DataFlowConfig` (class in *ads.jobs.utils*), 938  
`DataFlowLog` (class in *ads.dataflow.dataflow*), 679  
`DataFlowLogs` (class in *ads.jobs.builders.infrastructure.dataflow*), 881  
`DataFlowNotebookRuntime` (class in *ads.jobs*), 960  
`DataFlowNotebookRuntime` (class in *ads.jobs.builders.runtimes.python\_runtime*), 909  
`DataFlowRun` (class in *ads.dataflow.dataflow*), 680  
`DataFlowRun` (class in *ads.jobs*), 970  
`DataFlowRun` (class in *ads.jobs.builders.infrastructure.dataflow*), 882  
`DataFlowRuntime` (class in *ads.jobs*), 982  
`DataFlowRuntime` (class in *ads.jobs.builders.runtimes.python\_runtime*), 909  
`DataFrameLabelEncoder` (class in *ads.dataset.label\_encoder*), 717  
`DataFrameTransformer` (class in *ads.dataset.dataframe\_transformer*), 688  
`DataLabeling` (class in *ads.data\_labeling.data\_labeling\_service*), 667  
`DataLabelingAccessMixin` (class in *ads.data\_labeling.mixin.data\_labeling*), 633  
`DataLoader` (class in *ads.text\_dataset.dataset*), 1541  
`DATASCIENCE_JOB` (*ads.telemetry.telemetry.Surface* attribute), 1538  
`datascience_job()` (*ads.jobs.ads\_job.Job* static method), 928  
`datascience_job()` (*ads.jobs.Job* static method), 1020  
`DATASCIENCE_MODEL_DEPLOYMENT` (*ads.telemetry.telemetry.Surface* attribute), 1538  
`DATASCIENCE_NOTEBOOK` (*ads.telemetry.telemetry.Surface* attribute), 1538  
`DataScienceJob` (class in *ads.jobs*), 991  
`DataScienceJob` (class in *ads.jobs.builders.infrastructure.dsc\_job*), 886  
`DataScienceJobRun` (class in *ads.jobs*), 1000  
`DataScienceJobRun` (class in *ads.jobs.builders.infrastructure.dsc\_job*), 893  
`DataScienceJobRuntimeManager` (class in *ads.jobs.builders.infrastructure.dsc\_job\_runtime*), 897  
`DataScienceModel` (class in *ads.model*), 1365  
`DataScienceModelType` (class in *ads.model.generic\_model*), 1303  
`DataScienceModelVersionSet` (class in *ads.model.service.oci\_datascience\_model\_version\_set*), 1293  
`DataScienceObjective` (class in *ads.hpo.search\_cv*), 870  
`DataSciencePipeline` (class in *ads.pipeline.ads\_pipeline*), 1487  
`dataset_id` (*ads.data\_labeling.metadata.Metadata* attribute), 669, 670  
`dataset_name` (*ads.data\_labeling.metadata.Metadata* attribute), 669, 670  
`dataset_type` (*ads.data\_labeling.metadata.Metadata* attribute), 670  
`DatasetBrowser` (class in *ads.dataset.dataset\_browser*), 700  
`DatasetDefaults` (class in *ads.dataset.helper*), 714  
`DatasetError`, 708  
`DatasetFactory` (class in *ads.dataset.factory*), 709  
`DatasetLoadException`, 714  
`DatasetNotFoundError`, 654  
`DatasetType` (class in *ads.data\_labeling.constants*), 667  
`DataSizeTooWide`, 845  
`date` (*ads.feature\_engineering.adsstring.common\_regex\_mixin.CommonRegexMixin* property), 763  
`date` (*ads.feature\_engineering.feature\_type.adsstring.common\_regex\_mixin.CommonRegexMixin* property), 767  
`DateTime` (class in *ads.feature\_engineering.feature\_type.datetime*), 803  
`datetime_format` (*ads.catalog.project.ProjectSummaryList* attribute), 554  
`DateTimeDetector` (class in *ads.type\_discovery.datetime\_detector*), 1550  
`DateTimeTypedFeature` (class in

`ads.type_discovery.typed_feature`), 1552  
**DBAccessMixin** (class in `default_handler` (in module `ads.dbmixin.db_pandas_accessor`), 721  
**ddf** (`ads.dataset.dataset.ADSDataset` property), 691  
**deactivate()** (`ads.catalog.model.Model` method), 543  
**deactivate()** (`ads.model.deployment.model_deployment.ModelDeployment` method), 1063, 1065  
**deactivate()** (`ads.model.ModelDeployment` method), 1418, 1420  
**deactivate()** (`ads.opctl.backend.base.Backend` method), 1468  
**debug()** (`ads.dataset.correlation_plot.BokehHeatMap` method), 686  
**DecisionTreeClassifierSearchSpace** (class in `ads.hpo.ads_search_space`), 854  
**DecisionTreeRegressorSearchSpace** (class in `ads.hpo.ads_search_space`), 854  
**decode()** (`ads.secrets.adb.ADBSecretKeeper` method), 1523  
**decode()** (`ads.secrets.auth_token.AuthTokenSecretKeeper` method), 1525  
**decode()** (`ads.secrets.big_data_service.BDSSecretKeeper` method), 1529  
**decode()** (`ads.secrets.mysqladb.MySQLDBSecretKeeper` method), 1531  
**decode()** (`ads.secrets.oracledb.OracleDBSecretKeeper` method), 1533  
**decode()** (`ads.secrets.secrets.SecretKeeper` method), 1535  
**decode()** (in module `ads.hpo.distributions`), 858  
**decription** (`ads.model.deployment.common.progress_bar.ProgressBar` attribute), 1053  
**default()** (`ads.common.config.Config` method), 574  
**default()** (`ads.common.utils.JsonConverter` method), 620  
**default()** (`ads.hpo.distributions.DistributionEncode` method), 857  
**DEFAULT\_CODE\_DIR** (`ads.opctl.distributed.common.abstract_provider.AbstractProvider` attribute), 1474  
**default\_color** (`ads.data_labeling.visualizer.image_visualizer.RenderOptions` attribute), 661  
**default\_color** (`ads.data_labeling.visualizer.text_visualizer.RenderOptions` attribute), 663  
**default\_compartment\_id()** (`ads.model.deployment.common.utils.OCIClientManager` attribute), 1054  
**default\_handler()** (in module `ads.feature_engineering.feature_type.address`), 788  
**default\_handler()** (in module `ads.feature_engineering.feature_type.boolean`), 791  
**default\_handler()** (in module `ads.feature_engineering.feature_type.creditcard`), 802  
**default\_handler()** (in module `ads.feature_engineering.feature_type.datetime`), 805  
**default\_handler()** (in module `ads.feature_engineering.feature_type.gis`), 812  
**default\_handler()** (in module `ads.feature_engineering.feature_type.ip_address`), 816  
**default\_handler()** (in module `ads.feature_engineering.feature_type.ip_address_v4`), 818  
**default\_handler()** (in module `ads.feature_engineering.feature_type.ip_address_v6`), 820  
**default\_handler()** (in module `ads.feature_engineering.feature_type.lat_long`), 824  
**default\_handler()** (in module `ads.feature_engineering.feature_type.phone_number`), 829  
**default\_handler()** (in module `ads.feature_engineering.feature_type.string`), 832  
**default\_handler()** (in module `ads.feature_engineering.feature_type.zip_code`), 837  
**DEFAULT\_INFRA\_TYPE** (`ads.jobs.builders.infrastructure.dsc_job.DSCJob` attribute), 885  
**DEFAULT\_LABELS\_MAP** (`ads.evaluations.evaluator.ADSEvaluator.EvaluationOptions` attribute), 727  
**default\_schema()** (`ads.feature_engineering.schema.SchemaFactory` class method), 852  
**default\_schema()** (`ads.feature_engineering.schema.SchemaFactory` method), 851  
**default\_signer()** (in module `ads.common.auth`), 567  
**DEFAULT\_SQL\_ARRAYSIZE** (`ads.dataset.factory.CustomFormatReaders` attribute), 708  
**DEFAULT\_SQL\_CHUNKSIZE** (`ads.dataset.factory.CustomFormatReaders` attribute), 708  
**DEFAULT\_SQL\_CTU** (`ads.dataset.factory.CustomFormatReaders` attribute), 708  
**DEFAULT\_SQL\_MIL** (`ads.dataset.factory.CustomFormatReaders` attribute), 708  
**default\_type** (`ads.feature_engineering.accessor.dataframe_accessor.ADSSeries` attribute), 748  
**default\_type** (`ads.feature_engineering.accessor.dataframe_accessor.ADSDataset` property), 749  
**default\_type** (`ads.feature_engineering.accessor.series_accessor.ADSSeries` attribute), 753  
**default\_type** (`ads.feature_engineering.accessor.series_accessor.ADSDataset` property), 753

property), 754

defined\_metadata\_list (ads.model.DataScienceModel attribute), 1366

defined\_metadata\_list (ads.model.DataScienceModel property), 1370

defined\_tags (ads.jobs.DataFlowRun property), 973

defined\_tags (ads.jobs.DataScienceJobRun property), 1002

defined\_tags (ads.jobs.utils.DataFlowConfig property), 940

defined\_tags (ads.model.DataScienceModel attribute), 1366

defined\_tags (ads.model.DataScienceModel property), 1370

defined\_tags (ads.model.deployment.model\_deployment.ModelDeployment attribute), 1062

defined\_tags (ads.model.deployment.model\_deployment.ModelDeployment property), 1065

defined\_tags (ads.model.model\_version\_set.ModelVersionSet attribute), 1355

defined\_tags (ads.model.model\_version\_set.ModelVersionSet property), 1357

defined\_tags (ads.model.ModelDeployment attribute), 1417

defined\_tags (ads.model.ModelDeployment property), 1421

defined\_tags (ads.model.ModelVersionSet attribute), 1435

defined\_tags (ads.model.ModelVersionSet property), 1437

del\_metrics() (ads.evaluations.evaluator.ADSEvaluator method), 726, 729

del\_models() (ads.evaluations.evaluator.ADSEvaluator method), 726, 729

delete() (ads.common.oci\_logging.OCILog method), 603

delete() (ads.common.oci\_logging.OCILogGroup method), 606

delete() (ads.common.oci\_mixin.OCIModelMixin method), 611

delete() (ads.jobs.ads\_job.Job method), 928

delete() (ads.jobs.builders.infrastructure.base.Infrastructure method), 873

delete() (ads.jobs.builders.infrastructure.base.RunInstance method), 874

delete() (ads.jobs.builders.infrastructure.dataflow.DataFlow method), 876

delete() (ads.jobs.builders.infrastructure.dataflow.DataFlowApp method), 881

delete() (ads.jobs.builders.infrastructure.dataflow.DataFlowRun method), 882

delete() (ads.jobs.builders.infrastructure.dsc\_job.DataScienceJob method), 888

delete() (ads.jobs.builders.infrastructure.dsc\_job.DSCJob method), 885

delete() (ads.jobs.DataFlow method), 953

delete() (ads.jobs.DataFlowRun method), 974

delete() (ads.jobs.DataScienceJob method), 992

delete() (ads.jobs.DataScienceJobRun method), 1003

delete() (ads.jobs.Job method), 1020

delete() (ads.model.DataScienceModel method), 1367, 1370

delete() (ads.model.deployment.model\_deployer.ModelDeployer method), 1057, 1058

delete() (ads.model.deployment.model\_deployment.ModelDeployment method), 1063, 1066

delete() (ads.model.framework.huggingface\_model.HuggingFacePipeline class method), 1095

delete() (ads.model.framework.lightgbm\_model.LightGBMModel class method), 1123

delete() (ads.model.framework.pytorch\_model.PyTorchModel class method), 1149

delete() (ads.model.framework.sklearn\_model.SklearnModel class method), 1177

delete() (ads.model.framework.spark\_model.SparkPipelineModel class method), 1205

delete() (ads.model.framework.tensorflow\_model.TensorFlowModel class method), 1231

delete() (ads.model.framework.xgboost\_model.XGBoostModel class method), 1259

delete() (ads.model.generic\_model.GenericModel class method), 1310

delete() (ads.model.GenericModel class method), 1381

delete() (ads.model.model\_version\_set.ModelVersionSet method), 1355, 1357

delete() (ads.model.ModelDeployer method), 1413

delete() (ads.model.ModelDeployment method), 1418, 1421

delete() (ads.model.ModelVersionSet method), 1435, 1437

delete() (ads.model.service.oci\_datascience\_model.OCIDataScienceModel method), 1288, 1290

delete() (ads.model.service.oci\_datascience\_model\_version\_set.DataScienceModelVersionSet method), 1294

delete() (ads.opctl.backend.ads\_dataflow.DataFlowBackend method), 1466

delete() (ads.opctl.backend.ads\_ml\_job.MLJobBackend method), 1466

delete() (ads.opctl.backend.ads\_ml\_pipeline.PipelineBackend method), 1467

delete() (ads.opctl.backend.base.Backend method), 1468

delete() (ads.pipeline.ads\_pipeline.DataSciencePipeline method), 1488

delete() (ads.pipeline.ads\_pipeline.Pipeline method), 1494, 1497



`delete()` (*ads.pipeline.ads\_pipeline\_run.PipelineRun* method), 1508, 1510  
`delete_deployment()` (*ads.model.AutoMLModel* method), 1364  
`delete_deployment()` (*ads.model.framework.huggingface\_model.HuggingFacePipelineModel* method), 1090, 1096  
`delete_deployment()` (*ads.model.framework.lightgbm\_model.LightGBMModel* method), 1121, 1123  
`delete_deployment()` (*ads.model.framework.pytorch\_model.PyTorchModel* method), 1148, 1149  
`delete_deployment()` (*ads.model.framework.sklearn\_model.SklearnModel* method), 1175, 1178  
`delete_deployment()` (*ads.model.framework.spark\_model.SparkPipelineModel* method), 1203, 1205  
`delete_deployment()` (*ads.model.framework.tensorflow\_model.TensorFlowModel* method), 1230, 1232  
`delete_deployment()` (*ads.model.framework.xgboost\_model.XGBoostModel* method), 1257, 1259  
`delete_deployment()` (*ads.model.generic\_model.GenericModel* method), 1308, 1310  
`delete_deployment()` (*ads.model.GenericModel* method), 1379, 1381  
`delete_deployment()` (*ads.model.HuggingFacePipelineModel* method), 1402  
`delete_deployment()` (*ads.model.LightGBMModel* method), 1410  
`delete_deployment()` (*ads.model.PyTorchModel* method), 1443  
`delete_deployment()` (*ads.model.SklearnModel* method), 1447  
`delete_deployment()` (*ads.model.SparkPipelineModel* method), 1452  
`delete_deployment()` (*ads.model.TensorFlowModel* method), 1456  
`delete_deployment()` (*ads.model.XGBoostModel* method), 1461  
`delete_model()` (*ads.catalog.model.ModelCatalog* method), 545  
`delete_notebook_session()` (*ads.catalog.notebook.NotebookCatalog* method), 550  
`delete_project()` (*ads.catalog.project.ProjectCatalog* method), 552  
`DELETED` (*ads.model.deployment.common.utils.State* attribute), 1055  
`DELETED` (*ads.pipeline.visualizer.base.StepStatus* attribute), 1485  
`DELETING` (*ads.model.deployment.common.utils.State* attribute), 1055  
`define_pipeline()` (*ads.pipeline.ads\_pipeline\_step.PipelineStep* attribute), 1514  
`depends_on` (*ads.pipeline.ads\_pipeline\_step.PipelineStep* property), 1516  
`deploy()` (*ads.model.AutoMLModel* method), 1364  
`deploy()` (*ads.model.deployment.model\_deployer.ModelDeployer* method), 1057, 1058  
`deploy()` (*ads.model.deployment.model\_deployment.ModelDeployment* method), 1062, 1066  
`deploy()` (*ads.model.framework.huggingface\_model.HuggingFacePipelineModel* method), 1090, 1096  
`deploy()` (*ads.model.framework.lightgbm\_model.LightGBMModel* method), 1121, 1124  
`deploy()` (*ads.model.framework.pytorch\_model.PyTorchModel* method), 1148, 1150  
`deploy()` (*ads.model.framework.sklearn\_model.SklearnModel* method), 1175, 1178  
`deploy()` (*ads.model.framework.spark\_model.SparkPipelineModel* method), 1203, 1205  
`deploy()` (*ads.model.framework.tensorflow\_model.TensorFlowModel* method), 1230, 1232  
`deploy()` (*ads.model.framework.xgboost\_model.XGBoostModel* method), 1257, 1259  
`deploy()` (*ads.model.generic\_model.GenericModel* method), 1308, 1311  
`deploy()` (*ads.model.GenericModel* method), 1379, 1381  
`deploy()` (*ads.model.HuggingFacePipelineModel* method), 1402  
`deploy()` (*ads.model.LightGBMModel* method), 1410  
`deploy()` (*ads.model.ModelDeployer* method), 1413, 1414  
`deploy()` (*ads.model.ModelDeployment* method), 1418, 1421  
`deploy()` (*ads.model.PyTorchModel* method), 1443  
`deploy()` (*ads.model.SklearnModel* method), 1447  
`deploy()` (*ads.model.SparkPipelineModel* method), 1452  
`deploy()` (*ads.model.TensorFlowModel* method), 1456  
`deploy()` (*ads.model.XGBoostModel* method), 1461  
`deploy_from_model_uri()` (*ads.model.deployment.model\_deployer.ModelDeployer* method), 1059  
`deploy_from_model_uri()` (*ads.model.ModelDeployer* method), 1414  
`deployment_access_log_id` (*ads.model.model\_properties.ModelProperties* attribute), 1353  
`deployment_access_log_id`

- (*ads.model.ModelProperties* attribute), 1433
- `deployment_bandwidth_mbps` (*ads.model.model\_properties.ModelProperties* attribute), 1353
- `deployment_bandwidth_mbps` (*ads.model.ModelProperties* attribute), 1433
- `deployment_image` (*ads.model.model\_properties.ModelProperties* attribute), 1353
- `deployment_image` (*ads.model.ModelProperties* attribute), 1433
- `deployment_instance_count` (*ads.model.model\_properties.ModelProperties* attribute), 1354
- `deployment_instance_count` (*ads.model.ModelProperties* attribute), 1433
- `deployment_instance_shape` (*ads.model.model\_properties.ModelProperties* attribute), 1354
- `deployment_instance_shape` (*ads.model.ModelProperties* attribute), 1433
- `deployment_log_group_id` (*ads.model.model\_properties.ModelProperties* attribute), 1354
- `deployment_log_group_id` (*ads.model.ModelProperties* attribute), 1433
- `deployment_memory_in_gbs` (*ads.model.model\_properties.ModelProperties* attribute), 1354
- `deployment_memory_in_gbs` (*ads.model.ModelProperties* attribute), 1433
- `deployment_ocpus` (*ads.model.model\_properties.ModelProperties* attribute), 1354
- `deployment_ocpus` (*ads.model.ModelProperties* attribute), 1433
- `deployment_predict_log_id` (*ads.model.model\_properties.ModelProperties* attribute), 1354
- `deployment_predict_log_id` (*ads.model.ModelProperties* attribute), 1433
- `deprecate_default_value()` (in module *ads.dataset.helper*), 715
- `deprecate_variable()` (in module *ads.dataset.helper*), 715
- `deprecated()` (in module *ads.common.decorator.deprecate*), 557
- `deps` (*ads.pipeline.visualizer.base.PipelineVisualizer* attribute), 1482
- `DESC` (*ads.common.oci\_logging.SortOrder* attribute), 607
- `description` (*ads.feature\_engineering.feature\_type.address.Address* attribute), 785, 786
- `description` (*ads.feature\_engineering.feature\_type.adsstring.AdsString* attribute), 770
- `description` (*ads.feature\_engineering.feature\_type.base.FeatureType* attribute), 788
- `description` (*ads.feature\_engineering.feature\_type.boolean.Boolean* attribute), 789, 790
- `description` (*ads.feature\_engineering.feature\_type.category.Category* attribute), 792
- `description` (*ads.feature\_engineering.feature\_type.constant.Constant* attribute), 794, 795
- `description` (*ads.feature\_engineering.feature\_type.continuous.Continuous* attribute), 796
- `description` (*ads.feature\_engineering.feature\_type.creditcard.CreditCard* attribute), 798, 799
- `description` (*ads.feature\_engineering.feature\_type.datetime.DateTime* attribute), 803
- `description` (*ads.feature\_engineering.feature\_type.discrete.Discrete* attribute), 805, 806
- `description` (*ads.feature\_engineering.feature\_type.document.Document* attribute), 807, 808
- `description` (*ads.feature\_engineering.feature\_type.gis.GIS* attribute), 808, 809
- `description` (*ads.feature\_engineering.feature\_type.integer.Integer* attribute), 812
- `description` (*ads.feature\_engineering.feature\_type.ip\_address.IpAddress* attribute), 814, 815
- `description` (*ads.feature\_engineering.feature\_type.ip\_address\_v4.IpAddressV4* attribute), 816, 817
- `description` (*ads.feature\_engineering.feature\_type.ip\_address\_v6.IpAddressV6* attribute), 819
- `description` (*ads.feature\_engineering.feature\_type.lat\_long.LatLong* attribute), 821, 822
- `description` (*ads.feature\_engineering.feature\_type.object.Object* attribute), 825
- `description` (*ads.feature\_engineering.feature\_type.ordinal.Ordinal* attribute), 826
- `description` (*ads.feature\_engineering.feature\_type.phone\_number.PhoneNumber* attribute), 828
- `description` (*ads.feature\_engineering.feature\_type.string.String* attribute), 830
- `description` (*ads.feature\_engineering.feature\_type.text.Text* attribute), 832, 833
- `description` (*ads.feature\_engineering.feature\_type.unknown.Unknown* attribute), 834
- `description` (*ads.feature\_engineering.feature\_type.zip\_code.ZipCode* attribute), 835
- `description` (*ads.feature\_engineering.schema.Attribute* attribute), 844
- `description` (*ads.jobs.utils.DataFlowConfig* property), 940
- `description` (*ads.model.DataScienceModel* attribute), 1366
- `description` (*ads.model.DataScienceModel* property), 1371
- `description` (*ads.model.deployments.model\_deployments.ModelDeployments* attribute), 1062
- `description` (*ads.model.deployments.model\_deployments.ModelDeployments* property), 1066

DESCRIPTION (ads.model.model_metadata.MetadataCustomPrintColumn attribute), 1335	ads.model.model_metadata.UseCaseType attribute), 1351
description (ads.model.model_metadata.ModelCustomMetadata attribute), 1340	discover() (ads.type_discovery.abstract_detector.AbstractTypeDiscovery method), 1549
description (ads.model.model_metadata.ModelCustomMetadata property), 1341	discover() (ads.type_discovery.abstract_detector.DiscreteDiscoveryDetector method), 1549
description (ads.model.model_version_set.ModelVersionSet attribute), 1355	discover() (ads.type_discovery.constant_detector.ConstantDetector method), 1549
description (ads.model.model_version_set.ModelVersionSet property), 1357	discover() (ads.type_discovery.continuous_detector.ContinuousDetector method), 1549
description (ads.model.ModelDeployment attribute), 1417	discover() (ads.type_discovery.credit_card_detector.CreditCardDetector method), 1550
description (ads.model.ModelDeployment property), 1422	discover() (ads.type_discovery.datetime_detector.DateTimeDetector method), 1550
description (ads.model.ModelVersionSet attribute), 1434	discover() (ads.type_discovery.discrete_detector.DiscreteDetector method), 1550
description (ads.model.ModelVersionSet property), 1437	discover() (ads.type_discovery.document_detector.DocumentDetector method), 1550
description (ads.pipeline.ads_pipeline.Pipeline attribute), 1491	discover() (ads.type_discovery.ip_detector.IPDetector method), 1550
description (ads.pipeline.ads_pipeline.Pipeline property), 1498	discover() (ads.type_discovery.latlon_detector.LatLonDetector method), 1551
description (ads.pipeline.ads_pipeline_step.PipelineStep attribute), 1514	discover() (ads.type_discovery.phone_number_detector.PhoneNumberDetector method), 1551
description (ads.pipeline.ads_pipeline_step.PipelineStep property), 1516	discover() (ads.type_discovery.type_discovery_driver.TypeDiscoveryDriver method), 1551
deserialize() (ads.common.oci_mixin.OCIModelMixin class method), 611	discover() (ads.type_discovery.unknown_detector.UnknownDetector method), 1553
deserialize() (ads.common.oci_mixin.OCISerializableMixin class method), 613	discover() (ads.type_discovery.zipcode_detector.ZipCodeDetector method), 1553
deserialize() (ads.jobs.DataFlowRun class method), 974	Discrete (class in ads.feature_engineering.feature_type.discrete), 805
deserialize() (ads.jobs.DataScienceJobRun class method), 1003	DiscreteDetector (class in ads.type_discovery.discrete_detector), 1550
deserialize_tuner_args() (ads.hpo.tuner_artifact.DownloadTunerArtifact method), 871	DiscreteDiscoveryDetector (class in ads.type_discovery.abstract_detector), 1549
details_link (ads.model.model_version_set.ModelVersionSet attribute), 1355	DiscreteTypedFeature (class in ads.type_discovery.typed_feature), 1552
details_link (ads.model.model_version_set.ModelVersionSet property), 1357	DiscreteUniformDistribution (class in ads.hpo.distributions), 856
details_link (ads.model.ModelVersionSet attribute), 1435	display() (ads.evaluations.evaluator.Evaluator method), 733, 734
details_link (ads.model.ModelVersionSet property), 1437	display_name (ads.jobs.DataFlowRun property), 974
detect_encoding() (ads.text_dataset.backends.Tika method), 1540	display_name (ads.jobs.DataScienceJobRun property), 1003
df (ads.catalog.project.ProjectSummaryList attribute), 553	display_name (ads.jobs.utils.DataFlowConfig property), 940
df_read_functions (ads.dataset.dataset.ADSDataset attribute), 691	display_name (ads.model.DataScienceModel property), 1371
DIAGNOSTIC_COMMAND (ads.opctl.backend.ads_ml_job.MLJobBackend attribute), 1467	display_name (ads.model.deployment.model_deployment.ModelDeployment attribute), 1062
DIMENSIONALITY_REDUCTION	display_name (ads.model.deployment.model_deployment.ModelDeployment property), 1066
	display_name (ads.model.ModelDeployment attribute),

- 1417
- `display_name` (*ads.model.ModelDeployment* property), 1422
- `DistributedSpecParser` (class in *ads.opctl.config.yaml\_parsers.distributed.yaml\_parser*), 1470
- `Distribution` (class in *ads.hpo.distributions*), 856
- `DistributionEncode` (class in *ads.hpo.distributions*), 857
- `DLSBoundingBoxRecordParser` (class in *ads.data\_labeling.parser.dls\_record\_parser*), 636
- `DLSDatasetReader` (class in *ads.data\_labeling.reader.dataset\_reader*), 646
- `DLSMetadataReader` (class in *ads.data\_labeling.reader.metadata\_reader*), 654
- `DLSMultiLabelRecordParser` (class in *ads.data\_labeling.parser.dls\_record\_parser*), 636
- `DLSNERRecordParser` (class in *ads.data\_labeling.parser.dls\_record\_parser*), 637
- `DLSRecordParser` (class in *ads.data\_labeling.parser.dls\_record\_parser*), 638
- `DLSRecordParserFactory` (class in *ads.data\_labeling.parser.dls\_record\_parser*), 638
- `DLSRecordReader` (class in *ads.data\_labeling.reader.dls\_record\_reader*), 651
- `DLSSingleLabelRecordParser` (class in *ads.data\_labeling.parser.dls\_record\_parser*), 639
- `DOCUMENT` (*ads.data\_labeling.constants.DatasetType* attribute), 667
- `Document` (class in *ads.feature\_engineering.feature\_type.document*), 807
- `DocumentDetector` (class in *ads.type\_discovery.document\_detector*), 1550
- `DocumentTypedFeature` (class in *ads.type\_discovery.typed\_feature*), 1552
- `domain` (*ads.feature\_engineering.schema.Attribute* attribute), 844
- `Domain` (class in *ads.feature\_engineering.schema*), 845
- `DONE` (*ads.model.generic\_model.ModelState* attribute), 1330
- `DONE` (*ads.model.ModelState* attribute), 1434
- `double_overlay_plots` (*ads.evaluations.evaluation\_plot.EvaluationPlot* attribute), 724
- `down_sample()` (*ads.dataset.classification\_dataset.ClassificationDataset* method), 685
- `down_sample()` (in module *ads.dataset.helper*), 715
- `download()` (*ads.dataset.factory.DatasetFactory* static method), 709
- `download()` (*ads.jobs.ads\_job.Job* method), 928
- `download()` (*ads.jobs.builders.infrastructure.dsc\_job.DataScienceJobRun* method), 894
- `download()` (*ads.jobs.DataScienceJobRun* method), 1003
- `download()` (*ads.jobs.Job* method), 1020
- `download()` (*ads.model.artifact\_downloader.ArtifactDownloader* method), 1299
- `download()` (*ads.pipeline.ads\_pipeline.Pipeline* method), 1499
- `download_artifact()` (*ads.jobs.builders.infrastructure.dsc\_job.DSCJob* method), 885
- `download_artifact()` (*ads.model.DataScienceModel* method), 1367, 1371
- `download_certificates()` (in module *ads.opctl.distributed.certificates*), 1477
- `download_from_cloud()` (*ads.hpo.tuner\_artifact.DownloadTunerArtifact* method), 871
- `download_from_web()` (in module *ads.common.utils*), 622
- `download_model()` (*ads.catalog.model.ModelCatalog* method), 545, 546
- `DownloadTunerArtifact` (class in *ads.hpo.tuner\_artifact*), 871
- `driver` (*ads.jobs.builders.infrastructure.dataflow.DataFlowLogs* property), 882
- `driver_shape` (*ads.jobs.DataFlowRun* property), 974
- `driver_shape` (*ads.jobs.utils.DataFlowConfig* property), 940
- `driver_shape_config` (*ads.jobs.DataFlowRun* property), 974
- `driver_shape_config` (*ads.jobs.utils.DataFlowConfig* property), 941
- `drop_columns()` (*ads.dataset.dataset.ADSDataset* method), 691
- `ds_client` (*ads.model.deployment.model\_deployer.ModelDeployer* attribute), 1057
- `ds_client` (*ads.model.ModelDeployer* attribute), 1413
- `ds_composite_client` (*ads.model.deployment.model\_deployer.ModelDeployer* attribute), 1057
- `ds_composite_client` (*ads.model.ModelDeployer* attribute), 1413
- `dsc_model_deployment` (*ads.model.deployment.model\_deployment.ModelDeployment* attribute), 1061
- `dsc_model_deployment` (*ads.model.ModelDeployment*



- attribute), 1417
- DSCJob (class in *ads.jobs.builders.infrastructure.dsc\_job*), 884
- DSCJobRun (in module *ads.jobs.builders.infrastructure.dsc\_job*), 886
- DSCNotebookSession (class in *ads.common.oci\_datascience*), 600
- dsn (*ads.secrets.oracledb.OracleDBSecret* attribute), 1532
- dtype (*ads.feature\_engineering.schema.Attribute* attribute), 844
- DummyProgressBar (class in *ads.dataset.progress*), 718
- DummyProgressBar (class in *ads.model.deployment.common.progress\_bar*), 1053
- DuplicatedStudyError, 870
- duration (*ads.pipeline.visualizer.base.RendererItemStatus* property), 1484
- ## E
- EDAMixin (class in *ads.feature\_engineering.accessor.mixin.eda\_mixin*), 741
- EDAMixinSeries (class in *ads.feature\_engineering.accessor.mixin.eda\_mixin\_series*), 744
- ElaboratedPath (class in *ads.dataset.helper*), 714
- ElasticNetSearchSpace (class in *ads.hpo.ads\_search\_space*), 854
- ellipsis\_strings() (in module *ads.common.utils*), 622
- email (*ads.feature\_engineering.adsstring.common\_regex\_mixin.CommonRegexMixin* property), 763
- email (*ads.feature\_engineering.feature\_type.adsstring.common\_regex\_mixin.CommonRegexMixin* property), 767
- EMCEE (*ads.model.model\_metadata.Framework* attribute), 1334
- EmptyMetadata, 654
- enable\_service\_log (*ads.pipeline.ads\_pipeline.Pipeline* attribute), 1492
- enable\_service\_log (*ads.pipeline.ads\_pipeline.Pipeline* property), 1499
- encode() (*ads.feature\_engineering.feature\_type.adsstring.string.ADSString* method), 770
- encode() (*ads.secrets.adb.ADBSecretKeeper* method), 1523
- encode() (*ads.secrets.big\_data\_service.BDSSecretKeeper* method), 1529
- encode() (*ads.secrets.secrets.SecretKeeper* method), 1535
- encode() (in module *ads.hpo.distributions*), 858
- endswith() (*ads.feature\_engineering.feature\_type.adsstring.string.ADSString* method), 770
- engine() (*ads.text\_dataset.dataset.DataLoader* method), 1543
- ENSEMBLE (*ads.model.model\_metadata.Framework* attribute), 1334
- entity\_artwork (*ads.feature\_engineering.adsstring.parsers.spacy\_parser* property), 761
- entity\_artwork (*ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser* property), 765
- entity\_extract (*ads.feature\_engineering.adsstring.parsers.spacy\_parser* property), 762
- entity\_extract (*ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser* property), 765
- ENTITY\_EXTRACTION (*ads.data\_labeling.constants.AnnotationType* attribute), 667
- entity\_location (*ads.feature\_engineering.adsstring.parsers.spacy\_parser* property), 762
- entity\_location (*ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser* property), 765
- entity\_organization (*ads.feature\_engineering.adsstring.parsers.spacy\_parser.SpacyParser* property), 762
- entity\_organization (*ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser* property), 765
- entity\_people (*ads.feature\_engineering.adsstring.parsers.spacy\_parser* property), 762
- entity\_people (*ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser* property), 765
- entity\_product (*ads.feature\_engineering.adsstring.parsers.spacy\_parser* property), 762
- entity\_product (*ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser* property), 765
- EntityType (class in *ads.data\_labeling.parser.export\_record\_parser*), 641
- entry\_function (*ads.jobs.GitPythonRuntime* property), 1010
- entry\_function (*ads.jobs.PythonRuntime* property), 1037
- entry\_script (*ads.jobs.GitPythonRuntime* property), 1010
- entry\_script (*ads.jobs.PythonRuntime* property), 1037
- entrypoint (*ads.jobs.builders.runtimes.container\_runtime.ContainerRuntime* property), 907
- entrypoint (*ads.jobs.builders.runtimes.python\_runtime.ScriptRuntime* property), 918
- entrypoint (*ads.jobs.ContainerRuntime* property), 946
- entrypoint (*ads.jobs.PythonRuntime* property), 1037
- entrypoint (*ads.jobs.ScriptRuntime* property), 1046
- ents (*ads.data\_labeling.visualizer.text\_visualizer.LabeledTextItem* attribute), 662, 663
- EnvInfo (class in *ads.model.runtime.env\_info*), 1283
- ENVIRONMENT\_TYPE (*ads.model.model\_metadata.MetadataCustomKeys* attribute), 1335
- environment\_variable

[\(ads.pipeline.ads\\_pipeline.Pipeline attribute\), 1492](#)  
[environment\\_variable \(ads.pipeline.ads\\_pipeline.Pipeline property\), 1499](#)  
[environment\\_variable \(ads.pipeline.ads\\_pipeline\\_step.PipelineStep attribute\), 1514](#)  
[environment\\_variable \(ads.pipeline.ads\\_pipeline\\_step.PipelineStep property\), 1517](#)  
[environment\\_variables \(ads.jobs.builders.runtimes.base.Runtime property\), 903](#)  
[environment\\_variables \(ads.jobs.ContainerRuntime property\), 946](#)  
[environment\\_variables \(ads.jobs.DataFlowNotebookRuntime property\), 961](#)  
[environment\\_variables \(ads.jobs.DataFlowRuntime property\), 984](#)  
[environment\\_variables \(ads.jobs.GitPythonRuntime property\), 1010](#)  
[environment\\_variables \(ads.jobs.NotebookRuntime property\), 1028](#)  
[environment\\_variables \(ads.jobs.PythonRuntime property\), 1037](#)  
[environment\\_variables \(ads.jobs.ScriptRuntime property\), 1046](#)  
[envs \(ads.jobs.builders.runtimes.base.Runtime property\), 903](#)  
[envs \(ads.jobs.ContainerRuntime property\), 946](#)  
[envs \(ads.jobs.DataFlowNotebookRuntime property\), 962](#)  
[envs \(ads.jobs.DataFlowRuntime property\), 984](#)  
[envs \(ads.jobs.GitPythonRuntime property\), 1010](#)  
[envs \(ads.jobs.NotebookRuntime property\), 1028](#)  
[envs \(ads.jobs.PythonRuntime property\), 1037](#)  
[envs \(ads.jobs.ScriptRuntime property\), 1046](#)  
[EnvVarInterpolation \(class in ads.jobs.env\\_var\\_parser\), 935](#)  
[escape\(\) \(in module ads.jobs.env\\_var\\_parser\), 935](#)  
[estimator \(ads.model.AutoMLModel attribute\), 1362](#)  
[estimator \(ads.model.extractor.keras\\_extractor.KerasExtractor attribute\), 1078](#)  
[estimator \(ads.model.extractor.lightgbm\\_extractor.LightgbmExtractor method\), 1180](#)  
[estimator \(ads.model.extractor.lightgbm\\_extractor.LightgbmExtractor attribute\), 1079](#)  
[estimator \(ads.model.extractor.pytorch\\_extractor.PyTorchExtractor method\), 1207](#)  
[estimator \(ads.model.extractor.pytorch\\_extractor.PyTorchExtractor attribute\), 1082](#)  
[estimator \(ads.model.extractor.sklearn\\_extractor.SklearnExtractor method\), 1234](#)  
[estimator \(ads.model.extractor.sklearn\\_extractor.SklearnExtractor attribute\), 1083](#)  
[estimator \(ads.model.extractor.spark\\_extractor.SparkExtractor method\), 1261](#)  
[estimator \(ads.model.extractor.spark\\_extractor.SparkExtractor attribute\), 1085](#)  
[estimator \(ads.model.extractor.tensorflow\\_extractor.TensorflowExtractor method\), 1273](#)  
[estimator \(ads.model.extractor.xgboost\\_extractor.XgboostExtractor attribute\), 1086](#)  
[estimator \(ads.model.framework.huggingface\\_model.HuggingFacePipeline attribute\), 1089](#)  
[estimator \(ads.model.framework.lightgbm\\_model.LightGBMModel attribute\), 1119](#)  
[estimator \(ads.model.framework.pytorch\\_model.PyTorchModel attribute\), 1146](#)  
[estimator \(ads.model.framework.sklearn\\_model.SklearnModel attribute\), 1174](#)  
[estimator \(ads.model.framework.spark\\_model.SparkPipelineModel attribute\), 1201](#)  
[estimator \(ads.model.framework.tensorflow\\_model.TensorFlowModel attribute\), 1228](#)  
[estimator \(ads.model.framework.xgboost\\_model.XGBoostModel attribute\), 1255](#)  
[estimator \(ads.model.generic\\_model.GenericModel attribute\), 1306](#)  
[estimator \(ads.model.GenericModel attribute\), 1377](#)  
[estimator \(ads.model.HuggingFacePipelineModel attribute\), 1401](#)  
[estimator \(ads.model.LightGBMModel attribute\), 1408](#)  
[estimator \(ads.model.PyTorchModel attribute\), 1441](#)  
[estimator \(ads.model.SklearnModel attribute\), 1446](#)  
[estimator \(ads.model.SparkPipelineModel attribute\), 1450](#)  
[estimator \(ads.model.TensorFlowModel attribute\), 1455](#)  
[estimator \(ads.model.XGBoostModel attribute\), 1459](#)  
[ev\\_test \(ads.evaluations.evaluator.ADSEvaluator.EvaluationMetrics attribute\), 727](#)  
[ev\\_train \(ads.evaluations.evaluator.ADSEvaluator.EvaluationMetrics attribute\), 727](#)  
[evaluate\(\) \(ads.evaluations.EvaluatorMixin method\), 738](#)  
[evaluate\(\) \(ads.feature\\_engineering.schema.Expression method\), 846](#)  
[evaluate\(\) \(ads.model.framework.huggingface\\_model.HuggingFacePipeline method\), 1098](#)  
[evaluate\(\) \(ads.model.framework.lightgbm\\_model.LightGBMModel method\), 1126](#)  
[evaluate\(\) \(ads.model.framework.pytorch\\_model.PyTorchModel method\), 1152](#)  
[evaluate\(\) \(ads.model.framework.sklearn\\_model.SklearnModel method\), 1180](#)  
[evaluate\(\) \(ads.model.framework.spark\\_model.SparkPipelineModel method\), 1207](#)  
[evaluate\(\) \(ads.model.framework.tensorflow\\_model.TensorFlowModel method\), 1234](#)  
[evaluate\(\) \(ads.model.framework.xgboost\\_model.XGBoostModel method\), 1255](#)  
[EvaluationPlot \(class in ads.evaluations.evaluation\\_plot\), 723](#)

evaluations (*ads.evaluations.evaluator.ADSEvaluator* attribute), 725  
 Evaluator (*class in ads.evaluations.evaluator*), 731  
 EvaluatorMixin (*class in ads.evaluations*), 738  
 Eventing (*class in ads.common.config*), 577  
 EventType (*class in ads.common.config*), 577  
 exclude\_tag (*ads.jobs.builders.runtimes.python\_runtime.NotebookRuntime* property), 915  
 exclude\_tag (*ads.jobs.DataFlowNotebookRuntime* property), 962  
 exclude\_tag (*ads.jobs.NotebookRuntime* property), 1028  
 execute (*ads.jobs.DataFlowRun* property), 974  
 execute (*ads.jobs.utils.DataFlowConfig* property), 941  
 execute() (*in module ads.common.model\_artifact*), 591  
 execution\_failed() (*ads.opctl.distributed.common.abstract\_cluster\_provider.ClusterProvider* method), 1475  
 executor (*ads.jobs.builders.infrastructure.dataflow.DataFlowLogs* attribute), 846  
 executor (*ads.jobs.builders.infrastructure.dataflow.DataFlowRun* property), 882  
 executor\_shape (*ads.jobs.DataFlowRun* property), 975  
 executor\_shape (*ads.jobs.utils.DataFlowConfig* property), 941  
 executor\_shape\_config (*ads.jobs.DataFlowRun* property), 975  
 executor\_shape\_config (*ads.jobs.utils.DataFlowConfig* property), 941  
 ExitCriterionError, 870  
 expand\_lambda\_function() (*in module ads.dataset.dataframe\_transformer*), 688  
 expandtabs() (*ads.feature\_engineering.feature\_type.adsstring.AdsString* method), 770  
 EXPECTED\_KEYS (*ads.data\_labeling.parser.export\_metadata\_parser.ExportMetadataParser* attribute), 640  
 expected\_worker\_count() (*ads.opctl.distributed.common.abstract\_cluster\_provider.ClusterProvider* method), 1475  
 experiment() (*in module ads.model*), 1463  
 experiment() (*in module ads.model.model\_version\_set*), 1361  
 experimental() (*in module ads.text\_dataset.utils*), 1548  
 export() (*ads.data\_labeling.data\_labeling\_service.DataLabelingService* method), 668  
 export() (*in module ads.config*), 1555  
 export\_config\_files() (*ads.opctl.distributed.common.abstract\_cluster\_provider.ClusterProvider* method), 1475  
 export\_configuration() (*ads.opctl.distributed.common.abstract\_cluster\_provider.ClusterProvider* method), 1475  
 export\_dict() (*ads.secrets.secrets.Secret* method), 1534  
 export\_model\_artifact() (*ads.model.service.oci\_datascience\_model.OCIDataScienceModel* method), 1290  
 export\_options() (*ads.secrets.secrets.Secret* method), 1534  
 export\_vault\_details() (*ads.secrets.secrets.SecretKeeper* method), 1535  
 ExportMetadataReader (*class in ads.data\_labeling.reader.metadata\_reader*), 654  
 ExportReader (*class in ads.data\_labeling.reader.dataset\_reader*), 647  
 ExportRecordReader (*class in ads.data\_labeling.reader.export\_record\_reader*), 652  
 expression (*ads.feature\_engineering.schema.Expression* attribute), 846  
 Expression (*class in ads.feature\_engineering.schema*), 846  
 ExtendedConfigParser (*class in ads.common.config*), 577  
 ExtendedEnumMeta (*class in ads.common.extended\_enum*), 581  
 extract() (*ads.jobs.builders.infrastructure.dsc\_job\_runtime.DataScienceJobRuntime* method), 897  
 extract() (*ads.jobs.builders.infrastructure.dsc\_job\_runtime.RuntimeHandler* method), 900  
 extract\_info() (*ads.model.extractor.model\_info\_extractor\_factory.ModelInfoExtractorFactory* static method), 1082  
 extracting\_dependencies\_from\_model() (*in module ads.common.utils*), 622  
 extract\_region() (*in module ads.common.utils*), 622  
 extract\_tuner\_args() (*ads.hpo.tuner\_artifact.DownloadTunerArtifact* method), 812  
 extract\_x\_y() (*ads.type\_discovery.latlon\_detector.LatLonDetector* static method), 1551  
 ExtraTreesClassifierSearchSpace (*class in ads.hpo.ads\_search\_space*), 854  
 ExtraTreesRegressorSearchSpace (*class in ads.hpo.ads\_search\_space*), 854

## F

FAILED (*ads.model.deployment.common.utils.State* attribute), 1055  
 FAILED (*ads.pipeline.visualizer.base.StepStatus* attribute), 1485  
 failures (*ads.common.model\_introspect.ModelIntrospect* property), 1336  
 failures (*ads.model.model\_introspect.ModelIntrospect* property), 1332  
 fast\_launch\_shapes() (*ads.jobs.builders.infrastructure.dsc\_job.DataScienceJob*

class method), 888  
 fast\_launch\_shapes() (ads.jobs.DataScienceJob class method), 992  
 feature\_count() (ads.feature\_engineering.accessor.mixin.FeatureCount() class method), 742  
 feature\_domain() (ads.feature\_engineering.feature\_type.boolean.Boolean class method), 786  
 feature\_domain() (ads.feature\_engineering.feature\_type.boolean.Boolean class method), 790  
 feature\_domain() (ads.feature\_engineering.feature\_type.category.Category class method), 792  
 feature\_domain() (ads.feature\_engineering.feature\_type.category.Category class method), 795  
 feature\_domain() (ads.feature\_engineering.feature\_type.constant.Constant class method), 797  
 feature\_domain() (ads.feature\_engineering.feature\_type.constant.Constant class method), 799  
 feature\_domain() (ads.feature\_engineering.feature\_type.continuous.Continuous class method), 803  
 feature\_domain() (ads.feature\_engineering.feature\_type.continuous.Continuous class method), 806  
 feature\_domain() (ads.feature\_engineering.feature\_type.creditcard.CreditCard class method), 808  
 feature\_domain() (ads.feature\_engineering.feature\_type.creditcard.CreditCard class method), 809  
 feature\_domain() (ads.feature\_engineering.feature\_type.datetime.DateTime class method), 812  
 feature\_domain() (ads.feature\_engineering.feature\_type.datetime.DateTime class method), 815  
 feature\_domain() (ads.feature\_engineering.feature\_type.datetime.DateTime class method), 817  
 feature\_domain() (ads.feature\_engineering.feature\_type.datetime.DateTime class method), 819  
 feature\_domain() (ads.feature\_engineering.feature\_type.gis.GIS class method), 822  
 feature\_domain() (ads.feature\_engineering.feature\_type.gis.GIS class method), 825  
 feature\_domain() (ads.feature\_engineering.feature\_type.integer.Integer class method), 826  
 feature\_domain() (ads.feature\_engineering.feature\_type.integer.Integer class method), 828  
 feature\_domain() (ads.feature\_engineering.feature\_type.lat\_long.LatLong class method), 831  
 feature\_domain() (ads.feature\_engineering.feature\_type.lat\_long.LatLong class method), 833  
 feature\_domain() (ads.feature\_engineering.feature\_type.ordinal.Ordinal class method), 834  
 feature\_domain() (ads.feature\_engineering.feature\_type.ordinal.Ordinal class method), 836  
 feature\_names() (ads.common.model.ADSModel class method), 582  
 feature\_plot() (ads.feature\_engineering.accessor.mixin.FeaturePlot() class method), 743  
 feature\_plot() (ads.feature\_engineering.accessor.mixin.FeaturePlot() class method), 744  
 feature\_plot() (ads.feature\_engineering.feature\_type.address.Address class method), 786  
 feature\_plot() (ads.feature\_engineering.feature\_type.address.Address class method), 787  
 feature\_plot() (ads.feature\_engineering.feature\_type.boolean.Boolean class method), 789  
 feature\_plot() (ads.feature\_engineering.feature\_type.boolean.Boolean class method), 790  
 feature\_plot() (ads.feature\_engineering.feature\_type.category.Category class method), 792  
 feature\_plot() (ads.feature\_engineering.feature\_type.category.Category class method), 793  
 feature\_plot() (ads.feature\_engineering.feature\_type.constant.Constant class method), 794  
 feature\_plot() (ads.feature\_engineering.feature\_type.constant.Constant class method), 795  
 feature\_plot() (ads.feature\_engineering.feature\_type.continuous.Continuous class method), 796  
 feature\_plot() (ads.feature\_engineering.feature\_type.continuous.Continuous class method), 797  
 feature\_plot() (ads.feature\_engineering.feature\_type.creditcard.CreditCard class method), 799  
 feature\_plot() (ads.feature\_engineering.feature\_type.creditcard.CreditCard class method), 800  
 feature\_plot() (ads.feature\_engineering.feature\_type.datetime.DateTime class method), 803  
 feature\_plot() (ads.feature\_engineering.feature\_type.datetime.DateTime class method), 804  
 feature\_plot() (ads.feature\_engineering.feature\_type.datetime.DateTime class method), 806  
 feature\_plot() (ads.feature\_engineering.feature\_type.datetime.DateTime class method), 806  
 feature\_plot() (ads.feature\_engineering.feature\_type.gis.GIS class method), 809  
 feature\_plot() (ads.feature\_engineering.feature\_type.gis.GIS class method), 810  
 feature\_plot() (ads.feature\_engineering.feature\_type.integer.Integer class method), 812  
 feature\_plot() (ads.feature\_engineering.feature\_type.integer.Integer class method), 813  
 feature\_plot() (ads.feature\_engineering.feature\_type.lat\_long.LatLong class method), 821  
 feature\_plot() (ads.feature\_engineering.feature\_type.lat\_long.LatLong class method), 823  
 feature\_plot() (ads.feature\_engineering.feature\_type.ordinal.Ordinal class method), 826  
 feature\_plot() (ads.feature\_engineering.feature\_type.ordinal.Ordinal class method), 827  
 feature\_plot() (ads.feature\_engineering.feature\_type.string.String class method), 830  
 feature\_plot() (ads.feature\_engineering.feature\_type.string.String class method), 831  
 feature\_plot() (ads.feature\_engineering.feature\_type.text.Text class method), 831



- method), 833
- feature\_plot() (ads.feature\_engineering.feature\_type.text.Text), 833
- feature\_plot() (ads.feature\_engineering.feature\_type.zip\_code.ZipCode), 835
- feature\_plot() (ads.feature\_engineering.feature\_type.zip\_code.ZipCode), 836
- feature\_select() (ads.feature\_engineering.accessor.dataframe\_accessor.ADSDataFrameAccessor), 748, 749
- feature\_stat() (ads.feature\_engineering.accessor.mixin.FeatureMixin), 743
- feature\_stat() (ads.feature\_engineering.accessor.mixin.FeatureMixin), 745
- feature\_stat() (ads.feature\_engineering.feature\_type.address.Address), 786
- feature\_stat() (ads.feature\_engineering.feature\_type.address.Address), 787
- feature\_stat() (ads.feature\_engineering.feature\_type.book.Book), 789
- feature\_stat() (ads.feature\_engineering.feature\_type.book.Book), 791
- feature\_stat() (ads.feature\_engineering.feature\_type.category.Category), 792
- feature\_stat() (ads.feature\_engineering.feature\_type.category.Category), 793
- feature\_stat() (ads.feature\_engineering.feature\_type.confusion\_matrix.ConfusionMatrix), 794
- feature\_stat() (ads.feature\_engineering.feature\_type.confusion\_matrix.ConfusionMatrix), 795
- feature\_stat() (ads.feature\_engineering.feature\_type.confusion\_matrix.ConfusionMatrix), 796
- feature\_stat() (ads.feature\_engineering.feature\_type.confusion\_matrix.ConfusionMatrix), 797
- feature\_stat() (ads.feature\_engineering.feature\_type.creative\_type.CreativeType), 799
- feature\_stat() (ads.feature\_engineering.feature\_type.creative\_type.CreativeType), 801
- feature\_stat() (ads.feature\_engineering.feature\_type.date.DateType), 803
- feature\_stat() (ads.feature\_engineering.feature\_type.date.DateType), 804
- feature\_stat() (ads.feature\_engineering.feature\_type.date.DateType), 806
- feature\_stat() (ads.feature\_engineering.feature\_type.date.DateType), 807
- feature\_stat() (ads.feature\_engineering.feature\_type.discrete.DiscreteType), 807
- feature\_stat() (ads.feature\_engineering.feature\_type.gis.GIS), 809
- feature\_stat() (ads.feature\_engineering.feature\_type.gis.GIS), 811
- feature\_stat() (ads.feature\_engineering.feature\_type.integer.IntegerType), 812
- feature\_stat() (ads.feature\_engineering.feature\_type.integer.IntegerType), 813
- feature\_stat() (ads.feature\_engineering.feature\_type.ip\_address.IpAddress), 815
- feature\_stat() (ads.feature\_engineering.feature\_type.ip\_address.IpAddress), 817
- feature\_stat() (ads.feature\_engineering.feature\_type.ip\_address\_v4.IpAddress\_v4), 817
- feature\_stat() (ads.feature\_engineering.feature\_type.ip\_address\_v4.IpAddress\_v4), 818
- feature\_stat() (ads.feature\_engineering.feature\_type.ip\_address\_v6.IpAddress\_v6), 819
- feature\_stat() (ads.feature\_engineering.feature\_type.ip\_address\_v6.IpAddress\_v6), 820
- feature\_stat() (ads.feature\_engineering.feature\_type.ip\_address\_v6.IpAddress\_v6), 821
- feature\_stat() (ads.feature\_engineering.feature\_type.lat\_long.LatLong), 821
- feature\_stat() (ads.feature\_engineering.feature\_type.lat\_long.LatLong), 823
- feature\_stat() (ads.feature\_engineering.feature\_type.ordinal.Ordinal), 826
- feature\_stat() (ads.feature\_engineering.feature\_type.ordinal.Ordinal), 827
- feature\_stat() (ads.feature\_engineering.feature\_type.phone\_number.PhoneNumber), 828
- feature\_stat() (ads.feature\_engineering.feature\_type.phone\_number.PhoneNumber), 829
- feature\_stat() (ads.feature\_engineering.feature\_type.string.String), 830
- feature\_stat() (ads.feature\_engineering.feature\_type.string.String), 831
- feature\_stat() (ads.feature\_engineering.feature\_type.zip\_code.ZipCode), 835
- feature\_stat() (ads.feature\_engineering.feature\_type.zip\_code.ZipCode), 836
- feature\_type (ads.feature\_engineering.accessor.dataframe\_accessor.ADSDataFrameAccessor), 748
- feature\_type (ads.feature\_engineering.accessor.dataframe\_accessor.ADSDataFrameAccessor), 750
- feature\_type (ads.feature\_engineering.accessor.series\_accessor.ADSSeriesAccessor), 753
- feature\_type (ads.feature\_engineering.accessor.series\_accessor.ADSSeriesAccessor), 754
- feature\_type (ads.feature\_engineering.schema.Attribute), 844
- feature\_type\_description (ads.feature\_engineering.accessor.dataframe\_accessor.ADSDataFrameAccessor), 748
- feature\_type\_description (ads.feature\_engineering.accessor.dataframe\_accessor.ADSDataFrameAccessor), 750
- feature\_type\_description (ads.feature\_engineering.accessor.series\_accessor.ADSSeriesAccessor), 753
- feature\_type\_description (ads.feature\_engineering.accessor.series\_accessor.ADSSeriesAccessor), 754
- feature\_type\_object()

(ads.feature\_engineering.feature\_type\_manager.FeatureTypeManager  
 class method), 841  
 feature\_type\_object() (ads.opctl.distributed.common.abstract\_cluster\_provider.ClusterProvider  
 (ads.feature\_engineering.feature\_type\_manager.FeatureTypeManager  
 method), 840  
 feature\_type\_register() (ads.feature\_engineering.feature\_type\_manager.FeatureTypeManager  
 class method), 841  
 feature\_type\_register() (ads.feature\_engineering.feature\_type\_manager.FeatureTypeManager  
 method), 840  
 feature\_type\_registered() (ads.feature\_engineering.feature\_type\_manager.FeatureTypeManager  
 class method), 842  
 feature\_type\_registered() (ads.feature\_engineering.feature\_type\_manager.FeatureTypeManager  
 method), 840  
 feature\_type\_reset() (ads.feature\_engineering.feature\_type\_manager.FeatureTypeManager  
 class method), 842  
 feature\_type\_reset() (ads.feature\_engineering.feature\_type\_manager.FeatureTypeManager  
 method), 840  
 feature\_type\_unregister() (ads.feature\_engineering.feature\_type\_manager.FeatureTypeManager  
 class method), 842  
 feature\_type\_unregister() (ads.feature\_engineering.feature\_type\_manager.FeatureTypeManager  
 method), 840  
 FeatureBaseType (class in ads.feature\_engineering.feature\_type.base), 788  
 FeatureBaseTypeMeta (class in ads.feature\_engineering.feature\_type.base), 788  
 FeatureEngineeringTransformer (class in ads.dataset.feature\_engineering\_transformer), 713  
 FeatureImportance (class in ads.dataset.feature\_selection), 713  
 FeatureType (class in ads.feature\_engineering.feature\_type.base), 788  
 FeatureTypeManager (class in ads.feature\_engineering.feature\_type\_manager), 840  
 FeatureValidator (class in ads.feature\_engineering.feature\_type.handler.feature\_validator), 777  
 FeatureValidatorMethod (class in ads.feature\_engineering.feature\_type.handler.feature\_validator), 779  
 FeatureWarning (class in ads.feature\_engineering.feature\_type.handler.feature\_warning), 770

fetch\_all\_worker\_info() (ads.opctl.distributed.common.abstract\_cluster\_provider.ClusterProvider  
 method), 1475  
 fetch\_code() (ads.opctl.distributed.common.abstract\_cluster\_provider.ClusterProvider  
 method), 1475  
 fetch\_code\_details() (ads.dataflow.dataflow.DataFlowRun  
 method), 680  
 fetch\_manifest\_from\_conda\_location() (in module ads.model.common.utils), 1052  
 fetch\_metadata\_of\_object() (ads.common.object\_storage\_details.ObjectStorageDetails  
 method), 599  
 fetch\_repo() (ads.jobs.templates.driver\_oci.GitManager  
 method), 925  
 fetch\_training\_code\_details() (ads.model.model\_metadata.ModelProvenanceMetadata  
 class method), 1347  
 FILE\_METADATA (ads.text\_dataset.options.Options  
 attribute), 1548  
 FILE\_NAME (ads.text\_dataset.options.Options  
 attribute), 1548  
 file\_uri (ads.jobs.DataFlowRun property), 975  
 file\_uri (ads.jobs.utils.DataFlowConfig property), 941  
 FileLoaderFactory (class in ads.data\_labeling.loader.file\_loader), 630  
 FileLoaderFactory (class in ads.data\_labeling.loader.file\_loader), 631  
 filename (ads.feature\_engineering.adsimage.image.ADSSImage  
 attribute), 757  
 FileOption (class in ads.text\_dataset.options), 1548  
 FileOverwriteError, 620  
 filepath (ads.common.object\_storage\_details.ObjectStorageDetails  
 attribute), 598, 599  
 FileProcessor (class in ads.text\_dataset.extractor), 1545  
 FileProcessorFactory (class in ads.text\_dataset.extractor), 1546  
 filesystem() (ads.dataset.dataset\_browser.DatasetBrowser  
 static method), 700  
 filter() (ads.catalog.model.ModelSummaryList  
 method), 549  
 filter() (ads.catalog.notebook.NotebookSummaryList  
 method), 551  
 filter() (ads.catalog.project.ProjectSummaryList  
 method), 554  
 filter() (ads.catalog.summary.SummaryList  
 method), 555  
 filter() (ads.dataflow.dataflowssummary.SummaryList  
 method), 682  
 find() (ads.dataset.dataset\_browser.DatasetBrowser  
 method), 700  
 find() (ads.feature\_engineering.feature\_type.adsstring.string.ADSSString  
 method), 770

`find_self_ip()` (`ads.opctl.distributed.common.abstract_cluster_provider.ClusterProvider` class method), 1475  
`first_not_none()` (in module `ads.common.utils`), 623  
`fit()` (`ads.dataset.dataframe_transformer.DataFrameTransformer` method), 688  
`fit()` (`ads.dataset.feature_engineering_transformer.FeatureEngineeringTransformer` method), 713  
`fit()` (`ads.dataset.label_encoder.DataFrameLabelEncoder` method), 717  
`fit()` (`ads.dataset.recommendation_transformer.RecommendationTransformer` method), 718  
`fit()` (`ads.model.transformer.onnx_transformer.ONNXTransformer` method), 1295  
`fit_transform()` (`ads.dataset.feature_engineering_transformer.FeatureEngineeringTransformer` method), 713  
`fit_transform()` (`ads.dataset.recommendation_transformer.RecommendationTransformer` method), 718  
`fit_transform()` (`ads.model.transformer.onnx_transformer.ONNXTransformer` method), 1295  
`fix_column_names()` (in module `ads.dataset.helper`), 715  
`FLAIR` (`ads.model.model_metadata.Framework` attribute), 1334  
`flatten()` (`ads.common.oci_mixin.OCIMixin` static method), 611  
`flatten()` (`ads.jobs.DataFlowRun` static method), 975  
`flatten()` (`ads.jobs.DataScienceJobRun` static method), 1003  
`flatten()` (in module `ads.common.utils`), 623  
`flatten_corr_matrix()` (`ads.dataset.correlation_plot.BokehHeatMap` method), 686  
`folder_size()` (in module `ads.common.utils`), 623  
`font_sz` (`ads.evaluations.evaluation_plot.EvaluationPlot` attribute), 723, 724  
`ForecastingDataset` (class in `ads.dataset.forecasting_dataset`), 714  
`format` (`ads.dataset.helper.ElaboratedPath` property), 714  
`format()` (`ads.feature_engineering.feature_type.adsstring.AdsString` method), 770  
`format()` (`ads.text_dataset.dataset.TextDatasetFactory` static method), 1545  
`format_datetime()` (`ads.common.oci_logging.OCILog` static method), 603  
`format_datetime()` (`ads.pipeline.visualizer.base.Renderer` static method), 1484  
`format_map()` (`ads.feature_engineering.feature_type.adsstring.AdsString` method), 770  
`Formats` (class in `ads.data_labeling.constants`), 667  
`framework` (`ads.model.AutoMLModel` attribute), 1362  
`framework` (`ads.model.extractor.keras_extractor.KerasExtractor` property), 1079  
`framework` (`ads.model.extractor.lightgbm_extractor.LightgbmExtractor` property), 1083  
`framework` (`ads.model.extractor.pytorch_extractor.PyTorchExtractor` property), 1083  
`framework` (`ads.model.extractor.sklearn_extractor.SklearnExtractor` property), 1084  
`framework` (`ads.model.extractor.spark_extractor.SparkExtractor` property), 1085  
`framework` (`ads.model.extractor.tensorflow_extractor.TensorflowExtractor` property), 1086  
`framework` (`ads.model.extractor.xgboost_extractor.XgboostExtractor` property), 1087  
`framework` (`ads.model.framework.huggingface_model.HuggingFacePipelineModel` attribute), 1089  
`framework` (`ads.model.framework.lightgbm_model.LightGBMModel` attribute), 1119  
`framework` (`ads.model.framework.pytorch_model.PyTorchModel` attribute), 1146  
`framework` (`ads.model.framework.sklearn_model.SklearnModel` attribute), 1174  
`framework` (`ads.model.framework.spark_model.SparkPipelineModel` attribute), 1201  
`framework` (`ads.model.framework.tensorflow_model.TensorFlowModel` attribute), 1228  
`framework` (`ads.model.framework.xgboost_model.XGBoostModel` attribute), 1255  
`framework` (`ads.model.generic_model.GenericModel` attribute), 1306  
`framework` (`ads.model.GenericModel` attribute), 1377  
`framework` (`ads.model.HuggingFacePipelineModel` attribute), 1401  
`framework` (`ads.model.LightGBMModel` attribute), 1408  
`FRAMEWORK` (`ads.model.model_metadata.MetadataTaxonomyKeys` attribute), 1336  
`framework` (`ads.model.PyTorchModel` attribute), 1442  
`framework` (`ads.model.SklearnModel` attribute), 1446  
`framework` (`ads.model.SparkPipelineModel` attribute), 1450  
`framework` (`ads.model.TensorFlowModel` attribute), 1455  
`framework` (`ads.model.XGBoostModel` attribute), 1459  
`Framework` (class in `ads.model.model_metadata`), 1334  
`framework()` (`ads.model.extractor.lightgbm_extractor.LightgbmExtractor` method), 1079  
`framework()` (`ads.model.extractor.model_info_extractor.ModelInfoExtractor` method), 1080, 1081  
`framework()` (`ads.model.extractor.pytorch_extractor.PyTorchExtractor` method), 1082  
`framework()` (`ads.model.extractor.sklearn_extractor.SklearnExtractor` method), 1083  
`framework()` (`ads.model.extractor.spark_extractor.SparkExtractor` method), 1085  
`framework()` (`ads.model.extractor.tensorflow_extractor.TensorflowExtractor` method), 1086  
`framework()` (`ads.model.extractor.xgboost_extractor.XgboostExtractor` method), 1087

method), 1087

FRAMEWORK\_VERSION (*ads.model.model\_metadata.Metadata* attribute), 1336

FrameworkSpecificModel (class in *ads.model.generic\_model*), 1304

freeform\_tags (*ads.jobs.builders.runtimes.base.Runtime* property), 904

freeform\_tags (*ads.jobs.ContainerRuntime* property), 946

freeform\_tags (*ads.jobs.DataFlowNotebookRuntime* property), 962

freeform\_tags (*ads.jobs.DataFlowRun* property), 975

freeform\_tags (*ads.jobs.DataFlowRuntime* property), 984

freeform\_tags (*ads.jobs.DataScienceJobRun* property), 1003

freeform\_tags (*ads.jobs.GitPythonRuntime* property), 1010

freeform\_tags (*ads.jobs.NotebookRuntime* property), 1028

freeform\_tags (*ads.jobs.PythonRuntime* property), 1037

freeform\_tags (*ads.jobs.ScriptRuntime* property), 1046

freeform\_tags (*ads.jobs.utils.DataFlowConfig* property), 942

freeform\_tags (*ads.model.DataScienceModel* attribute), 1366

freeform\_tags (*ads.model.DataScienceModel* property), 1371

freeform\_tags (*ads.model.deployment.model\_deployment* attribute), 1062

freeform\_tags (*ads.model.deployment.model\_deployment* property), 1066

freeform\_tags (*ads.model.model\_version\_set.ModelVersionSet* attribute), 1355

freeform\_tags (*ads.model.model\_version\_set.ModelVersionSet* property), 1357

freeform\_tags (*ads.model.ModelDeployment* attribute), 1417

freeform\_tags (*ads.model.ModelDeployment* property), 1422

freeform\_tags (*ads.model.ModelVersionSet* attribute), 1435

freeform\_tags (*ads.model.ModelVersionSet* property), 1437

FREETEXT (*ads.common.oci\_resource.SEARCH\_TYPE* attribute), 615

from\_config() (*ads.common.base\_properties.BaseProperties* class method), 571

from\_config() (*ads.common.base\_properties.BaseProperties* method), 571

from\_config() (*ads.model.base\_properties.BaseProperties* class method), 1302

from\_config() (*ads.model.base\_properties.BaseProperties* method), 1302

from\_dataflow\_job() (*ads.jobs.ads\_job.Job* static method), 929

from\_dataflow\_job() (*ads.jobs.Job* static method), 1021

from\_dataframe() (*ads.dataset.factory.DatasetFactory* static method), 710

from\_datascience\_job() (*ads.jobs.ads\_job.Job* static method), 929

from\_datascience\_job() (*ads.jobs.Job* static method), 1021

from\_dict() (*ads.common.base\_properties.BaseProperties* class method), 571

from\_dict() (*ads.common.base\_properties.BaseProperties* method), 571

from\_dict() (*ads.common.oci\_mixin.OCIModelMixin* class method), 611

from\_dict() (*ads.common.serializer.DataClassSerializable* class method), 616

from\_dict() (*ads.common.serializer.DataClassSerializable* method), 616

from\_dict() (*ads.common.serializer.Serializable* class method), 617

from\_dict() (*ads.common.serializer.Serializable* method), 616

from\_dict() (*ads.data\_labeling.visualizer.image\_visualizer.RenderOptions* class method), 661

from\_dict() (*ads.data\_labeling.visualizer.text\_visualizer.RenderOptions* class method), 663

from\_dict() (*ads.feature\_engineering.schema.Schema* class method), 849

from\_dict() (*ads.feature\_engineering.schema.Schema* method), 847

from\_dict() (*ads.jobs.ads\_job.Job* class method), 929

from\_dict() (*ads.jobs.builders.base.Builder* class method), 919

from\_dict() (*ads.jobs.builders.infrastructure.dataflow.DataFlow* class method), 876

from\_dict() (*ads.jobs.ContainerRuntime* class method), 946

from\_dict() (*ads.jobs.DataFlow* class method), 953

from\_dict() (*ads.jobs.DataFlowNotebookRuntime* class method), 962

from\_dict() (*ads.jobs.DataFlowRun* class method), 976

from\_dict() (*ads.jobs.DataFlowRuntime* class method), 984

from\_dict() (*ads.jobs.DataScienceJob* class method), 993

from\_dict() (*ads.jobs.DataScienceJobRun* class method), 1004

from\_dict() (*ads.jobs.GitPythonRuntime* class method), 1011

from\_dict() (*ads.jobs.Job* class method), 1021



<code>from_dict()</code> ( <i>ads.jobs.NotebookRuntime</i> class method), 1028	<code>from_dict()</code> ( <i>ads.pipeline.ads_pipeline.Pipeline</i> class method), 1499
<code>from_dict()</code> ( <i>ads.jobs.PythonRuntime</i> class method), 1037	<code>from_dict()</code> ( <i>ads.pipeline.ads_pipeline_step.PipelineStep</i> class method), 1517
<code>from_dict()</code> ( <i>ads.jobs.ScriptRuntime</i> class method), 1046	<code>from_dict()</code> ( <i>ads.pipeline.ads_pipeline_step.PipelineStep</i> method), 1515
<code>from_dict()</code> ( <i>ads.jobs.serializer.Serializable</i> class method), 936	<code>from_DLS()</code> ( <i>ads.data_labeling.reader.dataset_reader.LabeledDatasetReader</i> class method), 649
<code>from_dict()</code> ( <i>ads.model.base_properties.BaseProperties</i> class method), 1302	<code>from_DLS()</code> ( <i>ads.data_labeling.reader.metadata_reader.MetadataReader</i> class method), 655
<code>from_dict()</code> ( <i>ads.model.base_properties.BaseProperties</i> method), 1302	<code>from_DLS()</code> ( <i>ads.data_labeling.reader.record_reader.RecordReader</i> class method), 657
<code>from_dict()</code> ( <i>ads.model.DataScienceModel</i> class method), 1371	<code>from_dls_dataset()</code> ( <i>ads.data_labeling.metadata.Metadata</i> class method), 670
<code>from_dict()</code> ( <i>ads.model.DataScienceModel</i> method), 1367	<code>from_dsc_job()</code> ( <i>ads.jobs.builders.infrastructure.dsc_job.DataScienceJob</i> class method), 888
<code>from_dict()</code> ( <i>ads.model.deployment.model_deployment.ModelDeployment</i> class method), 1067	<code>from_dsc_job()</code> ( <i>ads.jobs.DataScienceJob</i> class method), 993
<code>from_dict()</code> ( <i>ads.model.deployment.model_deployment.ModelDeployment</i> method), 1063	<code>from_deploy_model_version_set()</code> ( <i>ads.model.model_version_set.ModelVersionSet</i> class method), 1357
<code>from_dict()</code> ( <i>ads.model.model_metadata.ModelCustomMetadata</i> class method), 1339	<code>from_dsc_model_version_set()</code> ( <i>ads.model.ModelVersionSet</i> class method), 1437
<code>from_dict()</code> ( <i>ads.model.model_metadata.ModelCustomMetadata</i> method), 1337	<code>from_estimator()</code> ( <i>ads.model.runtime.runtime_info.RuntimeInfo</i> class method), 1286
<code>from_dict()</code> ( <i>ads.model.model_metadata.ModelCustomMetadata</i> method), 1340	<code>from_estimator()</code> ( <i>ads.common.model.ADSModel</i> static method), 582
<code>from_dict()</code> ( <i>ads.model.model_metadata.ModelMetadata</i> class method), 1342	<code>from_export()</code> ( <i>ads.data_labeling.reader.dataset_reader.LabeledDatasetReader</i> class method), 650
<code>from_dict()</code> ( <i>ads.model.model_metadata.ModelMetadata</i> method), 1342	<code>from_export()</code> ( <i>ads.data_labeling.reader.dataset_reader.LabeledDatasetReader</i> method), 648
<code>from_dict()</code> ( <i>ads.model.model_metadata.ModelMetadata</i> class method), 1345	<code>from_export_file()</code> ( <i>ads.data_labeling.reader.metadata_reader.MetadataReader</i> class method), 656
<code>from_dict()</code> ( <i>ads.model.model_metadata.ModelMetadata</i> method), 1345	<code>from_export_file()</code> ( <i>ads.data_labeling.reader.record_reader.RecordReader</i> class method), 658
<code>from_dict()</code> ( <i>ads.model.model_metadata.ModelProvenance</i> class method), 1348	<code>from_file()</code> ( <i>ads.feature_engineering.schema.Schema</i> class method), 849
<code>from_dict()</code> ( <i>ads.model.model_metadata.ModelTaxonomy</i> class method), 1349	<code>from_flow()</code> ( <i>ads.jobs.builders.infrastructure.dataflow.DataFlow</i> class method), 876
<code>from_dict()</code> ( <i>ads.model.model_metadata.ModelTaxonomy</i> method), 1349	<code>from_flow()</code> ( <i>ads.jobs.builders.infrastructure.dsc_job.DataScienceJob</i> class method), 889
<code>from_dict()</code> ( <i>ads.model.model_metadata.ModelTaxonomy</i> method), 1350	<code>from_id()</code> ( <i>ads.jobs.DataFlow</i> class method), 953
<code>from_dict()</code> ( <i>ads.model.model_version_set.ModelVersionSet</i> class method), 1357	<code>from_id()</code> ( <i>ads.jobs.DataScienceJob</i> class method), 993
<code>from_dict()</code> ( <i>ads.model.model_version_set.ModelVersionSet</i> method), 1355	<code>from_id()</code> ( <i>ads.model.DataScienceModel</i> class method), 1372
<code>from_dict()</code> ( <i>ads.model.ModelDeployment</i> class method), 1422	<code>from_id()</code> ( <i>ads.model.DataScienceModel</i> method), 1367
<code>from_dict()</code> ( <i>ads.model.ModelDeployment</i> method), 1418	<code>from_id()</code> ( <i>ads.model.deployment.model_deployment.ModelDeployment</i> class method), 1067
<code>from_dict()</code> ( <i>ads.model.ModelVersionSet</i> class method), 1437	<code>from_id()</code> ( <i>ads.model.deployment.model_deployment.ModelDeployment</i> method), 1063
<code>from_dict()</code> ( <i>ads.model.ModelVersionSet</i> method), 1435	<code>from_id()</code> ( <i>ads.model.framework.huggingface_model.HuggingFacePipeline</i> class method), 1100

`from_id()` (`ads.model.framework.lightgbm_model.LightGBMModel` class method), 1128  
`from_id()` (`ads.model.framework.pytorch_model.PyTorchModel` class method), 1154  
`from_id()` (`ads.model.framework.sklearn_model.SklearnModel` class method), 1182  
`from_id()` (`ads.model.framework.spark_model.SparkPipelineModel` class method), 1209  
`from_id()` (`ads.model.framework.tensorflow_model.TensorFlowModel` class method), 1236  
`from_id()` (`ads.model.framework.xgboost_model.XGBoostModel` class method), 1263  
`from_id()` (`ads.model.generic_model.GenericModel` class method), 1313  
`from_id()` (`ads.model.generic_model.GenericModel` method), 1308  
`from_id()` (`ads.model.GenericModel` class method), 1383  
`from_id()` (`ads.model.GenericModel` method), 1379  
`from_id()` (`ads.model.model_version_set.ModelVersionSet` class method), 1358  
`from_id()` (`ads.model.model_version_set.ModelVersionSet` method), 1355  
`from_id()` (`ads.model.ModelDeployment` class method), 1422  
`from_id()` (`ads.model.ModelDeployment` method), 1418  
`from_id()` (`ads.model.ModelVersionSet` class method), 1437  
`from_id()` (`ads.model.ModelVersionSet` method), 1435  
`from_id()` (`ads.model.service.oci_datascience_model.OCIDatascienceModel` class method), 1290  
`from_id()` (`ads.model.service.oci_datascience_model.OCIDatascienceModel` method), 1289  
`from_id()` (`ads.pipeline.ads_pipeline.Pipeline` class method), 1499  
`from_id()` (`ads.pipeline.ads_pipeline.Pipeline` method), 1494  
`from_json()` (`ads.common.serializer.Serializable` class method), 617  
`from_json()` (`ads.common.serializer.Serializable` method), 617  
`from_json()` (`ads.feature_engineering.schema.Schema` class method), 850  
`from_json()` (`ads.hpo.distributions.DistributionEncode` static method), 857  
`from_json()` (`ads.jobs.ads_job.Job` class method), 929  
`from_json()` (`ads.jobs.ContainerRuntime` class method), 946  
`from_json()` (`ads.jobs.DataFlow` class method), 953  
`from_json()` (`ads.jobs.DataFlowNotebookRuntime` class method), 962  
`from_json()` (`ads.jobs.DataFlowRuntime` class method), 984  
`from_json()` (`ads.jobs.DataScienceJob` class method), 999  
`from_json()` (`ads.jobs.GitPythonRuntime` class method), 1011  
`from_json()` (`ads.jobs.Job` class method), 1021  
`from_json()` (`ads.jobs.NotebookRuntime` class method), 1028  
`from_json()` (`ads.jobs.PythonRuntime` class method), 1037  
`from_json()` (`ads.jobs.ScriptRuntime` class method), 1046  
`from_json()` (`ads.jobs.serializer.Serializable` class method), 936  
`from_model_artifact()` (`ads.model.AutoMLModel` method), 1364  
`from_model_artifact()` (`ads.model.framework.huggingface_model.HuggingFacePipeline` class method), 1101  
`from_model_artifact()` (`ads.model.framework.huggingface_model.HuggingFacePipeline` method), 1090  
`from_model_artifact()` (`ads.model.framework.lightgbm_model.LightGBMModel` class method), 1128  
`from_model_artifact()` (`ads.model.framework.lightgbm_model.LightGBMModel` method), 1121  
`from_model_artifact()` (`ads.model.framework.pytorch_model.PyTorchModel` class method), 1155  
`from_model_artifact()` (`ads.model.framework.pytorch_model.PyTorchModel` method), 1148  
`from_model_artifact()` (`ads.model.framework.sklearn_model.SklearnModel` class method), 1183  
`from_model_artifact()` (`ads.model.framework.sklearn_model.SklearnModel` method), 1175  
`from_model_artifact()` (`ads.model.framework.spark_model.SparkPipelineModel` class method), 1210  
`from_model_artifact()` (`ads.model.framework.spark_model.SparkPipelineModel` method), 1203  
`from_model_artifact()` (`ads.model.framework.tensorflow_model.TensorFlowModel` class method), 1237  
`from_model_artifact()` (`ads.model.framework.tensorflow_model.TensorFlowModel` method), 1230  
`from_model_artifact()` (`ads.model.framework.xgboost_model.XGBoostModel` class method), 1264  
`from_model_artifact()` (`ads.model.framework.xgboost_model.XGBoostModel` method), 1264

`(ads.model.framework.xgboost_model.XGBoostModel`  
`method), 1257`  
`from_model_artifact()`  
`(ads.model.generic_model.GenericModel`  
`class method), 1313`  
`from_model_artifact()`  
`(ads.model.generic_model.GenericModel`  
`method), 1308`  
`from_model_artifact()` `(ads.model.GenericModel`  
`class method), 1384`  
`from_model_artifact()` `(ads.model.GenericModel`  
`method), 1379`  
`from_model_artifact()`  
`(ads.model.HuggingFacePipelineModel`  
`method), 1402`  
`from_model_artifact()` `(ads.model.LightGBMModel`  
`method), 1410`  
`from_model_artifact()` `(ads.model.PyTorchModel`  
`method), 1443`  
`from_model_artifact()` `(ads.model.SklearnModel`  
`method), 1447`  
`from_model_artifact()`  
`(ads.model.SparkPipelineModel method),`  
`1452`  
`from_model_artifact()`  
`(ads.model.TensorFlowModel method), 1457`  
`from_model_artifact()` `(ads.model.XGBoostModel`  
`method), 1461`  
`from_model_catalog()`  
`(ads.common.model_artifact.ModelArtifact`  
`class method), 587`  
`from_model_catalog()` `(ads.model.AutoMLModel`  
`method), 1364`  
`from_model_catalog()`  
`(ads.model.framework.huggingface_model.HuggingFacePipelineModel`  
`class method), 1102`  
`from_model_catalog()`  
`(ads.model.framework.huggingface_model.HuggingFacePipelineModel`  
`method), 1090`  
`from_model_catalog()`  
`(ads.model.framework.lightgbm_model.LightGBMModel`  
`class method), 1129`  
`from_model_catalog()`  
`(ads.model.framework.lightgbm_model.LightGBMModel`  
`method), 1121`  
`from_model_catalog()`  
`(ads.model.framework.pytorch_model.PyTorchModel`  
`class method), 1156`  
`from_model_catalog()`  
`(ads.model.framework.pytorch_model.PyTorchModel`  
`method), 1148`  
`from_model_catalog()`  
`(ads.model.framework.sklearn_model.SklearnModel`  
`class method), 1184`  
`from_model_catalog()`  
`(ads.model.framework.sklearn_model.SklearnModel`  
`method), 1175`  
`from_model_catalog()`  
`(ads.model.framework.spark_model.SparkPipelineModel`  
`class method), 1211`  
`from_model_catalog()`  
`(ads.model.framework.spark_model.SparkPipelineModel`  
`method), 1203`  
`from_model_catalog()`  
`(ads.model.framework.tensorflow_model.TensorFlowModel`  
`class method), 1238`  
`from_model_catalog()`  
`(ads.model.framework.tensorflow_model.TensorFlowModel`  
`method), 1230`  
`from_model_catalog()`  
`(ads.model.framework.xgboost_model.XGBoostModel`  
`class method), 1265`  
`from_model_catalog()`  
`(ads.model.framework.xgboost_model.XGBoostModel`  
`method), 1257`  
`from_model_catalog()`  
`(ads.model.generic_model.GenericModel`  
`class method), 1314`  
`from_model_catalog()`  
`(ads.model.generic_model.GenericModel`  
`method), 1308`  
`from_model_catalog()` `(ads.model.GenericModel`  
`class method), 1385`  
`from_model_catalog()` `(ads.model.GenericModel`  
`method), 1379`  
`from_model_catalog()`  
`(ads.model.HuggingFacePipelineModel`  
`method), 1403`  
`from_model_catalog()` `(ads.model.LightGBMModel`  
`method), 1410`  
`from_model_catalog()` `(ads.model.PyTorchModel`  
`method), 1443`  
`from_model_catalog()` `(ads.model.SklearnModel`  
`method), 1447`  
`from_model_catalog()`  
`(ads.model.SparkPipelineModel method),`  
`1452`  
`from_model_catalog()` `(ads.model.TensorFlowModel`  
`method), 1457`  
`from_model_catalog()` `(ads.model.XGBoostModel`  
`method), 1461`  
`from_model_deployment()`  
`(ads.model.framework.huggingface_model.HuggingFacePipelineModel`  
`class method), 1103`  
`from_model_deployment()`  
`(ads.model.framework.lightgbm_model.LightGBMModel`  
`class method), 1130`  
`from_model_deployment()`

`(ads.model.framework.pytorch_model.PyTorchModel.from_oci_id() (ads.model.model_version_set.ModelVersionSet class method), 1157`  
`from_model_deployment() (ads.model.framework.sklearn_model.SklearnModel class method), 1185`  
`from_model_deployment() (ads.model.framework.spark_model.SparkPipelineModel class method), 1212`  
`from_model_deployment() (ads.model.framework.tensorflow_model.TensorFlowModel class method), 1239`  
`from_model_deployment() (ads.model.framework.xgboost_model.XGBoostModel class method), 1266`  
`from_model_deployment() (ads.model.generic_model.GenericModel class method), 1315`  
`from_model_deployment() (ads.model.generic_model.GenericModel class method), 1308`  
`from_model_deployment() (ads.model.GenericModel class method), 1386`  
`from_model_deployment() (ads.model.GenericModel class method), 1379`  
`from_name() (ads.common.oci_logging.OCILoggingModel class method), 607`  
`from_name() (ads.common.oci_mixin.OCIModelWithName class method), 613`  
`from_name() (ads.model.model_version_set.ModelVersionSet class method), 1358`  
`from_name() (ads.model.model_version_set.ModelVersionSet class method), 1355`  
`from_name() (ads.model.ModelVersionSet class method), 1438`  
`from_name() (ads.model.ModelVersionSet method), 1435`  
`from_name() (ads.model.service.oci_datascience_model_version_set.DataScienceModelVersionSet class method), 1294`  
`from_oci_model() (ads.common.oci_mixin.OCIModelMixin class method), 611`  
`from_oci_model() (ads.jobs.DataFlowRun class method), 976`  
`from_oci_model() (ads.jobs.DataScienceJobRun class method), 1004`  
`from_oci_id() (ads.common.oci_mixin.OCIModelMixin class method), 611`  
`from_oci_id() (ads.jobs.builders.infrastructure.dsc_job.DSCJob class method), 885`  
`from_oci_id() (ads.jobs.DataFlowRun class method), 976`  
`from_oci_id() (ads.jobs.DataScienceJobRun class method), 1004`  
`from_oci_id() (ads.model.model_version_set.ModelVersionSet class method), 1358`  
`from_oci_id() (ads.model.model_version_set.ModelVersionSet class method), 1355`  
`from_oci_id() (ads.model.ModelVersionSet class method), 1438`  
`from_oci_id() (ads.model.ModelVersionSet method), 1435`  
`from_oci_id() (ads.model.service.oci_datascience_model_version_set.DataScienceModelVersionSet class method), 1294`  
`from_oci_id() (ads.pipeline.ads_pipeline.DataSciencePipeline class method), 1489`  
`from_oci_id() (ads.pipeline.ads_pipeline.Pipeline class method), 1499`  
`from_oci_id() (ads.pipeline.ads_pipeline.Pipeline class method), 1494`  
`from_path() (ads.common.object_storage_details.ObjectStorageDetails class method), 599`  
`from_path() (ads.model.runtime.env_info.EnvInfo class method), 1283`  
`from_pipeline_run() (ads.pipeline.visualizer.base.RendererItemStatus class method), 1484`  
`from_pipeline_step_run() (ads.pipeline.visualizer.base.RendererItemStatus class method), 1484`  
`from_regex() (ads.text_dataset.udfs.UDF static method), 1548`  
`from_slug() (ads.model.runtime.env_info.EnvInfo class method), 1283`  
`from_spacy() (ads.data_labeling.ner.NERItem class method), 671`  
`from_string() (ads.common.serializer.Serializable class method), 618`  
`from_string() (ads.common.serializer.Serializable class method), 617`  
`from_string() (ads.jobs.ads_job.Job class method), 930`  
`from_string() (ads.model.service.oci_datascience_model_version_set.DataScienceModelVersionSet class method), 947`  
`from_string() (ads.jobs.DataFlow class method), 954`  
`from_string() (ads.jobs.DataFlowNotebookRuntime class method), 962`  
`from_string() (ads.jobs.DataFlowRuntime class method), 985`  
`from_string() (ads.jobs.DataScienceJob class method), 994`  
`from_string() (ads.jobs.GitPythonRuntime class method), 1011`  
`from_string() (ads.jobs.Job class method), 1022`  
`from_string() (ads.jobs.NotebookRuntime class method), 1029`  
`from_string() (ads.jobs.PythonRuntime class method), 1038`  
`from_string() (ads.jobs.ScriptRuntime class method), 1047`



[from\\_string\(\)](#) (*ads.jobs.serializer.Serializable* class method), 936  
[from\\_uri\(\)](#) (*ads.feature\_engineering.adimage.image\_reader.ADSImageReader* class method), 759  
[from\\_uri\(\)](#) (*ads.feature\_engineering.adimage.image\_reader.ADSImageReaderBackend* class method), 759  
[from\\_uri\(\)](#) (*ads.model.artifact.ModelArtifact* class method), 1297  
[from\\_yaml\(\)](#) (*ads.common.serializer.Serializable* class method), 618  
[from\\_yaml\(\)](#) (*ads.common.serializer.Serializable* class method), 617  
[from\\_yaml\(\)](#) (*ads.jobs.ads\_job.Job* class method), 930  
[from\\_yaml\(\)](#) (*ads.jobs.ContainerRuntime* class method), 947  
[from\\_yaml\(\)](#) (*ads.jobs.DataFlow* class method), 954  
[from\\_yaml\(\)](#) (*ads.jobs.DataFlowNotebookRuntime* class method), 963  
[from\\_yaml\(\)](#) (*ads.jobs.DataFlowRuntime* class method), 985  
[from\\_yaml\(\)](#) (*ads.jobs.DataScienceJob* class method), 994  
[from\\_yaml\(\)](#) (*ads.jobs.GitPythonRuntime* class method), 1011  
[from\\_yaml\(\)](#) (*ads.jobs.Job* class method), 1022  
[from\\_yaml\(\)](#) (*ads.jobs.NotebookRuntime* class method), 1029  
[from\\_yaml\(\)](#) (*ads.jobs.PythonRuntime* class method), 1038  
[from\\_yaml\(\)](#) (*ads.jobs.ScriptRuntime* class method), 1047  
[from\\_yaml\(\)](#) (*ads.jobs.serializer.Serializable* class method), 937  
[from\\_yaml\(\)](#) (*ads.pipeline.ads\_pipeline.Pipeline* class method), 1494  
[from\\_yaml\(\)](#) (*ads.pipeline.ads\_pipeline\_step.PipelineStep* class method), 1515  
[from\\_yolo\(\)](#) (*ads.data\_labeling.boundingbox.BoundingBox* class method), 665

**G**

[generate\\_core\\_site\\_properties\(\)](#) (in module *ads.opctl.spark.cmds*), 1477  
[generate\\_core\\_site\\_properties\\_str\(\)](#) (in module *ads.opctl.spark.cmds*), 1478  
[generate\\_fn\\_artifacts\(\)](#) (in module *ads.common.function.fn\_util*), 560  
[generate\\_heatmap\(\)](#) (*ads.dataset.correlation\_plot.BokehHeatMap* class method), 686  
[generate\\_requirement\\_file\(\)](#) (in module *ads.common.utils*), 623  
[generate\\_sample\(\)](#) (in module *ads.dataset.helper*), 715  
[generate\\_target\\_heatmap\(\)](#) (*ads.dataset.correlation\_plot.BokehHeatMap* class method), 686  
[generate\\_worker\\_name\(\)](#) (*ads.data\_labeling.backend.ads\_ml\_job.MLJobDistributedBackend* static method), 1467  
[GENERIC](#) (*ads.data\_labeling.parser.export\_record\_parser.EntityType* attribute), 641  
[GenericModel](#) (class in *ads.model*), 1376  
[GenericModel](#) (class in *ads.model.generic\_model*), 1306  
[GENSIM](#) (*ads.model.model\_metadata.Framework* attribute), 1334  
[GEO](#) (*ads.common.decorator.runtime\_dependency.OptionalDependency* attribute), 558  
[get\(\)](#) (*ads.bds.big\_data\_service.HiveConnectionFactory* class method), 542  
[get\(\)](#) (*ads.common.config.ConfigSection* method), 576  
[get\(\)](#) (*ads.dbmixin.db\_pandas\_accessor.ConnectionFactory* class method), 721  
[get\(\)](#) (*ads.model.model\_metadata.ModelCustomMetadata* method), 1336  
[get\(\)](#) (*ads.model.model\_metadata.ModelMetadata* method), 1342  
[get\(\)](#) (*ads.model.model\_metadata.ModelTaxonomyMetadata* method), 1348  
[get\\_app\(\)](#) (*ads.dataflow.dataflow.DataFlow* method), 675  
[get\\_artifact\\_info\(\)](#) (*ads.model.service.oci\_datascience\_model.OCIDataScienceModel* method), 1288, 1290  
[get\\_base\\_modules\(\)](#) (in module *ads.common.utils*), 623  
[get\\_bootstrap\\_styles\(\)](#) (in module *ads.common.utils*), 623  
[get\\_compartment\\_id\(\)](#) (*ads.common.oci\_resource.OCIResource* class method), 614  
[get\\_compute\\_accelerator\\_ncores\(\)](#) (in module *ads.common.utils*), 623  
[get\\_cpu\\_count\(\)](#) (in module *ads.common.utils*), 623  
[get\\_cursor\(\)](#) (*ads.bds.big\_data\_service.HiveConnectionFactory* method), 541  
[get\\_cursor\(\)](#) (*ads.bds.big\_data\_service.ImpylaHiveConnectionFactory* method), 542  
[get\\_data\\_serializer\(\)](#) (*ads.model.framework.huggingface\_model.HuggingFacePipeline* method), 1104  
[get\\_data\\_serializer\(\)](#) (*ads.model.framework.lightgbm\_model.LightGBMModel* method), 1131  
[get\\_data\\_serializer\(\)](#) (*ads.model.framework.pytorch\_model.PyTorchModel* method), 1158  
[get\\_data\\_serializer\(\)](#)

`(ads.model.framework.sklearn_model.SklearnModel`  
`method), 1186`  
`get_data_serializer()`  
`(ads.model.framework.spark_model.SparkPipelineModel`  
`method), 1213`  
`get_data_serializer()`  
`(ads.model.framework.tensorflow_model.TensorFlowModel`  
`method), 1240`  
`get_data_serializer()`  
`(ads.model.framework.xgboost_model.XGBoostModel`  
`method), 1267`  
`get_data_serializer()`  
`(ads.model.generic_model.GenericModel`  
`method), 1316`  
`get_data_serializer()` `(ads.model.GenericModel`  
`method), 1387`  
`get_dataflow_config()` `(in module ads.jobs.utils),`  
`945`  
`get_dataframe_styles()` `(in module`  
`ads.common.utils), 624`  
`get_distribution()` `(ads.hpo.distributions.Distribution`  
`method), 856`  
`get_docker_client()` `(in module ads.opctl.utils), 1479`  
`get_dtype()` `(in module ads.dataset.helper), 715`  
`get_engine()` `(ads.bds.big_data_service.HiveConnection`  
`method), 541`  
`get_engine()` `(ads.bds.big_data_service.ImpylaHiveConn`  
`method), 542`  
`get_feature_type()` `(in module ads.dataset.helper),`  
`715`  
`get_files()` `(in module ads.common.utils), 624`  
`get_fill_val()` `(in module ads.dataset.helper), 715`  
`get_format_reader()` `(in module ads.dataset.factory),`  
`713`  
`get_function_config()` `(in module`  
`ads.common.function.fn_util), 560`  
`get_init_types()` `(ads.common.model.ADSModel`  
`static method), 583`  
`get_legend_labels()`  
`(ads.evaluations.evaluation_plot.EvaluationPlot`  
`class method), 724`  
`get_legend_labels()`  
`(ads.evaluations.evaluation_plot.EvaluationPlot`  
`method), 724`  
`get_logger()` `(in module`  
`ads.model.deployment.common.utils), 1055`  
`get_metadata()` `(ads.text_dataset.backends.Base`  
`method), 1539`  
`get_metadata()` `(ads.text_dataset.backends.PDFPlumber`  
`method), 1539`  
`get_metadata()` `(ads.text_dataset.backends.Tika`  
`method), 1540`  
`get_metadata()` `(ads.text_dataset.extractor.FileProcessor`  
`method), 1546`  
`get_metrics()` `(ads.evaluations.statistical_metrics.ModelEvaluator`  
`method), 737`  
`get_model()` `(ads.catalog.model.ModelCatalog`  
`method), 545, 546`  
`get_model2searchspace()` `(in module`  
`ads.hpo.ads_search_space), 856`  
`get_model_artifact_content()`  
`(ads.model.service.oci_datascience_model.OCIDataScienceModel`  
`method), 1291`  
`get_model_deployment()`  
`(ads.model.deployment.model_deployer.ModelDeployer`  
`method), 1057, 1059`  
`get_model_deployment()` `(ads.model.ModelDeployer`  
`method), 1413, 1414`  
`get_model_deployment_state()`  
`(ads.model.deployment.model_deployer.ModelDeployer`  
`method), 1057, 1059`  
`get_model_deployment_state()`  
`(ads.model.ModelDeployer method), 1413,`  
`1415`  
`get_model_provenance()`  
`(ads.model.service.oci_datascience_model.OCIDataScienceModel`  
`method), 1288, 1291`  
`get_model_serializer()`  
`(ads.model.framework.huggingface_model.HuggingFacePipeline`  
`method), 1104`  
`get_model_serializer()`  
`(ads.model.framework.lightgbm_model.LightGBMModel`  
`method), 1131`  
`get_model_serializer()`  
`(ads.model.framework.pytorch_model.PyTorchModel`  
`method), 1158`  
`get_model_serializer()`  
`(ads.model.framework.sklearn_model.SklearnModel`  
`method), 1186`  
`get_model_serializer()`  
`(ads.model.framework.spark_model.SparkPipelineModel`  
`method), 1213`  
`get_model_serializer()`  
`(ads.model.framework.tensorflow_model.TensorFlowModel`  
`method), 1240`  
`get_model_serializer()`  
`(ads.model.framework.xgboost_model.XGBoostModel`  
`method), 1267`  
`get_model_serializer()`  
`(ads.model.generic_model.GenericModel`  
`method), 1316`  
`get_model_serializer()` `(ads.model.GenericModel`  
`method), 1387`  
`get_namespace()` `(in module ads.opctl.utils), 1479`  
`get_notebook_session()`  
`(ads.catalog.notebook.NotebookCatalog`  
`method), 550`  
`get_object_storage_client()` `(in module`

<b>Index</b>	<b>1621</b>
--------------	-------------

## H

- `H2O` (`ads.model.metadata.Framework` attribute), 1334
- `halt()` (`ads.hpo.search_cv.ADSTuner` method), 861
- `HALTED` (`ads.hpo.search_cv.State` attribute), 870
- `handle()` (`ads.text_dataset.options.FileOption` method), 1548
- `handle()` (`ads.text_dataset.options.MetadataOption` method), 1548
- `handle()` (`ads.text_dataset.options.OptionHandler` method), 1548
- `has_kerberos_ticket()` (in module `ads.bds.auth`), 539
- `hdfs_host` (`ads.secrets.big_data_service.BDSecret` attribute), 1525, 1526
- `hdfs_host` (`ads.secrets.big_data_service.BDSecretKeeper` attribute), 1527
- `hdfs_port` (`ads.secrets.big_data_service.BDSecret` attribute), 1525, 1526
- `hdfs_port` (`ads.secrets.big_data_service.BDSecretKeeper` attribute), 1527
- `head()` (`ads.common.oci_logging.ConsolidatedLog` method), 602
- `head()` (`ads.common.oci_logging.OCILog` method), 603
- `head()` (`ads.dataflow.dataflow.DataFlowLog` method), 679
- `hello()` (in module `ads`), 1556
- `help()` (`ads.feature_engineering.accessor.dataframe_accessor.ADSDatasetAccessor` method), 748
- `help()` (`ads.feature_engineering.accessor.mixin.feature_type_mixin.ADSFeatureTypeMixin` method), 746
- `help()` (`ads.feature_engineering.accessor.series_accessor.ADSFeatureSeriesAccessor` method), 753
- `help()` (`ads.feature_engineering.feature_type.adsstring.string.ADSString` method), 770
- `high_cardinality_handler()` (in module `ads.feature_engineering.feature_type.handler.warnings`), 784
- `highlight_text()` (in module `ads.common.utils`), 625
- `hive_host` (`ads.secrets.big_data_service.BDSecret` attribute), 1525, 1526
- `hive_host` (`ads.secrets.big_data_service.BDSecretKeeper` attribute), 1527
- `hive_port` (`ads.secrets.big_data_service.BDSecret` attribute), 1525, 1526
- `hive_port` (`ads.secrets.big_data_service.BDSecretKeeper` attribute), 1527
- `HiveConnection` (class in `ads.bds.big_data_service`), 541
- `HiveConnectionFactory` (class in `ads.bds.big_data_service`), 542
- `horizontal_scrollable_div()` (in module `ads.common.utils`), 625
- `host` (`ads.secrets.mysqlpdb.MySQLDBSecret` attribute), 1530
- `host` (`ads.secrets.oracledb.OracleDBSecret` attribute), 1532
- `html()` (`ads.evaluations.evaluator.Evaluator` method), 733, 735
- `html_document()` (`ads.type_discovery.document_detector.DocumentDetector` method), 1550
- `HTTPS` (`ads.model.deployment.model_deployment.ModelDeploymentModel` attribute), 1073
- `HUGGINGFACE` (`ads.common.decorator.runtime_dependency.OptionalDependency` attribute), 558
- `HuggingFacePipelineModel` (class in `ads.model`), 1400
- `HuggingFacePipelineModel` (class in `ads.model.framework.huggingface_model`), 1088
- `human_size()` (in module `ads.common.utils`), 625
- `hyperparameter` (`ads.model.AutoMLModel` attribute), 1362
- `hyperparameter` (`ads.model.extractor.keras_extractor.KerasExtractor` property), 1079
- `hyperparameter` (`ads.model.extractor.lightgbm_extractor.LightGBMExtractor` property), 1080
- `hyperparameter` (`ads.model.extractor.pytorch_extractor.PyTorchExtractor` property), 1083
- `hyperparameter` (`ads.model.extractor.sklearn_extractor.SklearnExtractor` property), 1084
- `hyperparameter` (`ads.model.extractor.spark_extractor.SparkExtractor` property), 1085
- `hyperparameter` (`ads.model.extractor.tensorflow_extractor.TensorFlowExtractor` property), 1086
- `hyperparameter` (`ads.model.extractor.xgboost_extractor.XgboostExtractor` property), 1087
- `hyperparameter` (`ads.model.framework.huggingface_model.HuggingFaceModel` attribute), 1089
- `hyperparameter` (`ads.model.framework.lightgbm_model.LightGBMModel` attribute), 1119
- `hyperparameter` (`ads.model.framework.pytorch_model.PyTorchModel` attribute), 1146
- `hyperparameter` (`ads.model.framework.sklearn_model.SklearnModel` attribute), 1174
- `hyperparameter` (`ads.model.framework.spark_model.SparkPipelineModel` attribute), 1201
- `hyperparameter` (`ads.model.framework.tensorflow_model.TensorFlowModel` attribute), 1228
- `hyperparameter` (`ads.model.framework.xgboost_model.XGBoostModel` attribute), 1255
- `hyperparameter` (`ads.model.generic_model.GenericModel` attribute), 1306
- `hyperparameter` (`ads.model.GenericModel` attribute), 1377
- `hyperparameter` (`ads.model.HuggingFacePipelineModel` attribute), 1401
- `hyperparameter` (`ads.model.LightGBMModel` attribute), 1408



[hyperparameter](#) (*ads.model.PyTorchModel* attribute), 1442  
[hyperparameter](#) (*ads.model.SklearnModel* attribute), 1446  
[hyperparameter](#) (*ads.model.SparkPipelineModel* attribute), 1450  
[hyperparameter](#) (*ads.model.TensorFlowModel* attribute), 1455  
[hyperparameter](#) (*ads.model.XGBoostModel* attribute), 1459  
[hyperparameter\(\)](#) (*ads.model.extractor.lightgbm\_extractor.ModelInfoExtractor* method), 1079  
[hyperparameter\(\)](#) (*ads.model.extractor.model\_info\_extractor.ModelInfoExtractor* method), 1080, 1081  
[hyperparameter\(\)](#) (*ads.model.extractor.pytorch\_extractor.PyTorchExtractor* method), 1082  
[hyperparameter\(\)](#) (*ads.model.extractor.sklearn\_extractor.SklearnExtractor* method), 1084  
[hyperparameter\(\)](#) (*ads.model.extractor.spark\_extractor.SparkExtractor* method), 1085  
[hyperparameter\(\)](#) (*ads.model.extractor.tensorflow\_extractor.TensorFlowExtractor* method), 1086  
[hyperparameter\(\)](#) (*ads.model.extractor.xgboost\_extractor.XgboostExtractor* method), 1087  
[HYPERPARAMETERS](#) (*ads.model.model\_metadata.MetadataTags* attribute), 1336  
  
**I**  
[id](#) (*ads.jobs.ads\_job.Job* property), 931  
[id](#) (*ads.jobs.DataFlowRun* property), 976  
[id](#) (*ads.jobs.DataScienceJobRun* property), 1004  
[id](#) (*ads.jobs.Job* property), 1023  
[id](#) (*ads.jobs.utils.DataFlowConfig* property), 942  
[id](#) (*ads.model.DataScienceModel* attribute), 1365  
[id](#) (*ads.model.DataScienceModel* property), 1372  
[id](#) (*ads.model.model\_version\_set.ModelVersionSet* attribute), 1354  
[id](#) (*ads.model.model\_version\_set.ModelVersionSet* property), 1358  
[id](#) (*ads.model.ModelVersionSet* attribute), 1434  
[id](#) (*ads.model.ModelVersionSet* property), 1438  
[id](#) (*ads.pipeline.ads\_pipeline.Pipeline* attribute), 1491  
[id](#) (*ads.pipeline.ads\_pipeline.Pipeline* property), 1500  
[identify\\_issue\\_network\(\)](#) (*ads.common.card\_identifier.card\_identify* method), 573  
[identity](#) (*ads.common.oci\_client.OCIClientFactory* property), 600  
[idle\\_timeout\\_in\\_minutes](#) (*ads.jobs.DataFlowRun* property), 976  
[idle\\_timeout\\_in\\_minutes](#) (*ads.jobs.utils.DataFlowConfig* property), 942  
  
[IGNORE](#) (*ads.common.model\_artifact.ConflictStrategy* attribute), 585  
[ignore\\_deployment\\_error](#) (*ads.common.model\_artifact.ModelArtifact* attribute), 586  
[IMAGE](#) (*ads.data\_labeling.constants.DatasetType* attribute), 667  
[image](#) (*ads.jobs.builders.runtimes.container\_runtime.ContainerRuntime* property), 907  
[image](#) (*ads.jobs.ContainerRuntime* property), 948  
[IMAGECLASSIFICATION](#) (*ads.model.model\_metadata.UseCaseType* attribute), 1051  
[ImageClassifier](#) (*ads.data\_labeling.loader.file\_loader*), 632  
[ImageFileLoader](#) (class in *ads.data\_labeling.loader.file\_loader*), 632  
[ImageFileReader](#) (class in *ads.feature\_engineering.adsimage.image\_reader*), 760  
[ImageLabeler](#) (*ads.data\_labeling.visualizer.image\_visualizer*), 660  
[ImageObjectSelection](#) (*ads.data\_labeling.parser.export\_record\_parser.EntityType* attribute), 641  
[img](#) (*ads.feature\_engineering.adsimage.image.ADSImage* attribute), 757  
[import\\_model\\_artifact\(\)](#) (*ads.model.service.oci\_datascience\_model.OCIDataScienceModel* method), 1288, 1291  
[import\\_wallet\(\)](#) (in module *ads.database.connection*), 674  
[ImpylaHiveConnection](#) (class in *ads.bds.big\_data\_service*), 542  
[IN\\_PROGRESS](#) (*ads.pipeline.visualizer.base.StepStatus* attribute), 1485  
[INACTIVE](#) (*ads.model.deployment.common.utils.State* attribute), 1055  
[IncompatibleRuntime](#), 898  
[index\(\)](#) (*ads.feature\_engineering.feature\_type.adsstring.string.ADString* method), 770  
[infer\\_target\\_type\(\)](#) (*ads.dataset.factory.DatasetFactory* class method), 710  
[inference\\_conda\\_env](#) (*ads.common.model\_artifact.ModelArtifact* attribute), 586  
[inference\\_conda\\_env](#) (*ads.model.model\_properties.ModelProperties* attribute), 1354  
[inference\\_conda\\_env](#) (*ads.model.ModelProperties* attribute), 1433  
[inference\\_conda\\_env](#)

`(ads.model.runtime.model_deployment_details.ModelDeploymentDetails)`, 607  
`attribute`), 1285  
`init_client()` (`ads.common.oci_mixin.OCIClientMixin`  
`inference_env_path` (`ads.model.runtime.env_info.InferenceEnvInfo` class method), 609  
`attribute`), 1284  
`init_client()` (`ads.common.oci_resource.OCIResource`  
`inference_env_slug` (`ads.model.runtime.env_info.InferenceEnvInfo` class method), 615  
`attribute`), 1284  
`init_client()` (`ads.jobs.builders.infrastructure.dataflow.DataFlowApp`  
`inference_env_type` (`ads.model.runtime.env_info.InferenceEnvInfo` class method), 881  
`attribute`), 1284  
`init_client()` (`ads.jobs.builders.infrastructure.dataflow.DataFlowRun`  
`inference_python_version` class method), 882  
`(ads.common.model_artifact.ModelArtifact`  
`attribute`), 586  
`init_client()` (`ads.jobs.DataFlowRun` class method),  
976  
`inference_python_version` `init_client()` (`ads.jobs.DataScienceJobRun` class  
`(ads.model.model_properties.ModelProperties`  
`attribute`), 1354  
`method`), 1004  
`init_operator()` (`ads.opctl.backend.ads_ml_job.MLJobBackend`  
`method`), 1466  
`inference_python_version` `initialize_spec_attributes`  
`(ads.model.ModelProperties` attribute), 1433  
`inference_python_version` `(ads.model.deployment.model_deployment.ModelDeployment`  
`(ads.model.runtime.env_info.InferenceEnvInfo`  
`attribute`), 1284  
`attribute`), 1067  
`initialize_spec_attributes`  
`(ads.model.ModelDeployment` attribute),  
1422  
`Info()` (`ads.data_labeling.interface.reader.Reader`  
`method`), 630  
`INITIATED` (`ads.hpo.search_cv.State` attribute), 870  
`info()` (`ads.data_labeling.reader.dataset_reader.DLSDatasetReader` `ads.common.utils`), 626  
`method`), 646  
`inject_and_copy_kwargs()` (in module  
`info()` (`ads.data_labeling.reader.dataset_reader.ExportReader` 1366  
`method`), 647  
`input_schema` (`ads.model.DataScienceModel` attribute),  
1366  
`input_schema` (`ads.model.DataScienceModel` property),  
1372  
`info()` (`ads.data_labeling.reader.dataset_reader.LabeledDatasetReader` 672  
`method`), 648, 650  
`InputDataSerializer` (class in  
`info()` (`ads.feature_engineering.accessor.dataframe_accessor.ADSDataFrameAccessor` `ads.frame_accessor.serializer`), 581  
`method`), 750  
`insert()` (`ads.bds.big_data_service.ADSHiveConnection`  
`info()` (`ads.model.extractor.model_info_extractor.ModelInfoExtractor` `method`), 541  
`method`), 1080, 1081  
`install()` (in module `ads.opctl.conda.cmds`), 1469  
`install_libs` (`ads.common.model_artifact.ModelArtifact`  
`attribute`), 586  
`infrastructure` (`ads.jobs.ads_job.Job` property), 931  
`infrastructure` (`ads.jobs.Job` property), 1023  
`infrastructure` (`ads.model.deployment.model_deployment.ModelDeployment` `infrastructure_requirements()`  
`attribute`), 1062  
`(ads.common.model_artifact.ModelArtifact`  
`infrastructure` (`ads.model.deployment.model_deployment.ModelDeployment` `infrastructure_requirements()`  
`property`), 1067  
`INSTANCE_PRINCIPAL` (`ads.common.auth.AuthType` at-  
`tribute`), 564  
`infrastructure` (`ads.model.ModelDeployment` at-  
`tribute`), 1418  
`instance_shapes()` (`ads.jobs.builders.infrastructure.dsc_job.DataScience`  
`class` method), 889  
`infrastructure` (`ads.model.ModelDeployment` prop-  
`erty`), 1422  
`instance_shapes()` (`ads.jobs.DataScienceJob` class  
`method`), 995  
`infrastructure` (`ads.pipeline.ads_pipeline_step.PipelineStep` `attribute`), 1514  
`InstancePrincipal` (class in `ads.common.auth`), 564  
`infrastructure` (`ads.pipeline.ads_pipeline_step.PipelineStep` `property`), 1517  
`Integer` (class in `ads.feature_engineering.feature_type.integer`),  
812  
`Infrastructure` (class in `ads.jobs.builders.infrastructure.base`), 873  
`IntLogUniformDistribution` (class in  
`ads.hpo.distributions`), 857  
`init_ccache_with_keytab()` (in module `introspect()` (`ads.common.model_artifact.ModelArtifact`  
`ads.bds.auth`), 539  
`method`), 587, 588  
`init_client()` (`ads.common.oci_datascience.OCIDataScience` `introspect()` (`ads.model.AutoMLModel` method), 1364  
`class` method), 601  
`introspect()` (`ads.model.framework.huggingface_model.HuggingFacePi`  
`init_client()` (`ads.common.oci_logging.OCILoggingModelMixin` method), 1090, 1104

[introspect\(\)](#) (*ads.model.framework.lightgbm\_model.LightGBMModel* method), 1121, 1131  
[introspect\(\)](#) (*ads.model.framework.pytorch\_model.PyTorchModel* method), 720  
[introspect\(\)](#) (*ads.model.framework.sklearn\_model.SklearnModel* method), 1148, 1158  
[introspect\(\)](#) (*ads.model.framework.sklearn\_model.SklearnModel* method), 1175, 1186  
[introspect\(\)](#) (*ads.model.framework.spark\_model.SparkPipelineModel* method), 581  
[introspect\(\)](#) (*ads.model.framework.spark\_model.SparkPipelineModel* method), 1203, 1213  
[introspect\(\)](#) (*ads.model.framework.tensorflow\_model.TensorFlowModel* method), 1230, 1240  
[introspect\(\)](#) (*ads.model.framework.xgboost\_model.XGBoostModel* method), 1257, 1267  
[introspect\(\)](#) (*ads.model.generic\_model.GenericModel* method), 1308, 1316  
[introspect\(\)](#) (*ads.model.GenericModel* method), 1379, 1387  
[introspect\(\)](#) (*ads.model.HuggingFacePipelineModel* method), 1403  
[introspect\(\)](#) (*ads.model.LightGBMModel* method), 1410  
[introspect\(\)](#) (*ads.model.PyTorchModel* method), 1443  
[introspect\(\)](#) (*ads.model.SklearnModel* method), 1448  
[introspect\(\)](#) (*ads.model.SparkPipelineModel* method), 1452  
[introspect\(\)](#) (*ads.model.TensorFlowModel* method), 1457  
[introspect\(\)](#) (*ads.model.XGBoostModel* method), 1461  
[Introspectable](#) (class in *ads.common.model\_introspect*), 595  
[Introspectable](#) (class in *ads.model.model\_introspect*), 1332  
[IntrospectionNotPassed](#), 595, 1332  
[IntUniformDistribution](#) (class in *ads.hpo.distributions*), 858  
[InvalidDataType](#), 585  
[InvalidFeatureType](#), 839  
[InvalidObjectStoragePath](#), 598  
[InvalidStateTransition](#), 870  
[ip](#) (*ads.feature\_engineering.adsstring.common\_regex\_mixin.CommonRegexMixin* property), 763  
[ip](#) (*ads.feature\_engineering.feature\_type.adsstring.common\_regex\_mixin.CommonRegexMixin* property), 767  
[IPAddress](#) (class in *ads.feature\_engineering.feature\_type.ip\_subnets*), 814  
[IPAddressTypedFeature](#) (class in *ads.type\_discovery.typed\_feature*), 1552  
[IPAddressV4](#) (class in *ads.feature\_engineering.feature\_type.ip\_address\_v4*), 816  
[IPAddressV6](#) (class in *ads.feature\_engineering.feature\_type.ip\_address\_v6*), 819  
[IPDetector](#) (class in *ads.type\_discovery.ip\_detector*),  
[is\\_balanced\(\)](#) (*ads.dataset.target.TargetVariable* method), 550  
[is\\_boolean\(\)](#) (in module *ads.feature\_engineering.utils*), 853  
[is\\_bytes\(\)](#) (*ads.common.data\_serializer.InputDataSerializer* method), 581  
[is\\_classifier](#) (*ads.evaluations.evaluator.ADSEvaluator* attribute), 725  
[is\\_classifier\(\)](#) (*ads.common.model.ADSTuner* method), 583  
[is\\_completed\(\)](#) (*ads.hpo.search\_cv.ADSTuner* method), 861  
[is\\_constant\(\)](#) (*ads.type\_discovery.constant\_detector.ConstantDetector* method), 1549  
[is\\_credit\\_card\(\)](#) (*ads.type\_discovery.credit\_card\_detector.CreditCardDetector* method), 1550  
[is\\_data\\_too\\_wide\(\)](#) (in module *ads.common.utils*), 626  
[is\\_debug\\_mode\(\)](#) (in module *ads.common.utils*), 626  
[is\\_documentation\\_mode\(\)](#) (in module *ads.common.utils*), 626  
[is\\_halted\(\)](#) (*ads.hpo.search\_cv.ADSTuner* method), 862  
[is\\_in\\_notebook\\_session\(\)](#) (in module *ads.opctl.utils*), 1479  
[is\\_lat\\_lon\(\)](#) (*ads.type\_discovery.latlon\_detector.LatLonDetector* method), 1551  
[is\\_luhn\\_valid\(\)](#) (*ads.type\_discovery.credit\_card\_detector.CreditCardDetector* method), 1550  
[is\\_notebook\(\)](#) (in module *ads.common.utils*), 626  
[is\\_notebook\(\)](#) (in module *ads.model.deployment.common.utils*), 1055  
[is\\_phone\\_number\(\)](#) (*ads.type\_discovery.phone\_number\_detector.PhoneNumberDetector* method), 1551  
[is\\_resource\\_principal\\_mode\(\)](#) (in module *ads.common.utils*), 626  
[is\\_running\(\)](#) (*ads.hpo.search\_cv.ADSTuner* method), 862  
[is\\_text\(\)](#) (in module *ads.common.utils*), 626  
[is\\_terminated\(\)](#) (*ads.hpo.search\_cv.ADSTuner* method), 862  
[is\\_test\(\)](#) (in module *ads.common.utils*), 626  
[is\\_text\\_data\(\)](#) (in module *ads.dataset.helper*), 715  
[is\\_type\\_registered\(\)](#) (in module *ads.common.utils*), 626  
[is\\_valid\\_uri\(\)](#) (*ads.common.object\_storage\_details.ObjectStorageDetails* static method), 599  
[isalnum\(\)](#) (*ads.feature\_engineering.feature\_type.adsstring.string.ADSString* method), 770  
[isalpha\(\)](#) (*ads.feature\_engineering.feature\_type.adsstring.string.ADSString* method), 771  
[isascii\(\)](#) (*ads.feature\_engineering.feature\_type.adsstring.string.ADSString* method), 771

- method), 771
- isdecimal() (ads.feature\_engineering.feature\_type.adsstring.string.ADSString method), 771
- isdigit() (ads.feature\_engineering.feature\_type.adsstring.string.ADSString method), 771
- isempty() (ads.model.model\_metadata.ModelCustomMetadataItem method), 1337, 1339
- isidentifier() (ads.feature\_engineering.feature\_type.adsstring.string.ADSString method), 771
- islower() (ads.feature\_engineering.feature\_type.adsstring.string.ADSString method), 771
- isnumeric() (ads.feature\_engineering.feature\_type.adsstring.string.ADSString method), 771
- isprintable() (ads.feature\_engineering.feature\_type.adsstring.string.ADSString method), 771
- isspace() (ads.feature\_engineering.feature\_type.adsstring.string.ADSString method), 771
- istitle() (ads.feature\_engineering.feature\_type.adsstring.string.ADSString method), 771
- isupper() (ads.feature\_engineering.feature\_type.adsstring.string.ADSString method), 771
- items (ads.data\_labeling.boundingbox.BoundingBoxItems attribute), 666
- items (ads.data\_labeling.ner.NERItems attribute), 671
- J**
- job (ads.jobs.builders.infrastructure.dsc\_job.DataScienceJob property), 894
- job (ads.jobs.DataScienceJobRun property), 1004
- JOB (ads.opctl.constants.BACKEND\_NAME attribute), 1478
- Job (class in ads.jobs), 1018
- Job (class in ads.jobs.ads\_job), 926
- job\_configuration\_override\_details (ads.jobs.DataScienceJobRun property), 1004
- job\_def\_info() (ads.opctl.distributed.common.cluster\_config\_helper.ClusterConfigHelper method), 1476
- job\_id (ads.jobs.builders.infrastructure.dataflow.DataFlow property), 876
- job\_id (ads.jobs.builders.infrastructure.dsc\_job.DataScienceJob property), 889
- job\_id (ads.jobs.DataFlow property), 955
- job\_id (ads.jobs.DataScienceJob property), 995
- job\_id (ads.jobs.DataScienceJobRun property), 1004
- job\_id (ads.pipeline.ads\_pipeline\_step.PipelineStep attribute), 1514
- job\_id (ads.pipeline.ads\_pipeline\_step.PipelineStep property), 1517
- job\_infrastructure\_configuration\_details (ads.jobs.DataScienceJobRun property), 1005
- job\_infrastructure\_type (ads.jobs.builders.infrastructure.dsc\_job.DataScienceJob property), 889
- job\_infrastructure\_type (ads.jobs.DataScienceJob property), 995
- job\_log\_configuration\_override\_details (ads.jobs.DataScienceJobRun property), 1005
- job\_run\_info() (ads.opctl.distributed.common.cluster\_config\_helper.ClusterConfigHelper method), 1476
- job\_type (ads.jobs.builders.infrastructure.dsc\_job.DataScienceJob property), 889
- job\_type (ads.jobs.DataScienceJob property), 995
- join() (ads.feature\_engineering.feature\_type.adsstring.string.ADSString method), 771
- JPEG (ads.pipeline.visualizer.graph\_renderer.RenderToImage method), 1486
- json\_serialize\_tuner\_args() (ads.feature\_engineering.tuner\_artifact.UploadTunerArtifact method), 872
- JsonConfigADSString (class in ads.common.utils), 620
- JsonlReader (class in ads.data\_labeling.reader.jsonl\_reader), 653
- JsonSchemaLoader (class in ads.feature\_engineering.schema), 846
- K**
- KERAS (ads.model.model\_metadata.Framework attribute), 1334
- KerasExtractor (class in ads.model.extractor.keras\_extractor), 1078
- kerb5\_content (ads.secrets.big\_data\_service.BDSSecret attribute), 1526
- kerb5\_content (ads.secrets.big\_data\_service.BDSSecretKeeper attribute), 1527
- kerb5\_path (ads.secrets.big\_data\_service.BDSSecret attribute), 1526
- kerb5\_path (ads.secrets.big\_data\_service.BDSSecretKeeper attribute), 1527
- key (ads.opctl.constants.GOOGLE\_CLOUD\_STORAGE\_BUCKET attribute), 596
- key (ads.feature\_engineering.schema.Attribute property), 844
- keyJob (ads.model.model\_introspect.PrintItem attribute), 1333
- KEY (ads.model.model\_metadata.MetadataCustomPrintColumns attribute), 1335
- KEY (ads.model.model\_metadata.MetadataTaxonomyPrintColumns attribute), 1336
- key (ads.model.model\_metadata.ModelCustomMetadataItem attribute), 1340
- key (ads.model.model\_metadata.ModelTaxonomyMetadataItem attribute), 1350
- key (ads.model.model\_metadata.ModelTaxonomyMetadataItem property), 1350
- keyJob (ads.pipeline.visualizer.base.RendererItem property), 1483



- key (*ads.pipeline.visualizer.base.RendererItemStatus* property), 1484
- key\_id (*ads.secrets.big\_data\_service.BDSSecretKeeper* attribute), 1528
- key\_phrase (*ads.feature\_engineering.feature\_type.adsstring* property), 768
- keys (*ads.feature\_engineering.schema.Schema* property), 850
- keys (*ads.model.model\_metadata.ModelMetadata* property), 1343
- keys() (*ads.common.config.Config* method), 574
- keys() (*ads.common.config.ConfigSection* method), 576
- keytab\_content (*ads.secrets.big\_data\_service.BDSSecretKeeper* attribute), 1526
- keytab\_content (*ads.secrets.big\_data\_service.BDSSecretKeeper* attribute), 1528
- keytab\_path (*ads.secrets.big\_data\_service.BDSSecretKeeper* attribute), 1526
- keytab\_path (*ads.secrets.big\_data\_service.BDSSecretKeeper* attribute), 1527
- kind (*ads.jobs.ads\_job.Job* property), 931
- kind (*ads.jobs.builders.base.Builder* property), 920
- kind (*ads.jobs.builders.infrastructure.base.Infrastructure* property), 873
- kind (*ads.jobs.builders.runtimes.base.Runtime* property), 904
- kind (*ads.jobs.ContainerRuntime* property), 948
- kind (*ads.jobs.DataFlow* property), 955
- kind (*ads.jobs.DataFlowNotebookRuntime* property), 963
- kind (*ads.jobs.DataFlowRuntime* property), 986
- kind (*ads.jobs.DataScienceJob* property), 995
- kind (*ads.jobs.GitPythonRuntime* property), 1012
- kind (*ads.jobs.Job* property), 1023
- kind (*ads.jobs.NotebookRuntime* property), 1030
- kind (*ads.jobs.PythonRuntime* property), 1039
- kind (*ads.jobs.ScriptRuntime* property), 1047
- kind (*ads.model.DataScienceModel* property), 1372
- kind (*ads.model.deployment.model\_deployment.ModelDeployment* property), 1067
- kind (*ads.model.model\_version\_set.ModelVersionSet* property), 1358
- kind (*ads.model.ModelDeployment* property), 1422
- kind (*ads.model.ModelVersionSet* property), 1438
- kind (*ads.pipeline.ads\_pipeline.Pipeline* attribute), 1490
- kind (*ads.pipeline.ads\_pipeline.Pipeline* property), 1500
- kind (*ads.pipeline.ads\_pipeline\_step.PipelineStep* attribute), 1514
- kind (*ads.pipeline.ads\_pipeline\_step.PipelineStep* property), 1517
- kind (*ads.pipeline.visualizer.base.RendererItem* attribute), 1483
- kind (*ads.pipeline.visualizer.base.RendererItemStatus* attribute), 1484
- KRB5KinitError, 539
- krbcontext() (in module *ads.bds.auth*), 539
- kwargs (*ads.common.oci\_mixin.OCIClientMixin* attribute), 609
- kwargs (*ads.jobs.DataFlowRun* attribute), 976
- kwargs (*ads.jobs.DataScienceJobRun* attribute), 1005
- kwargs (*ads.secrets.big\_data\_service.BDSSecretKeeper* attribute), 1528
- ## L
- label (*ads.data\_labeling.ner.NERItem* attribute), 671
- LabeledDatasetReader (class in *ads.data\_labeling.reader.dataset\_reader*), 648
- LabeledImageItem (class in *ads.data\_labeling.visualizer.image\_visualizer*), 660
- LabeledTextItem (class in *ads.data\_labeling.visualizer.text\_visualizer*), 662
- labels (*ads.data\_labeling.boundingBox.BoundingBoxItem* attribute), 664, 665
- labels (*ads.data\_labeling.metadata.Metadata* attribute), 669, 670
- LABS (*ads.common.decorator.runtime\_dependency.OptionalDependency* attribute), 558
- language (*ads.feature\_engineering.schema.Expression* attribute), 846
- language (*ads.jobs.DataFlowRun* property), 976
- language (*ads.jobs.utils.DataFlowConfig* property), 942
- language\_dominant (*ads.feature\_engineering.feature\_type.adsstring.oci* property), 768
- LANGUAGE\_JAVA (*ads.jobs.DataFlowRun* attribute), 970
- LANGUAGE\_JAVA (*ads.jobs.utils.DataFlowConfig* attribute), 938
- language\_model\_cache (*ads.feature\_engineering.feature\_type.adsstring.string.ADSSString* attribute), 772
- LANGUAGE\_PYTHON (*ads.jobs.DataFlowRun* attribute), 970
- LANGUAGE\_PYTHON (*ads.jobs.utils.DataFlowConfig* attribute), 938
- LANGUAGE\_SCALA (*ads.jobs.DataFlowRun* attribute), 970
- LANGUAGE\_SCALA (*ads.jobs.utils.DataFlowConfig* attribute), 938
- LANGUAGE\_SQL (*ads.jobs.DataFlowRun* attribute), 970
- LANGUAGE\_SQL (*ads.jobs.utils.DataFlowConfig* attribute), 938
- LargeArtifactDownloader (class in *ads.model.artifact\_downloader*), 1299
- LargeArtifactUploader (class in *ads.model.artifact\_uploader*), 1300
- LassoSearchSpace (class in *ads.hpo.ads\_search\_space*), 855

LatLonDetector (class in LIFECYCLE\_STATE\_ACTIVE  
 ads.type\_discovery.latlon\_detector), 1551 (ads.jobs.utils.DataFlowConfig attribute),  
 LatLong (class in ads.feature\_engineering.feature\_type.lat\_long), 938  
 821 LIFECYCLE\_STATE\_ACTIVE  
 LEFT\_RIGHT (ads.pipeline.visualizer.base.GraphOrientation (ads.model.model\_version\_set.ModelVersionSet  
 attribute), 1481 attribute), 1356  
 legend\_labels (ads.evaluations.evaluator.ADSEvaluator LIFECYCLE\_STATE\_ACTIVE  
 attribute), 725 (ads.model.ModelVersionSet attribute), 1436  
 lemma (ads.feature\_engineering.adsstring.parsers.spacy\_parser.SpacyParser LIFECYCLE\_STATE\_ACTIVE  
 property), 762 (ads.pipeline.ads\_pipeline.Pipeline attribute),  
 lemma (ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser.SpacyParser LIFECYCLE\_STATE\_ACTIVE  
 property), 765 1496  
 length (ads.data\_labeling.ner.NERItem attribute), 671 LIFECYCLE\_STATE\_CANCELED (ads.jobs.DataFlowRun  
 attribute), 970  
 less\_is\_more (ads.evaluations.evaluator.ADSEvaluator.Evaluation LIFECYCLE\_STATE\_CANCELED  
 attribute), 727 (ads.jobs.DataScienceJobRun attribute),  
 LGBMClassifierSearchSpace (class in 1001  
 ads.hpo.ads\_search\_space), 855 LIFECYCLE\_STATE\_CANCELING (ads.jobs.DataFlowRun  
 attribute), 970  
 LGBMRegressorSearchSpace (class in  
 ads.hpo.ads\_search\_space), 855 LIFECYCLE\_STATE\_CANCELING  
 lifecycle\_details (ads.jobs.DataFlowRun property), (ads.jobs.DataScienceJobRun attribute),  
 977 1001  
 lifecycle\_details (ads.jobs.DataScienceJobRun LIFECYCLE\_STATE\_CREATING  
 property), 1005 (ads.pipeline.ads\_pipeline.Pipeline attribute),  
 lifecycle\_details (ads.model.deployment.model\_deployment.ModelDeployment LIFECYCLE\_STATE\_DELETED  
 attribute), 1062 1496  
 lifecycle\_details (ads.model.deployment.model\_deployment.ModelDeployment LIFECYCLE\_STATE\_DELETED  
 attribute), 1067 (ads.jobs.DataScienceJobRun attribute),  
 lifecycle\_details (ads.model.ModelDeployment LIFECYCLE\_STATE\_DELETED  
 attribute), 1417 (ads.jobs.utils.DataFlowConfig attribute),  
 lifecycle\_details (ads.model.ModelDeployment 938  
 property), 1423 LIFECYCLE\_STATE\_DELETED  
 lifecycle\_details (ads.pipeline.visualizer.base.RendererItemStatus (ads.model.model\_version\_set.ModelVersionSet  
 attribute), 1485 attribute), 1356  
 lifecycle\_state (ads.jobs.DataFlowRun LIFECYCLE\_STATE\_DELETED  
 property), 977 (ads.model.ModelVersionSet attribute), 1436  
 lifecycle\_state (ads.jobs.DataScienceJobRun LIFECYCLE\_STATE\_DELETED  
 property), 1005 (ads.pipeline.ads\_pipeline.Pipeline attribute),  
 lifecycle\_state (ads.jobs.utils.DataFlowConfig prop- 1496  
 erty), 942 LIFECYCLE\_STATE\_DELETING  
 lifecycle\_state (ads.model.deployment.model\_deployment.ModelDeployment LIFECYCLE\_STATE\_DELETING  
 attribute), 1062 (ads.model.model\_version\_set.ModelVersionSet  
 attribute), 1356  
 lifecycle\_state (ads.model.deployment.model\_deployment LIFECYCLE\_STATE\_DELETING  
 property), 1067 (ads.model.ModelVersionSet attribute), 1436  
 lifecycle\_state (ads.model.ModelDeployment LIFECYCLE\_STATE\_DELETING  
 attribute), 1417 (ads.pipeline.ads\_pipeline.Pipeline attribute),  
 lifecycle\_state (ads.model.ModelDeployment prop- 1496  
 erty), 1423 LIFECYCLE\_STATE\_FAILED (ads.jobs.DataFlowRun at-  
 lifecycle\_state (ads.pipeline.visualizer.base.RendererItemStatus tribute), 970  
 attribute), 1485 LIFECYCLE\_STATE\_FAILED  
 LIFECYCLE\_STATE\_ACCEPTED (ads.jobs.DataFlowRun (ads.jobs.DataScienceJobRun attribute),  
 attribute), 970 1001  
 LIFECYCLE\_STATE\_ACCEPTED LIFECYCLE\_STATE\_FAILED  
 (ads.jobs.DataScienceJobRun attribute), (ads.model.model\_version\_set.ModelVersionSet  
 1001 attribute), 1356

LIFECYCLE\_STATE\_FAILED  
     (*ads.model.ModelVersionSet* attribute), 1436  
 LIFECYCLE\_STATE\_FAILED  
     (*ads.pipeline.ads\_pipeline.Pipeline* attribute), 1497  
 LIFECYCLE\_STATE\_IN\_PROGRESS  
     (*ads.jobs.DataFlowRun* attribute), 970  
 LIFECYCLE\_STATE\_IN\_PROGRESS  
     (*ads.jobs.DataScienceJobRun* attribute), 1001  
 LIFECYCLE\_STATE\_INACTIVE  
     (*ads.jobs.utils.DataFlowConfig* attribute), 938  
 LIFECYCLE\_STATE\_NEEDS\_ATTENTION  
     (*ads.jobs.DataScienceJobRun* attribute), 1001  
 LIFECYCLE\_STATE\_STOPPED (*ads.jobs.DataFlowRun* attribute), 970  
 LIFECYCLE\_STATE\_STOPPING (*ads.jobs.DataFlowRun* attribute), 971  
 LIFECYCLE\_STATE\_SUCCEEDED (*ads.jobs.DataFlowRun* attribute), 971  
 LIFECYCLE\_STATE\_SUCCEEDED  
     (*ads.jobs.DataScienceJobRun* attribute), 1001  
 LIGHT\_GBM (*ads.model.model\_metadata.Framework* attribute), 1334  
 LightgbmExtractor (class in *ads.model.extractor.lightgbm\_extractor*), 1079  
 LightGBMModel (class in *ads.model*), 1408  
 LightGBMModel (class in *ads.model.framework.lightgbm\_model*), 1119  
 LINE\_DARK (*ads.feature\_engineering.utils.SchemeNeutral* attribute), 853  
 LINE\_DARK (*ads.feature\_engineering.utils.SchemeTeal* attribute), 853  
 LINE\_LIGHT (*ads.feature\_engineering.utils.SchemeNeutral* attribute), 853  
 LINE\_LIGHT (*ads.feature\_engineering.utils.SchemeTeal* attribute), 853  
 LinearSVCSearchSpace (class in *ads.hpo.ads\_search\_space*), 855  
 LinearSVRSearchSpace (class in *ads.hpo.ads\_search\_space*), 855  
 link (*ads.feature\_engineering.adsstring.common\_regex\_mixin.CommonRegexMixin* property), 763  
 link (*ads.feature\_engineering.feature\_type.adsstring.common\_regex\_mixin.CommonRegexMixin* property), 767  
 list() (*ads.dataset.dataset\_browser.DatasetBrowser* static method), 700  
 list() (*ads.dataset.dataset\_browser.GitHubDatasets* method), 701  
 list() (*ads.dataset.dataset\_browser.LocalFilesystemDatasets* method), 701  
 list() (*ads.dataset.dataset\_browser.SeabornDatasets* method), 702  
 list() (*ads.dataset.dataset\_browser.SklearnDatasets* method), 702  
 list() (*ads.dataset.dataset\_browser.WebDatasets* method), 703  
 list() (*ads.model.DataScienceModel* class method), 1372  
 list() (*ads.model.DataScienceModel* method), 1367  
 list() (*ads.model.deployment.model\_deployment.ModelDeployment* class method), 1068  
 list() (*ads.model.deployment.model\_deployment.ModelDeployment* method), 1063  
 list() (*ads.model.model\_version\_set.ModelVersionSet* class method), 1358  
 list() (*ads.model.ModelDeployment* class method), 1423  
 list() (*ads.model.ModelDeployment* method), 1418  
 list() (*ads.model.ModelVersionSet* class method), 1438  
 list() (*ads.pipeline.ads\_pipeline.Pipeline* class method), 1500  
 list() (*ads.pipeline.ads\_pipeline.Pipeline* method), 1494  
 list() (*ads.pipeline.ads\_pipeline\_run.PipelineRun* class method), 1510  
 list() (*ads.pipeline.ads\_pipeline\_run.PipelineRun* method), 1509  
 list\_ads\_operators() (in module *ads.opctl.utils*), 1479  
 list\_apps() (*ads.dataflow.dataflow.DataFlow* method), 675  
 list\_dataset() (*ads.data\_labeling.data\_labeling\_service.DataLabeling* method), 668  
 list\_deployments() (*ads.model.deployment.model\_deployer.ModelDeployer* method), 1058, 1059  
 list\_deployments() (*ads.model.ModelDeployer* method), 1413, 1415  
 list\_df() (*ads.model.DataScienceModel* class method), 1372  
 list\_df() (*ads.model.deployment.model\_deployment.ModelDeployment* class method), 1068  
 list\_df() (*ads.model.ModelDeployment* class method), 1423  
 list\_jobs() (*ads.jobs.builders.infrastructure.base.Infrastructure* method), 889  
 list\_jobs() (*ads.jobs.builders.infrastructure.dataflow.DataFlow* method), 955  
 list\_jobs() (*ads.jobs.builders.infrastructure.dsc\_job.DataScienceJob* class method), 889  
 list\_jobs() (*ads.jobs.DataFlow* class method), 955  
 list\_jobs() (*ads.jobs.DataScienceJob* class method), 995  
 list\_logs() (*ads.common.oci\_logging.OCILogGroup* method), 701

- method*), 606
- `list_model_deployment()`  
(*ads.catalog.model.ModelCatalog method*), 545, 547
- `list_models()` (*ads.catalog.model.ModelCatalog method*), 545, 547
- `list_notebook_session()`  
(*ads.catalog.notebook.NotebookCatalog method*), 550
- `list_projects()` (*ads.catalog.project.ProjectCatalog method*), 553
- `list_resource()` (*ads.common.oci\_mixin.OCIModelMixin class method*), 611
- `list_resource()` (*ads.jobs.DataFlowRun class method*), 977
- `list_resource()` (*ads.jobs.DataScienceJobRun class method*), 1005
- `list_runs()` (*ads.dataflow.dataflow.DataFlowApp method*), 677
- `list_snapshots()` (*ads.dataset.factory.DatasetFactory static method*), 710
- `ljust()` (*ads.feature\_engineering.feature\_type.adsstring.static method*), 772
- `load()` (*ads.common.config.Config method*), 574
- `load()` (*ads.data\_labeling.interface.loader.Loader method*), 629
- `load()` (*ads.data\_labeling.loader.file\_loader.FileLoader method*), 631
- `load()` (*ads.data\_labeling.loader.file\_loader.ImageFileLoader method*), 632
- `load()` (*ads.data\_labeling.loader.file\_loader.TextFileLoader method*), 633
- `load()` (*ads.model.transformer.onnx\_transformer.ONNXTransformer static method*), 1295
- `load()` (*in module ads.config*), 1555
- `load_app()` (*ads.dataflow.dataflow.DataFlow method*), 675
- `load_dataset()` (*in module ads.dataset.factory*), 713
- `load_defaults()` (*ads.jobs.builders.infrastructure.dsc\_job.DSCJob property*), 890  
*method*), 885
- `load_ipython_extension()` (*in module ads.jobs.extension*), 935
- `load_ipython_extension()` (*in module ads.pipeline.extension*), 1520
- `load_model()` (*ads.catalog.model.Model class method*), 544
- `load_model()` (*ads.catalog.model.Model method*), 543
- `load_model()` (*ads.hpo.tuner\_artifact.DownloadTunerArtifact static method*), 872
- `load_properties_from_env()`  
(*ads.common.oci\_mixin.OCIModelMixin method*), 612
- `load_properties_from_env()`  
(*ads.jobs.builders.infrastructure.dsc\_job.DSCJob* *method*), 886
- `load_properties_from_env()`  
(*ads.jobs.DataFlowRun method*), 977
- `load_properties_from_env()`  
(*ads.jobs.DataScienceJobRun method*), 1006
- `load_schema()` (*ads.feature\_engineering.schema.BaseSchemaLoader method*), 845
- `load_schema()` (*ads.feature\_engineering.schema.JsonSchemaLoader method*), 846
- `load_schema()` (*ads.feature\_engineering.schema.YamlSchemaLoader method*), 852
- `load_schema()` (*in module ads.jobs.schema.validator*), 921
- `load_scoring()` (*ads.hpo.tuner\_artifact.DownloadTunerArtifact static method*), 872
- `load_secret()` (*ads.secrets.secrets.SecretKeeper class method*), 1536
- `load_target_from_script()`  
(*ads.hpo.tuner\_artifact.DownloadTunerArtifact static method*), 872
- `Loader` (*class in ads.data\_labeling.interface.loader*), 629
- `loaders.py` (*ads.data\_labeling.loader.file\_loader.FileLoaderFactory static method*), 631
- `LOCAL` (*ads.opctl.constants.BACKEND\_NAME attribute*), 1478
- `local_dir` (*ads.dataflow.dataflow.DataFlowLog property*), 679
- `local_dir` (*ads.dataflow.dataflow.DataFlowRun property*), 680
- `local_dir` (*ads.dataflow.dataflow.RunObserver property*), 681
- `local_path` (*ads.dataflow.dataflow.DataFlowLog property*), 679
- `LocalFilesystemDatasets` (*class in ads.dataset.dataset\_browser*), 701
- `log_details` (*ads.jobs.DataScienceJobRun property*), 1006
- `log_group_id` (*ads.jobs.builders.infrastructure.dsc\_job.DataScienceJob property*), 890
- `log_group_id` (*ads.jobs.builders.infrastructure.dsc\_job.DataScienceJobRun property*), 894
- `log_group_id` (*ads.jobs.DataScienceJob property*), 995
- `log_group_id` (*ads.jobs.DataScienceJobRun property*), 1006
- `log_group_id` (*ads.pipeline.ads\_pipeline.Pipeline attribute*), 1491
- `log_group_id` (*ads.pipeline.ads\_pipeline.Pipeline property*), 1500
- `log_id` (*ads.jobs.builders.infrastructure.dsc\_job.DataScienceJob property*), 890
- `log_id` (*ads.jobs.builders.infrastructure.dsc\_job.DataScienceJobRun property*), 894
- `log_id` (*ads.jobs.DataScienceJob property*), 996
- `log_id` (*ads.jobs.DataScienceJobRun property*), 1006



[log\\_id](#) (*ads.pipeline.ads\_pipeline.Pipeline* attribute), 1491  
[log\\_id](#) (*ads.pipeline.ads\_pipeline.Pipeline* property), 1500  
[LOG\\_OUTPUTS](#) (*ads.dataflow.dataflow.DataFlowRun* attribute), 680  
[log\\_stderr](#) (*ads.dataflow.dataflow.DataFlowRun* property), 680  
[log\\_stdout](#) (*ads.dataflow.dataflow.DataFlowRun* property), 680  
[logging](#) (*ads.jobs.builders.infrastructure.dsc\_job.DataScienceJobRun* property), 894  
[logging](#) (*ads.jobs.DataScienceJobRun* property), 1006  
[LogisticRegressionSearchSpace](#) (class in *ads.hpo.ads\_search\_space*), 855  
[LogNotConfiguredError](#), 1061, 1508  
[logs](#) (*ads.jobs.builders.infrastructure.dataflow.DataFlowRun* property), 883  
[logs](#) (*ads.jobs.DataFlowRun* property), 977  
[logs\(\)](#) (*ads.jobs.builders.infrastructure.dsc\_job.DataScienceJobRun* method), 895  
[logs\(\)](#) (*ads.jobs.DataScienceJobRun* method), 1006  
[logs\(\)](#) (*ads.model.deployment.model\_deployment.ModelDeployment* method), 1068  
[logs\(\)](#) (*ads.model.ModelDeployment* method), 1424  
[logs\(\)](#) (*ads.pipeline.ads\_pipeline\_run.PipelineRun* method), 1511  
[logs\\_bucket\\_uri](#) (*ads.jobs.DataFlowRun* property), 978  
[logs\\_bucket\\_uri](#) (*ads.jobs.utils.DataFlowConfig* property), 942  
[LogType](#) (class in *ads.pipeline.ads\_pipeline\_run*), 1508  
[LogUniformDistribution](#) (class in *ads.hpo.distributions*), 858  
[LOWER](#) (*ads.common.decorator.argument\_to\_case.ArgumentCase* attribute), 556  
[lower\(\)](#) (*ads.feature\_engineering.feature\_type.adsstring.string.ADSString* method), 772  
[lstrip\(\)](#) (*ads.feature\_engineering.feature\_type.adsstring.string.ADSString* method), 772  
[luhn\\_checksum\(\)](#) (*ads.type\_discovery.credit\_card\_detector.CreditCardDetector* method), 1550

**M**

[main\(\)](#) (in module *ads.jobs.templates.driver\_notebook*), 922  
[main\(\)](#) (in module *ads.jobs.templates.driver\_oci*), 925  
[main\(\)](#) (in module *ads.jobs.templates.driver\_python*), 925  
[maketrans\(\)](#) (*ads.feature\_engineering.feature\_type.adsstring.string.ADSString* method), 772  
[map\\_types\(\)](#) (in module *ads.dataset.helper*), 715  
[max\\_duration\\_in\\_minutes](#) (*ads.jobs.DataFlowRun* property), 978  
[max\\_duration\\_in\\_minutes](#) (*ads.jobs.utils.DataFlowConfig* property), 943  
[max\\_progress](#) (*ads.model.deployment.common.progress\_bar.TqdmProgress* attribute), 1053  
[maximum\\_runtime\\_in\\_minutes](#) (*ads.jobs.builders.runtimes.base.Runtime* property), 904  
[maximum\\_runtime\\_in\\_minutes](#) (*ads.jobs.ContainerRuntime* property), 948  
[maximum\\_runtime\\_in\\_minutes](#) (*ads.jobs.DataFlowRuntime* property), 963  
[maximum\\_runtime\\_in\\_minutes](#) (*ads.jobs.DataFlowNotebookRuntime* property), 963  
[maximum\\_runtime\\_in\\_minutes](#) (*ads.jobs.DataFlowRuntime* property), 986  
[maximum\\_runtime\\_in\\_minutes](#) (*ads.jobs.GitPythonRuntime* property), 1012  
[maximum\\_runtime\\_in\\_minutes](#) (*ads.jobs.NotebookRuntime* property), 1030  
[maximum\\_runtime\\_in\\_minutes](#) (*ads.jobs.PythonRuntime* property), 1039  
[maximum\\_runtime\\_in\\_minutes](#) (*ads.jobs.ScriptRuntime* property), 1047  
[maximum\\_runtime\\_in\\_minutes](#) (*ads.pipeline.ads\_pipeline.Pipeline* attribute), 1492  
[maximum\\_runtime\\_in\\_minutes](#) (*ads.pipeline.ads\_pipeline.Pipeline* property), 1500  
[maximum\\_runtime\\_in\\_minutes](#) (*ads.pipeline.ads\_pipeline\_step.PipelineStep* attribute), 1514  
[maximum\\_runtime\\_in\\_minutes](#) (*ads.pipeline.ads\_pipeline\_step.PipelineStep* property), 1517  
[MERGE](#) (*ads.common.oci\_mixin.MergeStrategy* attribute), 607  
[merge\(\)](#) (*ads.dataset.dataset.ADSDataset* method), 691  
[MergeStrategy](#) (class in *ads.common.oci\_mixin*), 607  
[message](#) (*ads.common.model\_introspect.PrintItem* attribute), 596  
[message](#) (*ads.model.model\_introspect.PrintItem* attribute), 1333  
[Metadata](#) (class in *ads.data\_labeling.metadata*), 669  
[metadata\\_all\(\)](#) (*ads.text\_dataset.dataset.DataLoader* method), 1543  
[metadata\\_custom](#) (*ads.model.AutoMLModel* attribute), 1362  
[metadata\\_custom](#) (*ads.model.framework.huggingface\_model.HuggingFaceModel* attribute), 1089  
[metadata\\_custom](#) (*ads.model.framework.huggingface\_model.HuggingFaceModel* property), 1104  
[metadata\\_custom](#) (*ads.model.framework.lightgbm\_model.LightGBMModel* attribute), 1119

`metadata_custom(ads.model.framework.lightgbm_model.LightGBMModel attribute), 1119`  
`property), 1131` `metadata_provenance`  
`metadata_custom(ads.model.framework.pytorch_model.PyTorchModel attribute), 1146` `ads.model.framework.lightgbm_model.LightGBMModel`  
`property), 1131`  
`metadata_custom(ads.model.framework.pytorch_model.PyTorchModel attribute), 1158` `metadata_provenance`  
`property), 1158` `(ads.model.framework.pytorch_model.PyTorchModel`  
`metadata_custom(ads.model.framework.sklearn_model.SklearnModel attribute), 1146` `ads.model.framework.pytorch_model.PyTorchModel`  
`property), 1186` `property), 1158`  
`metadata_custom(ads.model.framework.spark_model.SparkPipelineModel attribute), 1201` `metadata_provenance`  
`property), 1174` `(ads.model.framework.sklearn_model.SklearnModel`  
`metadata_custom(ads.model.framework.spark_model.SparkPipelineModel attribute), 1174` `property), 1174`  
`property), 1213` `metadata_provenance`  
`metadata_custom(ads.model.framework.tensorflow_model.TensorFlowModel attribute), 1228` `ads.model.framework.sklearn_model.SklearnModel`  
`property), 1186`  
`metadata_custom(ads.model.framework.tensorflow_model.TensorFlowModel attribute), 1240` `metadata_provenance`  
`property), 1240` `(ads.model.framework.spark_model.SparkPipelineModel`  
`metadata_custom(ads.model.framework.xgboost_model.XGBoostModel attribute), 1201` `ads.model.framework.spark_model.SparkPipelineModel`  
`property), 1255` `property), 1213`  
`metadata_custom(ads.model.framework.xgboost_model.XGBoostModel attribute), 1267` `property), 1213`  
`property), 1267` `metadata_provenance`  
`metadata_custom(ads.model.generic_model.GenericModel attribute), 1307` `(ads.model.framework.tensorflow_model.TensorFlowModel`  
`property), 1316` `attribute), 1228`  
`property), 1316` `metadata_provenance`  
`metadata_custom(ads.model.GenericModel attribute), 1377` `(ads.model.framework.tensorflow_model.TensorFlowModel`  
`property), 1240`  
`property), 1377` `metadata_provenance`  
`metadata_custom(ads.model.GenericModel property), 1387` `(ads.model.framework.xgboost_model.XGBoostModel`  
`attribute), 1255`  
`attribute), 1401` `metadata_provenance`  
`metadata_custom(ads.model.LightGBMModel attribute), 1409` `(ads.model.framework.xgboost_model.XGBoostModel`  
`property), 1267`  
`property), 1442` `metadata_provenance`  
`(ads.model.generic_model.GenericModel`  
`attribute), 1307`  
`metadata_provenance`  
`(ads.model.generic_model.GenericModel`  
`property), 1316`  
`metadata_provenance(ads.model.GenericModel attribute), 1377`  
`metadata_provenance(ads.model.GenericModel property), 1387`  
`metadata_provenance`  
`(ads.model.HuggingFacePipelineModel attribute), 1401`  
`metadata_provenance(ads.model.LightGBMModel attribute), 1409`  
`metadata_provenance(ads.model.PyTorchModel attribute), 1442`  
`metadata_provenance(ads.model.SklearnModel attribute), 1446`  
`metadata_provenance` `(ads.model.framework.lightgbm_model.LightGBMModel attribute), 1119`

<code>(ads.model.SparkPipelineModel attribute), 1451</code>	<code>metadata_taxonomy (ads.model.SparkPipelineModel attribute), 1451</code>
<code>metadata_provenance (ads.model.TensorFlowModel attribute), 1455</code>	<code>metadata_taxonomy (ads.model.TensorFlowModel attribute), 1455</code>
<code>metadata_provenance (ads.model.XGBoostModel attribute), 1460</code>	<code>metadata_taxonomy (ads.model.XGBoostModel attribute), 1460</code>
<code>metadata_schema() (ads.text_dataset.dataset.DataLoader method), 1543</code>	<code>MetadataCustomCategory (class in ads.model.model_metadata), 1334</code>
<code>metadata_taxonomy (ads.model.AutoMLModel attribute), 1362</code>	<code>MetadataCustomKeys (class in ads.model.model_metadata), 1335</code>
<code>metadata_taxonomy (ads.model.framework.huggingface_model.FrameworkHuggingFaceModel attribute), 1089</code>	<code>MetadataCustomPrintColumns (class in ads.model.model_metadata), 1335</code>
<code>metadata_taxonomy (ads.model.framework.huggingface_model.FrameworkHuggingFaceModel property), 1104</code>	<code>MetadataDescriptionTooLong, 1335</code>
<code>metadata_taxonomy (ads.model.framework.lightgbm_model.LightGBMModel attribute), 1120</code>	<code>MetadataMixin (class in ads.model.model_metadata_mixin), 597</code>
<code>metadata_taxonomy (ads.model.framework.lightgbm_model.LightGBMModel property), 1131</code>	<code>MetadataMixin (class in ads.model.model_metadata_mixin), 1352</code>
<code>metadata_taxonomy (ads.model.framework.pytorch_model.PyTorchModel attribute), 1147</code>	<code>MetadataOption (class in ads.text_dataset.options), 648</code>
<code>metadata_taxonomy (ads.model.framework.pytorch_model.PyTorchModel property), 1158</code>	<code>MetadataParser (class in ads.data_labeling.parser.export_metadata_parser), 640</code>
<code>metadata_taxonomy (ads.model.framework.sklearn_model.SklearnModel attribute), 1174</code>	<code>MetadataReader (class in ads.data_labeling.reader.metadata_reader), 558</code>
<code>metadata_taxonomy (ads.model.framework.sklearn_model.SklearnModel property), 1186</code>	<code>MetadataSizeTooLarge, 1336</code>
<code>metadata_taxonomy (ads.model.framework.spark_model.SparkPipelineModel attribute), 1202</code>	<code>MetadataSizeTooManyKeys (class in ads.model.model_metadata), 1336</code>
<code>metadata_taxonomy (ads.model.framework.spark_model.SparkPipelineModel property), 1213</code>	<code>MetadataPrintColumns (class in ads.model.model_metadata), 1336</code>
<code>metadata_taxonomy (ads.model.framework.tensorflow_model.TensorFlowModel attribute), 1229</code>	<code>MetadataValueTooLong, 1336</code>
<code>metadata_taxonomy (ads.model.framework.tensorflow_model.TensorFlowModel property), 1240</code>	<code>metastore_id (ads.jobs.DataFlowRun property), 978</code>
<code>metadata_taxonomy (ads.model.framework.xgboost_model.XGBoostModel attribute), 1256</code>	<code>metastore_id (ads.jobs.DataFlowConfig property), 943</code>
<code>metadata_taxonomy (ads.model.framework.xgboost_model.XGBoostModel property), 1267</code>	<code>MTBD(s) (ads.common.decorator.deprecate.TARGET_TYPE attribute), 556</code>
<code>metadata_taxonomy (ads.model.generic_model.GenericModel attribute), 1307</code>	<code>MLCrossModel (class in ads.evaluations.evaluator.ADSEvaluator property), 730</code>
<code>metadata_taxonomy (ads.model.generic_model.GenericModel property), 1317</code>	<code>metrics (ads.evaluations.statistical_metrics.ModelEvaluator attribute), 737</code>
<code>metadata_taxonomy (ads.model.GenericModel attribute), 1377</code>	<code>metrics_to_show (ads.evaluations.evaluator.ADSEvaluator attribute), 725</code>
<code>metadata_taxonomy (ads.model.GenericModel property), 1387</code>	<code>missing_values_handler() (in module ads.feature_engineering.feature_type.handler.warnings), 784</code>
<code>metadata_taxonomy (ads.model.HuggingFacePipelineModel attribute), 1401</code>	<code>ML_JOB (ads.pipeline.ads_pipeline_run.StepType attribute), 1513</code>
<code>metadata_taxonomy (ads.model.LightGBMModel attribute), 1409</code>	<code>ML_JOB (ads.pipeline.visualizer.base.StepKind attribute), 1485</code>
<code>metadata_taxonomy (ads.model.PyTorchModel attribute), 1442</code>	<code>ml_task_types (class in ads.common.utils), 626</code>
<code>metadata_taxonomy (ads.model.SklearnModel attribute), 1446</code>	<code>MLJobBackend (class in ads.opctl.backend.ads_ml_job), 1466</code>
	<code>MLJobDistributedBackend (class in ads.opctl.backend.ads_ml_job), 1466</code>

Mode (class in `ads.common.config`), 579  
 model (`ads.model.extractor.keras_extractor.KerasExtractor` attribute), 1078  
 model (`ads.model.extractor.lightgbm_extractor.LightgbmExtractor` attribute), 1079  
 model (`ads.model.extractor.pytorch_extractor.PyTorchExtractor` attribute), 1082  
 model (`ads.model.extractor.sklearn_extractor.SklearnExtractor` attribute), 1083  
 model (`ads.model.extractor.spark_extractor.SparkExtractor` attribute), 1084  
 model (`ads.model.extractor.tensorflow_extractor.TensorflowExtractor` attribute), 1086  
 model (`ads.model.extractor.xgboost_extractor.XgboostExtractor` attribute), 1087  
 MODEL (`ads.model.generic_model.DataScienceModelType` attribute), 1304  
 Model (class in `ads.catalog.model`), 542  
 model\_add() (`ads.model.model_version_set.ModelVersionSet` method), 1359  
 model\_add() (`ads.model.ModelVersionSet` method), 1438  
 model\_artifact (`ads.model.AutoMLModel` attribute), 1363  
 model\_artifact (`ads.model.framework.huggingface_model.HuggingFacePipelineModel` attribute), 1089  
 model\_artifact (`ads.model.framework.lightgbm_model.LightGBMModel` attribute), 1120  
 model\_artifact (`ads.model.framework.pytorch_model.PyTorchModel` attribute), 1147  
 model\_artifact (`ads.model.framework.sklearn_model.SklearnModel` attribute), 1174  
 model\_artifact (`ads.model.framework.spark_model.SparkPipelineModel` attribute), 1202  
 model\_artifact (`ads.model.framework.tensorflow_model.TensorFlowModel` attribute), 1229  
 model\_artifact (`ads.model.framework.xgboost_model.XGBoostModel` attribute), 1256  
 model\_artifact (`ads.model.generic_model.GenericModel` attribute), 1307  
 model\_artifact (`ads.model.GenericModel` attribute), 1377  
 model\_artifact (`ads.model.HuggingFacePipelineModel` attribute), 1401  
 model\_artifact (`ads.model.LightGBMModel` attribute), 1409  
 model\_artifact (`ads.model.PyTorchModel` attribute), 1442  
 model\_artifact (`ads.model.SklearnModel` attribute), 1446  
 model\_artifact (`ads.model.SparkPipelineModel` attribute), 1451  
 model\_artifact (`ads.model.TensorFlowModel` attribute), 1455  
 model\_artifact (`ads.model.XGBoostModel` attribute), 1460  
 model\_artifact\_version (`ads.model.runtime.runtime_info.RuntimeInfo` attribute), 1286  
 MODEL\_ARTIFACTS (`ads.model.model_metadata.MetadataCustomKeys` attribute), 1335  
 model\_deployment (`ads.model.AutoMLModel` attribute), 1363  
 model\_deployment (`ads.model.framework.huggingface_model.HuggingFacePipelineModel` attribute), 1089  
 model\_deployment (`ads.model.framework.lightgbm_model.LightGBMModel` attribute), 1120  
 model\_deployment (`ads.model.framework.pytorch_model.PyTorchModel` attribute), 1147  
 model\_deployment (`ads.model.framework.sklearn_model.SklearnModel` attribute), 1174  
 model\_deployment (`ads.model.framework.tensorflow_model.TensorFlowModel` attribute), 1229  
 model\_deployment (`ads.model.framework.xgboost_model.XGBoostModel` attribute), 1256  
 MODEL\_DEPLOYMENT (`ads.model.generic_model.DataScienceModelType` attribute), 1304  
 model\_deployment (`ads.model.generic_model.GenericModel` attribute), 1377  
 model\_deployment (`ads.model.GenericModel` attribute), 1378  
 model\_deployment (`ads.model.HuggingFacePipelineModel` attribute), 1401  
 model\_deployment (`ads.model.LightGBMModel` attribute), 1409  
 model\_deployment (`ads.model.PyTorchModel` attribute), 1442  
 model\_deployment (`ads.model.runtime.runtime_info.RuntimeInfo` attribute), 1286  
 model\_deployment (`ads.model.SklearnModel` attribute), 1446  
 model\_deployment (`ads.model.TensorFlowModel` attribute), 1455  
 model\_deployment (`ads.model.XGBoostModel` attribute), 1460  
 MODEL\_DEPLOYMENT (`ads.opctl.constants.BACKEND_NAME` attribute), 1478  
 model\_deployment() (`ads.model.service.oci_datascience_model.OCIDatascienceModel` method), 1289, 1291  
 model\_deployment\_find\_fields() (in module `ads.model.model_artifact_boilerplate.artifact_introspection_test.model_artifact_introspection_test`), 1282  
 model\_deployment\_find\_fields() (in module `ads.model_artifact_boilerplate.artifact_introspection_test.model_artifact_introspection_test`), 1465  
 model\_deployment\_id (`ads.model.deployment.model_deployment.ModelDeployment` property), 1069



model_deployment_id	MODEL_FILE_NAME (ads.model.model_metadata.MetadataCustomKeys
(ads.model.framework.huggingface_model.HuggingFacePipelineModel	attribute), 1335
property), 1104	model_file_name (ads.model.PyTorchModel attribute),
model_deployment_id	1442
(ads.model.framework.lightgbm_model.LightGBMModel	model_file_name (ads.model.SklearnModel attribute),
property), 1131	1446
model_deployment_id	model_file_name (ads.model.SparkPipelineModel at-
(ads.model.framework.pytorch_model.PyTorchModel	tribute), 1451
property), 1158	model_file_name (ads.model.TensorFlowModel at-
model_deployment_id	tribute), 1456
(ads.model.framework.sklearn_model.SklearnModel	model_file_name (ads.model.XGBoostModel at-
property), 1186	tribute), 1460
model_deployment_id	model_id (ads.model.AutoMLModel attribute), 1363
(ads.model.framework.spark_model.SparkPipelineModel	model_id (ads.model.deployment.model_deployment_properties.ModelDep-
property), 1213	loymentProperties attribute), 1074
model_deployment_id	model_id (ads.model.framework.huggingface_model.HuggingFacePipeline
(ads.model.framework.tensorflow_model.TensorFlowModel attribute), 1089	model_id (ads.model.framework.huggingface_model.HuggingFacePipeline
property), 1240	model_id (ads.model.framework.huggingface_model.HuggingFacePipeline
model_deployment_id	property), 1104
(ads.model.framework.xgboost_model.XGBoostModel	model_id (ads.model.framework.lightgbm_model.LightGBMModel
property), 1267	attribute), 1120
model_deployment_id	model_id (ads.model.framework.lightgbm_model.LightGBMModel
(ads.model.generic_model.GenericModel	property), 1131
property), 1317	model_id (ads.model.framework.pytorch_model.PyTorchModel
model_deployment_id (ads.model.GenericModel prop-	attribute), 1147
erty), 1387	model_id (ads.model.framework.pytorch_model.PyTorchModel
model_deployment_id (ads.model.ModelDeployment	property), 1158
property), 1424	model_id (ads.model.framework.sklearn_model.SklearnModel
model_file_name (ads.common.model_artifact.ModelArtifact	attribute), 1174
attribute), 586	model_id (ads.model.framework.sklearn_model.SklearnModel
model_file_name (ads.model.AutoMLModel attribute),	property), 1186
1363	model_id (ads.model.framework.spark_model.SparkPipelineModel
model_file_name (ads.model.framework.huggingface_model.HuggingFacePipelineModel	attribute), 1202
attribute), 1089	model_id (ads.model.framework.spark_model.SparkPipelineModel
model_file_name (ads.model.framework.lightgbm_model.LightGBMModel	property), 1213
attribute), 1120	model_id (ads.model.framework.tensorflow_model.TensorFlowModel
model_file_name (ads.model.framework.pytorch_model.PyTorchModel	attribute), 1229
attribute), 1147	model_id (ads.model.framework.tensorflow_model.TensorFlowModel
model_file_name (ads.model.framework.sklearn_model.SklearnModel	property), 1240
attribute), 1174	model_id (ads.model.framework.xgboost_model.XGBoostModel
model_file_name (ads.model.framework.spark_model.SparkPipelineModel	attribute), 1256
attribute), 1202	model_id (ads.model.framework.xgboost_model.XGBoostModel
model_file_name (ads.model.framework.tensorflow_model.TensorFlowModel	attribute), 1267
attribute), 1229	model_id (ads.model.generic_model.GenericModel at-
model_file_name (ads.model.framework.xgboost_model.XGBoostModel	tribute), 1307
attribute), 1256	model_id (ads.model.generic_model.GenericModel
model_file_name (ads.model.generic_model.GenericModel	property), 1317
attribute), 1307	model_id (ads.model.GenericModel attribute), 1378
model_file_name (ads.model.GenericModel attribute),	model_id (ads.model.GenericModel property), 1387
1378	model_id (ads.model.HuggingFacePipelineModel
model_file_name (ads.model.HuggingFacePipelineModel	attribute), 1402
attribute), 1402	model_id (ads.model.LightGBMModel attribute), 1409
model_file_name (ads.model.LightGBMModel at-	model_id (ads.model.ModelDeploymentProperties at-
tribute), 1409	tribute), 1429

`model_id` (*ads.model.PyTorchModel* attribute), 1442  
`model_id` (*ads.model.SklearnModel* attribute), 1447  
`model_id` (*ads.model.SparkPipelineModel* attribute), 1451  
`model_id` (*ads.model.TensorFlowModel* attribute), 1456  
`model_id` (*ads.model.XGBoostModel* attribute), 1460  
`model_input_serializer` (*ads.model.deployment.model\_deployment.ModelDeployment* attribute), 1069  
`model_input_serializer` (*ads.model.generic\_model.GenericModel* attribute), 1307  
`model_input_serializer` (*ads.model.GenericModel* attribute), 1378  
`model_input_serializer` (*ads.model.ModelDeployment* attribute), 1424  
`model_input_serializer_type` (*ads.model.framework.huggingface\_model.HuggingFacePipelineModel* attribute), 1104  
`model_input_serializer_type` (*ads.model.framework.lightgbm\_model.LightGBMModel* attribute), 1131  
`model_input_serializer_type` (*ads.model.framework.pytorch\_model.PyTorchModel* attribute), 1158  
`model_input_serializer_type` (*ads.model.framework.sklearn\_model.SklearnModel* attribute), 1186  
`model_input_serializer_type` (*ads.model.framework.spark\_model.SparkPipelineModel* attribute), 1213  
`model_input_serializer_type` (*ads.model.framework.tensorflow\_model.TensorFlowModel* attribute), 1240  
`model_input_serializer_type` (*ads.model.framework.xgboost\_model.XGBoostModel* attribute), 1267  
`model_input_serializer_type` (*ads.model.generic\_model.GenericModel* attribute), 1317  
`model_input_serializer_type` (*ads.model.GenericModel* attribute), 1387  
`model_input_serializer_type` (*ads.model.SparkPipelineModel* attribute), 1454  
`model_name` (*ads.evaluations.statistical\_metrics.ModelEvaluation* attribute), 737  
`model_provenance` (*ads.model.runtime.runtime\_info.RuntimeInfo* attribute), 1286  
`model_save_serializer_type` (*ads.model.framework.huggingface\_model.HuggingFacePipelineModel* attribute), 1105  
`model_save_serializer_type` (*ads.model.framework.lightgbm\_model.LightGBMModel* attribute), 1132  
`model_save_serializer_type` (*ads.model.framework.pytorch\_model.PyTorchModel* attribute), 1159  
`model_save_serializer_type` (*ads.model.framework.sklearn\_model.SklearnModel* attribute), 1187  
`model_save_serializer_type` (*ads.model.framework.spark\_model.SparkPipelineModel* attribute), 1214  
`model_save_serializer_type` (*ads.model.framework.tensorflow\_model.TensorFlowModel* attribute), 1241  
`model_save_serializer_type` (*ads.model.framework.xgboost\_model.XGBoostModel* attribute), 1268  
`model_save_serializer_type` (*ads.model.generic\_model.GenericModel* attribute), 1317  
`model_save_serializer_type` (*ads.model.GenericModel* attribute), 1387  
`model_save_serializer_type` (*ads.model.HuggingFacePipelineModel* attribute), 1407  
`model_save_serializer_type` (*ads.model.LightGBMModel* attribute), 1412  
`model_save_serializer_type` (*ads.model.PyTorchModel* attribute), 1444  
`model_save_serializer_type` (*ads.model.SklearnModel* attribute), 1449  
`model_save_serializer_type` (*ads.model.SparkPipelineModel* attribute), 1454  
`model_save_serializer_type` (*ads.model.TensorFlowModel* attribute), 1458  
`model_save_serializer_type` (*ads.model.XGBoostModel* attribute), 1463  
`model_schema()` (*ads.feature\_engineering.accessor.dataframe\_accessor.DataFrameAccessor* method), 750  
`MODEL_SERIALIZATION_FORMAT` (*ads.model.model\_metadata.MetadataCustomKeys* attribute), 1335  
`model_uri` (*ads.model.deployment.model\_deployment\_properties.ModelDeploymentProperties* attribute), 1074  
`model_uri` (*ads.model.ModelDeploymentProperties* attribute), 1429  
`model_version_set_id` (*ads.model.DataScienceModel* attribute), 1367  
`model_version_set_id` (*ads.model.DataScienceModel* attribute), 1373  
`ModelArtifact` (class in *ads.common.model\_artifact*), 585

- ModelArtifact (class in *ads.model.artifact*), 1296  
 ModelArtifactNotFoundError, 1287  
 ModelArtifactSizeError, 544  
 ModelCatalog (class in *ads.catalog.model*), 544  
 ModelCustomMetadata (class in *ads.model.model\_metadata*), 1336  
 ModelCustomMetadataItem (class in *ads.model.model\_metadata*), 1340  
 ModelDeployer (class in *ads.model*), 1412  
 ModelDeployer (class in *ads.model.deployment.model\_deployer*), 1057  
 ModelDeployment (class in *ads.model*), 1416  
 ModelDeployment (class in *ads.model.deployment.model\_deployment*), 1061  
 ModelDeploymentDetails (class in *ads.model.runtime.model\_deployment\_details*), 1285  
 ModelDeploymentFailedError, 1073  
 ModelDeploymentLogType (class in *ads.model.deployment.model\_deployment*), 1073  
 ModelDeploymentMode (class in *ads.model.deployment.model\_deployment*), 1073  
 ModelDeploymentProperties (class in *ads.model*), 1428  
 ModelDeploymentProperties (class in *ads.model.deployment.model\_deployment\_properties*), 1074  
 ModelDeploymentRuntimeType (class in *ads.model.generic\_model*), 1330  
 ModelEvaluator (class in *ads.evaluations.statistical\_metrics*), 737  
 ModelInfoExtractor (class in *ads.model.extractor.model\_info\_extractor*), 1080  
 ModelInfoExtractorFactory (class in *ads.model.extractor.model\_info\_extractor\_factory*), 1082  
 ModelInputSerializer (class in *ads.model*), 1432  
 ModelIntrospect (class in *ads.common.model\_introspect*), 595  
 ModelIntrospect (class in *ads.model.model\_introspect*), 1332  
 ModelMetadata (class in *ads.model.model\_metadata*), 1341  
 ModelMetadataItem (class in *ads.model.model\_metadata*), 1345  
 ModelNotSavedError, 1287  
 ModelProperties (class in *ads.model*), 1433  
 ModelProperties (class in *ads.model.model\_properties*), 1353  
 ModelProvenanceDetails (class in *ads.model.runtime.model\_provenance\_details*), 1285  
 ModelProvenanceMetadata (class in *ads.model.model\_metadata*), 1347  
 ModelProvenanceNotFoundError, 1287  
 models (*ads.evaluations.evaluator.ADSEvaluator* attribute), 725  
 models() (*ads.model.model\_version\_set.ModelVersionSet* method), 1359  
 models() (*ads.model.ModelVersionSet* method), 1439  
 ModelSearchSpace (class in *ads.hpo.ads\_search\_space*), 855  
 ModelState (class in *ads.model*), 1434  
 ModelState (class in *ads.model.generic\_model*), 1330  
 ModelSummaryList (class in *ads.catalog.model*), 549  
 ModelTaxonomyMetadata (class in *ads.model.model\_metadata*), 1348  
 ModelTaxonomyMetadataItem (class in *ads.model.model\_metadata*), 1350  
 ModelVersionSet (class in *ads.model*), 1434  
 ModelVersionSet (class in *ads.model.model\_version\_set*), 1354  
 ModelVersionSetNotExists, 1295, 1441  
 ModelVersionSetNotSaved, 1295, 1441  
 ModelWithActiveDeploymentError, 549, 1287  
 module  
   ads, 1556  
   ads.bds, 542  
   ads.bds.auth, 539  
   ads.bds.big\_data\_service, 540  
   ads.catalog, 555  
   ads.catalog.model, 542  
   ads.catalog.notebook, 549  
   ads.catalog.project, 552  
   ads.catalog.summary, 555  
   ads.common, 629  
   ads.common.artifact, 555  
   ads.common.auth, 560  
   ads.common.base\_properties, 571  
   ads.common.card\_identifier, 573  
   ads.common.config, 573  
   ads.common.data, 579  
   ads.common.data\_serializer, 581  
   ads.common.decorator, 560  
   ads.common.decorator.argument\_to\_case, 556  
   ads.common.decorator.deprecate, 556  
   ads.common.decorator.runtime\_dependency, 557  
   ads.common.decorator.utils, 559  
   ads.common.error, 581  
   ads.common.extended\_enum, 581  
   ads.common.function, 560

`ads.common.function.fn_util`, 560  
`ads.common.ipython`, 582  
`ads.common.model`, 582  
`ads.common.model_artifact`, 585  
`ads.common.model_export_util`, 592  
`ads.common.model_introspect`, 594  
`ads.common.model_metadata`, 597  
`ads.common.model_metadata_mixin`, 597  
`ads.common.object_storage_details`, 598  
`ads.common.oci_client`, 599  
`ads.common.oci_datascience`, 600  
`ads.common.oci_logging`, 601  
`ads.common.oci_mixin`, 607  
`ads.common.oci_resource`, 614  
`ads.common.serializer`, 616  
`ads.common.utils`, 620  
`ads.common.word_lists`, 629  
`ads.config`, 1555  
`ads.data_labeling`, 673  
`ads.data_labeling.boundingBox`, 664  
`ads.data_labeling.constants`, 667  
`ads.data_labeling.data_labeling_service`, 667  
`ads.data_labeling.interface`, 630  
`ads.data_labeling.interface.loader`, 629  
`ads.data_labeling.interface.parser`, 629  
`ads.data_labeling.interface.reader`, 630  
`ads.data_labeling.loader`, 633  
`ads.data_labeling.loader.file_loader`, 630  
`ads.data_labeling.metadata`, 669  
`ads.data_labeling.mixin`, 636  
`ads.data_labeling.mixin.data_labeling`, 633  
`ads.data_labeling.ner`, 671  
`ads.data_labeling.parser`, 644  
`ads.data_labeling.parser.dls_record_parser`, 636  
`ads.data_labeling.parser.export_metadata_parser`, 640  
`ads.data_labeling.parser.export_record_parser`, 640  
`ads.data_labeling.reader`, 659  
`ads.data_labeling.reader.dataset_reader`, 644  
`ads.data_labeling.reader.dls_record_reader`, 651  
`ads.data_labeling.reader.export_record_reader`, 652  
`ads.data_labeling.reader.jsonl_reader`, 653  
`ads.data_labeling.reader.metadata_reader`, 654  
`ads.data_labeling.reader.record_reader`, 656  
`ads.data_labeling.record`, 672  
`ads.data_labeling.visualizer`, 664  
`ads.data_labeling.visualizer.image_visualizer`, 659  
`ads.data_labeling.visualizer.text_visualizer`, 662  
`ads.database`, 674  
`ads.database.connection`, 673  
`ads.dataflow`, 682  
`ads.dataflow.dataflow`, 674  
`ads.dataflow.dataflowssummary`, 682  
`ads.dataset`, 721  
`ads.dataset.classification_dataset`, 682  
`ads.dataset.correlation`, 686  
`ads.dataset.correlation_plot`, 686  
`ads.dataset.dataframe_transformer`, 688  
`ads.dataset.dataset`, 689  
`ads.dataset.dataset_browser`, 700  
`ads.dataset.dataset_with_target`, 703  
`ads.dataset.exception`, 708  
`ads.dataset.factory`, 708  
`ads.dataset.feature_engineering_transformer`, 713  
`ads.dataset.feature_selection`, 713  
`ads.dataset.forecasting_dataset`, 714  
`ads.dataset.helper`, 714  
`ads.dataset.label_encoder`, 717  
`ads.dataset.pipeline`, 717  
`ads.dataset.plot`, 717  
`ads.dataset.progress`, 718  
`ads.dataset.recommendation`, 718  
`ads.dataset.recommendation_transformer`, 718  
`ads.dataset.regression_dataset`, 719  
`ads.dataset.sampled_dataset`, 719  
`ads.dataset.target`, 720  
`ads.dataset.timeseries`, 721  
`ads.dbmixin`, 723  
`ads.dbmixin.db_pandas_accessor`, 721  
`ads.environment`, 723  
`ads.evaluations`, 738  
`ads.evaluations.evaluation_plot`, 723  
`ads.evaluations.evaluator`, 725  
`ads.evaluations.statistical_metrics`, 737  
`ads.experiments`, 741  
`ads.feature_engineering`, 854  
`ads.feature_engineering.accessor`, 756  
`ads.feature_engineering.accessor.dataframe_accessor`, 747  
`ads.feature_engineering.accessor.mixin`, 747  
`ads.feature_engineering.accessor.mixin.correlation`, 741

[ads.feature\\_engineering.accessor.mixin.eda\\_mixin](#), 788  
[741](#) [ads.feature\\_engineering.feature\\_type.boolean](#),  
[ads.feature\\_engineering.accessor.mixin.eda\\_mixin\\_series](#), 789  
[744](#) [ads.feature\\_engineering.feature\\_type.category](#),  
[ads.feature\\_engineering.accessor.mixin.feature\\_types\\_mixin](#), 792  
[745](#) [ads.feature\\_engineering.feature\\_type.constant](#),  
[ads.feature\\_engineering.accessor.mixin.utils](#), 794  
[747](#) [ads.feature\\_engineering.feature\\_type.continuous](#),  
[ads.feature\\_engineering.accessor.series\\_accessor](#), 796  
[752](#) [ads.feature\\_engineering.feature\\_type.creditcard](#),  
[ads.feature\\_engineering.adsimage](#), 761 [798](#)  
[ads.feature\\_engineering.adsimage.image](#), [ads.feature\\_engineering.feature\\_type.datetime](#),  
[756](#) [803](#)  
[ads.feature\\_engineering.adsimage.image\\_reader](#), [ads.feature\\_engineering.feature\\_type.discrete](#),  
[759](#) [805](#)  
[ads.feature\\_engineering.adsimage.interface](#), [ads.feature\\_engineering.feature\\_type.document](#),  
[756](#) [807](#)  
[ads.feature\\_engineering.adsimage.interface.reader](#), [ads.feature\\_engineering.feature\\_type.gis](#),  
[756](#) [808](#)  
[ads.feature\\_engineering.adsstring](#), 764 [ads.feature\\_engineering.feature\\_type.handler](#),  
[ads.feature\\_engineering.adsstring.common\\_regex\\_mixin](#), 775  
[762](#) [ads.feature\\_engineering.feature\\_type.handler.feature\\_w](#)  
[ads.feature\\_engineering.adsstring.oci\\_language](#), 777  
[761, 764](#) [ads.feature\\_engineering.feature\\_type.handler.feature\\_w](#)  
[ads.feature\\_engineering.adsstring.parsers](#), 781  
[762](#) [ads.feature\\_engineering.feature\\_type.handler.warnings](#),  
[ads.feature\\_engineering.adsstring.parsers.base](#), 784  
[761](#) [ads.feature\\_engineering.feature\\_type.integer](#),  
[ads.feature\\_engineering.adsstring.parsers.spacy\\_parser](#),  
[761](#) [ads.feature\\_engineering.feature\\_type.ip\\_address](#),  
[ads.feature\\_engineering.adsstring.string](#), 814  
[762, 764](#) [ads.feature\\_engineering.feature\\_type.ip\\_address\\_v4](#),  
[ads.feature\\_engineering.dataset](#), 764 [816](#)  
[ads.feature\\_engineering.dataset.zip\\_code\\_data](#), [ads.feature\\_engineering.feature\\_type.ip\\_address\\_v6](#),  
[764](#) [819](#)  
[ads.feature\\_engineering.exceptions](#), 839 [ads.feature\\_engineering.feature\\_type.lat\\_long](#),  
[ads.feature\\_engineering.feature\\_type](#), 837 [821](#)  
[ads.feature\\_engineering.feature\\_type.address](#), [ads.feature\\_engineering.feature\\_type.object](#),  
[785](#) [825](#)  
[ads.feature\\_engineering.feature\\_type.adsstring](#), [ads.feature\\_engineering.feature\\_type.ordinal](#),  
[777](#) [826](#)  
[ads.feature\\_engineering.feature\\_type.adsstring\\_adsfeature\\_engineering](#), [ads.feature\\_engineering.feature\\_type.phone\\_number](#),  
[766](#) [828](#)  
[ads.feature\\_engineering.feature\\_type.adsstring\\_if\\_language](#), [ads.feature\\_engineering.feature\\_type.string](#),  
[768](#) [830](#)  
[ads.feature\\_engineering.feature\\_type.adsstring\\_parsers](#), [ads.feature\\_engineering.feature\\_type.text](#),  
[766](#) [832](#)  
[ads.feature\\_engineering.feature\\_type.adsstring\\_parsers\\_base](#), [ads.feature\\_engineering.feature\\_type.unknown](#),  
[765](#) [834](#)  
[ads.feature\\_engineering.feature\\_type.adsstring\\_parsers\\_spacy\\_parser](#), [ads.feature\\_engineering.feature\\_type.zip\\_code](#),  
[765](#) [835](#)  
[ads.feature\\_engineering.feature\\_type.adsstring\\_adstring](#), [ads.feature\\_engineering.feature\\_type\\_manager](#),  
[769](#) [839](#)  
[ads.feature\\_engineering.feature\\_type.base](#), [ads.feature\\_engineering.schema](#), 843



`ads.feature_engineering.utils`, 853  
`ads.hpo`, 873  
`ads.hpo.ads_search_space`, 854  
`ads.hpo.distributions`, 856  
`ads.hpo.objective`, 859  
`ads.hpo.search_cv`, 859  
`ads.hpo.stopping_criterion`, 871  
`ads.hpo.tuner_artifact`, 871  
`ads.hpo.utils`, 872  
`ads.hpo.validation`, 872  
`ads.hpo.visualization`, 854  
`ads.jobs`, 945  
`ads.jobs.ads_job`, 926  
`ads.jobs.builders`, 920  
`ads.jobs.builders.base`, 919  
`ads.jobs.builders.infrastructure`, 901  
`ads.jobs.builders.infrastructure.base`, 873  
`ads.jobs.builders.infrastructure.dataflow`, 875  
`ads.jobs.builders.infrastructure.dsc_job`, 884  
`ads.jobs.builders.infrastructure.dsc_job_runtime`, 895  
`ads.jobs.builders.infrastructure.utils`, 901  
`ads.jobs.builders.runtimes`, 919  
`ads.jobs.builders.runtimes.artifact`, 901  
`ads.jobs.builders.runtimes.base`, 903  
`ads.jobs.builders.runtimes.container_runtime`, 906  
`ads.jobs.builders.runtimes.python_runtime`, 908  
`ads.jobs.cli`, 935  
`ads.jobs.env_var_parser`, 935  
`ads.jobs.extension`, 935  
`ads.jobs.schema`, 922  
`ads.jobs.schema.validator`, 920  
`ads.jobs.serializer`, 936  
`ads.jobs.templates`, 926  
`ads.jobs.templates.container`, 922  
`ads.jobs.templates.driver_notebook`, 922  
`ads.jobs.templates.driver_oci`, 923  
`ads.jobs.templates.driver_python`, 925  
`ads.jobs.utils`, 938  
`ads.model`, 1362  
`ads.model.artifact`, 1296  
`ads.model.artifact_downloader`, 1299  
`ads.model.artifact_uploader`, 1300  
`ads.model.base_properties`, 1301  
`ads.model.common`, 1053  
`ads.model.common.utils`, 1052  
`ads.model.deployment`, 1078  
`ads.model.deployment.common`, 1056  
`ads.model.deployment.common.progress_bar`, 1053  
`ads.model.deployment.common.utils`, 1054  
`ads.model.deployment.model_deployer`, 1056  
`ads.model.deployment.model_deployment`, 1061  
`ads.model.deployment.model_deployment_properties`, 1074  
`ads.model.extractor`, 1088  
`ads.model.extractor.keras_extractor`, 1078  
`ads.model.extractor.lightgbm_extractor`, 1079  
`ads.model.extractor.model_info_extractor`, 1080  
`ads.model.extractor.model_info_extractor_factory`, 1082  
`ads.model.extractor.pytorch_extractor`, 1082  
`ads.model.extractor.sklearn_extractor`, 1083  
`ads.model.extractor.spark_extractor`, 1084  
`ads.model.extractor.tensorflow_extractor`, 1086  
`ads.model.extractor.xgboost_extractor`, 1087  
`ads.model.framework`, 1282  
`ads.model.framework.huggingface_model`, 1088  
`ads.model.framework.lightgbm_model`, 1119  
`ads.model.framework.pytorch_model`, 1146  
`ads.model.framework.sklearn_model`, 1173  
`ads.model.framework.spark_model`, 1201  
`ads.model.framework.tensorflow_model`, 1228  
`ads.model.framework.xgboost_model`, 1255  
`ads.model.generic_model`, 1303  
`ads.model.model_artifact_boilerplate`, 1283  
`ads.model.model_artifact_boilerplate.artifact_introspect`, 1283  
`ads.model.model_artifact_boilerplate.artifact_introspect`, 1282  
`ads.model.model_introspect`, 1331  
`ads.model.model_metadata`, 1334  
`ads.model.model_metadata_mixin`, 1352  
`ads.model.model_properties`, 1353  
`ads.model.model_version_set`, 1354  
`ads.model.runtime`, 1287  
`ads.model.runtime.env_info`, 1283  
`ads.model.runtime.model_deployment_details`, 1285  
`ads.model.runtime.model_provenance_details`, 1285  
`ads.model.runtime.runtime_info`, 1286

[ads.model.runtime.utils](#), 1286  
[ads.model.service](#), 1295  
[ads.model.service.oci\\_datascience\\_model](#), 1287  
[ads.model.service.oci\\_datascience\\_model\\_version](#), 1293  
[ads.model.transformer](#), 1296  
[ads.model.transformer.onnx\\_transformer](#), 1295  
[ads.model\\_artifact\\_boilerplate](#), 1465  
[ads.model\\_artifact\\_boilerplate.artifact\\_introspection\\_test](#), 1465  
[ads.model\\_artifact\\_boilerplate.artifact\\_introspection\\_test.validate](#), 1464  
[ads.mysqlldb](#), 1465  
[ads.opctl](#), 1480  
[ads.opctl.backend](#), 1469  
[ads.opctl.backend.ads\\_dataflow](#), 1466  
[ads.opctl.backend.ads\\_ml\\_job](#), 1466  
[ads.opctl.backend.ads\\_ml\\_pipeline](#), 1467  
[ads.opctl.backend.base](#), 1468  
[ads.opctl.conda](#), 1470  
[ads.opctl.conda.cli](#), 1469  
[ads.opctl.conda.cmds](#), 1469  
[ads.opctl.conda.multipart\\_uploader](#), 1469  
[ads.opctl.config](#), 1474  
[ads.opctl.config.base](#), 1471  
[ads.opctl.config.diagnostics](#), 1470  
[ads.opctl.config.merger](#), 1472  
[ads.opctl.config.resolver](#), 1472  
[ads.opctl.config.utils](#), 1473  
[ads.opctl.config.validator](#), 1473  
[ads.opctl.config.versioner](#), 1473  
[ads.opctl.config.yaml\\_parsers](#), 1471  
[ads.opctl.config.yaml\\_parsers.base](#), 1471  
[ads.opctl.config.yaml\\_parsers.distributed](#), 1471  
[ads.opctl.config.yaml\\_parsers.distributed.yaml\\_parser](#), 1470  
[ads.opctl.constants](#), 1478  
[ads.opctl.diagnostics](#), 1474  
[ads.opctl.diagnostics.requirement\\_exception](#), 1474  
[ads.opctl.distributed](#), 1477  
[ads.opctl.distributed.certificates](#), 1477  
[ads.opctl.distributed.common](#), 1477  
[ads.opctl.distributed.common.abstract\\_cluster\\_provider](#), 1474  
[ads.opctl.distributed.common.abstract\\_framework\\_builder](#), 1476  
[ads.opctl.distributed.common.cluster\\_config\\_helper](#), 1476  
[ads.opctl.distributed.common.cluster\\_provider\\_factory](#), 1477  
[ads.opctl.distributed.common.cluster\\_runner](#), 1477  
[ads.opctl.spark](#), 1478  
[ads.opctl.spark.cli](#), 1477  
[ads.opctl.spark.cmds](#), 1477  
[ads.opctl.spec](#), 1478  
[ads.opctl.spec.utils](#), 1478  
[ads.opctl.utils](#), 1479  
[ads.oracledb](#), 1480  
[ads.pipeline](#), 1520  
[ads.pipeline.ads\\_pipeline](#), 1487  
[ads.pipeline.ads\\_pipeline\\_run](#), 1508  
[ads.pipeline.ads\\_pipeline\\_test.validate](#), 1518  
[ads.pipeline.builders](#), 1481  
[ads.pipeline.builders.infrastructure](#), 1481  
[ads.pipeline.builders.infrastructure.custom\\_script](#), 1480  
[ads.pipeline.cli](#), 1520  
[ads.pipeline.extension](#), 1520  
[ads.pipeline.schema](#), 1481  
[ads.pipeline.visualizer](#), 1487  
[ads.pipeline.visualizer.base](#), 1481  
[ads.pipeline.visualizer.graph\\_renderer](#), 1485  
[ads.pipeline.visualizer.text\\_renderer](#), 1487  
[ads.secrets](#), 1538  
[ads.secrets.adb](#), 1520  
[ads.secrets.auth\\_token](#), 1524  
[ads.secrets.big\\_data\\_service](#), 1525  
[ads.secrets.mysqlldb](#), 1530  
[ads.secrets.oracledb](#), 1532  
[ads.secrets.secrets](#), 1534  
[ads.telemetry](#), 1538  
[ads.telemetry.telemetry](#), 1538  
[ads.text\\_dataset](#), 1549  
[ads.text\\_dataset.backends](#), 1538  
[ads.text\\_dataset.dataset](#), 1541  
[ads.text\\_dataset.extractor](#), 1545  
[ads.text\\_dataset.options](#), 1548  
[ads.text\\_dataset.udfs](#), 1548  
[ads.text\\_dataset.utils](#), 1548  
[ads.type\\_discovery](#), 1553  
[ads.type\\_discovery.abstract\\_detector](#), 1549  
[ads.type\\_discovery.constant\\_detector](#), 1549  
[ads.type\\_discovery.continuous\\_detector](#), 1549  
[ads.type\\_discovery.credit\\_card\\_detector](#), 1549  
[ads.type\\_discovery.datetime\\_detector](#), 1550

<code>ads.type_discovery.discrete_detector</code> , 1550	<code>name (ads.feature_engineering.feature_type.boolean.Boolean attribute)</code> , 789
<code>ads.type_discovery.document_detector</code> , 1550	<code>name (ads.feature_engineering.feature_type.category.Category attribute)</code> , 792
<code>ads.type_discovery.ip_detector</code> , 1550	<code>name (ads.feature_engineering.feature_type.constant.Constant attribute)</code> , 794
<code>ads.type_discovery.latlon_detector</code> , 1551	<code>name (ads.feature_engineering.feature_type.continuous.Continuous attribute)</code> , 796
<code>ads.type_discovery.phone_number_detector</code> , 1551	<code>name (ads.feature_engineering.feature_type.creditcard.CreditCard attribute)</code> , 799
<code>ads.type_discovery.type_discovery_driver</code> , 1551	<code>name (ads.feature_engineering.feature_type.datetime.DateTime attribute)</code> , 803
<code>ads.type_discovery.typed_feature</code> , 1552	<code>name (ads.feature_engineering.feature_type.discrete.Discrete attribute)</code> , 805
<code>ads.type_discovery.unknown_detector</code> , 1553	<code>name (ads.feature_engineering.feature_type.document.Document attribute)</code> , 807
<code>ads.type_discovery.zipcode_detector</code> , 1553	<code>name (ads.feature_engineering.feature_type.gis.GIS attribute)</code> , 808
<code>ads.vault</code> , 1555	<code>name (ads.feature_engineering.feature_type.integer.Integer attribute)</code> , 812
<code>ads.vault.vault</code> , 1553	<code>name (ads.feature_engineering.feature_type.ip_address.IpAddress attribute)</code> , 814
<code>MULTI_CLASS_CLASSIFICATION</code> ( <code>ads.common.utils.ml_task_types</code> attribute), 627	<code>name (ads.feature_engineering.feature_type.ip_address_v4.IpAddressV4 attribute)</code> , 817
<code>MULTI_CLASS_TEXT_CLASSIFICATION</code> ( <code>ads.common.utils.ml_task_types</code> attribute), 627	<code>name (ads.feature_engineering.feature_type.ip_address_v6.IpAddressV6 attribute)</code> , 819
<code>MULTI_LABEL</code> ( <code>ads.data_labeling.constants.AnnotationType</code> attribute), 667	<code>name (ads.feature_engineering.feature_type.lat_long.LatLong attribute)</code> , 821
<code>MultiClassClassificationDataset</code> (class in <code>ads.dataset.classification_dataset</code> ), 685	<code>name (ads.feature_engineering.feature_type.object.Object attribute)</code> , 825
<code>MultiClassTextClassificationDataset</code> (class in <code>ads.dataset.classification_dataset</code> ), 685	<code>name (ads.feature_engineering.feature_type.ordinal.Ordinal attribute)</code> , 826
<code>MultiLabelRecordParser</code> (class in <code>ads.data_labeling.parser.export_record_parser</code> ), 641	<code>name (ads.feature_engineering.feature_type.phone_number.PhoneNumber attribute)</code> , 828
<code>MULTINOMIAL_CLASSIFICATION</code> ( <code>ads.model.model_metadata.UseCaseType</code> attribute), 1351	<code>name (ads.feature_engineering.feature_type.string.String attribute)</code> , 830
<code>MultiPartUploader</code> (class in <code>ads.opctl.conda.multipart_uploader</code> ), 1469	<code>name (ads.feature_engineering.feature_type.text.Text attribute)</code> , 832
<code>MXNET</code> ( <code>ads.model.model_metadata.Framework</code> attribute), 1334	<code>name (ads.feature_engineering.feature_type.unknown.Unknown attribute)</code> , 834
<code>MYSQL</code> ( <code>ads.common.decorator.runtime_dependency.OptionalDependency</code> attribute), 558	<code>name (ads.feature_engineering.feature_type.zip_code.ZipCode attribute)</code> , 835
<code>MySQLDBSecret</code> (class in <code>ads.secrets.mysqlpdb</code> ), 1530	<code>name (ads.feature_engineering.schema.Attribute attribute)</code> , 844
<code>MySQLDBSecretKeeper</code> (class in <code>ads.secrets.mysqlpdb</code> ), 1530	<code>name (ads.jobs.ads_job.Job property)</code> , 931
<b>N</b>	<code>name (ads.jobs.builders.infrastructure.base.Infrastructure property)</code> , 873
<code>n_trials</code> ( <code>ads.hpo.search_cv.ADSTuner</code> property), 862	<code>name (ads.jobs.builders.infrastructure.dataflow.DataFlow property)</code> , 876
<code>name (ads.common.oci_mixin.OCIModelMixin</code> property), 612	<code>name (ads.jobs.builders.infrastructure.dsc_job.DataScienceJob property)</code> , 890
<code>name (ads.dataset.helper.ElaboratedPath</code> property), 714	<code>name (ads.jobs.DataFlow</code> property), 955
<code>name (ads.feature_engineering.accessor.series_accessor.ADSSeriesAccessor</code> property), 753	<code>name (ads.jobs.DataFlowRun</code> property), 978
<code>name (ads.feature_engineering.feature_type.address.Address</code> attribute), 785	<code>name (ads.jobs.DataScienceJob</code> property), 996
<code>name (ads.feature_engineering.feature_type.base.FeatureType</code> attribute), 788	



- name (*ads.jobs.DataScienceJobRun* property), 1006
- name (*ads.jobs.Job* property), 1023
- name (*ads.model.DataScienceModel* attribute), 1366
- name (*ads.model.model\_version\_set.ModelVersionSet* attribute), 1354
- name (*ads.model.model\_version\_set.ModelVersionSet* property), 1359
- name (*ads.model.ModelVersionSet* attribute), 1434
- name (*ads.model.ModelVersionSet* property), 1439
- name (*ads.model.SERDE* attribute), 1445
- name (*ads.pipeline.ads\_pipeline.Pipeline* attribute), 1491
- name (*ads.pipeline.ads\_pipeline.Pipeline* property), 1501
- name (*ads.pipeline.ads\_pipeline\_step.PipelineStep* attribute), 1514
- name (*ads.pipeline.ads\_pipeline\_step.PipelineStep* property), 1518
- name (*ads.pipeline.visualizer.base.RendererItem* attribute), 1483
- name (*ads.pipeline.visualizer.base.RendererItemStatus* attribute), 1485
- Name (class in *ads.feature\_engineering.feature\_type.base*), 788
- NameAlreadyRegistered, 839
- namespace (*ads.common.object\_storage\_details.ObjectStorageDetails* attribute), 598, 599
- NEEDSACTION (*ads.model.generic\_model.ModelState* attribute), 1330
- NEEDSACTION (*ads.model.ModelState* attribute), 1434
- ner (*ads.feature\_engineering.feature\_type.adsstring.oci\_language\_model.NER* property), 768
- NER (*ads.model.model\_metadata.UseCaseType* attribute), 1351
- NERItem (class in *ads.data\_labeling.ner*), 671
- NERItems (class in *ads.data\_labeling.ner*), 671
- NERRecordParser (class in *ads.data\_labeling.parser.export\_record\_parser*), 641
- nlp\_backend() (*ads.feature\_engineering.feature\_type.adsstring.nlp\_backend* method), 772
- NLTK (*ads.model.model\_metadata.Framework* attribute), 1334
- NoRestartError, 870
- normalize\_config() (in module *ads.jobs.builders.infrastructure.utils*), 901
- normalize\_hyperparameter() (in module *ads.model.extractor.model\_info\_extractor*), 1081
- NOT\_PASSED (*ads.common.model\_introspect.TEST\_STATUS* attribute), 596
- NOT\_PASSED (*ads.model.model\_introspect.TEST\_STATUS* attribute), 1333
- NOT\_TESTED (*ads.common.model\_introspect.TEST\_STATUS* attribute), 596
- NOT\_TESTED (*ads.model.model\_introspect.TEST\_STATUS* attribute), 1333
- NotActiveDeploymentError, 1330
- NOTAVAILABLE (*ads.model.generic\_model.ModelState* attribute), 1330
- NOTAVAILABLE (*ads.model.ModelState* attribute), 1434
- NOTEBOOK (*ads.common.decorator.runtime\_dependency.OptionalDependency* attribute), 558
- notebook (*ads.jobs.builders.runtimes.python\_runtime.NotebookRuntime* property), 915
- notebook (*ads.jobs.DataFlowNotebookRuntime* property), 963
- notebook (*ads.jobs.NotebookRuntime* property), 1030
- notebook\_encoding (*ads.jobs.builders.runtimes.python\_runtime.NotebookRuntime* property), 915
- notebook\_encoding (*ads.jobs.DataFlowNotebookRuntime* property), 963
- notebook\_encoding (*ads.jobs.NotebookRuntime* property), 1030
- notebook\_uri (*ads.jobs.builders.runtimes.python\_runtime.NotebookRuntime* property), 915
- notebook\_uri (*ads.jobs.DataFlowNotebookRuntime* property), 963
- notebook\_uri (*ads.jobs.NotebookRuntime* property), 1030
- NotebookArtifact (class in *ads.jobs.builders.runtimes.artifact*), 902
- NotebookCatalog (class in *ads.catalog.notebook*), 549
- NotebookRuntime (class in *ads.jobs*), 1026
- NotebookRuntimeHandler (class in *ads.jobs.builders.runtimes.python\_runtime*), 914
- NotebookRuntimeHandler (class in *ads.jobs.builders.infrastructure.dsc\_job\_runtime*), 898
- NotebookSummaryList (class in *ads.catalog.notebook*), 551
- NotPickableError, 872
- NotSupportedError, 556, 1473, 1548
- noun (*ads.feature\_engineering.adsstring.parsers.base.Parser* property), 761
- noun (*ads.feature\_engineering.adsstring.parsers.spacy\_parser.SpacyParser* property), 762
- noun (*ads.feature\_engineering.feature\_type.adsstring.parsers.base.Parser* property), 765
- noun (*ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser.SpacyParser* property), 765
- noun\_phrase (*ads.feature\_engineering.adsstring.parsers.spacy\_parser.SpacyParser* property), 762
- noun\_phrase (*ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser.SpacyParser* property), 765
- NTrials (class in *ads.hpo.stopping\_criterion*), 871
- num\_executors (*ads.jobs.DataFlowRun* property), 978
- num\_executors (*ads.jobs.utils.DataFlowConfig* property), 943

- num\_paths (*ads.dataset.helper.ElaboratedPath* property), 714
- numeric\_pandas\_dtypes() (in module *ads.common.utils*), 627
- ## O
- Object (class in *ads.feature\_engineering.feature\_type.object*), 825
- OBJECT\_LOCALIZATION (*ads.model.model\_metadata.UseCaseType* attribute), 1351
- object\_storage (*ads.common.oci\_client.OCIClientFactory* property), 600
- ObjectStorageDetails (class in *ads.common.object\_storage\_details*), 598
- oci\_cli\_auth (*ads.common.auth.AuthState* attribute), 563
- oci\_client\_kwargs (*ads.common.auth.AuthState* attribute), 563
- oci\_config (*ads.common.auth.AuthState* attribute), 563
- oci\_config\_file() (in module *ads.common.utils*), 627
- oci\_config\_location() (in module *ads.common.utils*), 627
- oci\_config\_path (*ads.common.auth.AuthState* attribute), 563
- oci\_config\_profile() (in module *ads.common.utils*), 627
- oci\_iam\_type (*ads.common.auth.AuthState* attribute), 564
- oci\_key\_location() (in module *ads.common.utils*), 627
- oci\_key\_profile (*ads.common.auth.AuthState* attribute), 564
- oci\_key\_profile() (in module *ads.common.utils*), 627
- oci\_link (*ads.dataflow.dataflow.DataFlowApp* property), 677
- oci\_link (*ads.dataflow.dataflow.DataFlowRun* property), 681
- oci\_link (*ads.dataflow.dataflow.RunObserver* property), 681
- OCI\_MODEL\_PATTERN (*ads.common.oci\_mixin.OCIModelMixin* attribute), 610
- OCI\_MODEL\_PATTERN (*ads.jobs.DataFlowRun* attribute), 971
- OCI\_MODEL\_PATTERN (*ads.jobs.DataScienceJobRun* attribute), 1001
- oci\_path (*ads.dataflow.dataflow.DataFlowLog* property), 679
- OCI\_SERVICE (*ads.telemetry.telemetry.Surface* attribute), 1538
- oci\_signer (*ads.common.auth.AuthState* attribute), 564
- oci\_signer\_callable (*ads.common.auth.AuthState* attribute), 564
- oci\_signer\_kwargs (*ads.common.auth.AuthState* attribute), 564
- OCIAuthContext (class in *ads.common.auth*), 565
- OCIClientFactory (class in *ads.common.oci\_client*), 599
- OCIClientManager (class in *ads.model.deployment.common.utils*), 1054
- OCIClientMixin (class in *ads.common.oci\_mixin*), 608
- OCIDataScienceMixin (class in *ads.common.oci\_datascience*), 601
- OCIDataScienceModel (class in *ads.model.service.oci\_datascience\_model*), 1287
- OCILanguage (class in *ads.feature\_engineering.feature\_type.adsstring.oci\_language*), 768
- OCILog (class in *ads.common.oci\_logging*), 603
- OCILoggingModelMixin (class in *ads.common.oci\_logging*), 606
- OCILogGroup (class in *ads.common.oci\_logging*), 605
- OCIModelMixin (class in *ads.common.oci\_mixin*), 609
- OCIModelNotExists, 613
- OCIModelWithNameMixin (class in *ads.common.oci\_mixin*), 613
- OCIRecordSummary (class in *ads.data\_labeling.reader.dls\_record\_reader*), 651
- OCIResource (class in *ads.common.oci\_resource*), 614
- OCISerializableMixin (class in *ads.common.oci\_mixin*), 613
- OCIWorkRequestMixin (class in *ads.common.oci\_mixin*), 613
- offset (*ads.data\_labeling.ner.NERItem* attribute), 671
- on() (*ads.common.config.Eventing* method), 577
- ONNX (*ads.common.decorator.runtime\_dependency.OptionalDependency* attribute), 558
- ONNXTransformer (class in *ads.model.transformer.onnx\_transformer*), 1295
- opc\_request\_id (*ads.jobs.DataFlowRun* property), 978
- OPCTL (*ads.common.decorator.runtime\_dependency.OptionalDependency* attribute), 558
- open() (*ads.dataset.dataset\_browser.DatasetBrowser* method), 701
- open() (*ads.dataset.dataset\_browser.GitHubDatasets* method), 701
- open() (*ads.dataset.dataset\_browser.LocalFilesystemDatasets* method), 702
- open() (*ads.dataset.dataset\_browser.SeabornDatasets* method), 702
- open() (*ads.dataset.dataset\_browser.SklearnDatasets* method), 702
- open() (*ads.dataset.dataset\_browser.WebDatasets* method), 703

[open\(\)](#) ([ads.dataset.factory.DatasetFactory](#) static method), 710  
[open\(\)](#) ([ads.feature\\_engineering.adsimage.image.ADSTImage](#) class method), 757  
[open\(\)](#) ([ads.feature\\_engineering.adsimage.image.ADSTImage](#) method), 757  
[open\(\)](#) (in module [ads.config](#)), 1556  
[open\\_to\\_pandas\(\)](#) ([ads.dataset.factory.DatasetFactory](#) static method), 712  
[OperatorNotFound](#), 1473  
[optimizer\(\)](#) ([ads.hpo.search\\_cv.ADSTuner](#) static method), 862  
[option\(\)](#) ([ads.text\\_dataset.dataset.DataLoader](#) method), 1543  
[option\\_handler\(\)](#) ([ads.text\\_dataset.options.OptionFactory](#) static method), 1548  
[option\\_handlers](#) ([ads.text\\_dataset.options.OptionFactory](#) attribute), 1548  
[OptionalDependency](#) (class in [ads.common.decorator.runtime\\_dependency](#)), 557  
[OptionFactory](#) (class in [ads.text\\_dataset.options](#)), 1548  
[OptionHandler](#) (class in [ads.text\\_dataset.options](#)), 1548  
[Options](#) (class in [ads.text\\_dataset.options](#)), 1548  
[OPTUNA](#) ([ads.common.decorator.runtime\\_dependency.OptionDecorator](#) attribute), 558  
[ORACLE\\_AUTOML](#) ([ads.model.model\\_metadata.Framework](#) attribute), 1334  
[OracleConnector](#) (class in [ads.database.connection](#)), 673  
[OracleDBSecret](#) (class in [ads.secrets.oracledb](#)), 1532  
[OracleDBSecretKeeper](#) (class in [ads.secrets.oracledb](#)), 1532  
[order](#) ([ads.feature\\_engineering.schema.Attribute](#) attribute), 844  
[Ordinal](#) (class in [ads.feature\\_engineering.feature\\_type.ordinal](#)), 826  
[OrdinalTypedFeature](#) (class in [ads.type\\_discovery.typed\\_feature](#)), 1552  
[OTHER](#) ([ads.model.model\\_metadata.Framework](#) attribute), 1334  
[OTHER](#) ([ads.model.model\\_metadata.MetadataCustomCategory](#) attribute), 1335  
[OTHER](#) ([ads.model.model\\_metadata.UseCaseType](#) attribute), 1351  
[output\\_dir](#) ([ads.jobs.GitPythonRuntime](#) property), 1012  
[output\\_dir](#) ([ads.jobs.PythonRuntime](#) property), 1039  
[output\\_schema](#) ([ads.model.DataScienceModel](#) attribute), 1366  
[output\\_schema](#) ([ads.model.DataScienceModel](#) property), 1373  
[output\\_uri](#) ([ads.jobs.builders.runtimes.python\\_runtime.NotebookRuntime](#) property), 915  
[output\\_uri](#) ([ads.jobs.DataFlowNotebookRuntime](#) property), 963  
[output\\_uri](#) ([ads.jobs.GitPythonRuntime](#) property), 1012  
[output\\_uri](#) ([ads.jobs.NotebookRuntime](#) property), 1030  
[output\\_uri](#) ([ads.jobs.PythonRuntime](#) property), 1039  
[OVERRIDE](#) ([ads.common.oci\\_mixin.MergeStrategy](#) attribute), 607  
[overwrite](#) ([ads.jobs.builders.runtimes.python\\_runtime.DataFlowRuntime](#) property), 910  
[overwrite](#) ([ads.jobs.DataFlowNotebookRuntime](#) property), 964  
[overwrite](#) ([ads.jobs.DataFlowRuntime](#) property), 986  
[overwrite\\_existing\\_artifact](#) ([ads.model.model\\_properties.ModelProperties](#) attribute), 1354  
[overwrite\\_existing\\_artifact](#) ([ads.model.ModelProperties](#) attribute), 1434  
[owner\\_principal\\_id](#) ([ads.jobs.DataFlowRun](#) property), 978  
[owner\\_principal\\_id](#) ([ads.jobs.utils.DataFlowConfig](#) property), 943  
[owner\\_user\\_name](#) ([ads.jobs.DataFlowRun](#) property), 979  
[owner\\_user\\_name](#) ([ads.jobs.utils.DataFlowConfig](#) property), 943

## P

[PACK\\_TYPE](#) (class in [ads.common.model\\_artifact](#)), 591  
[PACK\\_TYPE](#) (class in [ads.model.runtime.env\\_info](#)), 1284  
[PandasDataset](#) (class in [ads.dataset.sampled\\_dataset](#)), 719  
[parameters](#) ([ads.jobs.DataFlowRun](#) property), 979  
[parameters](#) ([ads.jobs.utils.DataFlowConfig](#) property), 943  
[parse\(\)](#) ([ads.data\\_labeling.interface.parser.Parser](#) method), 629  
[parse\(\)](#) ([ads.data\\_labeling.parser.dls\\_record\\_parser.DLSRecordParser](#) method), 638  
[parse\(\)](#) ([ads.data\\_labeling.parser.export\\_metadata\\_parser.MetadataParser](#) static method), 640  
[parse\(\)](#) ([ads.data\\_labeling.parser.export\\_record\\_parser.RecordParser](#) method), 643  
[parse\(\)](#) ([ads.opctl.config.yaml\\_parsers.base.YamlSpecParser](#) method), 1471  
[parse\(\)](#) ([ads.opctl.config.yaml\\_parsers.distributed.yaml\\_parser.DistributedParser](#) method), 1470  
[parse\(\)](#) (in module [ads.jobs.env\\_var\\_parser](#)), 935  
[parse\\_apache\\_log\\_datetime\(\)](#) (in module [ads.dataset.helper](#)), 715  
[parse\\_apache\\_log\\_str\(\)](#) (in module [ads.dataset.helper](#)), 715  
[parse\\_certificate\(\)](#) ([ads.opctl.config.yaml\\_parsers.distributed.yaml\\_parser.DistributedParser](#) method), 1470

`method`), 1470  
`parse_cluster()` (*ads.opctl.config.yaml\_parsers.distributed.yaml\_parser.DistributedSpecParser* `method`), 1470  
`parse_conda_uri()` (*in module ads.opctl.utils*), 1479  
`parse_content()` (*ads.opctl.config.yaml\_parsers.base.YamlSpecParser* `class method`), 1471  
`parse_main()` (*ads.opctl.config.yaml\_parsers.distributed.yaml\_parser.DistributedSpecParser* `method`), 1470  
`parse_ps()` (*ads.opctl.config.yaml\_parsers.distributed.yaml\_parser.DistributedSpecParser* `method`), 1470  
`parse_runtime()` (*ads.opctl.config.yaml\_parsers.distributed.yaml\_parser.DistributedSpecParser* `method`), 1470  
`parse_worker()` (*ads.opctl.config.yaml\_parsers.distributed.yaml\_parser.DistributedSpecParser* `method`), 1470  
`parse_worker_params()` (*ads.opctl.config.yaml\_parsers.distributed.yaml\_parser.DistributedSpecParser* `method`), 1470  
`Parser` (*class in ads.data\_labeling.interface.parser*), 629  
`Parser` (*class in ads.feature\_engineering.adsstring.parsers.base*), 1551  
`Parser` (*class in ads.feature\_engineering.feature\_type.adsstring.parsers.base*), 1553  
`parser()` (*ads.data\_labeling.parser.dls\_record\_parser.DLSRecordParser* `static method`), 639  
`parser()` (*ads.data\_labeling.parser.export\_record\_parser.RecordParser* `static method`), 643  
`partition()` (*ads.feature\_engineering.feature\_type.adsstring.string.ADSString* `method`), 772  
`PASSED` (*ads.common.model\_introspect.TEST\_STATUS* `attribute`), 597  
`PASSED` (*ads.model.model\_introspect.TEST\_STATUS* `attribute`), 1333  
`password` (*ads.secrets.adb.ADBSecret* `attribute`), 1520  
`password` (*ads.secrets.mysqladb.MySQLDBSecret* `attribute`), 1530  
`password` (*ads.secrets.oracledb.OracleDBSecret* `attribute`), 1532  
`path` (*ads.common.object\_storage\_details.ObjectStorageDetails* `property`), 599  
`path` (*ads.data\_labeling.record.Record* `attribute`), 672  
`PATH_DELIMITER` (*ads.jobs.builders.infrastructure.dsc\_job\_runtime.CythonRuntimeHandler* `attribute`), 898  
`PATH_DELIMITER` (*ads.jobs.builders.infrastructure.dsc\_job\_runtime.PythonRuntimeHandler* `attribute`), 899  
`paths` (*ads.dataset.helper.ElaboratedPath* `property`), 714  
`payload_attribute_map` (*ads.jobs.builders.infrastructure.dsc\_job.DataScienceJob* `attribute`), 890  
`payload_attribute_map` (*ads.jobs.DataScienceJob* `attribute`), 996  
`PDFPlumber` (*class in ads.text\_dataset.backends*), 1539  
`PDFProcessor` (*class in ads.text\_dataset.extractor*), 1547  
`pearson()` (*ads.feature\_engineering.accessor.mixin.eda\_mixin.EDAMixin* `method`), 743  
`pearsonplot()` (*ads.feature\_engineering.accessor.mixin.eda\_mixin.EDAMixin* `method`), 744  
`perfect` (*ads.evaluations.evaluation\_plot.EvaluationPlot* `attribute`), 723, 724  
`perfect_kwargs` (*ads.evaluations.evaluation\_plot.EvaluationPlot* `attribute`), 723, 724  
`PERFORMANCE` (*ads.model.model\_metadata.MetadataCustomCategory* `attribute`), 725  
`phone_number_US` (*ads.feature\_engineering.adsstring.common\_regex\_mixin.CommonRegexMixin* `attribute`), 1551  
`phone_number_US` (*ads.feature\_engineering.feature\_type.adsstring.common\_regex\_mixin.CommonRegexMixin* `attribute`), 1551  
`PhoneNumber` (*class in ads.feature\_engineering.feature\_type.phone\_number*), 1551  
`PhoneNumberDetector` (*class in ads.type\_discovery.phone\_number\_detector*), 1551  
`PhoneNumberTypedFeature` (*class in ads.type\_discovery.typed\_feature*), 1553  
`pip_install()` (*in module ads.common.model\_artifact*), 591  
`PIPELINE` (*ads.opctl.constants.BACKEND\_NAME* `attribute`), 1478  
`pipeline` (*ads.pipeline.ads\_pipeline\_run.PipelineRun* `property`), 1511  
`pipeline` (*ads.pipeline.ads\_pipeline\_run.PipelineRun* `property`), 1511  
`pipeline` (*ads.pipeline.visualizer.base.PipelineVisualizer* `attribute`), 1481  
`PIPELINE` (*ads.pipeline.visualizer.base.StepKind* `attribute`), 1485  
`Pipeline` (*class in ads.pipeline.ads\_pipeline*), 1490  
`pipeline()` (*in module ads.pipeline.extension*), 1520  
`pipeline_cancel()` (*in module ads.pipeline.extension*), 1520  
`pipeline_delete()` (*in module ads.pipeline.extension*), 1520  
`pipeline_log()` (*in module ads.pipeline.extension*), 1520  
`pipeline_run` (*ads.pipeline.visualizer.base.PipelineVisualizer* `property`), 1511  
`pipeline_run()` (*in module ads.pipeline.extension*), 1520  
`pipeline_show()` (*in module ads.pipeline.extension*), 1520  
`pipeline_status()` (*in module ads.pipeline.extension*), 1520  
`PipelineBackend` (*class in ads.opctl.backend.ads\_ml\_pipeline*), 1467  
`PipelineGraphRenderer` (*class in ads.pipeline.visualizer.graph\_renderer*), 1485



**PipelineRenderer** (class in *ads.pipeline.visualizer.base*), 1481  
**PipelineRun** (class in *ads.pipeline.ads\_pipeline\_run*), 1508  
**PipelineStep** (class in *ads.pipeline.ads\_pipeline\_step*), 1513  
**PipelineTextRenderer** (class in *ads.pipeline.visualizer.text\_renderer*), 1487  
**PipelineVisualizer** (class in *ads.pipeline.visualizer.base*), 1481  
**PipelineVisualizerError**, 1483  
**plot()** (*ads.dataset.sampled\_dataset.PandasDataset* method), 719  
**plot()** (*ads.dataset.timeseries.Timeseries* method), 721  
**plot()** (*ads.evaluations.evaluation\_plot.EvaluationPlot* class method), 724  
**plot()** (*ads.evaluations.evaluation\_plot.EvaluationPlot* method), 724  
**plot\_best\_scores()** (*ads.hpo.search\_cv.ADSTuner* method), 862  
**plot\_contour\_scores()** (*ads.hpo.search\_cv.ADSTuner* method), 863  
**plot\_correlation\_heatmap()** (*ads.dataset.correlation\_plot.BokehHeatMap* method), 687  
**plot\_correlation\_heatmap()** (in module *ads.dataset.correlation\_plot*), 688  
**plot\_edf\_scores()** (*ads.hpo.search\_cv.ADSTuner* method), 863  
**plot\_gis\_scatter()** (*ads.dataset.sampled\_dataset.PandasDataset* method), 589  
**plot\_hbar()** (*ads.dataset.correlation\_plot.BokehHeatMap* method), 687  
**plot\_heat\_map()** (*ads.dataset.correlation\_plot.BokehHeatMap* method), 687  
**plot\_intermediate\_scores()** (*ads.hpo.search\_cv.ADSTuner* method), 863  
**plot\_parallel\_coordinate\_scores()** (*ads.hpo.search\_cv.ADSTuner* method), 863  
**plot\_param\_importance()** (*ads.hpo.search\_cv.ADSTuner* method), 864  
**Plotting** (class in *ads.dataset.plot*), 717  
**plugin\_clear()** (*ads.feature\_engineering.feature\_type.adsstring.parsers.base.Parser* method), 772  
**plugin\_list()** (*ads.feature\_engineering.feature\_type.adsstring.parsers.base.Parser* method), 773  
**plugin\_register()** (*ads.feature\_engineering.feature\_type.adsstring.parsers.base.Parser* method), 773  
**plugins** (*ads.feature\_engineering.feature\_type.adsstring.parsers.base.Parser* attribute), 769, 773  
**PNG** (*ads.pipeline.visualizer.graph\_renderer.RenderTo* attribute), 1486  
**populate\_metadata()** (*ads.common.model\_artifact.ModelArtifact* method), 587, 588  
**populate\_metadata()** (*ads.common.model\_metadata\_mixin.MetadataMixin* method), 597  
**populate\_metadata()** (*ads.model.framework.huggingface\_model.HuggingFacePipelineModel* method), 1105  
**populate\_metadata()** (*ads.model.framework.lightgbm\_model.LightGBMModel* method), 1132  
**populate\_metadata()** (*ads.model.framework.pytorch\_model.PyTorchModel* method), 1159  
**populate\_metadata()** (*ads.model.framework.sklearn\_model.SklearnModel* method), 1187  
**populate\_metadata()** (*ads.model.framework.spark\_model.SparkPipelineModel* method), 1214  
**populate\_metadata()** (*ads.model.framework.tensorflow\_model.TensorFlowModel* method), 1241  
**populate\_metadata()** (*ads.model.framework.xgboost\_model.XGBoostModel* method), 1268  
**populate\_metadata()** (*ads.model.model\_metadata\_mixin.MetadataMixin* method), 1352  
**populate\_schema()** (*ads.common.model\_artifact.ModelArtifact* method), 589  
**populate\_schema()** (*ads.common.model\_metadata\_mixin.MetadataMixin* method), 597  
**populate\_schema()** (*ads.model.framework.huggingface\_model.HuggingFacePipelineModel* method), 1105  
**populate\_schema()** (*ads.model.framework.lightgbm\_model.LightGBMModel* method), 1132  
**populate\_schema()** (*ads.model.framework.pytorch\_model.PyTorchModel* method), 1159  
**populate\_schema()** (*ads.model.framework.sklearn\_model.SklearnModel* method), 1187  
**populate\_schema()** (*ads.model.framework.spark\_model.SparkPipelineModel* method), 1214  
**populate\_schema()** (*ads.model.framework.tensorflow\_model.TensorFlowModel* method), 1241  
**populate\_schema()** (*ads.model.framework.xgboost\_model.XGBoostModel* method), 1268  
**populate\_schema()** (*ads.model.model\_metadata\_mixin.MetadataMixin* method), 1352  
**port** (*ads.secrets.oracledb.OracleDBSecret* attribute), 1530  
**pos** (*ads.secrets.oracledb.OracleDBSecret* attribute), 1532  
**pos** (*ads.feature\_engineering.adsstring.parsers.base.Parser* property), 761

`pos (ads.feature_engineering.adsstring.parsers.spacy_parser.SpacyParser property), 762`  
`pos (ads.feature_engineering.feature_type.adsstring.parsers.base.Parser property), 765`  
`pos (ads.feature_engineering.feature_type.adsstring.parsers.spacy_parser.SpacyParser property), 765`  
`positive_class (ads.evaluations.evaluator.ADSEvaluator attribute), 725`  
`positive_class (ads.evaluations.statistical_metrics.ModelEvaluator attribute), 737`  
`Positive_Class_Names (ads.evaluations.evaluator.ADSEvaluator attribute), 728`  
`Positive_Class_names (ads.evaluations.evaluator.ADSEvaluator attribute), 726`  
`precision (ads.evaluations.evaluator.ADSEvaluator.EvaluationMetric property), 727`  
`PREDICT (ads.model.deployment.model_deployment.ModelDeployment attribute), 1073`  
`predict() (ads.common.model.ADSModel method), 583`  
`predict() (ads.model.AutoMLModel method), 1364`  
`predict() (ads.model.deployment.model_deployment.ModelDeployment method), 1069`  
`predict() (ads.model.framework.huggingface_model.HuggingFacePipelineModel method), 1090, 1106`  
`predict() (ads.model.framework.lightgbm_model.LightGBMModel method), 1121, 1133`  
`predict() (ads.model.framework.pytorch_model.PyTorchModel method), 1148, 1160`  
`predict() (ads.model.framework.sklearn_model.SklearnModel method), 1175, 1188`  
`predict() (ads.model.framework.spark_model.SparkPipelineModel method), 1203, 1215`  
`predict() (ads.model.framework.tensorflow_model.TensorFlowModel method), 1230, 1242`  
`predict() (ads.model.framework.xgboost_model.XGBoostModel method), 1257, 1269`  
`predict() (ads.model.generic_model.FrameworkSpecificModel method), 1304`  
`predict() (ads.model.generic_model.GenericModel method), 1308, 1317`  
`predict() (ads.model.GenericModel method), 1379, 1387`  
`predict() (ads.model.HuggingFacePipelineModel method), 1403`  
`predict() (ads.model.LightGBMModel method), 1410`  
`predict() (ads.model.ModelDeployment method), 1424`  
`predict() (ads.model.PyTorchModel method), 1443`  
`predict() (ads.model.SklearnModel method), 1448`  
`predict() (ads.model.SparkPipelineModel method), 1452`  
`predict() (ads.model.TensorFlowModel method), 1457`  
`predict_proba() (ads.common.model.ADSModel method), 583`  
`prepare() (ads.common.model.ADSModel method), 583`  
`prepare() (ads.model.AutoMLModel method), 1364`  
`prepare() (ads.model.framework.huggingface_model.HuggingFacePipelineModel method), 1090, 1106`  
`prepare() (ads.model.framework.lightgbm_model.LightGBMModel method), 1121, 1133`  
`prepare() (ads.model.framework.pytorch_model.PyTorchModel method), 1148, 1160`  
`prepare() (ads.model.framework.sklearn_model.SklearnModel method), 1176, 1188`  
`prepare() (ads.model.framework.spark_model.SparkPipelineModel method), 1203, 1215`  
`prepare() (ads.model.framework.tensorflow_model.TensorFlowModel method), 1230, 1242`  
`prepare() (ads.model.framework.xgboost_model.XGBoostModel method), 1257, 1269`  
`prepare() (ads.model.generic_model.GenericModel method), 1308, 1317`  
`prepare() (ads.model.GenericModel method), 1379, 1387`  
`prepare() (ads.model.HuggingFacePipelineModel method), 1403`  
`prepare() (ads.model.LightGBMModel method), 1410`  
`prepare() (ads.model.PyTorchModel method), 1443`  
`prepare() (ads.model.SklearnModel method), 1448`  
`prepare() (ads.model.SparkPipelineModel method), 1452`  
`prepare() (ads.model.TensorFlowModel method), 1457`  
`prepare_app() (ads.dataflow.dataflow.DataFlow method), 675`  
`prepare_artifact() (ads.model.deployment.common.utils.OCIClientManager method), 1055`  
`prepare_fn_attributes() (in module ads.common.function.fn_util), 560`  
`prepare_generic_model() (in module ads.common.model_export_util), 592`  
`prepare_job_config() (ads.opctl.backend.ads_ml_job.MLJobDistributedBackend method), 1467`  
`prepare_run() (ads.dataflow.dataflow.DataFlowApp method), 677`  
`prepare_runtime_yaml() (ads.model.artifact.ModelArtifact method), 1297`  
`prepare_save_deploy()`

`(ads.model.framework.huggingface_model.HuggingFaceModel.prepare_save_deploy()`  
`method), 1108`  
`prepare_save_deploy()`  
`(ads.model.framework.lightgbm_model.LightGBMModel`  
`method), 1135`  
`prepare_save_deploy()`  
`(ads.model.framework.pytorch_model.PyTorchModel`  
`method), 1162`  
`prepare_save_deploy()`  
`(ads.model.framework.sklearn_model.SklearnModel`  
`method), 1190`  
`prepare_save_deploy()`  
`(ads.model.framework.spark_model.SparkPipelineModel`  
`method), 1217`  
`prepare_save_deploy()`  
`(ads.model.framework.tensorflow_model.TensorFlowModel`  
`method), 1244`  
`prepare_save_deploy()`  
`(ads.model.framework.xgboost_model.XGBoostModel`  
`method), 1271`  
`prepare_save_deploy()`  
`(ads.model.generic_model.GenericModel`  
`method), 1308, 1319`  
`prepare_save_deploy()` `(ads.model.GenericModel`  
`method), 1379, 1390`  
`prepare_score_py()` `(ads.model.artifact.ModelArtifact`  
`method), 1298`  
`prepare_tuner_artifact()`  
`(ads.hpo.tuner_artifact.UploadTunerArtifact`  
`method), 872`  
`preprocess_cell()` `(ads.jobs.templates.driver_notebook.PreprocessCell`  
`method), 922`  
`price` `(ads.feature_engineering.adsstring.common_regex_mixin.CommonRegexMixin`  
`property), 763`  
`price` `(ads.feature_engineering.feature_type.adsstring.common_regex_mixin.CommonRegexMixin`  
`property), 767`  
`principal` `(ads.secrets.big_data_service.BDSecret` `attribute), 1525, 1526`  
`principal` `(ads.secrets.big_data_service.BDSecretKeeper` `attribute), 1527`  
`print_user_message()` `(in module ads.common.utils), 627`  
`PrintItem` `(class in ads.common.model_introspect), 596`  
`PrintItem` `(class in ads.model.model_introspect), 1333`  
`private_endpoint_dns_zones`  
`(ads.jobs.DataFlowRun` `property), 979`  
`private_endpoint_id` `(ads.jobs.DataFlowRun` `property), 979`  
`private_endpoint_id` `(ads.jobs.utils.DataFlowConfig` `property), 944`  
`private_endpoint_max_host_count`  
`(ads.jobs.DataFlowRun` `property), 979`  
`private_endpoint_nsg_ids` `(ads.jobs.DataFlowRun` `property), 979`  
`private_endpoint_subnet_id`  
`(ads.jobs.DataFlowRun` `property), 980`  
`prob_type` `(ads.evaluations.evaluation_plot.EvaluationPlot` `attribute), 723, 725`  
`process()` `(ads.opctl.config.base.ConfigProcessor` `method), 1471`  
`process()` `(ads.opctl.config.merger.ConfigMerger` `method), 1472`  
`process()` `(ads.opctl.config.resolver.ConfigResolver` `method), 1472`  
`process()` `(ads.opctl.config.validator.ConfigValidator` `method), 1473`  
`process()` `(ads.opctl.config.versioner.ConfigVersioner` `method), 1473`  
`processor` `(ads.text_dataset.dataset.DataLoader` `attribute), 1541`  
`processor_map` `(ads.text_dataset.extractor.FileProcessorFactory` `attribute), 1547`  
`put_file_cmd()` `(ads.opctl.distributed.common.abstract_cluster_provider.CliClusterProvider` `method), 1475`  
`progress` `(ads.common.model_artifact.ModelArtifact` `attribute), 586`  
`progress_bar` `(ads.model.deployment.common.progress_bar.TqdmProgressBar` `attribute), 1053`  
`PROGRESS_STEPS_COUNT`  
`(ads.model.artifact_downloader.ArtifactDownloader` `attribute), 1299`  
`PROGRESS_STEPS_COUNT`  
`(ads.model.artifact_downloader.LargeArtifactDownloader` `attribute), 1300`  
`PROGRESS_STEPS_COUNT`  
`(ads.model.artifact_downloader.SmallArtifactDownloader` `attribute), 1300`  
`PROGRESS_STEPS_COUNT`  
`(ads.model.artifact_uploader.LargeArtifactUploader` `attribute), 1301`  
`PROGRESS_STEPS_COUNT`  
`(ads.model.artifact_uploader.SmallArtifactUploader` `attribute), 1301`  
`ProgressBar` `(class in ads.dataset.progress), 718`  
`ProgressBar` `(class in`  
`ads.model.deployment.common.progress_bar), 1053`  
`project_id` `(ads.jobs.builders.infrastructure.dsc_job.DataScienceJob` `property), 890`  
`project_id` `(ads.jobs.DataScienceJob` `property), 996`  
`project_id` `(ads.jobs.DataScienceJobRun` `property), 1006`  
`project_id` `(ads.model.DataScienceModel` `attribute), 1365`  
`project_id` `(ads.model.DataScienceModel` `property),`

[1373](#)  
[project\\_id\(ads.model.model\\_properties.ModelProperties attribute\), 1354](#)  
[project\\_id\(ads.model.model\\_version\\_set.ModelVersionSet attribute\), 1354](#)  
[project\\_id\(ads.model.model\\_version\\_set.ModelVersionSet property\), 1359](#)  
[project\\_id\(ads.model.ModelProperties attribute\), 1434](#)  
[project\\_id\(ads.model.ModelVersionSet attribute\), 1434](#)  
[project\\_id\(ads.model.ModelVersionSet property\), 1439](#)  
[project\\_id\(ads.pipeline.ads\\_pipeline.Pipeline attribute\), 1491](#)  
[project\\_id\(ads.pipeline.ads\\_pipeline.Pipeline property\), 1501](#)  
[project\\_ocid\(ads.model.runtime.model\\_provenance\\_details.ModelProvenanceDetails attribute\), 1285](#)  
[ProjectCatalog \(class in ads.catalog.project\), 552](#)  
[ProjectSummaryList \(class in ads.catalog.project\), 553](#)  
[properties\(ads.model.AutoMLModel attribute\), 1363](#)  
[properties\(ads.model.deployment.model\\_deployment.ModelDeployment attribute\), 1061](#)  
[properties\(ads.model.framework.huggingface\\_model.HuggingFacePipelineModel attribute\), 1090](#)  
[properties\(ads.model.framework.lightgbm\\_model.LightGBMModel attribute\), 1120](#)  
[properties\(ads.model.framework.pytorch\\_model.PyTorchModel attribute\), 1147](#)  
[properties\(ads.model.framework.sklearn\\_model.SklearnModel attribute\), 1175](#)  
[properties\(ads.model.framework.spark\\_model.SparkPipelineModel attribute\), 1202](#)  
[properties\(ads.model.framework.tensorflow\\_model.TensorFlowModel attribute\), 1229](#)  
[properties\(ads.model.framework.xgboost\\_model.XGBoostModel attribute\), 1256](#)  
[properties\(ads.model.generic\\_model.GenericModel attribute\), 1307](#)  
[properties\(ads.model.GenericModel attribute\), 1378](#)  
[properties\(ads.model.HuggingFacePipelineModel attribute\), 1402](#)  
[properties\(ads.model.LightGBMModel attribute\), 1409](#)  
[properties\(ads.model.ModelDeployment attribute\), 1416](#)  
[properties\(ads.model.PyTorchModel attribute\), 1442](#)  
[properties\(ads.model.SklearnModel attribute\), 1447](#)  
[properties\(ads.model.SparkPipelineModel attribute\), 1451](#)  
[properties\(ads.model.TensorFlowModel attribute\), 1456](#)  
[properties\(ads.model.XGBoostModel attribute\), 1460](#)  
[PROPHET \(ads.model.model\\_metadata.Framework attribute\), 1334](#)  
[provenance\\_metadata\(ads.model.DataScienceModel attribute\), 1366](#)  
[provenance\\_metadata\(ads.model.DataScienceModel property\), 1373](#)  
[provider\(ads.opctl.distributed.common.cluster\\_provider\\_factory.ClusterProvider attribute\), 1477](#)  
[publish\(\) \(in module ads.opctl.conda.cmds\), 1469](#)  
[publish\\_image\(\) \(in module ads.opctl.utils\), 1479](#)  
[PY4JGateway \(class in ads.text\\_dataset.utils\), 1548](#)  
[PYMC3 \(ads.model.model\\_metadata.Framework attribute\), 1334](#)  
[PYOD \(ads.model.model\\_metadata.Framework attribute\), 1334](#)  
[PYSTAN \(ads.model.model\\_metadata.Framework attribute\), 1334](#)  
[python\\_path\(ads.jobs.GitPythonRuntime property\), 1012](#)  
[python\\_path\(ads.jobs.PythonRuntime property\), 1039](#)  
[PythonArtifact \(class in ads.jobs.builders.runtimes.artifact\), 902](#)  
[PythonRuntime \(class in ads.jobs\), 1035](#)  
[PythonRuntime \(class in ads.jobs.builders.runtimes.python\\_runtime\), 916](#)  
[PythonRuntimeHandler \(class in ads.jobs.builders.infrastructure.dsc\\_job\\_runtime\), 899](#)  
[PYTORCH \(ads.common.decorator.runtime\\_dependency.OptionalDependency attribute\), 558](#)  
[PYTORCH \(ads.model.model\\_metadata.Framework attribute\), 1334](#)  
[PyTorchExtractor \(class in ads.model.extractor.pytorch\\_extractor\), 1082](#)  
[PyTorchExtractor \(class in ads.model.extractor.pytorch\\_extractor\), 1083](#)  
[PyTorchModel \(class in ads.model\), 1441](#)  
[PyTorchModel \(class in ads.model.framework.pytorch\\_model\), 1146](#)

## Q

[query\(\) \(ads.bds.big\\_data\\_service.ADSHiveConnection method\), 541](#)

## R

[random\\_color\\_func\(\) \(in module ads.feature\\_engineering.utils\), 854](#)  
[random\\_valid\\_ocid\(\) \(in module ads.common.utils\), 627](#)  
[RandomForestClassifierSearchSpace \(class in ads.hpo.ads\\_search\\_space\), 855](#)



RandomForestRegressorSearchSpace (class in [ads.hpo.ads\\_search\\_space](#)), 855  
 raw\_metrics (ads.evaluations.evaluator.ADSEvaluator property), 730  
 reached\_endoflife() (ads.opctl.distributed.common.abstract\_cluster\_provider.Provider method), 1475  
 READ (ads.common.config.Mode attribute), 579  
 read() (ads.common.config.ExtendedConfigParser method), 578  
 read() (ads.data\_labeling.interface.reader.Reader method), 630  
 read() (ads.data\_labeling.reader.dataset\_reader.DLSDatasetReader static method), 924  
 read() (ads.data\_labeling.reader.dataset\_reader.ExportReader class method), 709  
 read() (ads.data\_labeling.reader.dataset\_reader.LabeledDatasetReader static method), 721  
 read() (ads.data\_labeling.reader.dls\_record\_reader.DLSRecordReader method), 651  
 read() (ads.data\_labeling.reader.export\_record\_reader.ExportRecordReader method), 652  
 read() (ads.data\_labeling.reader.jsonl\_reader.JsonlReader method), 653  
 read() (ads.data\_labeling.reader.metadata\_reader.DLSMetadataReader method), 654  
 read() (ads.data\_labeling.reader.metadata\_reader.ExportMetadataReader method), 655  
 read() (ads.data\_labeling.reader.metadata\_reader.MetadataReader static method), 709  
 read() (ads.data\_labeling.reader.record\_reader.RecordReader static method), 709  
 read() (ads.feature\_engineering.adsimage.image\_reader.ADSImageReader method), 759, 760  
 read() (ads.feature\_engineering.adsimage.image\_reader.ImageReader static method), 760  
 read() (ads.feature\_engineering.adsimage.interface.reader.Reader method), 756  
 read\_arff() (ads.dataset.factory.CustomFormatReaders static method), 708  
 read\_avro() (ads.dataset.factory.CustomFormatReaders static method), 708  
 read\_from\_ini() (in module ads.opctl.config.utils), 1473  
 read\_html() (ads.dataset.factory.CustomFormatReaders static method), 708  
 read\_json() (ads.dataset.factory.CustomFormatReaders static method), 708  
 read\_labeled\_data() (ads.data\_labeling.mixin.data\_labeling.DataLabelingAccessMixin static method), 633  
 read\_libsvm() (ads.dataset.factory.CustomFormatReaders static method), 709  
 read\_line() (ads.text\_dataset.backends.Base method), 1539  
 read\_line() (ads.text\_dataset.backends.PDFPlumber method), 1540  
 read\_line() (ads.text\_dataset.backends.Tika method), 1540  
 read\_line() (ads.text\_dataset.dataset.DataLoader method), 1544  
 read\_line() (ads.text\_dataset.extractor.FileProcessor method), 1546  
 read\_log() (ads.dataset.factory.CustomFormatReaders static method), 709  
 read\_secret() (ads.jobs.templates.driver\_oci.CredentialManager static method), 924  
 read\_sql() (ads.dataset.factory.CustomFormatReaders static method), 709  
 read\_sql() (ads.dbmixin.db\_pandas\_accessor.DBAccessMixin static method), 721  
 read\_text() (ads.text\_dataset.backends.Base method), 1539  
 read\_text() (ads.text\_dataset.backends.PDFPlumber method), 1540  
 read\_text() (ads.text\_dataset.backends.Tika method), 1541  
 read\_text() (ads.text\_dataset.dataset.DataLoader method), 1544  
 read\_text() (ads.text\_dataset.extractor.FileProcessor method), 1546  
 read\_tsv() (ads.dataset.factory.CustomFormatReaders static method), 709  
 read\_xml() (ads.dataset.factory.CustomFormatReaders static method), 709  
 ReadAnnotationError, 640  
 ReadImageReadersError, 651  
 ReadDatasetError, 656  
 ReadFileReadersError, 651  
 Reader (class in ads.data\_labeling.interface.reader), 630  
 Reader (class in ads.feature\_engineering.adsimage.interface.reader), 756  
 ReadRecordsError, 651  
 ready() (ads.opctl.distributed.common.abstract\_cluster\_provider.ClusterProvider method), 1475  
 Recommendation (class in ads.dataset.recommendation), 718  
 recommendation\_type\_labels (ads.dataset.recommendation.Recommendation attribute), 718  
 recommendation\_types (ads.dataset.recommendation.Recommendation attribute), 718  
 RecommendationTransformer (class in ads.dataset.recommendation\_transformer), 718  
 RECOMMENDER (ads.model.model\_metadata.UseCaseType attribute), 1351  
 record (ads.data\_labeling.reader.dls\_record\_reader.OCIRecordSummary

attribute), 651

Record (class in `ads.data_labeling.record`), 672

RecordParser (class in `ads.data_labeling.parser.export_record_parser`), 642

RecordParserFactory (class in `ads.data_labeling.parser.export_record_parser`), 643

RecordReader (class in `ads.data_labeling.reader.record_reader`), 656

records\_path (`ads.data_labeling.metadata.Metadata` attribute), 669, 670

redact() (`ads.feature_engineering.adsstring.common_regex_mixin.CommonRegexMixin` method), 763

redact() (`ads.feature_engineering.feature_type.adsstring.common_regex_mixin.CommonRegexMixin` method), 767

redact() (`ads.feature_engineering.feature_type.adsstring.string.ADSString` method), 773

redact\_map (`ads.feature_engineering.adsstring.common_regex_mixin.CommonRegexMixin` attribute), 764

redact\_map (`ads.feature_engineering.feature_type.adsstring.common_regex_mixin.CommonRegexMixin` attribute), 768

refresh\_ticket() (in module `ads.bds.auth`), 540

regexes (`ads.feature_engineering.adsstring.common_regex_mixin.CommonRegexMixin` attribute), 762

regexes (`ads.feature_engineering.feature_type.adsstring.common_regex_mixin.CommonRegexMixin` attribute), 766

register() (`ads.common.auth.AuthFactory` class method), 563

register() (`ads.data_labeling.loader.file_loader.FileLoaderFactory` class method), 631

register() (`ads.data_labeling.parser.dls_record_parser.DLSRecordParserFactory` class method), 639

register() (`ads.data_labeling.parser.export_record_parser.RecordParserFactory` class method), 643

register() (`ads.feature_engineering.feature_type.adsstring.string.ADSString` method), 775

register() (`ads.feature_engineering.feature_type.handler.feature_validator.FeatureValidator` method), 777, 778

register() (`ads.feature_engineering.feature_type.handler.feature_validator.FeatureValidator` method), 780

register() (`ads.feature_engineering.feature_type.handler.feature_validator.FeatureValidator` method), 782, 783

register() (`ads.opctl.distributed.common.cluster_provider.ClusterProviderFactory` class method), 1477

register() (`ads.text_dataset.extractor.FileProcessorFactory` class method), 1547

register\_format() (`ads.feature_engineering.schema.SchemaFactory` method), 851, 852

register\_option() (`ads.text_dataset.options.OptionFactory` class method), 1548

registered() (`ads.feature_engineering.feature_type.adsstring.common_regex_mixin.CommonRegexMixin` method), 775

registered() (`ads.feature_engineering.feature_type.handler.feature_validator.FeatureValidator` method), 777, 779

registered() (`ads.feature_engineering.feature_type.handler.feature_validator.FeatureValidator` method), 780

registered() (`ads.feature_engineering.feature_type.handler.feature_validator.FeatureValidator` method), 782, 784

REGRESSION (`ads.common.utils.ml_task_types` attribute), 627

REGRESSION (`ads.model.model_metadata.UseCaseType` attribute), 1351

RegressionDataset (class in `ads.dataset.regression_dataset`), 719

reload (`ads.common.model_artifact.ModelArtifact` attribute), 1091, 1112

reload() (`ads.common.model_artifact.ModelArtifact` method), 1091, 1112

reload() (`ads.model.artifact.ModelArtifact` method), 1091, 1112

reload() (`ads.model.AutoMLModel` method), 1364

reload() (`ads.model.framework.huggingface_model.HuggingFacePipelineModel` method), 1400, 1401

reload() (`ads.model.framework.huggingface_model.HuggingFacePipelineModel` method), 1091, 1112

reload() (`ads.model.framework.lightgbm_model.LightGBMModel` method), 1121, 1139

reload() (`ads.model.framework.pytorch_model.PyTorchModel` method), 1121, 1139

reload() (`ads.model.framework.sklearn_model.SklearnModel` method), 1121, 1139

reload() (`ads.model.framework.spark_model.SparkPipelineModel` method), 1203, 1221

reload() (`ads.model.framework.tensorflow_model.TensorFlowModel` method), 1230, 1248

reload() (`ads.model.framework.xgboost_model.XGBoostModel` method), 1230, 1248

reload() (`ads.model.generic_model.GenericModel` method), 1257, 1275

reload() (`ads.model.generic_model.GenericModel` method), 1309, 1323

reload() (`ads.model.GenericModel` method), 1379,

reload() (`ads.model.HuggingFacePipelineModel` method), 1400, 1401

reload() (`ads.model.LightGBMModel` method), 1410

reload() (`ads.model.PyTorchModel` method), 1443

reload() (`ads.model.SklearnModel` method), 1448

reload() (`ads.model.SparkPipelineModel` method), 1452

reload() (`ads.model.TensorFlowModel` method), 1457

reload() (`ads.model.XGBoostModel` method), 1461

reload\_runtime\_info() (`ads.model.framework.huggingface_model.HuggingFacePipelineModel` method), 1112

reload\_runtime\_info() (`ads.model.framework.lightgbm_model.LightGBMModel` method), 1139

reload\_runtime\_info() (`ads.model.framework.pytorch_model.PyTorchModel` method), 1139

`method`), 1166  
`reload_runtime_info()` (`ads.model.framework.sklearn_model.SklearnModel` `method`), 1194  
`reload_runtime_info()` (`ads.model.framework.spark_model.SparkPipelineModel` `method`), 1221  
`reload_runtime_info()` (`ads.model.framework.tensorflow_model.TensorFlowModel` `method`), 1248  
`reload_runtime_info()` (`ads.model.framework.xgboost_model.XGBoostModel` `method`), 1275  
`reload_runtime_info()` (`ads.model.generic_model.GenericModel` `method`), 1324  
`reload_runtime_info()` (`ads.model.GenericModel` `method`), 1394  
`remove()` (`ads.common.config.ConfigSection` `method`), 576  
`remove()` (`ads.model.model_metadata.ModelCustomMetadata` `method`), 1337, 1339  
`remove_existing_artifact` (`ads.model.model_properties.ModelProperties` `attribute`), 1354  
`remove_existing_artifact` (`ads.model.ModelProperties` `attribute`), 1434  
`remove_file()` (in module `ads.common.utils`), 627  
`rename()` (`ads.common.model.ADSModel` `method`), 584  
`rename_columns()` (`ads.dataset.dataset.ADSDataset` `method`), 692  
`rename_columns()` (`ads.dataset.dataset_with_target.ADSDatasetWithTarget` `method`), 705  
`rename_duplicate_cols()` (in module `ads.dataset.helper`), 716  
`render()` (`ads.data_labeling.visualizer.text_visualizer.TextLabeledDataFormatter` `static method`), 663  
`render()` (`ads.pipeline.visualizer.base.PipelineRenderer` `method`), 1481  
`render()` (`ads.pipeline.visualizer.base.PipelineVisualizer` `method`), 1482  
`render()` (`ads.pipeline.visualizer.graph_renderer.PipelineGraphRenderer` `method`), 1485  
`render()` (`ads.pipeline.visualizer.text_renderer.PipelineTextRenderer` `method`), 1487  
`render()` (in module `ads.data_labeling.visualizer.image_visualizer`), 659, 661  
`render()` (in module `ads.data_labeling.visualizer.text_visualizer`), 662, 664  
`render_bounding_box()` (`ads.data_labeling.mixin.data_labeling.DataLabelingAccess` `method`), 634  
`render_item()` (`ads.data_labeling.visualizer.image_visualizer.ImageVisualizer` `static method`), 660  
`render_ner()` (`ads.data_labeling.mixin.data_labeling.DataLabelingAccess` `method`), 635  
`RendererItem` (class in `ads.pipeline.visualizer.base`), 1483  
`RendererItemStatus` (class in `ads.pipeline.visualizer.base`), 1483  
`RenderOptions` (class in `ads.data_labeling.visualizer.image_visualizer`), 660  
`RenderOptions` (class in `ads.data_labeling.visualizer.text_visualizer`), 663  
`RenderTo` (class in `ads.pipeline.visualizer.graph_renderer`), 1486  
`replace()` (`ads.feature_engineering.feature_type.adsstring.string.ADSString` `method`), 773  
`replace_spaces()` (in module `ads.common.utils`), 628  
`repo` (`ads.model.model_metadata.ModelProvenanceMetadata` `attribute`), 1348  
`repository_url` (`ads.model.model_metadata.ModelProvenanceMetadata` `attribute`), 1348  
`required` (`ads.feature_engineering.schema.Attribute` `attribute`), 844  
`required_keys` (`ads.secrets.secrets.SecretKeeper` `attribute`), 1537  
`RequirementException`, 1474  
`reset()` (`ads.model.model_metadata.ModelCustomMetadata` `method`), 1336  
`reset()` (`ads.model.model_metadata.ModelCustomMetadataItem` `method`), 1340, 1341  
`reset()` (`ads.model.model_metadata.ModelMetadata` `method`), 1342, 1343  
`reset()` (`ads.model.model_metadata.ModelTaxonomyMetadata` `method`), 1348  
`reset()` (`ads.model.model_metadata.ModelTaxonomyMetadataItem` `method`), 1350, 1351  
`RESOURCE_PRINCIPAL` (`ads.common.auth.AuthType` `attribute`), 564  
`resource_principal()` (in module `ads.common.auth`), 568  
`ResourceNotFoundError`, 615  
`ResourcePrincipal` (class in `ads.common.auth`), 565  
`response` (`ads.catalog.project.ProjectSummaryList` `attribute`), 554  
`restart_deployment()` (`ads.model.framework.huggingface_model.HuggingFacePipeline` `method`), 1112  
`restart_deployment()` (`ads.model.framework.lightgbm_model.LightGBMModel` `method`), 1139  
`restart_deployment()` (`ads.model.framework.pytorch_model.PyTorchModel` `method`), 1140  
`restart_deployment()` (`ads.model.framework.tensorflow_model.TensorFlowModel` `method`), 1141  
`restart_deployment()` (`ads.model.framework.xgboost_model.XGBoostModel` `method`), 1142

`(ads.model.framework.sklearn_model.SklearnModel method), 1194`  
`restart_deployment()` (`ads.model.framework.spark_model.SparkPipelineModel method`), 1221  
`restart_deployment()` (`ads.model.framework.tensorflow_model.TensorFlowModel method`), 1248  
`restart_deployment()` (`ads.model.framework.xgboost_model.XGBoostModel method`), 1275  
`restart_deployment()` (`ads.model.generic_model.GenericModel method`), 1309, 1324  
`restart_deployment()` (`ads.model.GenericModel method`), 1379, 1394  
`result` (`ads.common.model_introspect.PrintItem attribute`), 596  
`result` (`ads.model.model_introspect.PrintItem attribute`), 1333  
`resume()` (`ads.hpo.search_cv.ADSTuner method`), 864  
`rfind()` (`ads.feature_engineering.feature_type.adsstring.string.ADSString method`), 773  
`RidgeClassifierSearchSpace` (class in `ads.hpo.ads_search_space`), 855  
`RidgeSearchSpace` (class in `ads.hpo.ads_search_space`), 855  
`rindex()` (`ads.feature_engineering.feature_type.adsstring.string.ADSString method`), 773  
`rjust()` (`ads.feature_engineering.feature_type.adsstring.string.ADSString method`), 773  
`rollback()` (`ads.catalog.model.Model method`), 543, 544  
`rpartition()` (`ads.feature_engineering.feature_type.adsstring.string.ADSString method`), 773  
`rsplit()` (`ads.feature_engineering.feature_type.adsstring.string.ADSString method`), 774  
`rstrip()` (`ads.feature_engineering.feature_type.adsstring.string.ADSString method`), 774  
`run()` (`ads.common.model_introspect.ModelIntrospect method`), 595, 596  
`run()` (`ads.dataflow.dataflow.DataFlowApp method`), 678  
`run()` (`ads.jobs.ads_job.Job method`), 932  
`run()` (`ads.jobs.builders.infrastructure.base.Infrastructure method`), 874  
`run()` (`ads.jobs.builders.infrastructure.dataflow.DataFlow method`), 877  
`run()` (`ads.jobs.builders.infrastructure.dsc_job.DataScienceJob method`), 890  
`run()` (`ads.jobs.builders.infrastructure.dsc_job.DSCJob method`), 886  
`run()` (`ads.jobs.DataFlow method`), 955  
`run()` (`ads.jobs.DataScienceJob method`), 996  
`run()` (`ads.jobs.Job method`), 1024  
`run()` (`ads.jobs.templates.driver_oci.GitJobRunner method`), 924  
`run()` (`ads.model.model_introspect.ModelIntrospect method`), 1332, 1333  
`run()` (`ads.opctl.backend.ads_dataflow.DataFlowBackend method`), 1466  
`run()` (`ads.opctl.backend.ads_ml_job.MLJobBackend method`), 1466  
`run()` (`ads.opctl.backend.ads_ml_job.MLJobDistributedBackend method`), 1467  
`run()` (`ads.opctl.backend.ads_ml_pipeline.PipelineBackend method`), 1467  
`run()` (`ads.opctl.backend.base.Backend method`), 1468  
`run()` (`ads.opctl.distributed.common.cluster_runner.ClusterRunner method`), 1477  
`run()` (`ads.pipeline.ads_pipeline.DataSciencePipeline method`), 1489  
`run()` (`ads.pipeline.ads_pipeline.Pipeline method`), 1494, 1501  
`run_code()` (`ads.opctl.distributed.common.abstract_cluster_provider.ClusterProvider method`), 1475  
`run_command()` (in module `ads.opctl.utils`), 1479  
`run_container()` (in module `ads.opctl.utils`), 1479  
`run_details_link` (`ads.jobs.builders.infrastructure.base.RunInstance property`), 874  
`run_details_link` (`ads.jobs.DataFlowRun property`), 980  
`run_details_link` (`ads.jobs.DataScienceJobRun property`), 1006  
`run_diagnostics()` (`ads.opctl.backend.ads_ml_job.MLJobDistributedBackend method`), 1467  
`run_diagnostics()` (`ads.opctl.backend.base.Backend method`), 1468  
`run_duration_in_milliseconds` (`ads.jobs.DataFlowRun property`), 980  
`run_list()` (`ads.jobs.ads_job.Job method`), 932  
`run_list()` (`ads.jobs.builders.infrastructure.dataflow.DataFlow method`), 877  
`run_list()` (`ads.jobs.builders.infrastructure.dsc_job.DataScienceJob method`), 891  
`run_list()` (`ads.jobs.builders.infrastructure.dsc_job.DSCJob method`), 886  
`run_list()` (`ads.jobs.DataFlow method`), 955  
`run_list()` (`ads.jobs.DataScienceJob method`), 996  
`run_list()` (`ads.jobs.Job method`), 1024  
`run_list()` (`ads.pipeline.ads_pipeline.Pipeline method`), 1494, 1502  
`run_notebook()` (in module `ads.jobs.templates.driver_notebook`), 922  
`RunInstance` (class in `ads.jobs.builders.infrastructure.base`), 874  
`RUNNING` (`ads.hpo.search_cv.State attribute`), 870  
`RunObserver` (class in `ads.dataflow.dataflow`), 681



- runtime (ads.jobs.ads\_job.Job property), 932
- runtime (ads.jobs.Job property), 1024
- runtime (ads.model.deployment.model\_deployment.ModelDeployment attribute), 1062
- runtime (ads.model.deployment.model\_deployment.ModelDeployment property), 1070
- runtime (ads.model.ModelDeployment attribute), 1418
- runtime (ads.model.ModelDeployment property), 1425
- runtime (ads.pipeline.ads\_pipeline\_step.PipelineStep attribute), 1514
- runtime (ads.pipeline.ads\_pipeline\_step.PipelineStep property), 1518
- Runtime (class in ads.jobs.builders.runtimes.base), 903
- RUNTIME\_CLASS (ads.jobs.builders.infrastructure.dsc\_job\_runtime.ContextualRuntimeHandler attribute), 896
- RUNTIME\_CLASS (ads.jobs.builders.infrastructure.dsc\_job\_runtime.ContextualRuntimeHandler runtime.runtime\_info), 896
- RUNTIME\_CLASS (ads.jobs.builders.infrastructure.dsc\_job\_runtime.ContextualRuntimeHandler runtime.runtime\_info), 898
- RUNTIME\_CLASS (ads.jobs.builders.infrastructure.dsc\_job\_runtime.ContextualRuntimeHandler runtime.runtime\_info), 899
- RUNTIME\_CLASS (ads.jobs.builders.infrastructure.dsc\_job\_runtime.ContextualRuntimeHandler runtime.runtime\_info), 900
- RUNTIME\_CLASS (ads.jobs.builders.infrastructure.dsc\_job\_runtime.ContextualRuntimeHandler runtime.runtime\_info), 900
- runtime\_dependency() (in module ads.common.decorator.runtime\_dependency), 558
- runtime\_handlers (ads.jobs.builders.infrastructure.dsc\_job\_runtime.DataScienceJobRuntimeManager attribute), 897
- runtime\_info (ads.model.AutoMLModel attribute), 1363
- runtime\_info (ads.model.framework.huggingface\_model.HuggingFacePipelineModel attribute), 1090
- runtime\_info (ads.model.framework.lightgbm\_model.LightGBMModel attribute), 1120
- runtime\_info (ads.model.framework.pytorch\_model.PyTorchModel attribute), 1147
- runtime\_info (ads.model.framework.sklearn\_model.SklearnModel attribute), 1175
- runtime\_info (ads.model.framework.spark\_model.SparkPipelineModel attribute), 1202
- runtime\_info (ads.model.framework.tensorflow\_model.TensorFlowModel attribute), 1229
- runtime\_info (ads.model.framework.xgboost\_model.XGBoostModel attribute), 1256
- runtime\_info (ads.model.generic\_model.GenericModel attribute), 1307
- runtime\_info (ads.model.GenericModel attribute), 1378
- runtime\_info (ads.model.HuggingFacePipelineModel attribute), 1402
- runtime\_info (ads.model.LightGBMModel attribute), 1409
- runtime\_info (ads.model.PyTorchModel attribute), 1443
- runtime\_info (ads.model.SklearnModel attribute), 1447
- runtime\_info (ads.model.SparkPipelineModel attribute), 1451
- runtime\_info (ads.model.TensorFlowModel attribute), 1456
- runtime\_info (ads.model.XGBoostModel attribute), 1460
- RuntimeHandler (class in ads.jobs.builders.infrastructure.dsc\_job\_runtime), 899
- RuntimeHandler (class in ads.jobs.builders.infrastructure.dsc\_job\_runtime), 1286
- RuntimeHandler (class in ads.jobs.builders.infrastructure.dsc\_job\_runtime), 1330
- RuntimeHandler (class in ads.jobs.builders.infrastructure.dsc\_job\_runtime), 1330
- safe\_metrics\_call() (ads.evaluations.statistical\_metrics.ModelEvaluator method), 737, 738
- sample() (ads.dataset.helper.Dataset method), 692
- sampling\_confidence\_interval (ads.dataset.helper.DatasetDefaults attribute), 714
- sampling\_confidence\_level (ads.dataset.helper.DatasetDefaults attribute), 714
- save() (ads.common.config.ExtendedConfigParser method), 574
- save() (ads.common.config.ExtendedConfigParser method), 578
- save() (ads.common.model\_artifact.ModelArtifact method), 578
- save() (ads.dataflow.dataflow.DataFlowLog method), 578
- save() (ads.evaluations.evaluator.Evaluator method), 733, 736
- save() (ads.feature\_engineering.adsimage.image.ADSSImage method), 757, 758
- save() (ads.model.AutoMLModel method), 1364
- save() (ads.model.framework.huggingface\_model.HuggingFacePipelineModel method), 1091, 1112
- save() (ads.model.framework.lightgbm\_model.LightGBMModel method), 1121, 1139
- save() (ads.model.framework.pytorch\_model.PyTorchModel method), 1148, 1166
- save() (ads.model.framework.sklearn\_model.SklearnModel method), 1176, 1194
- save() (ads.model.framework.spark\_model.SparkPipelineModel method), 1203, 1221
- save() (ads.model.framework.tensorflow\_model.TensorFlowModel method), 1230, 1248

[save\(\)](#) ([ads.model.framework.xgboost\\_model.XGBoostModel](#) property), 1250  
[save\(\)](#) ([ads.model.framework.xgboost\\_model.XGBoostModel](#) method), 1257, 1275  
[save\(\)](#) ([ads.model.generic\\_model.GenericModel](#) attribute), 1256  
[save\(\)](#) ([ads.model.generic\\_model.GenericModel](#) method), 1309, 1324  
[save\(\)](#) ([ads.model.framework.xgboost\\_model.XGBoostModel](#) property), 1277  
[save\(\)](#) ([ads.model.generic\\_model.GenericModel](#) attribute), 1308  
[save\(\)](#) ([ads.model.generic\\_model.GenericModel](#) property), 1325  
[save\(\)](#) ([ads.model.GenericModel](#) attribute), 1378  
[save\(\)](#) ([ads.model.GenericModel](#) property), 1395  
[save\(\)](#) ([ads.model.HuggingFacePipelineModel](#) attribute), 1402  
[save\(\)](#) ([ads.model.HuggingFacePipelineModel](#) method), 1403  
[save\(\)](#) ([ads.model.LightGBMModel](#) attribute), 1409  
[save\(\)](#) ([ads.model.LightGBMModel](#) method), 1410  
[save\(\)](#) ([ads.model.PyTorchModel](#) attribute), 1443  
[save\(\)](#) ([ads.model.PyTorchModel](#) method), 1443  
[save\(\)](#) ([ads.model.runtime.runtime\\_info.RuntimeInfo](#) attribute), 1378  
[save\(\)](#) ([ads.model.runtime.runtime\\_info.RuntimeInfo](#) method), 1286  
[save\(\)](#) ([ads.model.SklearnModel](#) attribute), 1447  
[save\(\)](#) ([ads.model.SklearnModel](#) method), 1448  
[save\(\)](#) ([ads.model.SparkPipelineModel](#) attribute), 1451  
[save\(\)](#) ([ads.model.SparkPipelineModel](#) method), 1452  
[save\(\)](#) ([ads.model.TensorFlowModel](#) attribute), 1456  
[save\(\)](#) ([ads.model.TensorFlowModel](#) method), 1457  
[save\(\)](#) ([ads.model.transformer.onnx\\_transformer.ONNXTransformer](#) attribute), 1402  
[save\(\)](#) ([ads.model.transformer.onnx\\_transformer.ONNXTransformer](#) method), 1296  
[save\(\)](#) ([ads.model.XGBoostModel](#) attribute), 1409  
[save\(\)](#) ([ads.model.XGBoostModel](#) method), 1461  
[save\(\)](#) ([ads.secrets.adb.ADBSecretKeeper](#) method), 1523  
[save\(\)](#) ([ads.secrets.adb.ADBSecretKeeper](#) property), 1443  
[save\(\)](#) ([ads.secrets.big\\_data\\_service.BDSecretKeeper](#) attribute), 1447  
[save\(\)](#) ([ads.secrets.big\\_data\\_service.BDSecretKeeper](#) method), 1529  
[save\(\)](#) ([ads.secrets.secrets.SecretKeeper](#) attribute), 1451  
[save\(\)](#) ([ads.secrets.secrets.SecretKeeper](#) method), 1537  
[save\\_metadata\(\)](#) ([ads.jobs.templates.driver\\_oci.GitJobRunner](#) attribute), 1456  
[save\\_metadata\(\)](#) ([ads.jobs.templates.driver\\_oci.GitJobRunner](#) method), 924  
[save\\_to\(\)](#) ([ads.pipeline.visualizer.base.PipelineRenderer](#) attribute), 1469  
[save\\_to\(\)](#) ([ads.pipeline.visualizer.base.PipelineRenderer](#) method), 1481  
[save\\_to\(\)](#) ([ads.pipeline.visualizer.graph\\_renderer.PipelineGraphRenderer](#) attribute), 1469  
[save\\_to\(\)](#) ([ads.pipeline.visualizer.graph\\_renderer.PipelineGraphRenderer](#) method), 1486  
[Schema](#) (class in [ads.feature\\_engineering.schema](#)), 847  
[schema\\_input](#) ([ads.model.AutoMLModel](#) attribute), 1363  
[schema\\_input](#) ([ads.model.AutoMLModel](#) property), 1363  
[schema\\_input](#) ([ads.model.framework.huggingface\\_model.HuggingFacePipelineModel](#) attribute), 1090  
[schema\\_input](#) ([ads.model.framework.huggingface\\_model.HuggingFacePipelineModel](#) property), 1114  
[schema\\_input](#) ([ads.model.framework.huggingface\\_model.HuggingFacePipelineModel](#) method), 1114  
[schema\\_input](#) ([ads.model.framework.huggingface\\_model.HuggingFacePipelineModel](#) attribute), 1120  
[schema\\_input](#) ([ads.model.framework.huggingface\\_model.HuggingFacePipelineModel](#) property), 1120  
[schema\\_input](#) ([ads.model.framework.lightgbm\\_model.LightGBMModel](#) attribute), 1120  
[schema\\_input](#) ([ads.model.framework.lightgbm\\_model.LightGBMModel](#) property), 1141  
[schema\\_input](#) ([ads.model.framework.lightgbm\\_model.LightGBMModel](#) method), 1141  
[schema\\_input](#) ([ads.model.framework.pytorch\\_model.PyTorchModel](#) attribute), 1147  
[schema\\_input](#) ([ads.model.framework.pytorch\\_model.PyTorchModel](#) property), 1168  
[schema\\_input](#) ([ads.model.framework.pytorch\\_model.PyTorchModel](#) method), 1168  
[schema\\_input](#) ([ads.model.framework.sklearn\\_model.SklearnModel](#) attribute), 1175  
[schema\\_input](#) ([ads.model.framework.sklearn\\_model.SklearnModel](#) property), 1196  
[schema\\_input](#) ([ads.model.framework.sklearn\\_model.SklearnModel](#) method), 1196  
[schema\\_input](#) ([ads.model.framework.spark\\_model.SparkPipelineModel](#) attribute), 1202  
[schema\\_input](#) ([ads.model.framework.spark\\_model.SparkPipelineModel](#) property), 1223  
[schema\\_input](#) ([ads.model.framework.spark\\_model.SparkPipelineModel](#) method), 1223  
[schema\\_input](#) ([ads.model.framework.tensorflow\\_model.TensorFlowModel](#) attribute), 1229  
[schema\\_input](#) ([ads.model.framework.tensorflow\\_model.TensorFlowModel](#) property), 1250  
[schema\\_input](#) ([ads.model.framework.tensorflow\\_model.TensorFlowModel](#) method), 1250  
[schema\\_input](#) ([ads.model.framework.xgboost\\_model.XGBoostModel](#) attribute), 1250  
[schema\\_input](#) ([ads.model.framework.xgboost\\_model.XGBoostModel](#) property), 1250  
[schema\\_input](#) ([ads.model.framework.xgboost\\_model.XGBoostModel](#) method), 1250

[attribute](#)), 1256  
[schema\\_output](#) ([ads.model.framework.xgboost\\_model.XGBoostModel](#) property), 1277  
[schema\\_output](#) ([ads.model.generic\\_model.GenericModel](#) attribute), 1308  
[schema\\_output](#) ([ads.model.generic\\_model.GenericModel](#) property), 1325  
[schema\\_output](#) ([ads.model.GenericModel](#) attribute), 1378  
[schema\\_output](#) ([ads.model.GenericModel](#) property), 1395  
[schema\\_output](#) ([ads.model.HuggingFacePipelineModel](#) attribute), 1402  
[schema\\_output](#) ([ads.model.LightGBMModel](#) attribute), 1410  
[schema\\_output](#) ([ads.model.PyTorchModel](#) attribute), 1443  
[schema\\_output](#) ([ads.model.SklearnModel](#) attribute), 1447  
[schema\\_output](#) ([ads.model.SparkPipelineModel](#) attribute), 1451  
[schema\\_output](#) ([ads.model.TensorFlowModel](#) attribute), 1456  
[schema\\_output](#) ([ads.model.XGBoostModel](#) attribute), 1460  
[SchemaFactory](#) (class in [ads.feature\\_engineering.schema](#)), 851  
[SchemaSizeTooLarge](#), 852  
[SchemaValidator](#) (class in [ads.model.runtime.utils](#)), 1286  
[SchemeNeutral](#) (class in [ads.feature\\_engineering.utils](#)), 853  
[SchemeTeal](#) (class in [ads.feature\\_engineering.utils](#)), 853  
[SCIKIT\\_LEARN](#) ([ads.model.model\\_metadata.Framework](#) attribute), 1334  
[score\(\)](#) ([ads.common.model.ADSModel](#) method), 584  
[score\\_remaining](#) ([ads.hpo.search\\_cv.ADSTuner](#) property), 865  
[ScoreValue](#) (class in [ads.hpo.stopping\\_criterion](#)), 871  
[scoring\\_name](#) ([ads.hpo.search\\_cv.ADSTuner](#) property), 865  
[script\\_bucket](#) ([ads.jobs.builders.runtimes.python\\_runtime.DataFlowRuntime](#) property), 910  
[script\\_bucket](#) ([ads.jobs.DataFlowNotebookRuntime](#) property), 964  
[script\\_bucket](#) ([ads.jobs.DataFlowRuntime](#) property), 986  
[script\\_bucket](#) ([ads.jobs.utils.DataFlowConfig](#) property), 944  
[script\\_uri](#) ([ads.jobs.builders.runtimes.python\\_runtime.DataFlowRuntime](#) property), 910  
[script\\_uri](#) ([ads.jobs.builders.runtimes.python\\_runtime.ScriptRuntime](#) property), 918  
[script\\_uri](#) ([ads.jobs.DataFlowNotebookRuntime](#) property), 964  
[script\\_uri](#) ([ads.jobs.DataFlowRuntime](#) property), 986  
[script\\_uri](#) ([ads.jobs.PythonRuntime](#) property), 1039  
[script\\_uri](#) ([ads.jobs.ScriptRuntime](#) property), 1048  
[ScriptArtifact](#) (class in [ads.jobs.builders.runtimes.artifact](#)), 903  
[ScriptRuntime](#) (class in [ads.jobs](#)), 1044  
[ScriptRuntime](#) (class in [ads.jobs.builders.runtimes.python\\_runtime](#)), 917  
[ScriptRuntimeHandler](#) (class in [ads.jobs.builders.infrastructure.dsc\\_job\\_runtime](#)), 900  
[seaborn\(\)](#) ([ads.dataset.dataset\\_browser.DatasetBrowser](#) static method), 701  
[SeabornDatasets](#) (class in [ads.dataset.dataset\\_browser](#)), 702  
[search\(\)](#) ([ads.common.oci\\_logging.ConsolidatedLog](#) method), 602  
[search\(\)](#) ([ads.common.oci\\_logging.OCILog](#) method), 604  
[search\(\)](#) ([ads.common.oci\\_resource.OCIResource](#) class method), 615  
[search\\_client](#) ([ads.common.oci\\_logging.OCILog](#) property), 604  
[search\\_space\(\)](#) ([ads.hpo.search\\_cv.ADSTuner](#) method), 865  
[SEARCH\\_TYPE](#) (class in [ads.common.oci\\_resource](#)), 615  
[seconds\\_since\(\)](#) (in module [ads.model.deployment.common.utils](#)), 1055  
[secret](#) ([ads.common.oci\\_client.OCIClientFactory](#) property), 600  
[Secret](#) (class in [ads.secrets.secrets](#)), 1534  
[secret\\_id](#) ([ads.secrets.big\\_data\\_service.BDSecret](#) attribute), 1526  
[secret\\_id](#) ([ads.secrets.big\\_data\\_service.BDSecretKeeper](#) attribute), 1528  
[SecretKeeper](#) (class in [ads.secrets.secrets](#)), 1535  
[section\\_exists\(\)](#) ([ads.common.config.Config](#) method), 574  
[section\\_get\(\)](#) ([ads.common.config.Config](#) method), 575  
[section\\_remove\(\)](#) ([ads.common.config.Config](#) method), 575  
[section\\_set\(\)](#) ([ads.common.config.Config](#) method), 575  
[select\\_best\\_features\(\)](#) ([ads.dataset.classification\\_dataset.BinaryTextClassificationDataset](#) method), 683  
[select\\_best\\_features\(\)](#) ([ads.dataset.classification\\_dataset.MultiClassTextClassificationDataset](#) method), 686  
[select\\_best\\_features\(\)](#) ([ads.dataset.dataset\\_with\\_target.ADSDatasetWithTarget](#) method), 686

[method](#)), 705  
[select\\_best\\_features\(\)](#) ([ads.dataset.forecasting\\_dataset.ForecastingDataset](#) [method](#)), 714  
[select\\_best\\_plot\(\)](#) ([ads.dataset.plot.Plotting](#) [method](#)), 717  
[Self](#) (in module [ads.jobs.builders.base](#)), 920  
[Self](#) (in module [ads.jobs.builders.runtimes.base](#)), 906  
[Self](#) (in module [ads.jobs.serializer](#)), 936  
[send\(\)](#) ([ads.common.data\\_serializer.InputDataSerializer](#) [method](#)), 581  
[send\\_request\(\)](#) (in module [ads.model.deployment.common.utils](#)), 1056  
[sentence](#) ([ads.feature\\_engineering.adsstring.parsers.base.Parser](#) [property](#)), 761  
[sentence](#) ([ads.feature\\_engineering.adsstring.parsers.spacy\\_parser.SpacyParser](#) [property](#)), 762  
[sentence](#) ([ads.feature\\_engineering.feature\\_type.adsstring.parsers.base.Parser](#) [property](#)), 765  
[sentence](#) ([ads.feature\\_engineering.feature\\_type.adsstring.parsers.spacy\\_parser.SpacyParser](#) [property](#)), 766  
[SENTIMENT\\_ANALYSIS](#) ([ads.model.model\\_metadata.UseCaseType](#) [attribute](#)), 1352  
[SERDE](#) (class in [ads.model](#)), 1445  
[Serializable](#) (class in [ads.common.serializer](#)), 616  
[Serializable](#) (class in [ads.jobs.serializer](#)), 936  
[serialize](#) ([ads.model.AutoMLModel](#) [attribute](#)), 1363  
[serialize](#) ([ads.model.framework.huggingface\\_model.HuggingFacePipelineModel](#) [attribute](#)), 1090  
[serialize](#) ([ads.model.framework.lightgbm\\_model.LightGBMModel](#) [method](#)), 1412  
[serialize](#) ([ads.model.framework.lightgbm\\_model.LightGBMModel](#) [attribute](#)), 1120  
[serialize](#) ([ads.model.framework.pytorch\\_model.PyTorchModel](#) [method](#)), 1444  
[serialize](#) ([ads.model.framework.pytorch\\_model.PyTorchModel](#) [attribute](#)), 1147  
[serialize](#) ([ads.model.framework.sklearn\\_model.SklearnModel](#) [method](#)), 1449  
[serialize](#) ([ads.model.framework.sklearn\\_model.SklearnModel](#) [attribute](#)), 1175  
[serialize](#) ([ads.model.framework.spark\\_model.SparkPipelineModel](#) [method](#)), 1454  
[serialize](#) ([ads.model.framework.spark\\_model.SparkPipelineModel](#) [attribute](#)), 1202  
[serialize](#) ([ads.model.framework.tensorflow\\_model.TensorFlowModel](#) [method](#)), 1458  
[serialize](#) ([ads.model.framework.tensorflow\\_model.TensorFlowModel](#) [attribute](#)), 1229  
[serialize](#) ([ads.model.framework.xgboost\\_model.XGBoostModel](#) [method](#)), 1463  
[serialize](#) ([ads.model.framework.xgboost\\_model.XGBoostModel](#) [attribute](#)), 1256  
[serialize](#) ([ads.model.generic\\_model.GenericModel](#) [attribute](#)), 1308  
[serialize](#) ([ads.model.GenericModel](#) [attribute](#)), 1378  
[serialize](#) ([ads.model.HuggingFacePipelineModel](#) [attribute](#)), 1402  
[serialize](#) ([ads.model.LightGBMModel](#) [attribute](#)), 1410  
[serialize](#) ([ads.model.PyTorchModel](#) [attribute](#)), 1443  
[serialize](#) ([ads.model.SklearnModel](#) [attribute](#)), 1447  
[serialize](#) ([ads.model.SparkPipelineModel](#) [attribute](#)), 1451  
[serialize](#) ([ads.model.TensorFlowModel](#) [attribute](#)), 1456  
[serialize](#) ([ads.model.XGBoostModel](#) [attribute](#)), 1461  
[serialize\(\)](#) ([ads.common.oci\\_mixin.OCISerializableMixin](#) [method](#)), 613  
[serialize\(\)](#) ([ads.jobs.DataFlowRun](#) [method](#)), 980  
[serialize\(\)](#) ([ads.jobs.DataScienceJobRun](#) [method](#)), 1007  
[serialize\(\)](#) ([ads.model.ModelInputSerializer](#) [method](#)), 1433  
[serialize\(\)](#) ([ads.secrets.secrets.Secret](#) [method](#)), 1534  
[serialize\\_model\(\)](#) ([ads.model.framework.huggingface\\_model.HuggingFacePipelineModel](#) [method](#)), 1114  
[serialize\\_model\(\)](#) ([ads.model.framework.lightgbm\\_model.LightGBMModel](#) [method](#)), 1141  
[serialize\\_model\(\)](#) ([ads.model.framework.pytorch\\_model.PyTorchModel](#) [method](#)), 1168  
[serialize\\_model\(\)](#) ([ads.model.framework.sklearn\\_model.SklearnModel](#) [method](#)), 1196  
[serialize\\_model\(\)](#) ([ads.model.framework.spark\\_model.SparkPipelineModel](#) [method](#)), 1223  
[serialize\\_model\(\)](#) ([ads.model.framework.tensorflow\\_model.TensorFlowModel](#) [method](#)), 1256  
[serialize\\_model\(\)](#) ([ads.model.framework.xgboost\\_model.XGBoostModel](#) [method](#)), 1277  
[serialize\\_model\(\)](#) ([ads.model.generic\\_model.GenericModel](#) [method](#)), 1325  
[serialize\\_model\(\)](#) ([ads.model.GenericModel](#) [method](#)), 1396  
[serialize\\_model\(\)](#) ([ads.model.HuggingFacePipelineModel](#) [method](#)), 1408  
[serialize\\_model\(\)](#) ([ads.model.LightGBMModel](#) [method](#)), 1412  
[serialize\\_model\(\)](#) ([ads.model.PyTorchModel](#) [method](#)), 1444  
[serialize\\_model\(\)](#) ([ads.model.SklearnModel](#) [method](#)), 1449  
[serialize\\_model\(\)](#) ([ads.model.SparkPipelineModel](#) [method](#)), 1454  
[serialize\\_model\(\)](#) ([ads.model.TensorFlowModel](#) [method](#)), 1458  
[serialize\\_model\(\)](#) ([ads.model.XGBoostModel](#) [method](#)), 1463  
[serialize\\_model\(\)](#) (in module [ads.common.model\\_export\\_util](#)), 594  
[SerializeInputNotImplementedError](#), 1330  
[SerializeModelNotImplementedError](#), 1331  
[SERVICE\\_LOG](#) ([ads.pipeline.ads\\_pipeline\\_run.LogType](#) [attribute](#)), 1508  
[service\\_log\\_id](#) ([ads.pipeline.ads\\_pipeline.Pipeline](#) [attribute](#)), 1492  
[service\\_log\\_id](#) ([ads.pipeline.ads\\_pipeline.Pipeline](#) [property](#)), 1503  
[service\\_logging](#) ([ads.pipeline.ads\\_pipeline\\_run.PipelineRun](#) [property](#)), 1511  
[service\\_name](#) ([ads.secrets.adb.ADBSecret](#) [attribute](#)), 1520



<code>service_name</code> ( <i>ads.secrets.oracledb.OracleDBSecret attribute</i> ), 1532	<code>set_model_save_serializer()</code> ( <i>ads.model.framework.pytorch_model.PyTorchModel method</i> ), 1169
<code>SERVICE_PACK</code> ( <i>ads.common.model_artifact.PACK_TYPE attribute</i> ), 591	<code>set_model_save_serializer()</code> ( <i>ads.model.framework.sklearn_model.SklearnModel method</i> ), 1197
<code>SERVICE_PACK</code> ( <i>ads.model.runtime.env_info.PACK_TYPE attribute</i> ), 1284	<code>set_model_save_serializer()</code> ( <i>ads.model.framework.spark_model.SparkPipelineModel method</i> ), 1224
<code>set()</code> ( <i>ads.common.config.ConfigSection method</i> ), 577	<code>set_model_save_serializer()</code> ( <i>ads.model.framework.tensorflow_model.TensorFlowModel method</i> ), 1251
<code>set_auth()</code> ( <i>in module ads.common.auth</i> ), 569	<code>set_model_save_serializer()</code> ( <i>ads.model.framework.xgboost_model.XGBoostModel method</i> ), 1278
<code>set_debug_mode()</code> ( <i>in module ads</i> ), 1556	<code>set_model_save_serializer()</code> ( <i>ads.model.generic_model.GenericModel method</i> ), 1326
<code>set_default_storage()</code> ( <i>ads.dataset.factory.DatasetFactory static method</i> ), 712	<code>set_model_save_serializer()</code> ( <i>ads.model.GenericModel method</i> ), 1397
<code>set_description()</code> ( <i>ads.dataset.dataset.ADSDataset method</i> ), 692	<code>set_name()</code> ( <i>ads.dataset.dataset.ADSDataset method</i> ), 693
<code>set_documentation_mode()</code> ( <i>in module ads</i> ), 1556	<code>set_name()</code> ( <i>in module ads.common.utils</i> ), 628
<code>set_expert_mode()</code> ( <i>in module ads</i> ), 1556	<code>set_positive_class()</code> ( <i>ads.dataset.classification_dataset.BinaryClassificationDataset method</i> ), 683
<code>set_ipython_traceback()</code> ( <i>in module ads.common.ipython</i> ), 582	<code>set_spec()</code> ( <i>ads.jobs.ads_job.Job method</i> ), 933
<code>set_log_level()</code> ( <i>in module ads.model.deployment.common.utils</i> ), 1056	<code>set_spec()</code> ( <i>ads.jobs.builders.base.Builder method</i> ), 920
<code>set_log_level()</code> ( <i>in module ads.opctl</i> ), 1480	<code>set_spec()</code> ( <i>ads.jobs.ContainerRuntime method</i> ), 948
<code>set_model_input_serializer()</code> ( <i>ads.model.framework.huggingface_model.HuggingFacePipelineModel method</i> ), 1114	<code>set_spec()</code> ( <i>ads.jobs.DataFlow method</i> ), 956
<code>set_model_input_serializer()</code> ( <i>ads.model.framework.lightgbm_model.LightGBMModel method</i> ), 1141	<code>set_spec()</code> ( <i>ads.jobs.DataFlowNotebookRuntime method</i> ), 964
<code>set_model_input_serializer()</code> ( <i>ads.model.framework.pytorch_model.PyTorchModel method</i> ), 1168	<code>set_spec()</code> ( <i>ads.jobs.DataFlowRuntime method</i> ), 986
<code>set_model_input_serializer()</code> ( <i>ads.model.framework.sklearn_model.SklearnModel method</i> ), 1196	<code>set_spec()</code> ( <i>ads.jobs.DataScienceJob method</i> ), 997
<code>set_model_input_serializer()</code> ( <i>ads.model.framework.spark_model.SparkPipelineModel method</i> ), 1223	<code>set_spec()</code> ( <i>ads.jobs.GitPythonRuntime method</i> ), 1012
<code>set_model_input_serializer()</code> ( <i>ads.model.framework.tensorflow_model.TensorFlowModel method</i> ), 1250	<code>set_spec()</code> ( <i>ads.jobs.Job method</i> ), 1025
<code>set_model_input_serializer()</code> ( <i>ads.model.framework.xgboost_model.XGBoostModel method</i> ), 1277	<code>set_spec()</code> ( <i>ads.jobs.NotebookRuntime method</i> ), 1030
<code>set_model_input_serializer()</code> ( <i>ads.model.generic_model.GenericModel method</i> ), 1309, 1326	<code>set_spec()</code> ( <i>ads.jobs.PythonRuntime method</i> ), 1039
<code>set_model_input_serializer()</code> ( <i>ads.model.GenericModel method</i> ), 1379, 1396	<code>set_spec()</code> ( <i>ads.jobs.ScriptRuntime method</i> ), 1048
<code>set_model_save_serializer()</code> ( <i>ads.model.framework.huggingface_model.HuggingFacePipelineModel method</i> ), 1115	<code>set_target()</code> ( <i>ads.dataset.dataset.ADSDataset method</i> ), 693
<code>set_model_save_serializer()</code> ( <i>ads.model.framework.lightgbm_model.LightGBMModel method</i> ), 1142	<code>set_training_data()</code> ( <i>ads.model.model_metadata.ModelCustomMetadata method</i> ), 1339
	<code>set_validation_data()</code> ( <i>ads.model.model_metadata.ModelCustomMetadata method</i> ), 1339
	<code>setup_configuration()</code> ( <i>ads.model.metadata.distributed.common.abstract_cluster_provider.ClusterProvider method</i> ), 1475
	<code>setup_extra_configs()</code> ( <i>ads.opctl.distributed.common.abstract_cluster_provider.ClusterProvider method</i> ), 1475

[SGDClassifierSearchSpace](#) (class in [ads.hpo.ads\\_search\\_space](#)), 855  
[SGDRegressorSearchSpace](#) (class in [ads.hpo.ads\\_search\\_space](#)), 856  
[shape\\_config\\_details](#) ([ads.jobs.builders.infrastructure.dsc\\_job.DataScienceJob](#) property), 891  
[shape\\_config\\_details](#) ([ads.jobs.DataScienceJob](#) property), 997  
[shape\\_config\\_details](#) ([ads.pipeline.ads\\_pipeline.Pipeline](#) attribute), 1492  
[shape\\_config\\_details](#) ([ads.pipeline.ads\\_pipeline.Pipeline](#) property), 1503  
[shape\\_config\\_details\\_attribute\\_map](#) ([ads.jobs.builders.infrastructure.dsc\\_job.DataScienceJob](#) attribute), 891  
[shape\\_config\\_details\\_attribute\\_map](#) ([ads.jobs.DataScienceJob](#) attribute), 997  
[shape\\_name](#) ([ads.jobs.builders.infrastructure.dsc\\_job.DataScienceJob](#) property), 891  
[shape\\_name](#) ([ads.jobs.DataScienceJob](#) property), 997  
[shape\\_name](#) ([ads.pipeline.ads\\_pipeline.Pipeline](#) attribute), 1492  
[shape\\_name](#) ([ads.pipeline.ads\\_pipeline.Pipeline](#) property), 1503  
[short\\_id\\_index](#) ([ads.catalog.project.ProjectSummaryList](#) attribute), 554  
[show\(\)](#) ([ads.pipeline.ads\\_pipeline.Pipeline](#) method), 1494, 1503  
[show\(\)](#) ([ads.pipeline.ads\\_pipeline\\_run.PipelineRun](#) method), 1509, 1511  
[show\\_all\(\)](#) ([ads.dataflow.dataflow.DataFlowLog](#) method), 679  
[show\\_corr\(\)](#) ([ads.dataset.dataset.ADSDataset](#) method), 693  
[show\\_deployments\(\)](#) ([ads.model.deployment.model\\_deployer.ModelDeployer](#) method), 1058, 1060  
[show\\_deployments\(\)](#) ([ads.model.ModelDeployer](#) method), 1413, 1415  
[show\\_full\\_name](#) ([ads.evaluations.evaluator.ADSEvaluator](#) attribute), 725  
[show\\_in\\_notebook\(\)](#) ([ads.catalog.model.Model](#) method), 543, 544  
[show\\_in\\_notebook\(\)](#) ([ads.catalog.summary.SummaryList](#) method), 555  
[show\\_in\\_notebook\(\)](#) ([ads.common.model.ADSSModel](#) method), 585  
[show\\_in\\_notebook\(\)](#) ([ads.dataset.dataset.ADSDataset](#) method), 694  
[show\\_in\\_notebook\(\)](#) ([ads.dataset.feature\\_selection.FeatureImportance](#) method), 713  
[show\\_in\\_notebook\(\)](#) ([ads.dataset.plot.Plotting](#) method), 717  
[show\\_in\\_notebook\(\)](#) ([ads.dataset.recommendation.Recommendation](#) method), 718  
[show\\_in\\_notebook\(\)](#) ([ads.dataset.target.TargetVariable](#) method), 720  
[show\\_in\\_notebook\(\)](#) ([ads.evaluations.evaluator.ADSEvaluator](#) method), 726, 730  
[show\\_in\\_notebook\(\)](#) ([ads.evaluations.evaluator.ADSEvaluator.Evaluation](#) method), 727  
[show\\_logs\(\)](#) ([ads.model.deployment.model\\_deployment.ModelDeployment](#) method), 1070  
[show\\_logs\(\)](#) ([ads.model.ModelDeployment](#) method), 1425  
[ShowMode](#) (class in [ads.pipeline.ads\\_pipeline\\_run](#)), 1513  
[sid](#) ([ads.secrets.oracledb.OracleDBSecret](#) attribute), 1532  
[SideEffect](#) (class in [ads.common.serializer](#)), 619  
[signer](#) ([ads.common.oci\\_mixin.OCIClientMixin](#) attribute), 609  
[signer](#) ([ads.jobs.DataFlowRun](#) attribute), 980  
[signer](#) ([ads.jobs.DataScienceJobRun](#) attribute), 1007  
[signerGenerator\(\)](#) ([ads.common.auth.AuthFactory](#) method), 563  
[SINGLE\\_LABEL](#) ([ads.data\\_labeling.constants.AnnotationType](#) attribute), 667  
[single\\_overlay\\_plots](#) ([ads.evaluations.evaluation\\_plot.EvaluationPlot](#) attribute), 725  
[SingleLabelRecordParser](#) (class in [ads.data\\_labeling.parser.export\\_record\\_parser](#)), 644  
[SingletonMeta](#) (class in [ads.common.auth](#)), 566  
[size\(\)](#) ([ads.model.model\\_metadata.ModelCustomMetadata](#) method), 1336  
[size\(\)](#) ([ads.model.model\\_metadata.ModelCustomMetadataItem](#) method), 1340  
[size\(\)](#) ([ads.model.model\\_metadata.ModelMetadata](#) method), 1342, 1343  
[size\(\)](#) ([ads.model.model\\_metadata.ModelMetadataItem](#) method), 1345  
[size\(\)](#) ([ads.model.model\\_metadata.ModelTaxonomyMetadata](#) method), 1348  
[size\(\)](#) ([ads.model.model\\_metadata.ModelTaxonomyMetadataItem](#) method), 1350  
[skew\\_handler\(\)](#) (in [ads.feature\\_engineering.feature\\_type.handler.warnings](#) module), 785  
[skip\\_metadata\\_update](#) ([ads.jobs.builders.runtimes.python\\_runtime.GitPythonRuntime](#) property), 913  
[skip\\_metadata\\_update](#) ([ads.jobs.GitPythonRuntime](#) property), 1013  
[SKIPPED](#) ([ads.pipeline.visualizer.base.StepStatus](#) attribute), 1485

`sklearn()` (`ads.dataset.dataset_browser.DatasetBrowser` static method), 701  
`sklearn_datasets` (`ads.dataset.dataset_browser.SklearnDatasetParser` (class in `ads.feature_engineering.adsstring.parsers.spacy_parser`), attribute), 703  
`sklearn_steps` (`ads.hpo.search_cv.ADSTuner` property), 865  
`SklearnDatasets` (class in `ads.dataset.dataset_browser`), 702  
`SklearnExtractor` (class in `ads.model.extractor.sklearn_extractor`), 1083  
`SklearnModel` (class in `ads.model`), 1445  
`SklearnModel` (class in `ads.model.framework.sklearn_model`), 1173  
`SKTIME` (`ads.model.model_metadata.Framework` attribute), 1334  
`SLUG_NAME` (`ads.model.model_metadata.MetadataCustomKey` attribute), 1335  
`SmallArtifactDownloader` (class in `ads.model.artifact_downloader`), 1300  
`SmallArtifactUploader` (class in `ads.model.artifact_uploader`), 1301  
`snake_to_camel()` (in module `ads.common.utils`), 628  
`snake_to_camel_map` (`ads.jobs.builders.infrastructure.dsc_job.DataScienceJob` attribute), 891  
`snake_to_camel_map` (`ads.jobs.DataScienceJob` attribute), 997  
`snapshot()` (`ads.dataset.dataset.ADSDataset` method), 695  
`sort_by()` (`ads.catalog.model.ModelSummaryList` method), 549  
`sort_by()` (`ads.catalog.notebook.NotebookSummaryList` method), 551  
`sort_by()` (`ads.catalog.project.ProjectSummaryList` method), 554  
`sort_by()` (`ads.catalog.summary.SummaryList` method), 555  
`sort_by()` (`ads.dataflow.dataflowssummary.SummaryList` method), 682  
`sort_index` (`ads.feature_engineering.schema.Attribute` attribute), 844  
`SortOrder` (class in `ads.common.oci_logging`), 607  
`source` (`ads.jobs.builders.runtimes.python_runtime.NotebookRuntime` property), 915  
`source` (`ads.jobs.DataFlowNotebookRuntime` property), 964  
`source` (`ads.jobs.NotebookRuntime` property), 1030  
`source_path` (`ads.data_labeling.metadata.Metadata` attribute), 669, 670  
`source_uri` (`ads.jobs.builders.runtimes.python_runtime.ScriptRuntime` property), 918  
`source_uri` (`ads.jobs.PythonRuntime` property), 1039  
`source_uri` (`ads.jobs.ScriptRuntime` property), 1048  
`SPACY` (`ads.data_labeling.constants.Formats` attribute), 667  
`SPARK` (`ads.model.model_metadata.Framework` attribute), 1334  
`SpacyParser` (class in `ads.feature_engineering.adsstring.parsers.spacy_parser`), 761  
`SpacyParser` (class in `ads.feature_engineering.feature_type.adsstring.parsers.spacy_parser`), 765  
`SPARK` (`ads.common.decorator.runtime_dependency.OptionalDependency` attribute), 558  
`SPARK` (`ads.model.model_metadata.Framework` attribute), 1334  
`spark_version` (`ads.jobs.DataFlowRun` property), 980  
`spark_version` (`ads.jobs.utils.DataFlowConfig` property), 944  
`SPARK_VERSION` (class in `ads.dataflow.dataflow`), 682  
`SparkExtractor` (class in `ads.model.extractor.spark_extractor`), 1084  
`SparkPipelineModel` (class in `ads.model`), 1450  
`SparkPipelineModel` (class in `ads.model.framework.spark_model`), 1201  
`spec` (`ads.pipeline.visualizer.base.RendererItem` attribute), 1083  
`SPEC_MAPPINGS` (`ads.jobs.builders.infrastructure.dsc_job_runtime.GitPythonRuntime` attribute), 898  
`SPEC_MAPPINGS` (`ads.jobs.builders.infrastructure.dsc_job_runtime.NotebookRuntime` attribute), 899  
`SPEC_MAPPINGS` (`ads.jobs.builders.infrastructure.dsc_job_runtime.PythonRuntime` attribute), 899  
`split()` (`ads.feature_engineering.feature_type.adsstring.string.ADSSString` method), 774  
`split_args()` (`ads.jobs.builders.infrastructure.dsc_job_runtime.ContainerRuntime` static method), 896  
`split_data()` (in module `ads.common.utils`), 628  
`splitlines()` (`ads.feature_engineering.feature_type.adsstring.string.ADSSString` method), 774  
`ssh_secret_ocid` (`ads.jobs.builders.runtimes.python_runtime.GitPythonRuntime` property), 913  
`ssh_secret_ocid` (`ads.jobs.GitPythonRuntime` property), 1013  
`ssn` (`ads.feature_engineering.adsstring.common_regex_mixin.CommonRegexMixin` property), 764  
`ssn` (`ads.feature_engineering.feature_type.adsstring.common_regex_mixin.CommonRegexMixin` property), 768  
`standardize_spec()` (`ads.jobs.builders.infrastructure.dsc_job.DataScienceJob` static method), 891  
`standardize_spec()` (`ads.jobs.DataScienceJob` static method), 997  
`start_main()` (`ads.opctl.distributed.common.abstract_cluster_provider.ClusterProvider` method), 1476  
`start_main()` (`ads.opctl.distributed.common.abstract_cluster_provider.ClusterProvider` method), 1476  
`start_ps()` (`ads.opctl.distributed.common.abstract_cluster_provider.ClusterProvider` method), 1476

`start_worker()` (`ads.opctl.distributed.common.abstract_cluster_provider.ClusterProvider` method), 1476  
`startswith()` (`ads.feature_engineering.feature_type.adsstring.string.ADSSString` method), 774  
`state` (`ads.model.deployment.model_deployment.ModelDeployment` attribute), 1061  
`state` (`ads.model.deployment.model_deployment.ModelDeployment` property), 1070  
`state` (`ads.model.ModelDeployment` attribute), 1417  
`state` (`ads.model.ModelDeployment` property), 1426  
`State` (class in `ads.hpo.search_cv`), 870  
`State` (class in `ads.model.deployment.common.utils`), 1055  
`stats` (`ads.feature_engineering.schema.Domain` attribute), 845  
`STATSMODELS` (`ads.model.model_metadata.Framework` attribute), 1334  
`status` (`ads.common.model_introspect.ModelIntrospect` property), 596  
`status` (`ads.common.oci_mixin.OCIModelMixin` property), 612  
`status` (`ads.dataflow.dataflow.DataFlowRun` property), 681  
`status` (`ads.dataflow.dataflow.RunObserver` property), 681  
`status` (`ads.hpo.search_cv.ADSTuner` property), 866  
`status` (`ads.jobs.builders.infrastructure.base.RunInstance` property), 874  
`status` (`ads.jobs.builders.infrastructure.dataflow.DataFlowRun` property), 883  
`status` (`ads.jobs.builders.infrastructure.dsc_job.DataScienceJob` property), 891  
`status` (`ads.jobs.builders.infrastructure.dsc_job.DataScienceJobRun` property), 895  
`status` (`ads.jobs.DataFlowRun` property), 980  
`status` (`ads.jobs.DataScienceJob` property), 997  
`status` (`ads.jobs.DataScienceJobRun` property), 1007  
`status` (`ads.model.DataScienceModel` attribute), 1367  
`status` (`ads.model.DataScienceModel` property), 1373  
`status` (`ads.model.deployment.model_deployment.ModelDeployment` attribute), 1076  
`status` (`ads.model.deployment.model_deployment.ModelDeployment` property), 1070  
`status` (`ads.model.model_introspect.ModelIntrospect` property), 1333  
`status` (`ads.model.model_version_set.ModelVersionSet` property), 1360  
`status` (`ads.model.ModelDeployment` property), 1426  
`status` (`ads.model.ModelVersionSet` property), 1439  
`status` (`ads.pipeline.ads_pipeline.Pipeline` attribute), 1492  
`status` (`ads.pipeline.ads_pipeline.Pipeline` property), 1503  
`status` (`ads.pipeline.ads_pipeline_run.PipelineRun` attribute), 1508  
`status` (`ads.pipeline.ads_pipeline_run.PipelineRun` property), 1515  
`status()` (`ads.jobs.ads_job.Job` method), 933  
`status()` (`ads.jobs.ads_job.Job` method), 1025  
`step()` (`ads.opctl.config.base.ConfigProcessor` method), 1471  
`step_details` (`ads.pipeline.ads_pipeline.Pipeline` attribute), 1491  
`step_details` (`ads.pipeline.ads_pipeline.Pipeline` property), 1503  
`step_status` (`ads.pipeline.visualizer.base.PipelineVisualizer` attribute), 1482  
`StepKind` (class in `ads.pipeline.visualizer.base`), 1485  
`steps` (`ads.dataset.pipeline.TransformerPipeline` attribute), 717  
`steps` (`ads.pipeline.visualizer.base.PipelineVisualizer` attribute), 1481  
`StepStatus` (class in `ads.pipeline.visualizer.base`), 1485  
`StepType` (class in `ads.pipeline.ads_pipeline_run`), 1513  
`stop()` (`ads.opctl.distributed.common.abstract_cluster_provider.ClusterProvider` method), 1476  
`stop_filesystem` (`ads.opctl.distributed.common.abstract_cluster_provider.ClusterProvider` property), 1476  
`STREAM` (`ads.model.deployment.model_deployment.ModelDeploymentModel` attribute), 1074  
`stream()` (`ads.common.oci_logging.ConsolidatedLog` method), 602  
`stream()` (`ads.common.oci_logging.OCILog` method), 604  
`string` (`ads.feature_engineering.feature_type.adsstring.string.ADSSString` attribute), 769  
`string` (`ads.feature_engineering.feature_type.adsstring.string.ADSSString` property), 774  
`string` (class in `ads.feature_engineering.feature_type.string`), 830  
`strip()` (`ads.feature_engineering.feature_type.adsstring.string.ADSSString` method), 774  
`STRUCTURED` (`ads.common.oci_resource.SEARCH_TYPE` attribute), 615  
`sub_properties` (`ads.model.deployment.model_deployment_properties.ModelDeploymentProperties` attribute), 1076  
`sub_properties` (`ads.model.ModelDeploymentProperties` attribute), 1430  
`sub_vectorization()` (`ads.type_discovery.typed_feature.DocumentTypedFeature` static method), 1552  
`subnet_id` (`ads.jobs.builders.infrastructure.dsc_job.DataScienceJob` property), 891  
`subnet_id` (`ads.jobs.DataScienceJob` property), 997  
`SUCCEEDED` (`ads.pipeline.visualizer.base.StepStatus` attribute), 1485  
`suggest_recommendations()` (`ads.dataset.dataset_with_target.ADSDatasetWithTarget` method), 706  
`suggest_space()` (`ads.hpo.ads_search_space.DecisionTreeClassifierSearchSpace` method), 706



method), 854

suggest\_space() (ads.hpo.ads\_search\_space.DecisionTreeSearchSpace method), 854

suggest\_space() (ads.hpo.ads\_search\_space.ElasticNetSearchSpace method), 854

suggest\_space() (ads.hpo.ads\_search\_space.ExtraTreesSearchSpace method), 854

suggest\_space() (ads.hpo.ads\_search\_space.GradientBoostingSearchSpace method), 855

suggest\_space() (ads.hpo.ads\_search\_space.LGBMClassifierSearchSpace method), 855

suggest\_space() (ads.hpo.ads\_search\_space.LinearSVCSearchSpace method), 855

suggest\_space() (ads.hpo.ads\_search\_space.LinearSVRSearchSpace method), 855

suggest\_space() (ads.hpo.ads\_search\_space.LogisticRegressionSearchSpace method), 855

suggest\_space() (ads.hpo.ads\_search\_space.ModelSearchSpace method), 855

suggest\_space() (ads.hpo.ads\_search\_space.RidgeSearchSpace method), 855

suggest\_space() (ads.hpo.ads\_search\_space.SGDClassifierSearchSpace method), 855

suggest\_space() (ads.hpo.ads\_search\_space.SVCSearchSpace method), 856

suggest\_space() (ads.hpo.ads\_search\_space.XGBClassifierSearchSpace method), 856

summary() (ads.common.model.ADSModel method), 585

summary() (ads.dataset.sampled\_dataset.PandasDataset method), 720

summary\_status() (ads.model.AutoMLModel method), 1364

summary\_status() (ads.model.framework.huggingface\_model.HuggingFaceModel method), 1091, 1116

summary\_status() (ads.model.framework.lightgbm\_model.LightGBMModel method), 1121, 1143

summary\_status() (ads.model.framework.pytorch\_model.PyTorchModel method), 1148, 1170

summary\_status() (ads.model.framework.sklearn\_model.SklearnModel method), 1176, 1198

summary\_status() (ads.model.framework.spark\_model.SparkPipelineModel method), 1203, 1225

summary\_status() (ads.model.framework.tensorflow\_model.TensorFlowModel method), 1230, 1252

summary\_status() (ads.model.framework.xgboost\_model.XGBoostModel method), 1257, 1279

summary\_status() (ads.model.generic\_model.GenericModel method), 1309, 1327

summary\_status() (ads.model.GenericModel method), 1379, 1398

summary\_status() (ads.model.HuggingFacePipelineModel method), 1403

summary\_status() (ads.model.LightGBMModel method), 1410

summary\_status() (ads.model.PyTorchModel method), 1443

summary\_status() (ads.model.SklearnModel method), 1448

summary\_status() (ads.model.SparkPipelineModel method), 1452

summary\_status() (ads.model.TensorFlowModel method), 1457

summary\_status() (ads.model.XGBoostModel method), 1461

SummaryList (class in ads.catalog.summary), 555

SummaryList (class in ads.dataflow.dataflowssummary), 682

SummaryStatus (class in ads.model.generic\_model), 1445

suppress\_traceback() (in module ads.opctl.utils), 1479

Surface (class in ads.telemetry.telemetry), 1538

Surface() (ads.telemetry.telemetry.Surface class method), 1538

SVCSearchSpace (class in ads.hpo.ads\_search\_space), 856

SVG (ads.pipeline.visualizer.graph\_renderer.RenderTo attribute), 1486

SVRSearchSpace (class in ads.hpo.ads\_search\_space), 856

swagger\_types (ads.model.deployment.model\_deployment\_properties.ModelDeploymentProperties attribute), 1074

swagger\_types (ads.model.ModelDeploymentProperties attribute), 1429

swapcase() (ads.feature\_engineering.feature\_type.adsstring.string.ADString attribute), 774

sync() (ads.common.pipeline\_model.Log method), 605

sync() (ads.common.oci\_mixin.OCIMixin attribute), 612

sync() (ads.feature\_engineering.accessor.dataframe\_accessor.ADSDataset attribute), 748, 752

sync() (ads.feature\_engineering.accessor.series\_accessor.ADSSeriesAccessor attribute), 753, 755

sync() (ads.jobs.DataFlowRun method), 980

sync() (ads.model.DataScienceJobRun method), 1007

sync() (ads.model.DataScienceModel method), 1373

sync() (ads.model.deployment.model\_deployment.ModelDeployment attribute), 1063, 1070

sync() (ads.model.ModelDeployment method), 1418, 1426

sync() (ads.opctl.distributed.common.abstract\_cluster\_provider.ClusterProvider attribute), 1476

sync() (ads.pipeline.ads\_pipeline\_run.PipelineRun method), 1509, 1512

SYNC\_SCRIPT\_PATH (ads.opctl.distributed.common.abstract\_cluster\_provider attribute), 1474

## T

- Tag (class in `ads.feature_engineering.feature_type.base`), 788
- tags (`ads.feature_engineering.accessor.dataframe_accessor.ADSDataFrameAccessor` attribute), 748
- tags (`ads.feature_engineering.accessor.dataframe_accessor.ADSDataFrameAccessor` property), 752
- tags (`ads.feature_engineering.accessor.series_accessor.ADSSeriesAccessor` attribute), 753
- tail() (`ads.common.oci_logging.ConsolidatedLog` method), 603
- tail() (`ads.common.oci_logging.OCILog` method), 605
- tail() (`ads.dataflow.dataflow.DataFlowLog` method), 679
- TARGET\_TYPE (class in `ads.common.decorator.deprecate`), 556
- TargetVariable (class in `ads.dataset.target`), 720
- tearable() (`ads.opctl.distributed.common.abstract_cluster_provider.ClusterProvider` method), 1476
- template() (`ads.dataflow.dataflow.DataFlow` method), 676
- tenancy\_ocid (`ads.model.runtime.model_provenance_details.ModelProvenanceDetails` attribute), 1285
- TENSORFLOW (`ads.common.decorator.runtime_dependency.OptionalDependency` attribute), 558
- TENSORFLOW (`ads.model.model_metadata.Framework` attribute), 1334
- TensorflowExtractor (class in `ads.model.extractor.tensorflow_extractor`), 1086
- TensorFlowModel (class in `ads.model`), 1454
- TensorFlowModel (class in `ads.model.framework.tensorflow_model`), 1228
- TERMINAL\_STATES (`ads.jobs.builders.infrastructure.dsc_job.DataScienceJobRun` attribute), 894
- TERMINAL\_STATES (`ads.jobs.DataScienceJobRun` attribute), 1001
- terminate() (`ads.hpo.search_cv.ADSTuner` method), 866
- TERMINATED (`ads.hpo.search_cv.State` attribute), 870
- TERMINATED\_STATES (`ads.jobs.builders.infrastructure.dataflow.DataFlowRun` attribute), 882
- TERMINATED\_STATES (`ads.jobs.DataFlowRun` attribute), 971
- test\_data (`ads.evaluations.evaluator.ADSEvaluator` attribute), 726
- TEST\_STATUS (class in `ads.common.model_introspect`), 596
- TEST\_STATUS (class in `ads.model.model_introspect`), 1333
- TEXT (`ads.common.decorator.runtime_dependency.OptionalDependency` attribute), 558
- TEXT (`ads.data_labeling.constants.DatasetType` attribute), 667
- TEXT (`ads.pipeline.ads_pipeline_run.ShowMode` attribute), 1513
- Text (class in `ads.feature_engineering.feature_type.text`), 832
- text\_classification (`ads.feature_engineering.feature_type.adsstring.oci_language.OCIString` property), 768
- TextDatasetFactory (class in `ads.text_dataset.dataset`), 1545
- TextFileLoader (class in `ads.data_labeling.loader.file_loader`), 632
- TextLabeledDataFormatter (class in `ads.data_labeling.visualizer.text_visualizer`), 663
- TEXTSELECTION (`ads.data_labeling.parser.export_record_parser.EntityType` attribute), 641
- Tika (class in `ads.text_dataset.backends`), 1540
- time (`ads.feature_engineering.adsstring.common_regex_mixin.CommonRegexMixin` property), 764
- time (`ads.feature_engineering.feature_type.adsstring.common_regex_mixin.CommonRegexMixin` property), 768
- time\_accepted (`ads.jobs.DataScienceJobRun` property), 1007
- time\_created (`ads.jobs.DataFlowRun` property), 981
- time\_created (`ads.jobs.utils.DataFlowConfig` property), 944
- time\_created (`ads.model.deployment.model_deployment.ModelDeployment` attribute), 1062
- time\_created (`ads.model.deployment.model_deployment.ModelDeployment` property), 1071
- time\_created (`ads.model.ModelDeployment` attribute), 1417
- time\_created (`ads.model.ModelDeployment` property), 1426
- time\_elapsed (`ads.hpo.search_cv.ADSTuner` property), 866
- time\_finished (`ads.jobs.DataScienceJobRun` property), 1007
- time\_finished (`ads.pipeline.visualizer.base.RendererItemStatus` attribute), 1485
- time\_remaining (`ads.hpo.search_cv.ADSTuner` property), 866
- TIME\_SERIES\_FORECASTING (`ads.model.model_metadata.UseCaseType` attribute), 1352
- time\_since\_resume (`ads.hpo.search_cv.ADSTuner` property), 866
- time\_started (`ads.jobs.DataScienceJobRun` property), 1007
- time\_started (`ads.pipeline.visualizer.base.RendererItemStatus` attribute), 1485
- time\_updated (`ads.jobs.DataFlowRun` property), 981
- time\_updated (`ads.jobs.utils.DataFlowConfig` property), 944

- erty), 944
- TimeBudget (class in *ads.hpo.stopping\_criterion*), 871
- Timeseries (class in *ads.dataset.timeseries*), 721
- timeseries() (*ads.dataset.sampled\_dataset.PandasDataset* method), 720
- title() (*ads.feature\_engineering.feature\_type.adsstring.string.ADSString* method), 774
- to\_adsstring() (in module *ads.feature\_engineering.feature\_type.adsstring.string.ADSString*), 776
- to\_avro() (*ads.dataset.dataset.ADSDataset* method), 695
- to\_bytes() (*ads.feature\_engineering.adsimage.image.ADSSImage* method), 758
- to\_config() (*ads.common.base\_properties.BaseProperties* method), 571, 572
- to\_config() (*ads.model.base\_properties.BaseProperties* method), 1302
- to\_csv() (*ads.dataset.dataset.ADSDataset* method), 696
- to\_dask() (*ads.dataset.dataset.ADSDataset* method), 696
- to\_dask\_dataframe() (*ads.dataset.dataset.ADSDataset* method), 697
- to\_dataframe() (*ads.catalog.model.Model* method), 542, 544
- to\_dataframe() (*ads.catalog.summary.SummaryList* method), 555
- to\_dataframe() (*ads.common.model\_introspect.ModelIntrospect* method), 595, 596
- to\_dataframe() (*ads.data\_labeling.metadata.Metadata* method), 670
- to\_dataframe() (*ads.dataflow.dataflowssummary.Summary* method), 682
- to\_dataframe() (*ads.model.model\_introspect.ModelIntrospect* method), 1332, 1333
- to\_dataframe() (*ads.model.model\_metadata.ModelCustomMetadata* method), 1336, 1340
- to\_dataframe() (*ads.model.model\_metadata.ModelMetadata* method), 1342, 1343
- to\_dataframe() (*ads.model.model\_metadata.ModelTaxonomyMetadata* method), 1348, 1350
- to\_dataframe() (in module *ads.common.utils*), 628
- to\_dict() (*ads.common.base\_properties.BaseProperties* method), 571, 572
- to\_dict() (*ads.common.config.Config* method), 575
- to\_dict() (*ads.common.config.ConfigSection* method), 577
- to\_dict() (*ads.common.config.ExtendedConfigParser* method), 578
- to\_dict() (*ads.common.data\_serializer.InputDataSerializer* method), 581
- to\_dict() (*ads.common.oci\_mixin.OCIModelMixin* method), 612
- to\_dict() (*ads.common.serializer.DataClassSerializable* method), 616
- to\_dict() (*ads.common.serializer.Serializable* method), 616, 618
- to\_dict() (*ads.data\_labeling.metadata.Metadata* method), 670
- to\_dict() (*ads.data\_labeling.record.Record* method), 672
- to\_dict() (*ads.data\_labeling.visualizer.image\_visualizer.RenderOptions* method), 661
- to\_dict() (*ads.data\_labeling.visualizer.text\_visualizer.RenderOptions* method), 663
- to\_dict() (*ads.feature\_engineering.schema.Attribute* method), 844
- to\_dict() (*ads.feature\_engineering.schema.Schema* method), 847, 850
- to\_dict() (*ads.jobs.ads\_job.Job* method), 933
- to\_dict() (*ads.jobs.builders.base.Builder* method), 920
- to\_dict() (*ads.jobs.builders.infrastructure.dataflow.DataFlow* method), 877
- to\_dict() (*ads.jobs.ContainerRuntime* method), 948
- to\_dict() (*ads.jobs.DataFlow* method), 956
- to\_dict() (*ads.jobs.DataFlowNotebookRuntime* method), 964
- to\_dict() (*ads.jobs.DataFlowRun* method), 981
- to\_dict() (*ads.jobs.DataFlowRuntime* method), 986
- to\_dict() (*ads.jobs.DataScienceJob* method), 997
- to\_dict() (*ads.jobs.DataScienceJobRun* method), 1007
- to\_dict() (*ads.jobs.GitPythonRuntime* method), 1013
- to\_dict() (*ads.jobs.Job* method), 1025
- to\_dict() (*ads.jobs.NotebookRuntime* method), 1030
- to\_dict() (*ads.jobs.PythonRuntime* method), 1039
- to\_dict() (*ads.jobs.ScriptRuntime* method), 1048
- to\_dict() (*ads.jobs.serializer.Serializable* method), 937
- to\_dict() (*ads.model.base\_properties.BaseProperties* method), 1301, 1303
- to\_dict() (*ads.model.DataScienceModel* method), 1367, 1373
- to\_dict() (*ads.model.deployment.model\_deployment.ModelDeployment* method), 1071
- to\_dict() (*ads.model.model\_metadata.ModelCustomMetadata* method), 1336
- to\_dict() (*ads.model.model\_metadata.ModelCustomMetadataItem* method), 1340
- to\_dict() (*ads.model.model\_metadata.ModelMetadata* method), 1342, 1343
- to\_dict() (*ads.model.model\_metadata.ModelMetadataItem* method), 1345
- to\_dict() (*ads.model.model\_metadata.ModelProvenanceMetadata* method), 1348
- to\_dict() (*ads.model.model\_metadata.ModelTaxonomyMetadata* method), 1349
- to\_dict() (*ads.model.model\_metadata.ModelTaxonomyMetadataItem* method), 1350

`to_dict()` (*ads.model.model\_version\_set.ModelVersionSet* method), 1355, 1360  
`to_dict()` (*ads.model.ModelDeployment* method), 1426  
`to_dict()` (*ads.model.ModelVersionSet* method), 1435, 1439  
`to_dict()` (*ads.pipeline.ads\_pipeline.Pipeline* method), 1493, 1503  
`to_dict()` (*ads.pipeline.ads\_pipeline\_step.PipelineStep* method), 1515, 1518  
`to_dict()` (*ads.secrets.secrets.Secret* method), 1534  
`to_dict()` (*ads.secrets.secrets.SecretKeeper* method), 1537  
`to_h2o()` (*ads.dataset.dataset.ADSDataset* method), 697  
`to_h2o_dataframe()` (*ads.dataset.dataset.ADSDataset* method), 698  
`to_hdf()` (*ads.dataset.dataset.ADSDataset* method), 698  
`to_json()` (*ads.common.serializer.Serializable* method), 617, 619  
`to_json()` (*ads.dataset.dataset.ADSDataset* method), 698  
`to_json()` (*ads.feature\_engineering.schema.Schema* method), 847, 850  
`to_json()` (*ads.jobs.ads\_job.Job* method), 933  
`to_json()` (*ads.jobs.ContainerRuntime* method), 948  
`to_json()` (*ads.jobs.DataFlow* method), 956  
`to_json()` (*ads.jobs.DataFlowNotebookRuntime* method), 964  
`to_json()` (*ads.jobs.DataFlowRuntime* method), 986  
`to_json()` (*ads.jobs.DataScienceJob* method), 997  
`to_json()` (*ads.jobs.GitPythonRuntime* method), 1013  
`to_json()` (*ads.jobs.Job* method), 1025  
`to_json()` (*ads.jobs.NotebookRuntime* method), 1031  
`to_json()` (*ads.jobs.PythonRuntime* method), 1039  
`to_json()` (*ads.jobs.ScriptRuntime* method), 1048  
`to_json()` (*ads.jobs.serializer.Serializable* method), 937  
`to_json()` (*ads.model.model\_metadata.ModelCustomMetadata* method), 1337  
`to_json()` (*ads.model.model\_metadata.ModelCustomMetadataItem* method), 1509, 1512  
`to_json()` (*ads.model.model\_metadata.ModelCustomMetadataItem* method), 1341  
`to_json()` (*ads.model.model\_metadata.ModelMetadata* method), 1342, 1343  
`to_json()` (*ads.model.model\_metadata.ModelMetadataItem* method), 1345  
`to_json()` (*ads.model.model\_metadata.ModelTaxonomyMetadata* method), 1349  
`to_json()` (*ads.model.model\_metadata.ModelTaxonomyMetadataItem* method), 1350  
`to_json_file()` (*ads.feature\_engineering.schema.Schema* method), 847, 850  
`to_json_file()` (*ads.model.model\_metadata.ModelCustomMetadata* method), 1337  
`to_json_file()` (*ads.model.model\_metadata.ModelCustomMetadataItem* method), 1341  
`to_json_file()` (*ads.model.model\_metadata.ModelMetadata* method), 1342, 1343  
`method)`, 1342, 1343  
`to_json_file()` (*ads.model.model\_metadata.ModelMetadataItem* method), 1345, 1346  
`to_json_file()` (*ads.model.model\_metadata.ModelTaxonomyMetadata* method), 1349  
`to_json_file()` (*ads.model.model\_metadata.ModelTaxonomyMetadataItem* method), 1350  
`to_list()` (*ads.common.model\_introspect.PrintItem* method), 596  
`to_list()` (*ads.model.model\_introspect.PrintItem* method), 1333  
`to_oci_model()` (*ads.common.oci\_mixin.OCIModelMixin* method), 612  
`to_oci_model()` (*ads.jobs.DataFlowRun* method), 981  
`to_oci_model()` (*ads.jobs.DataScienceJobRun* method), 1007  
`to_oci_model()` (*ads.model.deployment.model\_deployment\_properties.ModelDeploymentProperties* method), 1076  
`to_oci_model()` (*ads.model.ModelDeploymentProperties* method), 1431  
`to_onnxrt()` (*ads.common.data.ADSDData* method), 580  
`to_pandas()` (*ads.dataset.dataset.ADSDataset* method), 699  
`to_pandas_dataframe()` (*ads.dataset.dataset.ADSDataset* method), 699  
`to_parquet()` (*ads.dataset.dataset.ADSDataset* method), 699  
`to_spacy()` (*ads.data\_labeling.ner.NERItem* method), 671  
`to_spacy()` (*ads.data\_labeling.ner.NERItems* method), 671  
`to_sql()` (*ads.dbmixin.db\_pandas\_accessor.DBAccessMixin* method), 722  
`to_svg()` (*ads.pipeline.ads\_pipeline.Pipeline* method), 1494, 1503  
`to_svg()` (*ads.pipeline.ads\_pipeline\_run.PipelineRun* method), 1482  
`to_svg()` (*ads.pipeline.visualizer.base.PipelineVisualizer* method), 1482  
`to_tuple()` (*ads.common.object\_storage\_details.ObjectStorageDetails* method), 599  
`to_tuple()` (*ads.data\_labeling.record.Record* method), 673  
`to_update_deployment()` (*ads.model.deployment.model\_deployment\_properties.ModelDeploymentProperties* method), 1076  
`to_update_deployment()` (*ads.model.ModelDeploymentProperties* method), 1431  
`to_xgb()` (*ads.dataset.dataset.ADSDataset* method), 700  
`to_xgb_data_matrix()` (*ads.dataset.dataset.ADSDataset* method), 700  
`to_yaml()` (*ads.common.oci\_mixin.OCIModelMixin* method), 612



method), 612

to\_yaml() (ads.common.serializer.Serializable method), 617, 619

to\_yaml() (ads.feature\_engineering.schema.Schema method), 847, 850

to\_yaml() (ads.jobs.ads\_job.Job method), 933

to\_yaml() (ads.jobs.builders.infrastructure.dataflow.DataFlow method), 877

to\_yaml() (ads.jobs.builders.infrastructure.dataflow.DataFlowRun method), 881

to\_yaml() (ads.jobs.builders.infrastructure.dataflow.DataFlowRuntime method), 883

to\_yaml() (ads.jobs.builders.infrastructure.dsc\_job.DataScienceJob method), 895

to\_yaml() (ads.jobs.ContainerRuntime method), 949

to\_yaml() (ads.jobs.DataFlow method), 956

to\_yaml() (ads.jobs.DataFlowNotebookRuntime method), 964

to\_yaml() (ads.jobs.DataFlowRun method), 981

to\_yaml() (ads.jobs.DataFlowRuntime method), 986

to\_yaml() (ads.jobs.DataScienceJob method), 998

to\_yaml() (ads.jobs.DataScienceJobRun method), 1008

to\_yaml() (ads.jobs.GitPythonRuntime method), 1013

to\_yaml() (ads.jobs.Job method), 1025

to\_yaml() (ads.jobs.NotebookRuntime method), 1031

to\_yaml() (ads.jobs.PythonRuntime method), 1040

to\_yaml() (ads.jobs.ScriptRuntime method), 1048

to\_yaml() (ads.jobs.serializer.Serializable method), 937

to\_yaml() (ads.model.model\_metadata.ModelCustomMetadata method), 1337

to\_yaml() (ads.model.model\_metadata.ModelCustomMetadataItem method), 1340

to\_yaml() (ads.model.model\_metadata.ModelMetadata method), 1342, 1344

to\_yaml() (ads.model.model\_metadata.ModelMetadataItem method), 1345, 1346

to\_yaml() (ads.model.model\_metadata.ModelTaxonomyMetadata method), 1349

to\_yaml() (ads.model.model\_metadata.ModelTaxonomyMetadataItem method), 1350

to\_yaml() (ads.pipeline.ads\_pipeline.Pipeline method), 1494

to\_yaml() (ads.pipeline.ads\_pipeline\_run.PipelineRun method), 1509, 1512

to\_yaml() (ads.pipeline.ads\_pipeline\_step.PipelineStep method), 1515

to\_yaml\_file() (ads.feature\_engineering.schema.Schema method), 847, 850

to\_yolo() (ads.data\_labeling.boundingBox.BoundingBoxItem method), 666

to\_yolo() (ads.data\_labeling.boundingBox.BoundingBoxItems method), 666

token(ads.feature\_engineering.adsstring.parsers.spacy\_parser.SpacyParser), 762

token(ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser), 766

TOP\_BOTTOM(ads.pipeline.visualizer.base.GraphOrientation attribute), 1481

top\_left(ads.data\_labeling.boundingBox.BoundingBoxItem attribute), 664, 666

top\_right(ads.data\_labeling.boundingBox.BoundingBoxItem attribute), 665, 666

TOP\_MODELING(ads.model.model\_metadata.UseCaseType attribute), 1352

total\_cpu(ads.jobs.DataFlowRun property), 981

TqdmProgressBar (class in ads.dataset.progress), 718

TqdmProgressBar (class in ads.model.deployment.common.progress\_bar), 1053

train\_test\_split() (ads.dataset.dataset\_with\_target.ADSDatasetWithTarget method), 707

train\_validation\_test\_split() (ads.dataset.dataset\_with\_target.ADSDatasetWithTarget method), 707

TRAINING\_AND\_VALIDATION\_DATASETS (ads.model.model\_metadata.MetadataCustomCategory attribute), 1335

training\_code(ads.model.runtime.model\_provenance\_details.ModelProvenanceDetails attribute), 1285

training\_compartment\_ocid (ads.model.runtime.model\_provenance\_details.ModelProvenanceDetails attribute), 1285

training\_conda\_env(ads.model.model\_properties.ModelProperties attribute), 1354

training\_conda\_env (ads.model.ModelProperties attribute), 1434

training\_conda\_env(ads.model.runtime.model\_provenance\_details.ModelProvenanceDetails attribute), 1285

training\_data(ads.evaluations.evaluator.ADSEvaluator attribute), 726

TRAINING\_DATASET(ads.model.model\_metadata.MetadataCustomKeys attribute), 1335

TRAINING\_DATASET\_NUMBER\_OF\_COLS (ads.model.model\_metadata.MetadataCustomKeys attribute), 1335

TRAINING\_DATASET\_NUMBER\_OF\_ROWS (ads.model.model\_metadata.MetadataCustomKeys attribute), 1335

TRAINING\_DATASET\_SIZE (ads.model.model\_metadata.MetadataCustomKeys attribute), 1335

TRAINING\_ENV(ads.model.model\_metadata.MetadataCustomCategory attribute), 1335

training\_env\_path(ads.model.runtime.env\_info.TrainingEnvInfo attribute), 1284

training\_env\_slug(ads.model.runtime.env\_info.TrainingEnvInfo attribute), 1284

training\_env\_type(ads.model.runtime.env\_info.TrainingEnvInfo attribute), 1284

attribute), 1284  
 training\_id(*ads.model.model\_metadata.ModelProvenanceMetadata* attribute), 1348  
 training\_id(*ads.model.model\_properties.ModelProperties* attribute), 1354  
 training\_id(*ads.model.ModelProperties* attribute), 1434  
 TRAINING\_PROFILE(*ads.model.model\_metadata.Metadata* attribute), 1335  
 training\_python\_version(*ads.model.model\_properties.ModelProperties* attribute), 1354  
 training\_python\_version(*ads.model.ModelProperties* attribute), 1434  
 training\_python\_version(*ads.model.runtime.env\_info.TrainingEnvInfo* attribute), 1284  
 training\_region(*ads.model.runtime.model\_provenance\_details.ModelProvenanceDetails* attribute), 1285  
 training\_resource\_id(*ads.model.model\_properties.ModelProperties* attribute), 1354  
 training\_resource\_id(*ads.model.ModelProperties* attribute), 1434  
 training\_resource\_ocid(*ads.model.runtime.model\_provenance\_details.ModelProvenanceDetails* attribute), 1285  
 training\_script\_path(*ads.model.model\_metadata.ModelProvenanceMetadata* attribute), 1348  
 training\_script\_path(*ads.model.model\_properties.ModelProperties* attribute), 1354  
 training\_script\_path(*ads.model.ModelProperties* attribute), 1434  
 TrainingCode (class in *ads.model.runtime.model\_provenance\_details*), 1285  
 TrainingEnvInfo (class in *ads.model.runtime.env\_info*), 1284  
 transform()(*ads.common.model.ADSModel* method), 585  
 transform()(*ads.dataset.dataframe\_transformer.DataFrameTransformer* method), 688  
 transform()(*ads.dataset.feature\_engineering\_transformer.FeatureEngineeringTransformer* method), 713  
 transform()(*ads.dataset.label\_encoder.DataFrameLabelEncoder* method), 717  
 transform()(*ads.dataset.recommendation\_transformer.RecommendationTransformer* method), 719  
 transform()(*ads.model.transformer.onnx\_transformer.ONNXTransformer* method), 1296  
 transformer\_log()(*ads.dataset.recommendation\_transformer.RecommendationTransformer* method), 719  
 TransformerPipeline (class in *ads.dataset.pipeline*), 717  
 TRANSFORMERS(*ads.model.model\_metadata.Framework* attribute), 1334  
 translate()(*ads.feature\_engineering.feature\_type.adsstring.string.ADSString* method), 774  
 translate()(*ads.jobs.builders.infrastructure.dsc\_job\_runtime.DataScienceJobRuntime* method), 897  
 translate()(*ads.jobs.builders.infrastructure.dsc\_job\_runtime.RuntimeHandler* method), 900  
 translate\_config()(*ads.opctl.config.yaml\_parsers.base.YamlSpecParser* method), 1471  
 trial\_count(*ads.hpo.search\_cv.ADSTuner* property), 867  
 trials(*ads.hpo.search\_cv.ADSTuner* property), 867  
 trials\_export()(*ads.hpo.search\_cv.ADSTuner* method), 867  
 trials\_import()(*ads.hpo.search\_cv.ADSTuner* method), 868  
 trials\_remaining(*ads.hpo.search\_cv.ADSTuner* property), 868  
 trigger()(*ads.common.config.Eventing* method), 577  
 trigram(*ads.feature\_engineering.adsstring.parsers.base.Parser* property), 761  
 trigram(*ads.feature\_engineering.adsstring.parsers.spacy\_parser.SpacyParser* property), 762  
 trigram(*ads.feature\_engineering.feature\_type.adsstring.parsers.base.Parser* property), 765  
 trigram(*ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser.SpacyParser* property), 766  
 truncate\_series\_top\_n() (in *ads.common.utils* module), 629  
 tune()(*ads.hpo.search\_cv.ADSTuner* method), 868  
 txt(*ads.data\_labeling.visualizer.text\_visualizer.LabeledTextItem* attribute), 662, 663  
 type(*ads.jobs.ads\_job.Job* property), 934  
 type(*ads.jobs.builders.base.Builder* property), 920  
 type(*ads.jobs.builders.runtimes.base.Runtime* property), 904  
 type(*ads.jobs.ContainerRuntime* property), 949  
 type(*ads.jobs.DataFlow* property), 956  
 type(*ads.jobs.DataFlowNotebookRuntime* property), 967  
 type(*ads.jobs.DataFlowRun* property), 981  
 type(*ads.jobs.DataScienceJobRuntime* property), 987  
 type(*ads.jobs.DataScienceJob* property), 998  
 type(*ads.jobs.GitPythonRuntime* property), 1013  
 type(*ads.jobs.Job* property), 1026  
 type(*ads.jobs.NotebookRuntime* property), 1031  
 type(*ads.jobs.PythonRuntime* property), 1040  
 type(*ads.jobs.ScriptRuntime* property), 1049  
 type(*ads.jobs.utils.DataFlowConfig* property), 944  
 type(*ads.model\_deployment.ModelDeployment* property), 1071

- [type](#) (*ads.model.ModelDeployment* property), 1426  
[TYPE\\_BATCH](#) (*ads.jobs.DataFlowRun* attribute), 971  
[TYPE\\_BATCH](#) (*ads.jobs.utils.DataFlowConfig* attribute), 938  
[type\\_mappings](#) (*ads.common.oci\_mixin.OCISerializableMixin* attribute), 613  
[type\\_mappings](#) (*ads.jobs.DataFlowRun* attribute), 982  
[type\\_mappings](#) (*ads.jobs.DataScienceJobRun* attribute), 1008  
[type\\_of\\_target\(\)](#) (*ads.dataset.dataset\_with\_target.ADSDatasetWithTarget* method), 708  
[TYPE\\_SESSION](#) (*ads.jobs.DataFlowRun* attribute), 971  
[TYPE\\_SESSION](#) (*ads.jobs.utils.DataFlowConfig* attribute), 939  
[TYPE\\_STREAMING](#) (*ads.jobs.DataFlowRun* attribute), 971  
[TYPE\\_STREAMING](#) (*ads.jobs.utils.DataFlowConfig* attribute), 939  
[TypeAlreadyAdded](#), 839  
[TypeAlreadyRegistered](#), 839  
[TypedFeature](#) (class in *ads.type\_discovery.typed\_feature*), 1553  
[TypeDiscoveryDriver](#) (class in *ads.type\_discovery.type\_discovery\_driver*), 1551  
[TypeNotFound](#), 839
- ## U
- [UDF](#) (class in *ads.text\_dataset.udfs*), 1548  
[UniformDistribution](#) (class in *ads.hpo.distributions*), 858  
[UNKNOWN](#) (*ads.model.deployment.common.utils.State* attribute), 1055  
[Unknown](#) (class in *ads.feature\_engineering.feature\_type.unknown*), 834  
[UnknownDetector](#) (class in *ads.type\_discovery.unknown\_detector*), 1553  
[UnknownTypedFeature](#) (class in *ads.type\_discovery.typed\_feature*), 1553  
[unregister\(\)](#) (*ads.feature\_engineering.feature\_type.adsstring.ADSString* method), 775  
[unregister\(\)](#) (*ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidator* method), 777, 779  
[unregister\(\)](#) (*ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidatorMethod* method), 780  
[unregister\(\)](#) (*ads.feature\_engineering.feature\_type.handler.feature\_validator.FeatureValidatorWarning* method), 782, 784  
[UNSUPPORTED](#) (*ads.common.utils.ml\_task\_types* attribute), 627  
[up\\_sample\(\)](#) (*ads.dataset.classification\_dataset.ClassificationDataset* method), 685  
[up\\_sample\(\)](#) (in module *ads.dataset.helper*), 716  
[UPDATE](#) (*ads.common.model\_artifact.ConflictStrategy* attribute), 585  
[update\(\)](#) (*ads.dataset.progress.DummyProgressBar* method), 718  
[update\(\)](#) (*ads.dataset.progress.ProgressBar* method), 718  
[update\(\)](#) (*ads.dataset.progress.TqdmProgressBar* method), 718  
[update\(\)](#) (*ads.jobs.builders.infrastructure.base.Infrastructure* method), 874  
[update\(\)](#) (*ads.jobs.builders.infrastructure.dsc\_job.DSCJob* method), 886  
[update\(\)](#) (*ads.jobs.DataFlow* method), 957  
[update\(\)](#) (*ads.jobs.DataScienceJob* method), 998  
[update\(\)](#) (*ads.model.DataScienceModel* method), 1367, 1373  
[update\(\)](#) (*ads.model.deployment.common.progress\_bar.DummyProgressBar* method), 1053  
[update\(\)](#) (*ads.model.deployment.common.progress\_bar.ProgressBar* method), 1053  
[update\(\)](#) (*ads.model.deployment.common.progress\_bar.TqdmProgressBar* method), 1054  
[update\(\)](#) (*ads.model.deployment.model\_deployer.ModelDeployer* method), 1060  
[update\(\)](#) (*ads.model.deployment.model\_deployment.ModelDeployment* method), 1063, 1071  
[update\(\)](#) (*ads.model.framework.huggingface\_model.HuggingFacePipeline* method), 1116  
[update\(\)](#) (*ads.model.framework.lightgbm\_model.LightGBMModel* method), 1143  
[update\(\)](#) (*ads.model.framework.pytorch\_model.PyTorchModel* method), 1170  
[update\(\)](#) (*ads.model.framework.sklearn\_model.SklearnModel* method), 1198  
[update\(\)](#) (*ads.model.framework.spark\_model.SparkPipelineModel* method), 1225  
[update\(\)](#) (*ads.model.framework.tensorflow\_model.TensorFlowModel* method), 1252  
[update\(\)](#) (*ads.model.framework.xgboost\_model.XGBoostModel* method), 1279  
[update\(\)](#) (*ads.model.generic\_model.GenericModel* method), 1327  
[update\(\)](#) (*ads.model.GenericModel* method), 1398  
[update\(\)](#) (*ads.model.model\_metadata.ModelCustomMetadataItem* method), 1411  
[update\(\)](#) (*ads.model.model\_metadata.ModelFeatureValidatorMethod* method), 1411  
[update\(\)](#) (*ads.model.model\_metadata.ModelTaxonomyMetadataItem* method), 1450, 1451  
[update\(\)](#) (*ads.model.model\_version\_set.ModelVersionSet* method), 1355, 1360  
[update\(\)](#) (*ads.model.ModelDeployer* method), 1416  
[update\(\)](#) (*ads.model.ModelDeployment* method), 1418, 1426  
[update\(\)](#) (*ads.model.ModelVersionSet* method), 1435, 1440  
[update\(\)](#) (*ads.model.service.oci\_datascience\_model.OCIDataScienceModel* method), 1288, 1292

`update()` (*ads.model.service.oci\_datascience\_model\_versioning\_model.ModelVersionSet* method), 1294  
`update()` (*ads.opctl.distributed.common.abstract\_framework\_spec\_builder.WorkSpecBuilder* method), 1476  
`update_action()` (*ads.model.generic\_model.SummaryStatus* method), 1331  
`update_config()` (*ads.dataflow.dataflow.DataFlowRun* method), 681  
`update_config()` (*ads.dataflow.dataflow.RunObserver* method), 682  
`update_deployment()` (*ads.model.framework.huggingface\_model.HuggingFacePipelineModel* class method), 1116  
`update_deployment()` (*ads.model.framework.lightgbm\_model.LightGBMModel* class method), 1144  
`update_deployment()` (*ads.model.framework.pytorch\_model.PyTorchModel* class method), 1171  
`update_deployment()` (*ads.model.framework.sklearn\_model.SklearnModel* class method), 1199  
`update_deployment()` (*ads.model.framework.spark\_model.SparkPipelineModel* class method), 1225  
`update_deployment()` (*ads.model.framework.tensorflow\_model.TensorFlowModel* class method), 1253  
`update_deployment()` (*ads.model.framework.xgboost\_model.XGBoostModel* class method), 1280  
`update_deployment()` (*ads.model.generic\_model.GenericModel* class method), 1328  
`update_deployment()` (*ads.model.generic\_model.GenericModel* method), 1308  
`update_deployment()` (*ads.model.GenericModel* class method), 1398  
`update_deployment()` (*ads.model.GenericModel* method), 1379  
`update_env_vars()` (in module *ads.opctl.distributed.common.abstract\_framework\_spec\_builder*), 1476  
`update_from_oci_model()` (*ads.common.oci\_mixin.OCIModelMixin* method), 612  
`update_from_oci_model()` (*ads.jobs.DataFlowRun* method), 982  
`update_from_oci_model()` (*ads.jobs.DataScienceJobRun* method), 1008  
`update_job_run_metadata_with_rest_api()` (*ads.jobs.templates.driver\_oci.GitJobRunner* method), 924  
`update_model()` (*ads.model.ModelCatalog* method), 545, 547  
`update_model_provenance()` (*ads.model.service.oci\_datascience\_model.OCIDataScienceModel* method), 1292  
`update_notebook_session()` (*ads.catalog.notebook.NotebookCatalog* method), 551  
`update_oci_client_config()` (in module *ads.telemetry.telemetry*), 1538  
`update_project()` (*ads.catalog.project.ProjectCatalog* method), 553  
`update_repository()` (in module *ads.database.connection*), 674  
`update_secret()` (*ads.vault.vault.Vault* method), 1554  
`update_status()` (*ads.model.generic\_model.SummaryStatus* method), 1331  
`UPDATING` (*ads.model.deployment.common.utils.State* attribute), 1055  
`upload()` (*ads.dataset.factory.DatasetFactory* static method), 713  
`upload()` (*ads.hpo.tuner\_artifact.UploadTunerArtifact* method), 872  
`upload()` (*ads.model.artifact\_uploader.ArtifactUploader* method), 1300  
`upload()` (*ads.opctl.conda.multipart\_uploader.MultiPartUploader* method), 1469  
`upload_artifact()` (*ads.jobs.builders.infrastructure.dsc\_job.DSCJob* method), 886  
`upload_artifact()` (*ads.model.DataScienceModel* method), 1367, 1373  
`upload_artifact()` (*ads.model.framework.huggingface\_model.HuggingFacePipelineModel* method), 1117  
`upload_artifact()` (*ads.model.framework.lightgbm\_model.LightGBMModel* method), 1145  
`upload_artifact()` (*ads.model.framework.pytorch\_model.PyTorchModel* method), 1172  
`upload_artifact()` (*ads.model.framework.sklearn\_model.SklearnModel* method), 1200  
`upload_artifact()` (*ads.model.framework.spark\_model.SparkPipelineModel* method), 1226  
`upload_artifact()` (*ads.model.framework.tensorflow\_model.TensorFlowModel* method), 1254  
`upload_artifact()` (*ads.model.framework.xgboost\_model.XGBoostModel* method), 1281  
`upload_artifact()` (*ads.model.generic\_model.GenericModel* method), 1309, 1329  
`upload_artifact()` (*ads.model.GenericModel* method), 1379, 1399  
`upload_artifact()` (*ads.pipeline.ads\_pipeline.DataSciencePipeline* method), 1490  
`upload_model()` (*ads.catalog.model.ModelCatalog* method), 545, 548  
`upload_to_cloud()` (*ads.hpo.tuner\_artifact.UploadTunerArtifact*



method), 872

UploadTunerArtifact (class in `ads.hpo.tuner_artifact`), 872

UPPER (`ads.common.decorator.argument_to_case.ArgumentCase` attribute), 556

upper() (`ads.feature_engineering.feature_type.adsstring.string.ADSString` method), 775

url (`ads.jobs.builders.runtimes.python_runtime.GitPythonRuntime` property), 914

url (`ads.jobs.GitPythonRuntime` property), 1014

url (`ads.model.deployment.model_deployment.ModelDeployment` property), 1072

url (`ads.model.ModelDeployment` property), 1427

USE\_CASE\_TYPE (`ads.model.model_metadata.MetadataTaxonomyKeys` attribute), 1336

use\_training (`ads.evaluations.evaluator.ADSEvaluator.EvaluationMetadata.hpo.validation` attribute), 727

UseCaseType (class in `ads.model.model_metadata`), 1351

USER\_CODE\_DIR (`ads.jobs.builders.runtimes.artifact.PythonArtifact` attribute), 903

USER\_CUSTOM\_PACK (`ads.common.model_artifact.PACK_TYPE` attribute), 591

USER\_CUSTOM\_PACK (`ads.model.runtime.env_info.PACK_TYPE` attribute), 1284

user\_name (`ads.secrets.adb.ADBSecret` attribute), 1520

user\_name (`ads.secrets.mysqladb.MySQLDBSecret` attribute), 1530

user\_name (`ads.secrets.oracledb.OracleDBSecret` attribute), 1532

user\_ocid (`ads.model.runtime.model_provenance_details.ModelProvenanceDetails` attribute), 1285

**V**

v2\_4\_4 (`ads.dataflow.dataflow.SPARK_VERSION` attribute), 682

v3\_0\_2 (`ads.dataflow.dataflow.SPARK_VERSION` attribute), 682

validate() (`ads.jobs.schema.validator.ValidateInfrastructure` method), 920

validate() (`ads.jobs.schema.validator.ValidateJob` method), 921

validate() (`ads.jobs.schema.validator.ValidateRuntime` method), 921

validate() (`ads.jobs.schema.validator.ValidatorFactory` method), 921

validate() (`ads.model.model_metadata.ModelCustomMetadata` method), 1336

validate() (`ads.model.model_metadata.ModelCustomMetadataItem` method), 1341

validate() (`ads.model.model_metadata.ModelMetadata` method), 1342, 1344

validate() (`ads.model.model_metadata.ModelMetadataItem` method), 1345, 1346

validate() (`ads.model.model_metadata.ModelTaxonomyMetadata` method), 1348

validate() (`ads.model.model_metadata.ModelTaxonomyMetadataItem` method), 1350, 1351

validate() (`ads.model.runtime.utils.SchemaValidator` method), 1286

validate\_artifact() (in module `ads.model.model_artifact_boilerplate.artifact_introspection_test`), 1283

validate\_artifact() (in module `ads.model_artifact_boilerplate.artifact_introspection_test.model`), 1465

validate\_fit\_params() (in module `ads.hpo.validation`), 872

validate\_params\_for\_plot() (in module `ads.hpo.validation`), 872

validate\_pipeline() (in module `ads.hpo.validation`), 872

validate\_schema() (`ads.feature_engineering.schema.Schema` method), 851

validate\_search\_space() (in module `ads.hpo.validation`), 872

validate\_size() (`ads.feature_engineering.schema.Schema` method), 851

validate\_size() (`ads.model.model_metadata.ModelMetadata` method), 1344

ValidateInfrastructure (class in `ads.jobs.schema.validator`), 920

ValidateJob (class in `ads.jobs.schema.validator`), 921

ValidateRuntime (class in `ads.jobs.schema.validator`), 921

ValidationDataset (`ads.model.model_metadata.MetadataCustomKeys` attribute), 1335

VALIDATION\_DATASET\_NUMBER\_OF\_COLS (`ads.model.model_metadata.MetadataCustomKeys` attribute), 1335

VALIDATION\_DATASET\_NUMBER\_OF\_ROWS (`ads.model.model_metadata.MetadataCustomKeys` attribute), 1335

VALIDATION\_DATASET\_SIZE (`ads.model.model_metadata.MetadataCustomKeys` attribute), 1335

ValidationError, 708

validator (`ads.feature_engineering.feature_type.address.Address` attribute), 786, 788

validator (`ads.feature_engineering.feature_type.adsstring.string.ADSString` attribute), 775

validator (`ads.feature_engineering.feature_type.base.FeatureType` attribute), 788

validator (`ads.feature_engineering.feature_type.boolean.Boolean` attribute), 789, 791

validator (`ads.feature_engineering.feature_type.category.Category` attribute), 792, 794

validator (`ads.feature_engineering.feature_type.constant.Constant` attribute), 792, 794

- attribute), 794, 796
- validator (ads.feature\_engineering.feature\_type.continuous.Continuous attribute), 796, 798
- validator (ads.feature\_engineering.feature\_type.creditcard.CreditCard attribute), 799, 802
- validator (ads.feature\_engineering.feature\_type.datetime.DateTime attribute), 803, 805
- validator (ads.feature\_engineering.feature\_type.discrete.Discrete property), 806, 807
- validator (ads.feature\_engineering.feature\_type.document.Document attribute), 808
- validator (ads.feature\_engineering.feature\_type.gis.GIS attribute), 808, 811
- validator (ads.feature\_engineering.feature\_type.integer.Integer attribute), 812, 814
- validator (ads.feature\_engineering.feature\_type.ip\_address.IPAddress attribute), 815, 816
- validator (ads.feature\_engineering.feature\_type.ip\_address\_vectorization.IPAddressVectorization), 817, 818
- validator (ads.feature\_engineering.feature\_type.ip\_address\_vectorization.IPAddressVectorization), 819, 820
- validator (ads.feature\_engineering.feature\_type.lat\_long.LatLong attribute), 821, 824
- validator (ads.feature\_engineering.feature\_type.object.Object attribute), 825
- validator (ads.feature\_engineering.feature\_type.ordinal.Ordinal attribute), 826, 827
- validator (ads.feature\_engineering.feature\_type.phone\_number.PhoneNumber attribute), 828, 829
- validator (ads.feature\_engineering.feature\_type.string.String attribute), 830, 832
- validator (ads.feature\_engineering.feature\_type.text.Text attribute), 833
- validator (ads.feature\_engineering.feature\_type.unknown.Unknown attribute), 834
- validator (ads.feature\_engineering.feature\_type.zip\_code.ZipCode attribute), 835, 837
- validator\_registered() (ads.feature\_engineering.accessor.mixin.feature\_type\_accessor.FeatureTypeAccessor method), 746
- validator\_registered() (ads.feature\_engineering.feature\_type\_manager.FeatureTypeManager class method), 843
- validator\_registered() (ads.feature\_engineering.feature\_type\_manager.FeatureTypeManager method), 840
- ValidatorAlreadyExists, 780
- ValidatorFactory (class in ads.jobs.schema.validator), 921
- ValidatorNotFound, 781
- ValidatorWithConditionAlreadyExists, 781
- ValidatorWithConditionNotFound, 781
- VALUE (ads.model.model\_metadata.MetadataCustomPrintColumns attribute), 1335
- VALUE (ads.model.model\_metadata.MetadataTaxonomyPrintColumns attribute), 1336
- value (ads.model.model\_metadata.ModelCustomMetadataItem attribute), 1340
- value (ads.model.model\_metadata.ModelTaxonomyMetadataItem attribute), 1350
- value (ads.model.model\_metadata.ModelTaxonomyMetadataItem attribute), 1351
- values (ads.feature\_engineering.schema.Domain attribute), 845
- values() (ads.common.extended\_enum.ExtendedEnumMeta method), 581
- vault (ads.common.oci\_client.OCIClientFactory property), 600
- Vault (class in ads.vault.vault), 1553
- validate (ads.secrets.big\_data\_service.BDSSecretKeeper attribute), 1528
- vectorization() (ads.type\_discovery.typed\_feature.DocumentTypedFeature static method), 1552
- ver6 (ads.feature\_engineering.adsstring.parsers.base.Parser property), 761
- ver6 (ads.feature\_engineering.adsstring.parsers.spacy\_parser.SpacyParser property), 762
- verify (ads.feature\_engineering.feature\_type.adsstring.parsers.base.Parser property), 765
- verify (ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser.SpacyParser property), 766
- verify\_bar() (ads.model.deployement.common.progress\_bar.TqdmProgressBar attribute), 1053
- verify() (ads.common.model\_artifact.ModelArtifact method), 587, 591
- verify() (ads.model.AutoMLModel method), 1364
- verify() (ads.model.framework.huggingface\_model.HuggingFacePipeline method), 1203, 1227
- verify() (ads.model.framework.lightgbm\_model.LightGBMModel method), 1121, 1145
- verify() (ads.model.framework.pytorch\_model.PyTorchModel method), 1148, 1172
- verify() (ads.model.framework.sklearn\_model.SklearnModel method), 1176, 1200
- verify() (ads.model.framework.spark\_model.SparkPipelineModel method), 1203, 1227
- verify() (ads.model.framework.tensorflow\_model.TensorFlowModel method), 1230, 1254
- verify() (ads.model.framework.xgboost\_model.XGBoostModel method), 1257, 1281
- verify() (ads.model.generic\_model.FrameworkSpecificModel method), 1305
- verify() (ads.model.generic\_model.GenericModel method), 1309, 1329
- verify() (ads.model.GenericModel method), 1379, 1400
- verify() (ads.model.HuggingFacePipelineModel method), 1403

- [verify\(\)](#) (*ads.model.LightGBMModel* method), 1410  
[verify\(\)](#) (*ads.model.PyTorchModel* method), 1444  
[verify\(\)](#) (*ads.model.SklearnModel* method), 1448  
[verify\(\)](#) (*ads.model.SparkPipelineModel* method), 1452  
[verify\(\)](#) (*ads.model.TensorFlowModel* method), 1457  
[verify\(\)](#) (*ads.model.XGBoostModel* method), 1461  
[version](#) (*ads.model.AutoMLModel* attribute), 1363  
[version](#) (*ads.model.extractor.keras\_extractor.KerasExtractor* property), 1079  
[version](#) (*ads.model.extractor.lightgbm\_extractor.LightgbmExtractor* property), 1080  
[version](#) (*ads.model.extractor.pytorch\_extractor.PyTorchExtractor* property), 1083  
[version](#) (*ads.model.extractor.sklearn\_extractor.SklearnExtractor* property), 1084  
[version](#) (*ads.model.extractor.spark\_extractor.SparkExtractor* property), 1085  
[version](#) (*ads.model.extractor.tensorflow\_extractor.TensorflowExtractor* property), 1086  
[version](#) (*ads.model.extractor.xgboost\_extractor.XgboostExtractor* property), 1088  
[version](#) (*ads.model.framework.huggingface\_model.HuggingFacePipelineModel* attribute), 1090  
[version](#) (*ads.model.framework.lightgbm\_model.LightGBMModel* attribute), 1121  
[version](#) (*ads.model.framework.pytorch\_model.PyTorchModel* attribute), 1148  
[version](#) (*ads.model.framework.sklearn\_model.SklearnModel* attribute), 1175  
[version](#) (*ads.model.framework.spark\_model.SparkPipelineModel* attribute), 1202  
[version](#) (*ads.model.framework.tensorflow\_model.TensorFlowModel* attribute), 1230  
[version](#) (*ads.model.framework.xgboost\_model.XGBoostModel* attribute), 1257  
[version](#) (*ads.model.generic\_model.GenericModel* attribute), 1308  
[version](#) (*ads.model.GenericModel* attribute), 1378  
[version](#) (*ads.model.HuggingFacePipelineModel* attribute), 1402  
[version](#) (*ads.model.LightGBMModel* attribute), 1410  
[version](#) (*ads.model.PyTorchModel* attribute), 1443  
[version](#) (*ads.model.SklearnModel* attribute), 1447  
[version](#) (*ads.model.SparkPipelineModel* attribute), 1452  
[version](#) (*ads.model.TensorFlowModel* attribute), 1456  
[version](#) (*ads.model.XGBoostModel* attribute), 1461  
[version\(\)](#) (*ads.model.extractor.lightgbm\_extractor.LightgbmExtractor* method), 1079  
[version\(\)](#) (*ads.model.extractor.model\_info\_extractor.ModelInfoExtractor* method), 1080, 1081  
[version\(\)](#) (*ads.model.extractor.pytorch\_extractor.PyTorchExtractor* method), 1082  
[version\(\)](#) (*ads.model.extractor.sklearn\_extractor.SklearnExtractor* method), 1084  
[version\(\)](#) (*ads.model.extractor.spark\_extractor.SparkExtractor* method), 1085  
[version\(\)](#) (*ads.model.extractor.tensorflow\_extractor.TensorflowExtractor* method), 1086  
[version\(\)](#) (*ads.model.extractor.xgboost\_extractor.XgboostExtractor* method), 1087  
[version\\_label](#) (*ads.model.DataScienceModel* attribute), 1367  
[Version\\_label](#) (*ads.model.DataScienceModel* property), 1374  
[VersionConflictWarning](#) (class in *ads.common.model\_artifact*), 591  
[visualize\(\)](#) (*ads.dataset.pipeline.TransformerPipeline* method), 717  
[visualize\\_transformation\(\)](#) (in module *ads.dataset.helper*), 716  
[visualize\\_transforms\(\)](#) (*ads.common.model.ADSModel* method), 585  
[visualize\\_transforms\(\)](#) (*ads.common.model.dataset\_with\_target.ADSDataSetWithTarget* method), 708  
[WithADS](#) (*ads.common.decorator.runtime\_dependency.OptionalDependency* attribute), 558  
[walled\\_image\\_internal\\_id](#) (*ads.model.runtime.model\_provenance\_details.ModelProvenance* attribute), 1285  
[Wait](#)  
[wait\(\)](#) (*ads.dataflow.dataflow.RunObserver* method), 682  
[wait\(\)](#) (*ads.hpo.search\_cv.ADSTuner* method), 869  
[wait\(\)](#) (*ads.jobs.builders.infrastructure.dataflow.DataFlowRun* method), 883  
[wait\(\)](#) (*ads.jobs.DataFlowRun* method), 982  
[wait\\_for\\_work\\_request\(\)](#) (*ads.common.oci\_mixin.OCIWorkRequestMixin* method), 614  
[WAITING](#) (*ads.pipeline.visualizer.base.StepStatus* attribute), 1485  
[wallet\\_content](#) (*ads.secrets.adb.ADBSecret* attribute), 1520  
[wallet\\_file\\_name](#) (*ads.secrets.adb.ADBSecret* attribute), 1520  
[wallet\\_location](#) (*ads.secrets.adb.ADBSecret* attribute), 1520  
[wallet\\_secret\\_ids](#) (*ads.secrets.adb.ADBSecret* attribute), 1520  
[warehouse\\_bucket\\_uri](#) (*ads.jobs.DataFlowRun* property), 982  
[warehouse\\_bucket\\_uri](#) (*ads.jobs.utils.DataFlowConfig* property),

945 (ads.feature\_engineering.accessor.mixin.feature\_types\_mixin.ADS  
warning (ads.feature\_engineering.feature\_type.address.Address method), 746, 747  
attribute), 786, 788 warning\_registered()  
warning (ads.feature\_engineering.feature\_type.adsstring.string.ADSString (ads.feature\_engineering.feature\_type\_manager.FeatureTypeManager  
attribute), 775 class method), 843  
warning (ads.feature\_engineering.feature\_type.base.FeatureType warning\_registered()  
attribute), 788 (ads.feature\_engineering.feature\_type\_manager.FeatureTypeManager  
warning (ads.feature\_engineering.feature\_type.boolean.Boolean method), 840  
attribute), 789, 791 WarningAlreadyExists, 839  
warning (ads.feature\_engineering.feature\_type.category.Category WarningNotFound, 839  
attribute), 792, 794 watch() (ads.jobs.builders.infrastructure.base.RunInstance  
warning (ads.feature\_engineering.feature\_type.constant.Constant method), 874  
attribute), 794, 796 watch() (ads.jobs.builders.infrastructure.dataflow.DataFlowRun  
warning (ads.feature\_engineering.feature\_type.continuous.Continuous method), 883  
attribute), 796, 798 watch() (ads.jobs.builders.infrastructure.dsc\_job.DataScience.JobRun  
warning (ads.feature\_engineering.feature\_type.creditcard.CreditCard method), 895  
attribute), 799, 802 watch() (ads.jobs.DataFlowRun method), 982  
warning (ads.feature\_engineering.feature\_type.datetime.DateTime watch() (ads.jobs.DataScienceJobRun method), 1008  
attribute), 803, 805 watch() (ads.model.deployment.model\_deployment.ModelDeployment  
warning (ads.feature\_engineering.feature\_type.discrete.Discrete method), 1072  
attribute), 805, 807 watch() (ads.model.ModelDeployment method), 1427  
warning (ads.feature\_engineering.feature\_type.document.Document watch() (ads.opctl.backend.ads\_dataflow.DataFlowBackend  
attribute), 807, 808 method), 1466  
warning (ads.feature\_engineering.feature\_type.gis.GIS watch() (ads.opctl.backend.ads\_ml\_job.MLJobBackend  
attribute), 808, 812 method), 1466  
warning (ads.feature\_engineering.feature\_type.integer.Integer watch() (ads.opctl.backend.ads\_ml\_pipeline.PipelineBackend  
attribute), 812, 814 method), 1467  
warning (ads.feature\_engineering.feature\_type.ip\_address.IPAddress watch() (ads.opctl.backend.base.Backend method),  
attribute), 814, 816 1468  
warning (ads.feature\_engineering.feature\_type.ip\_address\_watch() (ads.pipeline.ads\_pipeline\_run.PipelineRun  
attribute), 817, 818 method), 1509, 1512  
warning (ads.feature\_engineering.feature\_type.ip\_address\_watch() (ads.opctl.backend.base.Backend method),  
attribute), 819, 820 1468  
warning (ads.feature\_engineering.feature\_type.lat\_long.LatLong WebDatasets (class in ads.dataset.dataset\_browser),  
attribute), 821, 824 703  
warning (ads.feature\_engineering.feature\_type.object.Object when\_ready() (ads.opctl.distributed.common.abstract\_cluster\_provider.Cl  
attribute), 825 method), 1476  
warning (ads.feature\_engineering.feature\_type.ordinal.Ordinal with\_access\_log() (ads.model.deployment.model\_deployment\_properties  
attribute), 826, 827 method), 1075, 1076  
warning (ads.feature\_engineering.feature\_type.phone\_number.PhoneNumber with\_access\_log() (ads.model.ModelDeploymentProperties  
attribute), 828, 829 method), 1429, 1431  
warning (ads.feature\_engineering.feature\_type.string.String with\_archive\_bucket()  
attribute), 830, 832 (ads.jobs.builders.runtimes.python\_runtime.DataFlowRuntime  
warning (ads.feature\_engineering.feature\_type.text.Text method), 910  
attribute), 833 with\_archive\_bucket()  
warning (ads.feature\_engineering.feature\_type.unknown.Unknown (ads.jobs.DataFlowNotebookRuntime method),  
attribute), 834 965  
warning (ads.feature\_engineering.feature\_type.zip\_code.ZipCode with\_archive\_bucket() (ads.jobs.DataFlowRuntime  
attribute), 835, 837 method), 987  
warning() (ads.feature\_engineering.accessor.mixin.eda\_mixin.EdaMixin with\_archive\_uri() (ads.jobs.builders.runtimes.python\_runtime.DataFl  
method), 744 method), 910  
warning() (ads.feature\_engineering.accessor.mixin.eda\_mixin.EdaMixin with\_archive\_uri() (ads.jobs.DataFlowNotebookRuntime  
method), 745 method), 965  
warning\_registered() with\_archive\_uri() (ads.jobs.DataFlowRuntime



`method`), 987  
`with_argument()` (`ads.jobs.builders.runtimes.base.Runtime`  
`method`), 904  
`with_argument()` (`ads.jobs.ContainerRuntime`  
`method`), 949  
`with_argument()` (`ads.jobs.DataFlowNotebookRuntime`  
`method`), 965  
`with_argument()` (`ads.jobs.DataFlowRuntime`  
`method`), 987  
`with_argument()` (`ads.jobs.GitPythonRuntime`  
`method`), 1014  
`with_argument()` (`ads.jobs.NotebookRuntime` `method`),  
1031  
`with_argument()` (`ads.jobs.PythonRuntime` `method`),  
1040  
`with_argument()` (`ads.jobs.ScriptRuntime` `method`),  
1049  
`with_argument()` (`ads.pipeline.ads_pipeline.Pipeline`  
`method`), 1493, 1504  
`with_argument()` (`ads.pipeline.ads_pipeline_step.PipelineStep`  
`method`), 1515, 1518  
`with_artifact()` (`ads.model.DataScienceModel`  
`method`), 1368, 1374  
`with_block_storage_size()`  
(`ads.jobs.builders.infrastructure.dsc_job.DataScienceJob`  
`method`), 891  
`with_block_storage_size()`  
(`ads.jobs.DataScienceJob` `method`), 998  
`with_block_storage_size_in_gbs()`  
(`ads.pipeline.ads_pipeline.Pipeline` `method`),  
1493, 1504  
`with_category_log()`  
(`ads.model.deployment.model_deployment_properties.ModelDeploymentProperties`  
`method`), 1076  
`with_category_log()`  
(`ads.model.ModelDeploymentProperties`  
`method`), 1431  
`with_cmd()` (`ads.jobs.builders.runtimes.container_runtime.ContainerRuntime`  
`method`), 907  
`with_cmd()` (`ads.jobs.ContainerRuntime` `method`), 950  
`with_compartment_id()`  
(`ads.jobs.builders.infrastructure.dataflow.DataFlow`  
`method`), 877  
`with_compartment_id()`  
(`ads.jobs.builders.infrastructure.dsc_job.DataScienceJob`  
`method`), 891  
`with_compartment_id()` (`ads.jobs.DataFlow` `method`),  
957  
`with_compartment_id()` (`ads.jobs.DataScienceJob`  
`method`), 998  
`with_compartment_id()`  
(`ads.model.DataScienceModel` `method`),  
1367, 1374  
`with_compartment_id()`  
(`ads.model.model_version_set.ModelVersionSet`  
`method`), 1360  
`with_compartment_id()` (`ads.model.ModelVersionSet`  
`method`), 1440  
`with_compartment_id()`  
(`ads.pipeline.ads_pipeline.Pipeline` `method`),  
1493, 1504  
`with_conda()` (`ads.jobs.builders.runtimes.python_runtime.DataFlowRuntime`  
`method`), 911  
`with_conda()` (`ads.jobs.DataFlowNotebookRuntime`  
`method`), 966  
`with_conda()` (`ads.jobs.DataFlowRuntime` `method`),  
988  
`with_config()` (`ads.common.base_properties.BaseProperties`  
`method`), 571, 572  
`with_config()` (`ads.model.base_properties.BaseProperties`  
`method`), 1301, 1303  
`with_configuration()`  
(`ads.jobs.builders.infrastructure.dataflow.DataFlow`  
`method`), 878  
`with_configuration()`  
(`ads.jobs.builders.runtimes.python_runtime.DataFlowRuntime`  
`method`), 911  
`with_configuration()` (`ads.jobs.DataFlow` `method`),  
957  
`with_configuration()`  
(`ads.jobs.DataFlowNotebookRuntime` `method`),  
966  
`with_configuration()` (`ads.jobs.DataFlowRuntime`  
`method`), 988  
`with_created_by()` (`ads.pipeline.ads_pipeline.Pipeline`  
`method`), 1493, 1505  
`with_custom_conda()` (`ads.model.ModelDeploymentProperties`  
`method`), 1076  
`with_custom_conda()`  
(`ads.jobs.builders.runtimes.python_runtime.CondaRuntime`  
`method`), 908  
`with_custom_conda()`  
(`ads.jobs.builders.runtimes.python_runtime.DataFlowRuntime`  
`method`), 911  
`with_custom_conda()`  
(`ads.jobs.DataFlowNotebookRuntime` `method`),  
966  
`with_custom_conda()` (`ads.jobs.DataFlowRuntime`  
`method`), 988  
`with_custom_conda()` (`ads.jobs.GitPythonRuntime`  
`method`), 1014  
`with_custom_conda()` (`ads.jobs.NotebookRuntime`  
`method`), 1032  
`with_custom_conda()` (`ads.jobs.PythonRuntime`  
`method`), 1041  
`with_custom_conda()` (`ads.jobs.ScriptRuntime`  
`method`), 1049  
`with_custom_metadata_list()`  
(`ads.model.DataScienceModel` `method`),  
1368, 1374

`with_dag()` (*ads.pipeline.ads\_pipeline.Pipeline* method), 878  
`with_dag_details()` (*ads.pipeline.ads\_pipeline.Pipeline* method), 1505  
`with_defined_metadata_list()` (*ads.model.DataScienceModel* method), 1493  
`with_defined_tags()` (*ads.model.DataScienceModel* method), 1368, 1375  
`with_defined_tags()` (*ads.model.deployment.model\_deployment.ModelDeployment* method), 1063, 1072  
`with_defined_tags()` (*ads.model.model\_version\_set.ModelVersionSet* method), 1360  
`with_defined_tags()` (*ads.model.ModelDeployment* method), 1418, 1427  
`with_defined_tags()` (*ads.model.ModelVersionSet* method), 1440  
`with_defined_tags()` (*ads.pipeline.ads\_pipeline.Pipeline* method), 1493, 1505  
`with_description()` (*ads.model.DataScienceModel* method), 1367, 1375  
`with_description()` (*ads.model.deployment.model\_deployment.ModelDeployment* method), 1063, 1072  
`with_description()` (*ads.model.model\_version\_set.ModelVersionSet* method), 1360  
`with_description()` (*ads.model.ModelDeployment* method), 1418, 1428  
`with_description()` (*ads.model.ModelVersionSet* method), 1440  
`with_description()` (*ads.pipeline.ads\_pipeline.Pipeline* method), 1493, 1505  
`with_description()` (*ads.pipeline.ads\_pipeline\_step.PipelineStep* method), 1515, 1518  
`with_dict()` (*ads.common.base\_properties.BaseProperties* method), 571, 572  
`with_dict()` (*ads.common.config.Config* method), 576  
`with_dict()` (*ads.common.config.ConfigSection* method), 577  
`with_dict()` (*ads.common.config.ExtendedConfigParser* method), 579  
`with_dict()` (*ads.model.base\_properties.BaseProperties* method), 1301, 1303  
`with_display_name()` (*ads.model.DataScienceModel* method), 1368, 1375  
`with_display_name()` (*ads.model.deployment.model\_deployment.ModelDeployment* method), 1063, 1072  
`with_display_name()` (*ads.model.ModelDeployment* method), 1418, 1428  
`with_driver_shape()` (*ads.jobs.builders.infrastructure.dataflow.DataFlow* method), 957  
`with_driver_shape()` (*ads.jobs.DataFlow* method), 957  
`with_driver_shape_config()` (*ads.jobs.builders.infrastructure.dataflow.DataFlow* method), 878  
`with_driver_shape_config()` (*ads.jobs.DataFlow* method), 957  
`with_enable_service_log()` (*ads.pipeline.ads\_pipeline.Pipeline* method), 1493, 1505  
`with_entrypoint()` (*ads.jobs.builders.runtimes.container\_runtime.ContainerRuntime* method), 907  
`with_entrypoint()` (*ads.jobs.builders.runtimes.python\_runtime.ScriptRuntime* method), 918  
`with_entrypoint()` (*ads.jobs.ContainerRuntime* method), 950  
`with_entrypoint()` (*ads.jobs.GitPythonRuntime* method), 1015  
`with_entrypoint()` (*ads.jobs.PythonRuntime* method), 1041  
`with_entrypoint()` (*ads.jobs.ScriptRuntime* method), 1050  
`with_env()` (*ads.common.base\_properties.BaseProperties* method), 571, 572  
`with_env()` (*ads.model.base\_properties.BaseProperties* method), 1301, 1303  
`with_environment_variable()` (*ads.jobs.builders.runtimes.base.Runtime* method), 905  
`with_environment_variable()` (*ads.jobs.ContainerRuntime* method), 950  
`with_environment_variable()` (*ads.jobs.DataFlowNotebookRuntime* method), 967  
`with_environment_variable()` (*ads.jobs.DataFlowRuntime* method), 989  
`with_environment_variable()` (*ads.jobs.GitPythonRuntime* method), 1015  
`with_environment_variable()` (*ads.jobs.NotebookRuntime* method), 1032  
`with_environment_variable()` (*ads.jobs.PythonRuntime* method), 1041  
`with_environment_variable()` (*ads.jobs.ScriptRuntime* method), 1050  
`with_environment_variable()` (*ads.pipeline.ads\_pipeline.Pipeline* method), 1493, 1505  
`with_environment_variable()` (*ads.pipeline.ads\_pipeline\_step.PipelineStep* method), 1515, 1519  
`with_exclude_tag()` (*ads.jobs.builders.runtimes.python\_runtime.NotebookRuntime* method), 915  
`with_exclude_tag()` (*ads.jobs.DataFlowNotebookRuntime* method), 915

`method`), 967  
`with_exclude_tag()` (`ads.jobs.NotebookRuntime` `method`), 1033  
`with_execute()` (`ads.jobs.builders.infrastructure.dataflow.DataFlow` `method`), 878  
`with_execute()` (`ads.jobs.DataFlow` `method`), 957  
`with_executor_shape()` (`ads.jobs.builders.infrastructure.dataflow.DataFlow` `method`), 878  
`with_executor_shape()` (`ads.jobs.DataFlow` `method`), 958  
`with_executor_shape_config()` (`ads.jobs.builders.infrastructure.dataflow.DataFlow` `method`), 879  
`with_executor_shape_config()` (`ads.jobs.DataFlow` `method`), 958  
`with_freeform_tag()` (`ads.jobs.builders.runtimes.base.Runtime` `method`), 905  
`with_freeform_tag()` (`ads.jobs.ContainerRuntime` `method`), 951  
`with_freeform_tag()` (`ads.jobs.DataFlowNotebookRuntime` `method`), 968  
`with_freeform_tag()` (`ads.jobs.DataFlowRuntime` `method`), 989  
`with_freeform_tag()` (`ads.jobs.GitPythonRuntime` `method`), 1016  
`with_freeform_tag()` (`ads.jobs.NotebookRuntime` `method`), 1033  
`with_freeform_tag()` (`ads.jobs.PythonRuntime` `method`), 1042  
`with_freeform_tag()` (`ads.jobs.ScriptRuntime` `method`), 1051  
`with_freeform_tags()` (`ads.model.DataScienceModel` `method`), 1368, 1375  
`with_freeform_tags()` (`ads.model.deployment.model_deployment.ModelDeployment` `method`), 1063, 1073  
`with_freeform_tags()` (`ads.model.model_version_set.ModelVersionSet` `method`), 1360  
`with_freeform_tags()` (`ads.model.ModelDeployment` `method`), 1418, 1428  
`with_freeform_tags()` (`ads.model.ModelVersionSet` `method`), 1440  
`with_freeform_tags()` (`ads.pipeline.ads_pipeline.Pipeline` `method`), 1493, 1506  
`with_id()` (`ads.jobs.builders.infrastructure.dataflow.DataFlow` `method`), 879  
`with_id()` (`ads.jobs.DataFlow` `method`), 958  
`with_id()` (`ads.pipeline.ads_pipeline.Pipeline` `method`), 1493, 1506  
`with_image()` (`ads.jobs.builders.runtimes.container_runtime.ContainerRuntime` `method`), 907  
`with_image()` (`ads.jobs.ContainerRuntime` `method`), 951  
`with_infrastructure()` (`ads.jobs.ads_job.Job` `method`), 934  
`with_infrastructure()` (`ads.jobs.Job` `method`), 1026  
`with_infrastructure()` (`ads.model.deployment.model_deployment.ModelDeployment` `method`), 1063, 1073  
`with_infrastructure()` (`ads.model.ModelDeployment` `method`), 1418, 1428  
`with_infrastructure()` (`ads.pipeline.ads_pipeline_step.PipelineStep` `method`), 1515, 1519  
`with_input_schema()` (`ads.model.DataScienceModel` `method`), 1368, 1375  
`with_instance_configuration()` (`ads.model.deployment.model_deployment_properties.ModelDeploymentProperties` `method`), 1075, 1077  
`with_instance_configuration()` (`ads.model.ModelDeploymentProperties` `method`), 1429, 1431  
`with_job_id()` (`ads.pipeline.ads_pipeline_step.PipelineStep` `method`), 1515, 1519  
`with_job_infrastructure_type()` (`ads.jobs.builders.infrastructure.dsc_job.DataScienceJob` `method`), 892  
`with_job_infrastructure_type()` (`ads.jobs.DataScienceJob` `method`), 999  
`with_job_type()` (`ads.jobs.builders.infrastructure.dsc_job.DataScienceJob` `method`), 892  
`with_job_type()` (`ads.jobs.DataScienceJob` `method`), 999  
`with_kind()` (`ads.pipeline.ads_pipeline_step.PipelineStep` `method`), 1515, 1519  
`with_language()` (`ads.jobs.builders.infrastructure.dataflow.DataFlow` `method`), 879  
`with_language()` (`ads.jobs.DataFlow` `method`), 958  
`with_log_group_id()` (`ads.jobs.builders.infrastructure.dsc_job.DataScienceJob` `method`), 892  
`with_log_group_id()` (`ads.jobs.DataScienceJob` `method`), 999  
`with_log_group_id()` (`ads.pipeline.ads_pipeline.Pipeline` `method`), 1493, 1506  
`with_log_id()` (`ads.jobs.builders.infrastructure.dsc_job.DataScienceJob` `method`), 892  
`with_log_id()` (`ads.jobs.DataScienceJob` `method`), 999  
`with_log_id()` (`ads.pipeline.ads_pipeline.Pipeline` `method`), 1493, 1506  
`with_logging_configuration()`

`(ads.model.deployment.model_deployment_properties.MethodBook().get_jobs_notebook_runtime_method)`, 1077  
`with_logging_configuration()` (`ads.model.ModelDeploymentProperties` method), 1432  
`with_logs_bucket_uri()` (`ads.jobs.builders.infrastructure.dataflow.DataFlow` method), 879  
`with_logs_bucket_uri()` (`ads.jobs.DataFlow` method), 959  
`with_maximum_runtime_in_minutes()` (`ads.jobs.builders.runtimes.base.Runtime` method), 905  
`with_maximum_runtime_in_minutes()` (`ads.jobs.ContainerRuntime` method), 951  
`with_maximum_runtime_in_minutes()` (`ads.jobs.DataFlowNotebookRuntime` method), 968  
`with_maximum_runtime_in_minutes()` (`ads.jobs.DataFlowRuntime` method), 990  
`with_maximum_runtime_in_minutes()` (`ads.jobs.GitPythonRuntime` method), 1016  
`with_maximum_runtime_in_minutes()` (`ads.jobs.NotebookRuntime` method), 1034  
`with_maximum_runtime_in_minutes()` (`ads.jobs.PythonRuntime` method), 1042  
`with_maximum_runtime_in_minutes()` (`ads.jobs.ScriptRuntime` method), 1051  
`with_maximum_runtime_in_minutes()` (`ads.pipeline.ads_pipeline.Pipeline` method), 1493, 1506  
`with_maximum_runtime_in_minutes()` (`ads.pipeline.ads_pipeline_step.PipelineStep` method), 1515, 1519  
`with_metastore_id()` (`ads.jobs.builders.infrastructure.dataflow.DataFlow` method), 880  
`with_metastore_id()` (`ads.jobs.DataFlow` method), 959  
`with_model_version_set_id()` (`ads.model.DataScienceModel` method), 1376  
`with_name()` (`ads.jobs.ads_job.Job` method), 934  
`with_name()` (`ads.jobs.Job` method), 1026  
`with_name()` (`ads.model.model_version_set.ModelVersionSet` method), 1361  
`with_name()` (`ads.model.ModelVersionSet` method), 1440  
`with_name()` (`ads.pipeline.ads_pipeline.Pipeline` method), 1492, 1507  
`with_notebook()` (`ads.jobs.builders.runtimes.python_runtime.NotebookRuntime` method), 915  
`with_notebook()` (`ads.jobs.DataFlowNotebookRuntime` method), 968  
`with_num_executors()` (`ads.jobs.builders.infrastructure.dataflow.DataFlow` method), 880  
`with_num_executors()` (`ads.jobs.DataFlow` method), 959  
`with_output()` (`ads.jobs.builders.runtimes.python_runtime.NotebookRuntime` method), 916  
`with_output()` (`ads.jobs.DataFlowNotebookRuntime` method), 968  
`with_output()` (`ads.jobs.GitPythonRuntime` method), 1016  
`with_output()` (`ads.jobs.NotebookRuntime` method), 1034  
`with_output()` (`ads.jobs.PythonRuntime` method), 1042  
`with_output_schema()` (`ads.model.DataScienceModel` method), 1368, 1376  
`with_overwrite()` (`ads.jobs.builders.runtimes.python_runtime.DataFlow` method), 911  
`with_overwrite()` (`ads.jobs.DataFlowNotebookRuntime` method), 968  
`with_overwrite()` (`ads.jobs.DataFlowRuntime` method), 990  
`with_pipeline()` (`ads.pipeline.visualizer.base.PipelineVisualizer` method), 1482  
`with_pipeline_run()` (`ads.pipeline.visualizer.base.PipelineVisualizer` method), 1483  
`with_predict_log()` (`ads.model.deployment.model_deployment_properties.MethodBook().get_jobs_notebook_runtime_method`), 1075, 1077  
`with_predict_log()` (`ads.model.ModelDeploymentProperties` method), 1429, 1432  
`with_private_endpoint_id()` (`ads.jobs.builders.infrastructure.dataflow.DataFlow` method), 880  
`with_private_endpoint_id()` (`ads.jobs.DataFlow` method), 959  
`with_processor()` (`ads.text_dataset.dataset.DataLoader` method), 1545  
`with_project_id()` (`ads.jobs.builders.infrastructure.dsc_job.DataScienceJob` method), 893  
`with_project_id()` (`ads.jobs.DataScienceJob` method), 999  
`with_project_id()` (`ads.model.DataScienceModel` method), 1367, 1376  
`with_project_id()` (`ads.model.model_version_set.ModelVersionSet` method), 1361  
`with_project_id()` (`ads.model.ModelVersionSet` method), 1441  
`with_project_id()` (`ads.pipeline.ads_pipeline.Pipeline` method), 1493, 1507  
`with_prop()` (`ads.common.base_properties.BaseProperties` method), 571, 573



[with\\_prop\(\)](#) ([ads.model.base\\_properties.BaseProperties](#) method), 1301, 1303  
[with\\_prop\(\)](#) ([ads.model.deployment.model\\_deployment\\_properties.ModelDeploymentProperties](#) method), 1074, 1078  
[with\\_prop\(\)](#) ([ads.model.ModelDeploymentProperties](#) method), 1429, 1432  
[with\\_provenance\\_metadata\(\)](#) ([ads.model.DataScienceModel](#) method), 1368, 1376  
[with\\_python\\_path\(\)](#) ([ads.jobs.GitPythonRuntime](#) method), 1017  
[with\\_python\\_path\(\)](#) ([ads.jobs.PythonRuntime](#) method), 1043  
[with\\_renderer\(\)](#) ([ads.pipeline.visualizer.base.PipelineVisualizer](#) method), 1483  
[with\\_runtime\(\)](#) ([ads.jobs.ads\\_job.Job](#) method), 934  
[with\\_runtime\(\)](#) ([ads.jobs.Job](#) method), 1026  
[with\\_runtime\(\)](#) ([ads.model.deployment.model\\_deployment\\_properties.ModelDeploymentProperties](#) method), 1063, 1073  
[with\\_runtime\(\)](#) ([ads.model.ModelDeployment](#) method), 1418, 1428  
[with\\_runtime\(\)](#) ([ads.pipeline.ads\\_pipeline\\_step.PipelineStep](#) method), 1515, 1519  
[with\\_script\(\)](#) ([ads.jobs.builders.runtimes.python\\_runtime.ScriptRuntime](#) method), 918  
[with\\_script\(\)](#) ([ads.jobs.PythonRuntime](#) method), 1043  
[with\\_script\(\)](#) ([ads.jobs.ScriptRuntime](#) method), 1051  
[with\\_script\\_bucket\(\)](#) ([ads.jobs.builders.runtimes.python\\_runtime.DataFlowRuntime](#) method), 912  
[with\\_script\\_bucket\(\)](#) ([ads.jobs.DataFlowNotebookRuntime](#) method), 969  
[with\\_script\\_bucket\(\)](#) ([ads.jobs.DataFlowRuntime](#) method), 990  
[with\\_script\\_uri\(\)](#) ([ads.jobs.builders.runtimes.python\\_runtime.DataFlowRuntime](#) method), 912  
[with\\_script\\_uri\(\)](#) ([ads.jobs.DataFlowNotebookRuntime](#) method), 969  
[with\\_script\\_uri\(\)](#) ([ads.jobs.DataFlowRuntime](#) method), 990  
[with\\_service\\_conda\(\)](#) ([ads.jobs.builders.runtimes.python\\_runtime.CondaRuntime](#) method), 909  
[with\\_service\\_conda\(\)](#) ([ads.jobs.builders.runtimes.python\\_runtime.DataFlowRuntime](#) method), 912  
[with\\_service\\_conda\(\)](#) ([ads.jobs.DataFlowNotebookRuntime](#) method), 969  
[with\\_service\\_conda\(\)](#) ([ads.jobs.DataFlowRuntime](#) method), 990  
[with\\_service\\_conda\(\)](#) ([ads.jobs.GitPythonRuntime](#) method), 1017  
[with\\_service\\_conda\(\)](#) ([ads.jobs.NotebookRuntime](#) method), 1034  
[with\\_service\\_conda\(\)](#) ([ads.jobs.PythonRuntime](#) method), 1043  
[with\\_service\\_conda\(\)](#) ([ads.jobs.ScriptRuntime](#) method), 1051  
[with\\_shape\\_config\\_details\(\)](#) ([ads.jobs.builders.infrastructure.dsc\\_job.DataScienceJob](#) method), 893  
[with\\_shape\\_config\\_details\(\)](#) ([ads.jobs.DataScienceJob](#) method), 1000  
[with\\_shape\\_config\\_details\(\)](#) ([ads.pipeline.ads\\_pipeline.Pipeline](#) method), 1493, 1507  
[with\\_shape\\_name\(\)](#) ([ads.jobs.builders.infrastructure.dsc\\_job.DataScienceJob](#) method), 893  
[with\\_shape\\_name\(\)](#) ([ads.jobs.DataScienceJob](#) method), 1000  
[with\\_shape\\_name\(\)](#) ([ads.pipeline.ads\\_pipeline.Pipeline](#) method), 1493, 1507  
[with\\_source\(\)](#) ([ads.jobs.builders.runtimes.python\\_runtime.GitPythonRuntime](#) method), 914  
[with\\_source\(\)](#) ([ads.jobs.builders.runtimes.python\\_runtime.NotebookRuntime](#) method), 916  
[with\\_source\(\)](#) ([ads.jobs.builders.runtimes.python\\_runtime.ScriptRuntime](#) method), 919  
[with\\_source\(\)](#) ([ads.jobs.DataFlowNotebookRuntime](#) method), 969  
[with\\_source\(\)](#) ([ads.jobs.GitPythonRuntime](#) method), 1017  
[with\\_source\(\)](#) ([ads.jobs.NotebookRuntime](#) method), 1034  
[with\\_source\(\)](#) ([ads.jobs.PythonRuntime](#) method), 1043  
[with\\_source\(\)](#) ([ads.jobs.ScriptRuntime](#) method), 1052  
[with\\_spark\\_version\(\)](#) ([ads.jobs.builders.infrastructure.dataflow.DataFlowRuntime](#) method), 880  
[with\\_spark\\_version\(\)](#) ([ads.jobs.DataFlow](#) method), 959  
[with\\_step\\_details\(\)](#) ([ads.pipeline.ads\\_pipeline.Pipeline](#) method), 1493, 1508  
[with\\_subnet\\_id\(\)](#) ([ads.jobs.builders.infrastructure.dsc\\_job.DataScienceJob](#) method), 893  
[with\\_subnet\\_id\(\)](#) ([ads.jobs.DataScienceJob](#) method), 1000  
[with\\_version\\_label\(\)](#) ([ads.model.DataScienceModel](#) method), 1376  
[with\\_warehouse\\_bucket\\_uri\(\)](#) ([ads.jobs.builders.infrastructure.dataflow.DataFlowRuntime](#) method), 880  
[with\\_warehouse\\_bucket\\_uri\(\)](#) ([ads.jobs.DataFlow](#) method), 959  
[with\\_working\\_dir\(\)](#) ([ads.jobs.GitPythonRuntime](#) method), 1017

method), 1017  
 with\_working\_dir() (ads.jobs.PythonRuntime method), 1044  
 word(ads.feature\_engineering.adsstring.parsers.base.Parser property), 761  
 word(ads.feature\_engineering.adsstring.parsers.spacy\_parser property), 762  
 word(ads.feature\_engineering.feature\_type.adsstring.parsers.base.Parser property), 765  
 word(ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser property), 766  
 WORD2VEC (ads.model.model\_metadata.Framework attribute), 1334  
 word\_count(ads.feature\_engineering.adsstring.parsers.base.Parser property), 761  
 word\_count(ads.feature\_engineering.adsstring.parsers.spacy\_parser property), 762  
 word\_count(ads.feature\_engineering.feature\_type.adsstring.parsers.base.Parser property), 765  
 word\_count(ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser.SpacyParser property), 766  
 WordProcessor (class in ads.text\_dataset.extractor), 1547  
 workflow\_state\_progress (ads.model.deployment.model\_deployment.ModelDeployment attribute), 1061  
 workflow\_state\_progress (ads.model.ModelDeployment attribute), 1416  
 workflow\_steps(ads.model.deployment.model\_deployment.ModelDeployment attribute), 1061  
 workflow\_steps (ads.model.ModelDeployment attribute), 1416  
 working\_dir (ads.jobs.GitPythonRuntime property), 1018  
 working\_dir (ads.jobs.PythonRuntime property), 1044  
 WORKSTATION (ads.telemetry.telemetry.Surface attribute), 1538  
 wrap\_lines() (in module ads.common.utils), 629  
 wrap\_output\_string() (in module ads.feature\_engineering.feature\_type.adsstring.string), 776  
 WRITE (ads.common.config.Mode attribute), 579  
 write\_html() (in module ads.model.model\_artifact\_boilerplate.artifact\_introspection\_test.model\_artifact\_validate), 1283  
 write\_html() (in module ads.model\_artifact\_boilerplate.artifact\_introspection\_test.model\_artifact\_validate), 1465  
 write\_parquet() (in module ads.dataset.helper), 716  
 write\_score() (in module ads.common.function.fn\_util), 560  
 WrongEntityFormat, 661  
 WrongEntityFormatLabelIsEmpty, 672  
 WrongEntityFormatLabelNotString, 672  
 WrongEntityFormatLengthIsNegative, 672  
 WrongEntityFormatLengthNotInteger, 672  
 WrongEntityFormatOffsetIsNegative, 672  
 WrongEntityFormatOffsetNotInteger, 672  
 WrongHandlerMethodSignature, 781  
**X**  
 XGBClassifierSearchSpace (class in ads.feature\_engineering.feature\_type.adsstring.parsers.spacy\_parser), 856  
 XGBOOST (ads.model.model\_metadata.Framework attribute), 1334  
 XgboostExtractor (class in ads.model.extractor.xgboost\_extractor), 1087  
 XGBoostModel (class in ads.model), 1459  
 XGBoostModel (class in ads.model.framework.xgboost\_model), 1255  
 XGBRegressorSearchSpace (class in ads.hpo.ads\_search\_space), 856  
**Y**  
 y\_pred(ads.evaluations.statistical\_metrics.ModelEvaluator attribute), 737  
 y\_score(ads.evaluations.statistical\_metrics.ModelEvaluator attribute), 737  
 y\_true(ads.evaluations.statistical\_metrics.ModelEvaluator attribute), 737  
 YamlSchemaLoader (class in ads.feature\_engineering.schema), 852  
 YamlSpecParser (class in ads.opctl.config.yaml\_parsers.base), 1471  
 YOLO (ads.data\_labeling.constants.Formats attribute), 667  
**Z**  
 zeros\_handler() (in module ads.feature\_engineering.feature\_type.handler.warnings), 785  
 zfill() (ads.feature\_engineering.feature\_type.adsstring.string.ADSString method), 776  
 zip\_artifact() (in module ads.model.common.utils), 1052  
 zip\_code(ads.feature\_engineering.adsstring.common\_regex\_mixin.CommonRegexMixin property), 764  
 zip\_code(ads.feature\_engineering.feature\_type.adsstring.common\_regex\_mixin.CommonRegexMixin property), 768  
 ZipCode (class in ads.feature\_engineering.feature\_type.zip\_code), 835  
 ZipCodeDetector (class in ads.type\_discovery.zipcode\_detector), 1553  
 ZipcodeTypedFeature (class in ads.type\_discovery.typed\_feature), 1553